

Exhibit 2008

Fundamentals of Automatic Control

Robert C. Weyrick
Community and Technical College
The University of Akron

McGraw-Hill Book Company

New York	Montreal
St. Louis	New Delhi
Dallas	Panama
San Francisco	Paris
Düsseldorf	São Paulo
Johannesburg	Singapore
Kuala Lumpur	Sydney
London	Tokyo
Mexico	Toronto

Class Cataloging in Publication Data

Control. I. Title.
74-10896

-1

ALS OF AUTOMATIC CONTROL

1975 by McGraw-Hill, Inc. All rights reserved.

United States of America. No part of this publication
may be reproduced, stored in a retrieval system, or transmitted, in
any form or by any means, electronic, mechanical, photocopying, recording,
or by any information storage and retrieval system, without the prior written permission of the publisher.

DKPKP 78321098765

This book was written by Alan W. Lowe and
Tracy A. Glasner, the designer was Valerie Klima and Laurence Charnow.
The book was published by Kingsport Press, Inc.
and bound by Kingsport Press, Inc.

To my mother

TJ
213
W43

134771




Figure 1-8 Takeoff-point representation

as being combined at a summing point must be in the same plane, two voltages may be combined but a voltage and current cannot be brought together. Any number of variables may be combined at a summing point.

A takeoff point is used when the output of a block is applied to two or more blocks. A takeoff point is simply represented by a dot as shown in Figure 1-8.

In the block-diagram representation of a system, let us consider the oven-temperature control described in the preceding section. The system is shown in block-diagram form in Fig. 1-9. In this diagram the various blocks may be identified with elements of a process. In addition the units associated with the transfer function blocks are shown in parentheses.

The diagram tends to clarify the physical understanding of the system and provides a convenient basis for system analysis. We shall use block diagrams as useful in pointing out the similarity between apparently unrelated systems. It should be emphasized that in connecting one block with another represent the flow of information within the system. The main sources of energy for the system need not be included in the block diagram.

1-6 SIMPLIFICATION OF BLOCK DIAGRAMS

A block diagram that is initially drawn for a system may contain a large number of blocks and signal paths and be more complicated than necessary. In such cases a simplification may be performed to rearrange the block diagram to a form with fewer blocks. Rearranging

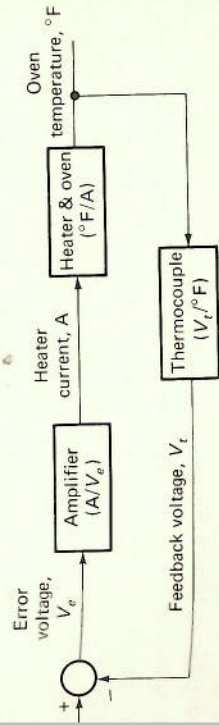


Figure 1-9 Block diagram of oven-temperature control

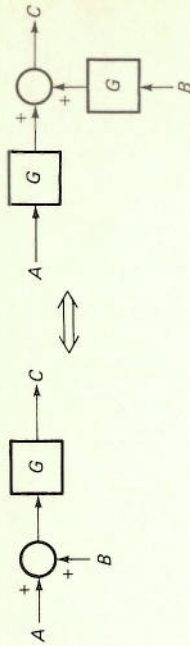


Figure 1-10 Moving summing point around a block

a system diagram to effect simplification is termed block-diagram algebra since it is analogous to simplifying algebraic equations. However, reducing a block diagram has the advantage of providing a better understanding of the interrelationships of the various elements in the system as compared to simplifying the system equations.

The combining of cascaded blocks into a single block, as described in Sec. 1-5, is obviously one step toward simplification. As another possibility, it is sometimes useful to move a summing point around a block as indicated in Fig. 1-10. Note that the inputs A and B are introduced through blocks incorporating the function G around which the summing point was moved. Applying the distributive property of algebra, we see that $C = (A + B)G = AG + BG$. Thus the two diagrams are equivalent.

Table 1-1 gives a number of transformations useful in simplifying block diagrams. These transformations can be verified by showing that the outputs from the two equivalent diagrams are the same. Note that the original and equivalent identities can be used interchangeably.

1-7 CLOSED-LOOP TRANSFER FUNCTION

Since certain functions and types of variables are commonly associated with feedback control systems, a generalized block diagram may be formulated and the associated closed-loop transfer function derived. Some standardization of the symbols and terminology relating to feedback control systems has been achieved and is used in this case.

Figure 1-11 is a general block diagram of a closed-loop control system. It is important that the terms used in this diagram be clearly understood.

System Variables

The desired value V is an external signal applied to the system to command a specific output from the process. The desired value is sometimes called the system command or set point.

