




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>6</sup> : <b>H04Q 7/38</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 99/46947</b> (43) International Publication Date: 16 September 1999 (16.09.99)</p>
<p>(21) International Application Number: PCT/US99/05077 (22) International Filing Date: 8 March 1999 (08.03.99) (30) Priority Data: 09/037,071 9 March 1998 (09.03.98) US (71) Applicant: ERICSSON INC. [US/US]; 7001 Development Drive, P.O. Box 13969, Research Triangle Park, NC 27709 (US). (72) Inventors: ROEL-NG, Maya; 1604 Chester Drive, Plano, TX 75025 (US). HAYES, Stephen; 2104 Via Madonna, Carrollton, TX 75006 (US). HAVINIS, Theodore; 1520 Preston Road #427, Plano, TX 75093 (US). (74) Agents: MOORE, Stanley, R. et al.; Jenkins &amp; Gilchrist, P.C., Suite 3200, 1445 Ross Avenue, Dallas, TX 75202 (US).</p>	<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> <i>With international search report.</i></p>	

(54) Title: SYSTEM AND METHOD FOR INFORMING NETWORK OF TERMINAL-BASED POSITIONING METHOD CAPABILITIES

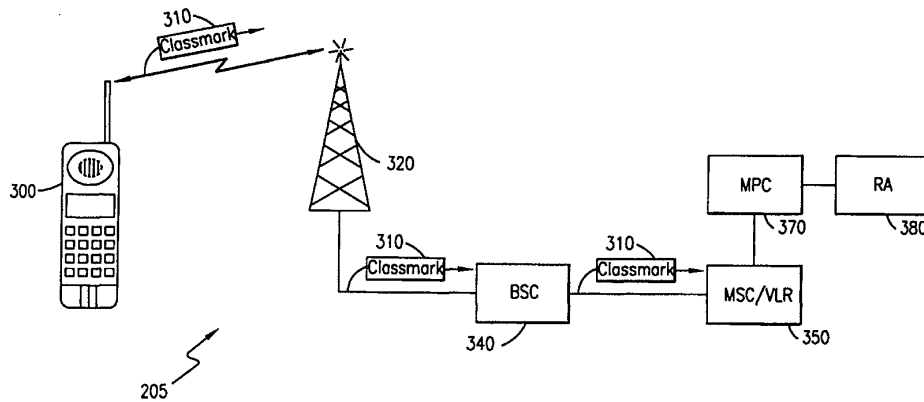

(57) Abstract

A telecommunications system and method is disclosed for allowing a cellular network to determine the optimum positioning method, having knowledge of all available network-based and terminal-based positioning methods. This can be accomplished by the Mobile Station (MS) sending to the Mobile Switching Center/Visitor Location Register (MSC/VLR) a list of terminal-based positioning methods that the MS is capable of performing. This list can, in turn, be forwarded to the Mobile Positioning Center (MPC) for determination of the optimum positioning method. For example, in a GSM network, the MS CLASSMARK information, which is sent to the MSC/VLR when the MS registers with the MSC/VLR, can be extended to include the MS's positioning capabilities.

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

**SYSTEM AND METHOD FOR INFORMING NETWORK OF  
TERMINAL-BASED POSITIONING METHOD CAPABILITIES**

BACKGROUND OF THE PRESENT INVENTION

5           Field of the Invention

The present invention relates generally to telecommunications systems and methods for determining the location of a mobile terminal within a cellular network, and specifically to determining the optimum positioning method based upon available network positioning methods and positioning capabilities of the mobile terminal itself.

10           Background and Objects of the Present Invention

Cellular telecommunications is one of the fastest growing and most demanding telecommunications applications ever. Today it represents a large and continuously increasing percentage of all new telephone subscriptions around the world. A standardization group, European Telecommunications Standards Institute (ETSI), was established in 1982 to formulate the specifications for the Global System for Mobile Communication (GSM) digital mobile cellular radio system.

With reference now to FIGURE 1 of the drawings, there is illustrated a GSM Public Land Mobile Network (PLMN), such as cellular network 10, which in turn is composed of a plurality of areas 12, each with a Mobile Switching Center (MSC) 14 and an integrated Visitor Location Register (VLR) 16 therein. The MSC/VLR areas 12, in turn, include a plurality of Location Areas (LA) 18, which are defined as that part of a given MSC/VLR area 12 in which a mobile station (MS) (terminal) 20 may move freely without having to send update location information to the MSC/VLR area 12 that controls the LA 18. Each Location Area 18 is divided into a number of cells 22. Mobile Station (MS) 20 is the physical equipment, e.g., a car phone or other portable phone, used by mobile subscribers to communicate with the cellular network 10, each other, and users outside the subscribed network, both wireline and wireless.

The MSC 14 is in communication with at least one Base Station Controller (BSC) 23, which, in turn, is in contact with at least one Base Transceiver Station (BTS) 24. The BTS is the physical equipment, illustrated for simplicity as a radio

-2-

tower, that provides radio coverage to the cell 22 for which it is responsible. It should be understood that the BSC 23 may be connected to several base transceiver stations 24, and may be implemented as a stand-alone node or integrated with the MSC 14. In either event, the BSC 23 and BTS 24 components, as a whole, are generally referred to as a Base Station System (BSS) 25.

With further reference to FIGURE 1, the PLMN Service Area or cellular network 10 includes a Home Location Register (HLR) 26, which is a database maintaining all subscriber information, e.g., user profiles, current location information, International Mobile Subscriber Identity (IMSI) numbers, and other administrative information. The HLR 26 may be co-located with a given MSC 14, integrated with the MSC 14, or alternatively can service multiple MSCs 14, the latter of which is illustrated in FIGURE 1.

The VLR 16 is a database containing information about all of the Mobile Stations 20 currently located within the MSC/VLR area 12. If a MS 20 roams into a new MSC/VLR area 12, the VLR 16 connected to that MSC 14 will request data about that Mobile Station 20 from the HLR database 26 (simultaneously informing the HLR 26 about the current location of the MS 20). Accordingly, if the user of the MS 20 then wants to make a call, the local VLR 16 will have the requisite identification information without having to reinterrogate the HLR 26. In the aforescribed manner, the VLR and HLR databases 16 and 26, respectively, contain various subscriber information associated with a given MS 20.

Determining the geographical position of a MS 20 within a cellular network 10 has recently become important for a wide range of applications. For example, positioning services may be used by transport and taxi companies to determine the location of their vehicles. In addition, for emergency calls, e.g., 911 calls, the exact location of the mobile terminal 20 may be extremely important to the outcome of the emergency situation. Furthermore, positioning services can be used to determine the location of a stolen car, for the detection of home zone calls, which are charged at a lower rate, for the detection of hot spots for micro cells, or for the subscriber to determine, for example, the nearest gas station, restaurant, or hospital.

-3-

As can be seen in FIGURE 2 of the drawings, upon a network positioning request, the Base Station System (BSS) (220 and 240) serving the MS 200 generates positioning data, which is delivered to the Mobile Switching Center (MSC) 260. This positioning data is then forwarded to a Mobile Positioning Center (MPC) 270 for  
5 calculation of the geographical location of the MS 200. The location of the MS 200 can then be sent to the application 280 that requested the positioning. Alternatively, the requesting application 280 could be located within the MS 200 itself or within the network (MSC/VLR 260).

In order to accurately determine the location of the MS 200, positioning data  
10 from three or more separate Base Transceiver Stations (210, 220, and 230) is required. This positioning data for GSM systems can include, for example, a Timing Advance (TA) value, which corresponds to the amount of time in advance that the MS 200 must send a message in order for the BTS 220 to receive it in the time slot allocated to that MS 200. When a message is sent from the MS 200 to the BTS 220, there is a  
15 propagation delay, which depends upon the distance between the MS 200 and the BTS 220. TA values are expressed in bit periods, and can range from 0 to 63, with each bit period corresponding to approximately 550 meters between the MS 200 and the BTS 220. It should be understood, however, that any estimate of time, distance, or angle for any cellular system can be used, instead of the TA value discussed herein for a  
20 network-based positioning method.

Once a TA value is determined for one BTS 220, the distance between the MS 200 and that particular BTS 220 is known, but the actual location is not. If, for example, the TA value equals one, the MS 200 could be anywhere along a radius of 550 meters. Two TA values from two BTSs, for example, BTSs 210 and 220, provide  
25 two possible points that the MS 200 could be located (where the two radiuses intersect). However, with three TA values from three BTSs, e.g., BTSs 210, 220, and 230, the location of the MS 200 can be determined with a certain degree of accuracy. Using a triangulation algorithm, with knowledge of the three TA values and site location data associated with each BTS (210, 220, and 230), the position of the mobile  
30 station 200 can be determined (with certain accuracy) by the Mobile Positioning Center 270.

# Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

## Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

## Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

## Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

## API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

## LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

## FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

## E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.