

Fundamentals of Analog and Digital Communication Systems

This book
The ALYNN
in Electrical
Engineering
Concordia
Normal
Syracuse

Richard S. Simpson Ronald C. Houts

*Associate Professor of
Electrical Engineering
University of Alabama*

*Professor of Electrical Engineering
University of Houston*

IPR2025
MM EX1015,
ALYNN and BACON, Inc.

© Copyright 1971 by Allyn and
Bacon, Inc., Boston, Massachusetts.
All rights reserved.
No part of the material protected
herein may be reproduced or
utilized in any form or by any
means, electronic or mechanical,
including photocopying, recording, or
by any information storage and
retrieval system, without written permission
of the copyright owner.

Library of Congress Catalog Card No. 71-10000

assumption is not justifiable. Schemes will be presented for the non-coherent detection of ASK and FSK signals, plus a technique for detecting information transmitted by phase shifts without having a phase-coherent channel.

ASK DETECTOR

The noncoherent detector for ASK signals is shown in Fig. 11-1. The

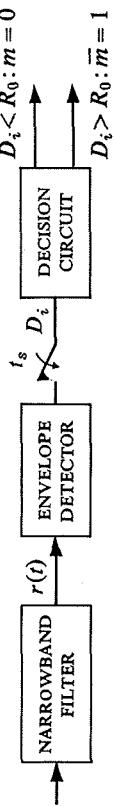


Figure 11-1 Noncoherent ASK detector

narrowband filter is used to improve the incoming SNR by removing the noise outside of the filter bandwidth B . Therefore, the output noise has power $N_0 B$ and can be represented by the narrowband approximation discussed in Chapter 8. It will be assumed that the filter bandwidth B is approximately equal to the bit rate $1/T_b$. This assumption permits us to ignore intersymbol interference, i.e., energy associated with one bit influencing a decision regarding the next bit. Because the signal information is present in the amplitude, an envelope detector followed by a threshold-decision circuit is used to determine whether the incoming data bit is a ZERO or a ONE.


We can determine the conditional probability density functions for the received waveform given that either a ZERO or a ONE was transmitted. With no signal present the filter output is simply narrowband noise. We know from Chapter 8 that the probability density function for the envelope is Rayleigh, i.e.,

$$p_0(r) = \frac{r}{N_0 B} \exp\left[\frac{-r^2}{2N_0 B}\right] \quad r > 0, \quad (11.1a)$$

where the noise power P in (8.19a) has been replaced by $N_0 B$. We can express the incoming signal $s_1(t)$ as

$$s_1(t) = V \cos(\omega_0 t + \theta), \quad (11.1b)$$

where the initial phase angle θ is a random variable uniformly distributed from 0 to 2π radians. Hence, with signal present the filter output is given by the sum of (8.19f) and (11.1b). One component of the noise is

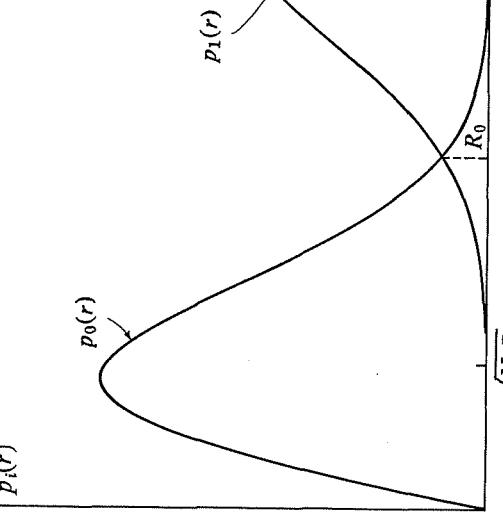

11.1 Noncoherent Detector Techniques

where the θ found in (11.1b) has been arbitrary without affecting the final results. The joint dependence and phase of an incoming waveform can be shown (see Problem 11.1-1) to be

$$p_1(r, \phi) = \frac{r}{2\pi N_0 B} \exp\left[-\frac{r^2 + V^2}{2N_0 B}\right],$$

$$p_1(r, \phi) = \int_0^{2\pi} p_1(r, \phi) d\phi$$

$$= \frac{r}{N_0 B} \exp\left[-\frac{r^2 + V^2}{2N_0 B}\right] \frac{1}{2\pi} \int_0^{2\pi} \exp\left[-\frac{r^2 + V^2}{2N_0 B}\right] I_0\left(\frac{rV}{N_0 B}\right) d\phi,$$

$$= \frac{r}{N_0 B} \exp\left[-\frac{r^2 + V^2}{2N_0 B}\right] I_0\left(\frac{rV}{N_0 B}\right),$$

where $I_0(x)$ is the modified Bessel Function of order. The density functions $p_i(r)$, $i = 0$ or 1, are It will be necessary for us to determine the obtain solutions for the error performance. A

$$p_i(r)$$