

Fundamentals of Analog and Digital Communication Systems

Richard S. Simpson
Professor of Electrical Engineering
University of Houston

Ronald C. Houts
Associate Professor of
Electrical Engineering
University of Alabama

IPR2020-
MM EX1035, I

DOCKET
ALARM

Find authenticated court documents without watermarks at docketalarm.com.

This book is
The ALLYN Series
in Electrical Engineering

Consistent
Norms
Syracuse

© Copyright 1971 by Allyn and
Massachusetts. All rights reserved.
No part of the material protected
or utilized in any form or by any
photocopying, recording, or by
system, without written permission.
Library of Congress Catalog Card

assumption is not justifiable. Schemes will be presented for the non-coherent detection of ASK and FSK signals, plus a technique for detecting information transmitted by phase shifts without having a phase-coherent channel.

ASK DETECTOR

The noncoherent detector for ASK signals is shown in Fig. 11-1. The

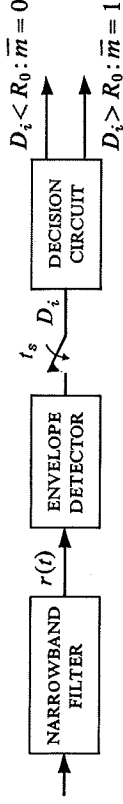


Figure 11-1 Noncoherent ASK detector

narrowband filter is used to improve the incoming SNR by removing the noise outside of the filter bandwidth B . Therefore, the output noise has power $N_0 B$ and can be represented by the narrowband approximation discussed in Chapter 8. It will be assumed that the filter bandwidth B is approximately equal to the bit rate $1/T_b$. This assumption permits us to ignore intersymbol interference, i.e., energy associated with one bit influencing a decision regarding the next bit. Because the signal information is present in the amplitude, an envelope detector followed by a threshold-decision circuit is used to determine whether the incoming data bit is a ZERO or a ONE.

We can determine the conditional probability density functions for the received waveform given that either a ZERO or a ONE was transmitted. With no signal present the filter output is simply narrowband noise. We know from Chapter 8 that the probability density function for the envelope is Rayleigh, i.e.,

$$p_0(r) = \frac{r}{N_0 B} \exp \left[-\frac{r^2}{2N_0 B} \right] \quad r > 0, \quad (11.1a)$$

where the noise power P in (8.19o) has been replaced by $N_0 B$. We can express the incoming signal $s_1(t)$ as

$$s_1(t) = V \cos(\omega_0 t + \theta), \quad (11.1b)$$

where the initial phase angle θ is a random variable uniformly distributed from 0 to 2π radians. Hence, with signal present the filter output is given by the sum of (8.19f) and (11.1b). One component of the noise is

11.1.1 Noncoherent Detector Techniques

where the θ found in (11.1b) has been arbitrarily without affecting the final results. The joint density function and phase of an incoming waveform can be shown (see Problem 11.1-1) to be

$$p_1(r, \phi) = \frac{r}{2\pi N_0 B} \exp \left[-\frac{r^2 + V^2}{2N_0 B} \right]$$

We can obtain the envelope density function $p_1(r)$ which gives

$$\begin{aligned} p_1(r) &= \int_0^{2\pi} p_1(r, \phi) d\phi \\ &= \frac{r}{N_0 B} \exp \left[-\frac{r^2 + V^2}{2N_0 B} \right] \frac{1}{2\pi} \int_0^{2\pi} \exp \left[-\frac{rV}{N_0 B} \cos \phi \right] d\phi \\ &= \frac{r}{N_0 B} \exp \left[-\frac{r^2 + V^2}{2N_0 B} \right] I_0 \left(\frac{rV}{N_0 B} \right), \end{aligned}$$

where $I_0(x)$ is the modified Bessel Function of order. The density functions $p_i(r)$, $i = 0$ or 1, are shown in Fig. 11-2. It will be necessary for us to determine the threshold-decision level R_0 to obtain solutions for the error performance. A

