

VOLUME 23 NUMBER 4 1992

電子情報通信

SYSTEMS
and
COMPUTERS
in
JAPAN

(formerly
Systems • Computers • Controls)



SCRIPTA TECHNICA, INC.
A Subsidiary of John Wiley & Sons, Inc.

Petition for Inter Partes Review of
U.S. Pat. No. 7,477,284

IPR2013-00327

EXHIBIT

Sonv-1106

SYSTEMS AND COMPUTERS IN JAPAN
(formerly *Systems • Computers • Controls*)

A Translation of Denshi Joho Tsushin Gakkai Ronbunshi

DENSHI JOHO TSUSHIN GAKKAI RONBUNSHI (formerly *Denshi Tsushin Gakkai Ronbunshi*) [電子通信学会論文誌], the *Transactions of the Institute of Electronics, Information and Communication Engineers of Japan* is published in seven monthly sections (part A (ISSN 0913-5707), B-I (ISSN 0915-1877), B-II (ISSN 0915-1885), C-I (ISSN 0915-1893), C-II (ISSN 0915-1907), D-I (ISSN 0915-1915), and D-II (ISSN 0915-1923)), comprising 84 issues per year. Papers translated from *Denshi Joho Tsushin Gakkai Ronbunshi* are published in *Systems and Computers in Japan* (formerly *Systems • Computers • Controls*), as well as *Part 1: Communications*, *Part 2: Electronics*, and *Part 3: Fundamental Electronic Science*, of *Electronics and Communications in Japan*. All four journals are published by Scripta Technica, Inc., a subsidiary of John Wiley & Sons, Inc., Publishers, with the permission and cooperation of the Institute of Electronics, Information and Communication Engineers of Japan. The Editorial Board of *Denshi Joho Tsushin Gakkai Ronbunshi* is headed by Toshio Sekiguchi. The Associate Editors are headed by Toshio Sekiguchi. The Associate Editors are: Kunihiko Asada, Hideo Fujiwara, Hiroshi Harashima, Kazuo Horiuchi, Fumiaki Machihara, Kazuo Murano, Makoto Nagao, Michiharu Nakamura, Shoji Shinoda, Takuo Sugano, Shigeo Tsujii, and Haruo Yamaguchi. The consulting editor for *Systems and Computers in Japan* is C. M. Park, Catholic University of America, Washington, D.C.

SYSTEMS AND COMPUTERS IN JAPAN (ISSN 0882-1666), comprises 14 issues (one volume, monthly, except twice in June and November) per year, and publishes papers on computer architecture, large system design, advanced digital circuitry, data transmission, interface devices, data processing, programming techniques, automata, formal languages, and biomedical applications of computers. Papers are published in *Systems and Computers in Japan* approximately 18 weeks after the publication of their Japanese-language equivalents. The views expressed in these journals are exclusively those of the Japanese authors and editors. The Japanese authors are generally consulted regarding the translation of their papers, but are not responsible for the published English versions.

Copyright ©1992 by Scripta Technica, Inc. All right reserved. Reproduction or translation of any part of this work beyond that permitted by Sections 107 and 108 of the U. S. Copyright Law without the permission of the copyright owner is unlawful. The code and copyright notice appearing at the bottom of the first page of an article in the journal indicates the copyright holder's consent that copies may be made for personal or internal use, or for personal or internal use of specific clients, on the condition that the copier pay for copying beyond that permitted by Sections 107 or 108 of the United States Copyright Law. The per-copy fee for each article appears after the dollar sign and is to be paid through the Copyright Clearance Center, Inc., 21 Congress Street, Salem, Massachusetts, 01970. (The fee for items published prior to 1992 is \$7.50 per paper.) This consent does not extend to other kinds of copying, such as copying for general distribution, for advertising or promotional purposes, for creating new collective works or for resale. Such permission requests and other permission inquiries should be addressed to the publisher.

SUBSCRIPTIONS (1992): *Systems and Computers in Japan*, \$925 per volume in the U.S., \$1,100 outside the U.S. Claims for undelivered copies will be accepted only after the following issue has been received. Please enclose a copy of the mailing label. Missing copies will be supplied when losses have been sustained in transit and where reserve stock permits. Please allow four weeks for processing a change of address.

POSTMASTER: Send address changes to *Systems and Computers in Japan*, Subscription Department, John Wiley & Sons, Inc., 605 Third Avenue, New York, New York 10158.

The contents of this journal are indexed or abstracted in *Mathematical Reviews*, *Engineering Index*, *INSPEC*, and *Zentralblatt für Mathematik/MATH data base*.

ADVERTISING: Inquiries concerning advertising should be forwarded to Roberta Fredericks, John Wiley & Sons, Inc., Advertising/Reprints Sales, 605 Third Ave., New York, NY 10158, (212) 850-6289. Advertising Sales, European Contact: Michael Levermore, Advertising Manager, John Wiley & Sons, Ltd., Baffins Lane, Chichester, Sussex PO 19 1UD, England.

Scripta Technica, Inc.
A Subsidiary of John Wiley & Sons, Inc.

Second class postage paid in New York and additional offices

SYSTEMS AND COMPUTERS IN JAPAN

1992

VOLUME 23

NUMBER 4

CONTENTS

	Page
Tsuyoshi Kawaguchi, Hiroshi Masuyama, and Tamotsu Maeda. An Asynchronous Parallel Branch-and-Bound Algorithm	1
Masahiko Morita. A Neural Network Model of the Dynamics of a Short-Term Memory System in the Temporal Cortex	14
Sadayuki Hongo, Mitsuo Kawato, Toshio Inui, and Sei Miyake. Contour Extraction by Local Parallel and Stochastic Algorithm Which Has Energy Learning Faculty	26
Kouichirou Yamauchi, Takashi Jimbo, and Masayoshi Umeno. Self-Organizing Architecture for Learning Novel Patterns	36
Hiroshi Ishiguro, Masashi Yamamoto, and Saburo Tsuji. Acquiring Omnidirectional Range Information	47
Hiroshi Naruse, Atsushi Ide, Mitsuhiro Tateda, and Yoshihiko Nomura. Edge Feature Determination by Using Neural Networks Based on a Blurred Edge Model	57
Yoshiyuki Saito and Shigeru Niinomi. Development of Software System Organized by Minimal Automata Realization Theorem for Gait Measuring	69
Minoru Okada, Shigeki Yokoi, and Jun-ichiro Toriwaki. A Method of Digital Figure Decomposition Based on Distance Feature	80
Yasuhiro Wada and Mitsuo Kawato. A New Information Criterion Combined with Cross-Validation Method to Estimate Generalization Capability	92

Acquiring Omnidirectional Range Information

Hiroshi Ishiguro, Masashi Yamamoto, and Saburo Tsuji, *Members*

Faculty of Engineering Science, Osaka University, Toyama, Japan 560

SUMMARY

This paper describes a method of obtaining a precise omnidirectional view and coarse ranges to objects by rotating a single camera. The omnidirectional view is obtained by arranging image data taken through a vertical slit on the image plane while the camera rotates around the vertical axis. The omnidirectional view contains precise azimuth information determined by the resolution of the camera rotation. The range is obtained from two omnidirectional images taken through two slits when the camera moves along a circular path. This range estimate contains errors due to a finite resolution of the camera rotation system, while a conventional binocular stereo method contains errors due to quantization of images. The representation of an environment, "panoramic representation," by the omnidirectional view and range information is useful for a vision sensor of a mobile robot.

1. Introduction

A camera used for a vision sensor of a conventional mobile robot is mounted on the robot. To recognize an environment more flexibly, it is necessary to design a camera to have more active functions. To achieve this requirement, a camera should be able to sense the whole environment and its specific part.

Fixation of gaze upon the interesting object is used in the paradigm of "Active Vision" [1, 2] which is a current topic in Computer Vision. In the Active Vision, a camera gazes upon a particular feature point in an

environment while moving, and generates an environmental description with respect to the point.

Viewing the whole environment from an observation point is also important for a robot. It is necessary to build an accurate map when a robot works in an unknown environment. For this purpose, it is more efficient to use a wide view than integrating partial views of the whole environment by using a camera with a limited visual field. Since the conventional camera has a limited visual field, it is necessary to add extra facility to the camera to obtain an omnidirectional view field.

Yagi and Kawato [3] obtained an omnidirectional image by using a conic mirror which yields the image of the environment from the entire direction and by taking this image by a camera viewing from the top of the cone. Their method takes an omnidirectional image in real time and can analyze the image using a property whereby the optical flow of a point for a linear camera motion forms a curve. However, the angular resolution of their method is rather limited (the minimum resolution is about 0.2° in an image of 512×512 pixels), the resolution being coarse near the vertex of the cone, since the image of the entire environment is projected onto a single image plane.

Morita et al. [4] obtained a wideview image by using a camera with a fisheye lens. The angular resolution of their method is also not very high, although they reconstruct a three-dimensional (3-D) structure using the vanishing point of straight lines in its environment and not directly using omnidirectional information.

Sarachik [5] has devised a method to obtain an omnidirectional image and the distance to a ceiling edge (a horizontal edge between a ceiling and a wall) by using two rotatable cameras on a robot. Her method can locate the robot in a room and estimate the camera direction.

By contrast to these passive methods, there have been active methods which project an optical pattern onto objects to measure their distances. Blais et al. [12] have constructed a compact stereo-based distance-measurement system by projecting a light onto the environment. By rotating their system, omnidirectional range information can be obtained. A disadvantage of the active method is that its environment is restricted by physical conditions, especially those of illumination.

The method proposed in this paper is a passive one without projecting a light pattern and uses a camera rotating around a fixed vertical axis, similar to Sarachik's system, to obtain an omnidirectional image. However, unlike her method which uses two cameras to obtain the distance information, the proposed method uses a single camera and can obtain both the view and range information with a high angular accuracy over 360°. Let us call this camera-centered 2.5-D representation containing both the visual information and the range information "panoramic representation." The method of Blais et al. [12] also can obtain both the omnidirectional view and range information. The difference of the proposed method from their method, other than the light projection, is the cause of errors in azimuth measurements. The error in their method depends on the resolution of its image sensor, and that in the proposed method depends on the angular accuracy of rotation of the camera around its axis (see section 2).

Advantages of the panoramic representation are as follows:

(A) Omnidirectional visual information has the following features:

- (1) When an omnidirectional image is taken in a rectangular room, four vanishing points appear every 90°.
- (2) When a camera moves on a straight line on a plane perpendicular to the rotation axis of the camera, two "foci of expansion" (FOE) of the optical flow of objects in its environment appear at an interval of 180° in the omnidirectional image.

- (3) The environmental structure is obtained by a set of two omnidirectional images.

By using feature (1) as a constraint, the vanishing points in an omnidirectional image can be determined more precisely; and this is useful in obtaining the rotation angle of a mobile robot. By using feature (2), the rotation angle and the direction of the robot motion can be obtained from the projection of the features onto a Gaussian sphere [6]. Feature (3) can be used for stereovision by using two omnidirectional images taken at different locations in an environment. The correspondence of the two images can be obtained by using "circular dynamic programming" [7] based on the structure of the omnidirectional image.

(B) Precise angular information

An image obtained by the proposed method has a resolution equal to that of the camera rotation; i.e., by using a precise camera rotation control system, the resolution of the angular information could be higher than that of a conventional method. This is an excellent feature of the proposed method. For example, the stereovision using a pair of two omnidirectional images (feature (3) in (A)) is useful for determining both the structure of the wide environment and positions of objects in it.

(C) Omnidirectional range information

The proposed method can obtain an omnidirectional view and at the same time the range information. The latter is useful in finding free regions in its environment, establishing the correspondence of a pair of two omnidirectional images, and determination of motion parameters of a robot.

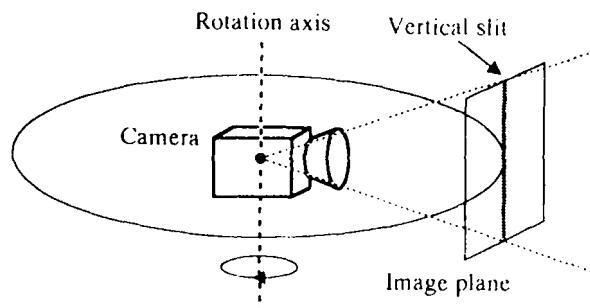


Fig. 1. Imaging method (omnidirectional view).

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.