



UNIVERSITAT
POLITÈCNICA
DE VALÈNCIA



Non-Uniform Constellations for Next-Generation Digital Terrestrial Broadcast Systems

Departamento de Comunicaciones
Universitat Politècnica de València

A thesis for the degree of
PhD in Telecommunications Engineering

Valencia, June 2017

Author:
Manuel Fuentes Muela

Supervisors:
Dr. David Gómez Barquero
Prof. Narcís Cardona Marcet

Abstract

Nowadays, the digital terrestrial television (DTT) market is characterized by the high capacity needed for high definition TV services, and the limited spectrum available. There is a need for an efficient use of the broadcast spectrum, which requires new technologies to guarantee increased capacities. Non-Uniform Constellations (NUC) arise as one of the most innovative techniques to approach those requirements. These constellations have been implemented in next-generation broadcast systems such as DVB-NGH (Digital Video Broadcasting - Next Generation Handheld) or ATSC 3.0 (Advanced Television Systems Committee - Third Generation). NUCs reduce the gap between uniform Gray-labelled Quadrature Amplitude Modulation (QAM) constellations and the theoretical unconstrained Shannon limit. With these constellations, symbols are optimized in both in-phase (I) and quadrature (Q) components by means of signal geometrical shaping, considering a certain signal-to-noise ratio (SNR) and channel model.

There are two types of NUC, depending on the number of real-valued dimensions considered in the optimization process, i.e. one-dimensional and two dimensional NUCs (1D-NUC and 2D-NUC, respectively). 1D-NUCs maintain the squared shape from QAM, but relaxing the distribution between constellation symbols in a single component, with non-uniform distance between them. These constellations provide better SNR performance than QAM, without any demapping complexity increase. 2D-NUCs also relax the square shape constraint, allowing to optimize the symbol positions in both dimensions, thus achieving higher capacity gains and lower SNR requirements. However, the use of 2D-NUCs implies a higher demapping complexity, since a 2D-demapper is needed, i.e. I and Q components cannot be separated.

In this dissertation, NUCs are analyzed from both transmit and receive point of views, using either single-input single-output (SISO) or multiple-input multiple-output (MIMO) antenna configurations. In SISO transmissions, 1D-NUCs and 2D-NUCs are optimized for a wide range of SNRs, several channel models and different constellation orders, using the Nelder-Mead optimization

ABSTRACT

algorithm. The optimization of rotated 2D-NUCs is also investigated, including the rotation angle as an additional variable in the optimization. Even though the demapping complexity is not increased, the SNR gain of these constellations is not significant. The highest rotation gain is obtained for low-order constellations and high SNRs. However, with multi-RF techniques such as Channel Bonding (CB) or Time-Frequency Slicing (TFS), the SNR gain is drastically increased, since I and Q components are transmitted in different RF channels. In this thesis, multi-RF gains of NUCs with and without rotation are provided for some representative scenarios.

At the receiver, two different implementation bottlenecks are explored. First, the demapping complexity of all considered constellations is analyzed. Afterwards, two complexity reduction algorithms for 2D-NUCs are proposed. Both algorithms drastically reduce the number of distances to compute the output log-likelihood ratios (LLR). Moreover, both are finally combined in a single demapper. Quantization of NUCs is also explored in this dissertation, since LLR values and I/Q components are modified when using these constellations, compared to traditional QAM constellations. A new algorithm that is based on the optimization of the quantizer levels for a particular constellation is proposed. The proposed algorithm reduces the number of quantization bits and can be also extrapolated to QAM.

The use of NUCs in multi-antenna communications is also investigated. In this dissertation, parameters that affect the optimization process are evaluated, when using a 2×2 dual polarized MIMO system. It includes the optimization in one or two antennas, the use of power imbalance, the cross-polar discrimination (XPD) between receive antennas, the use of different optimum and sub-optimum demappers, equalization methods and different channel models. Assuming different values for the parameters evaluated, new Multi-Antenna Non-Uniform Constellations (MA-NUC) are obtained by means of a particularized re-optimization process, specific for MIMO. At the receiver, an extended demapping complexity analysis is performed, where it is shown that the use of 2D-NUCs in MIMO extremely increases the demapping complexity. In multi-antenna systems, the optimum demapping complexity grows exponentially with the number of antennas and the constellation order. As an alternative, an efficient solution for 2D-NUCs and MIMO systems based on Soft-Fixed Sphere Decoding (SFSD) is proposed. The main drawback is that SFSD demappers do not work with 2D-NUCs, since they perform a Successive Interference Cancellation (SIC) step that needs to be performed in separated I and Q components. The proposed method quantifies the closest symbol using Voronoi regions and allows SFSD demappers to work.

Resumen

Hoy en día, el mercado de la televisión digital terrestre (TDT) está caracterizado por la alta capacidad requerida para transmitir servicios de televisión de alta definición y el espectro disponible, el cual se encuentra muy limitado. Es necesario por tanto un uso eficiente del espectro radioeléctrico, el cual requiere nuevas tecnologías para garantizar mayores capacidades. Las constelaciones no-uniformes (NUC) emergen como una de las técnicas más innovadoras para abordar tales requerimientos. Estas constelaciones han sido adoptadas en sistemas de televisión de siguiente generación tales como DVB-NGH (Digital Video Broadcasting - Next Generation Handheld) o ATSC 3.0 (Advanced Television Systems Committee - Third Generation). Las NUC reducen el espacio existente entre las constelaciones uniformes QAM y el límite teórico de Shannon. Con estas constelaciones, los símbolos se optimizan en ambas componentes fase (I) y cuadratura (Q) mediante técnicas geométricas de modelado de la señal, considerando un nivel señal a ruido (SNR) concreto y un modelo de canal específico.

Hay dos tipos de NUC, dependiendo del número de dimensiones reales consideradas en el proceso de optimización, es decir, NUCs unidimensionales y bidimensionales (1D-NUC y 2D-NUC, respectivamente). Las 1D-NUC mantienen la forma cuadrada de las QAM, pero permiten cambiar la distribución entre los símbolos en una componente concreta, teniendo una distancia no uniforme entre ellos. Estas constelaciones proporcionan un mejor rendimiento SNR que QAM, sin ningún incremento en la complejidad en el demapper. Las 2D-NUC también permiten cambiar la forma cuadrada de la constelación, permitiendo optimizar los símbolos en ambas dimensiones y por tanto obteniendo mayores ganancias en capacidad y menores requerimientos en SNR. Sin embargo, el uso de 2D-NUCs implica una mayor complejidad en el receptor, puesto que se necesita un demapper 2D, donde las componentes I y Q no pueden ser separadas.

En esta tesis se analizan las NUC desde el punto de vista tanto de transmisión como de recepción, utilizando bien configuraciones con una antena (SISO) o con múltiples antenas (MIMO). En transmisiones SISO, se han op-

RESUMEN

timizado 1D-NUCs para un rango amplio de distintas SNR, distintos modelos de canal y varios órdenes de constelación. También se ha investigado la optimización de 2D-NUCs rotadas, donde el ángulo de rotación se incluye en la optimización como una variable adicional. Aunque la complejidad no aumenta, la ganancia SNR de estas constelaciones no es significativa. La mayor ganancia por rotación se obtiene para bajos órdenes de constelación y altas SNR. Sin embargo, utilizando técnicas multi-RF como Channel Bonding (CB) o Time-Frequency Slicing (TFS), la ganancia aumenta drásticamente puesto que las componentes I y Q se transmiten en distintos canales RF. En esta tesis, se han estudiado varias ganancias multi-RF representativas de las NUC, con o sin rotación.

En el receptor, se han identificado dos cuellos de botella diferentes en la implementación. Primero, se ha analizado la complejidad en el receptor para todas las constelaciones consideradas y, posteriormente, se proponen dos algoritmos para reducir la complejidad con 2D-NUCs. Ambos algoritmos reducen drásticamente el número de distancias para computar los LLR en el demapper con 2D-NUCs. Además, los dos pueden combinarse en un único demapper. También se ha explorado la cuantización de estas constelaciones, ya que tanto los valores LLR como las componentes I/Q se ven modificados, comparando con constelaciones QAM tradicionales. Además, se ha propuesto un algoritmo que se basa en la optimización para diferentes niveles de cuantización, para una NUC concreta. El algoritmo propuesto reduce el número de bits a utilizar y puede ser utilizado también con QAM.

Igualmente, se ha investigado en detalle el uso de NUCs en MIMO. En esta tesis se han evaluado los distintos parámetros que afectan al proceso de optimización cuando se utilizan sistemas MIMO 2×2 dual polarizados. Se ha incluido la optimización en una sola o en dos antenas, el uso de un desbalance de potencia, factores de discriminación entre antenas receptoras (XPD), el uso de distintos demappers óptimos y subóptimos, métodos de ecualización y distintos canales. Asumiendo distintos valores, se han obtenido nuevas constelaciones multi-antena (MA-NUC) gracias a un nuevo proceso de re-optimización específico para MIMO. En el receptor, se ha extendido el análisis de complejidad en el demapper, la cual se incrementa enormemente con el uso de 2D-NUCs y sistemas MIMO. En concreto, la complejidad aumenta exponencialmente con el número de antenas y el orden de constelación. Como alternativa, se propone una solución basada en el algoritmo Soft-Fixed Sphere Decoding (SFS). El principal problema es que estos demappers no funcionan con 2D-NUCs, puesto que necesitan de un paso adicional en el que las componentes I y Q necesitan separarse. El método propuesto cuantifica el símbolo más cercano utilizando las regiones de Voronoi, permitiendo el uso de este tipo de receptor.

Resum

Actualment, el mercat de la televisió digital terrestre (TDT) està caracteritzat per l'alta capacitat requerida per a transmetre servicis de televisió d'alta definició i l'espectre disponible, el qual es troba molt limitat. És necessari per tant un ús eficient de l'espectre radioelèctric, el qual requereix noves tecnologies per a garantir majors capacitats i millors servicis. Les constel·lacions no-uniformes (NUC) emergeixen com una de les tècniques més innovadores en els sistemes de televisió de següent generació per a abordar tals requeriments. Les NUC redueixen l'espai existent entre les constel·lacions uniformes QAM i el límit teòric de Shannon. Amb estes constel·lacions, els símbols s'optimitzen en ambdós components fase (I) i quadratura (Q) per mitjà de tècniques geomètriques de modelatge del senyal, considerant un nivell senyal a soroll (SNR) concret i un model de canal específic.

Hi ha dos tipus de NUC, depenent del nombre de dimensions reals considerades en el procés d'optimització, és a dir, NUCs unidimensionals i bidimensionals (1D-NUC i 2D-NUC, respectivament). 1D-NUCs mantenen la forma quadrada de les QAM, però permet canviar la distribució entre els símbols en una component concreta, tenint una distància no uniforme entre ells. Estes constel·lacions proporcionen un millor rendiment SNR que QAM, sense cap increment en la complexitat al demapper. 2D-NUC també canvien la forma quadrada de la constel·lació, permetent optimitzar els símbols en ambdós dimensions i per tant obtenint majors guanys en capacitat i menors requeriments en SNR. No obstant això, l'ús de 2D-NUCs implica una major complexitat en el receptor, ja que es necessita un demapper 2D, on les components I i Q no poden ser separades.

En esta tesi s'analitzen les NUC des del punt de vista tant de transmissió com de recepció, utilitzant bé configuracions amb una antena (SISO) o amb múltiples antenes (MIMO). En transmissions SISO, s'han optimitzat 1D-NUCs, per a un rang ampli de distintes SNR, diversos models de canal i diferents ordes de constel·lació. També s'ha investigat l'optimització de 2D-NUCs rotades, on l'angle de rotació s'inclou en l'optimització com una variable addicional.

RESUM

Encara que la complexitat no augmenta, el guany SNR d'estes constel·lacions no és significativa. El major guany per rotació s'obté per a baixos ordes de constel·lació i altes SNR. No obstant això, utilitzant tècniques multi-RF com Channel Bonding (CB) o Time-Frequency Slicing (TFS) , el guany augmenta dràsticament ja que les components I i Q es transmeten en distints canals RF. En esta tesi, s'ha estudiat el guany multi-RF de les NUC, amb o sense rotació.

En el receptor, s'han identificat dos colls de botella diferents en la implementació. Primer, s'ha analitzat la complexitat en el receptor per a totes les constel·lacions considerades i, posteriorment, es proposen dos algorismes per a reduir la complexitat amb 2D-NUCs. Ambdós algorismes redueixen dràsticament el nombre de distàncies per a computar els LLR en el demapper amb 2D-NUCs. A més, els dos poden combinar-se en un únic demapper. També s'ha explorat la quantització d'estes constel·lacions, ja que tant els valors LLR com les components I/Q es veuen modificats, comparant amb constel·lacions QAM tradicionals. A més, s'ha proposat un algorisme que es basa en l'optimització per a diferents nivells de quantització, per a una NUC concreta. L'algorisme proposat redueix el nombre de bits a utilitzar i pot ser utilitzat també amb QAM.

Igualment, s'ha investigat en detall l'ús de NUCs en MIMO. En esta tesi s'han avaluat els distints paràmetres que afecten el procés d'optimització quan s'utilitzen sistemes 2×2 MIMO dual polaritzats. S'ha inclòs l'optimització en una sola o en dos antenes, l'ús d'un desbalanç de potència, factors de discriminació entre antenes receptores (XPD) , l'ús de distints demappers òptims i subòptims, mètodes d'equalització i distints canals. Assumint distints valors, s'han obtingut noves constel·lacions multi-antena (MA-NUC) gràcies a un nou procés de re-optimització específic per a MIMO. En el receptor, s'ha modificat l'anàlisi de complexitat al demapper, la qual s'incrementa enormement amb l'ús de 2D-NUCs i sistemes MIMO. En concret, la complexitat augmenta exponencialment amb el nombre d'antenes i l'orde de constel·lació. Com a alternativa, es proposa una solució basada en l'algorisme Soft-Fixed Sphere Decoding (SFSD) . El principal problema és que estos demappers no funcionen amb 2D-NUCs, ja que necessiten d'un pas addicional en què les components I i Q necessiten separar-se. El mètode proposat quantifica el símbol més pròxim utilitzant les regions de Voronoi, permetent l'ús d'este tipus de receptor.

Acknowledgements

First of all, I would like to thank my two supervisors for their assistance and guidance. From the very beginning, Dr. David Gómez Barquero gave me the opportunity to be part of the Institute de Telecommunications and Multimedia Applications (iTEAM) at the Universitat Politècnica de València (UPV). His advice and support during all these years has been fundamental to improve as an engineer and researcher. Prof. Narcís Cardona also received me with open arms and gave me the chance to pursue my Ph.D. in his group. Thanks to both of them, I could present my work to many people around the world, enjoying the experience and achieving new skills.

Very special thanks go to my colleagues of the Mobile Communications Group (MCG). During these three years, the people that had been part of this group have helped me to grow not only as a professional, but also as a person. Thank you to my friends Gerardo, Edu, Carlos Andreu, Carlos Barjau, Alejandro, Jordi Joan, Shitomi, Conchi, Tere, Josetxo, Carlos Herranz, Alicia, Sonia, Irene, Jorge, Sofía, Martina, José Luis, Sergio, Sandra and many others. I also want to thank my old colleagues David Vargas, Jaime and Jefferson for the good moments we spent together. I'm also indebted to Prof. Gerald Matz from the Technical University of Vienna, for inviting me to his research team. It has been one of the best experiences in my life, and I will be eternally grateful to him. Very special thanks also go to Georg Pichler, who helped me every single day during my stay there.

Y por supuesto, esta tesis va dedicada a toda mi familia. En especial a mis padres, por darme la oportunidad de venir a Valencia a estudiar y convertirme en lo que hoy en día soy. A mi hermano, por los grandes momentos que hemos vivido juntos y los que nos quedan por vivir. Y a mi novia, por su grandísimo apoyo, amor incondicional e incontables consejos que me ha dado durante estos años. Os quiero a todos.

ACKNOWLEDGEMENTS

Table of contents

1	Introduction	15
1.1	Evolution and New Challenges of Digital Terrestrial Broadcasting	15
1.2	Preliminaries	19
1.3	Research Challenges on Non-Uniform Constellations	22
1.4	Objectives and Scope	23
1.5	State-of-the-Art	25
1.6	Thesis Outline and Contributions	31
1.7	List of Publications	34
1.7.1	Publications and Activities Related to this Thesis	34
1.7.2	Other Publications	35
2	Background	37
2.1	System Model Overview	37
2.1.1	Multi-Antenna Considerations	39
2.1.2	BICM Components	41
2.2	BICM Capacity Limits	43
2.2.1	The Unconstrained Shannon Limit	43
2.2.2	Capacity Calculation for BICM	44
2.2.3	BICM Limits for Uniform QAM Constellations	45
2.2.4	Extension to MIMO-BICM Systems	48
2.3	Single-Antenna Receivers	49
2.3.1	Demapping Algorithms	50
2.3.2	Signal Quantization	53
2.4	Multi-Antenna Receivers	55
2.4.1	ML and Max-Log Demappers	56
2.4.2	ZF and MMSE Detectors	57
2.4.3	Sphere Decoding Techniques	58

TABLE OF CONTENTS

3	Optimization and Performance Evaluation of Non-Uniform Constellations	61
3.1	Non-Uniform Constellations Optimization	61
3.1.1	One-Dimensional Non-Uniform Constellations	62
3.1.2	Two-Dimensional Non-Uniform Constellations	70
3.1.3	BICM Capacity Improvements	75
3.2	Non-Uniform Rotated Constellations	77
3.2.1	Optimization Before Rotation	78
3.2.2	Optimization with Additional Rotation	80
3.3	Application of NURC to Multi-RF Techniques	82
3.4	Performance Analysis Based on Physical Layer Simulations . .	84
3.4.1	Non-Uniform Constellations Gain	85
3.4.2	Rotation Gain	87
3.4.3	Non-Uniform Rotated Constellations with Multiple RF Channels	87
3.5	Conclusion	94
4	Low-Complexity Demapping and Quantization Algorithms	97
4.1	Demapping Complexity at the Receiver	98
4.2	Low-Complexity Demapping Algorithm	100
4.2.1	Quadrant Search Reduction (QSR)	100
4.2.2	Condensed Symbols Reduction (CSR)	102
4.2.3	Quadrant Condensed Search Reduction (QCSR)	104
4.3	Performance Evaluation: Minimum Number of Distances	105
4.3.1	Calculation of the Minimum Number of Distances	105
4.3.2	Performance Loss with Alternative Channel Models	108
4.3.3	QCSR with Non-Uniform Rotated Constellations	110
4.4	Digital Quantization of LLR and I/Q Components	111
4.4.1	System Model and Considered Scenario	112
4.4.2	Quantization of Log-Likelihood Ratios	115
4.4.3	Quantization of I/Q Components	118
4.5	Quantization Loss vs. Time De-Interleaving Memory Trade-Off	121
4.5.1	Performance Loss of LLR Quantization	121
4.5.2	Performance Loss of I/Q Components Quantization	124
4.5.3	Time De-Interleaving Memory Requirements	125
4.6	Conclusion	127
5	Non-Uniform Constellations for MIMO Communications	129
5.1	Multi-Antenna Non-Uniform Constellations	130
5.1.1	Preliminary Design	131
5.1.2	Re-optimization without Power Imbalance	138

TABLE OF CONTENTS

5.1.3	Re-optimization with Power Imbalance	140
5.2	Performance Evaluation of Multi-Antenna Non-Uniform Constellations	142
5.2.1	Transmission without Power Imbalance	142
5.2.2	Transmission with Power Imbalance of 6 dB	143
5.3	Demapping Complexity Analysis	145
5.4	Fixed Sphere Decoder for Two-Dimensional NUCs in MIMO	146
5.4.1	Successive Interference Cancellation	147
5.4.2	Voronoi Regions Selection Algorithm	147
5.4.3	Resolution vs. Performance Trade-Off	151
5.5	Conclusion	152
6	Conclusions and Future Work	153
6.1	Concluding Remarks	154
6.1.1	Non-Uniform Constellations Optimization	154
6.1.2	Complexity Implications at the Receiver	155
6.1.3	Multi-Antenna Optimization and Complexity Reduction	157
6.2	Constellation and CR Recommendation	158
6.3	Future work	161
6.3.1	High-Order Two-Dimensional Non-Uniform Constellations	161
6.3.2	Further Optimization for MIMO Systems	161
6.3.3	The Future of Broadcasting: Constellations for 5G Communications	161
A	Physical Layer Simulator	163
A.1	Transmitter Block Diagram	163
A.2	Receiver Block Diagram	168
A.3	Channel Models	170
B	Optimization Algorithm	175
B.1	Nelder-Mead Simplex Method	175
B.2	Application to Use Cases Considered	179
	Acronyms	183
	References	187

TABLE OF CONTENTS

Chapter 1

Introduction

1.1 Evolution and New Challenges of Digital Terrestrial Broadcasting

Television (TV) is one of the most popular and extended telecommunication systems in the world. Commercial TV as it is known today began in the late 1940s. Its implementation introduced dramatic social changes and facilitated the appearance of new business models. TV has coexisted with society during more than 70 years, experiencing big transformations such as the transition from black and white to color, or from analog to digital. With the arrival of flat-screen displays, Digital Terrestrial Television (DTT) communications and video compression systems, TV has experienced a high-speed and large evolution in the 21st century.

The switch from analog to digital entailed several advantages such as the transmission of noise-free high-quality video and audio, a larger exploitation of the Radio Frequency (RF) spectrum, the delivery of multilingual audio tracks, subtitles and interactivity, or the use of a flexible network with configurable parameters such as transmission power, capacity or quality of service. Currently, DTT is the main TV system adopted in many European countries including the United Kingdom, France, Spain, Portugal and Italy, being ahead other services such as cable or satellite TV. DTT systems are capable of providing a specific set of services without any restriction in the number of users [1]. DTT allows for an efficient delivery of free-to-air content to large audiences with a guaranteed quality of service, and provides a near universal coverage of over 98 % population [2]. With DTT, the Ultra-High Frequency (UHF) spectrum needed to transmit a single analog channel is used to carry several multiplexed digital

CHAPTER 1. INTRODUCTION

services. In other words, the same set of services can be transmitted using just a reduced part of the spectrum available. As a consequence, the spectral efficiency increase offered by DTT systems attracted emerging technologies such as Long Term Evolution (LTE) to request part of the UHF spectrum.

First and Second Digital Dividends

In the World Radiocommunication Conference (WRC)-07, the International Telecommunications Union (ITU) decided to allocate the upper part of the TV broadcasting band to International Mobile Telecommunications (IMT) technologies, giving room to which is known as Digital Dividend (DD) [3]. Regions 1 (Europe and Africa) and 3 (Asia) allocated the 800 MHz band (790-862 MHz, channels 61-69) for fourth generation (4G) LTE services, and Region 2 (America) allocated the 700 MHz band (698-806 MHz, channels 52-69). In the WRC-12, the ITU concluded with a decision to allocate additional UHF spectrum to mobile services. This situation will remain for more than 10 years, since in the WRC-15 it was decided that there will not be any change to the allocation in the 470-694 MHz band for the time being.

The new mobile allocation, also known as Second Digital Dividend (DD2), is to be made in Region 1 in the 700 MHz band. The main difference compared to the 800 MHz band lies in the fact that the Uplink (UL) is located in the lower part, instead of the Downlink (DL). For most countries, releasing the 700 MHz band will require a new re-tune of existing DTT networks. Implementing the DD2 within ITU Region 1 affects up to eleven more DTT channels (49-60), creating a number of challenges. Since cellular terminals are closer to the DTT receivers than base stations, interference issues may be relevant in the 700 MHz band [4]. The DD2 is particularly problematic in countries where terrestrial TV is the main distribution platform.

The DD2 arises as a turning point for introducing new DTT systems and video compression standards, in order to increase the network spectral efficiency and provide new services such as Ultra High-Definition TV (UHDTV). In fact, reference [5] presents an overview of the upcoming television broadcast spectrum incentive auction in the United States, reviews the potential plans for the 600 MHz band, and discusses the opportunities that could bring the use of new digital terrestrial television specifications.

Initial DTT Technologies

Nowadays, several first generation DTT technologies are in place over the world, such as Advanced Television Systems Committee (ATSC) in North America and South Korea [6], Integrated Services Digital Broadcasting – Terrestrial (ISDB-T) in Japan and South America [7], or Digital Terrestrial Multime-

1.1 Evolution and New Challenges of Digital Terrestrial Broadcasting

dia Broadcast (DTMB) in China [8]. Although these technologies are utilized in many countries, Digital Video Broadcasting - Terrestrial (DVB-T) is the most widely implemented DTT standard in the world. DVB-T permits to configure a number of parameters in order to adapt the system to a particular network and transmission requirements. The DVB-T specification provides bit rates ranging from 4 to 30 Mbps [9]. DVB-T, together with ISDB-T and DTMB specifications, is based on the multi-carrier Orthogonal Frequency-Division Multiplexing (OFDM) modulation [10]. All data carriers are modulated using different uniform Quadrature Amplitude Modulation (QAM) constellations, that is, QPSK, 16QAM or 64QAM. DVB-T permits to use several Coding Rates (CR), Guard Intervals (GI) or Fast Fourier Transform (FFT) sizes to adapt the signal. However, first generation standards are still far from the theoretical Shannon capacity limit [11]. Motivated by technological progress and new advanced techniques, different standardization forums decided to develop next-generation DTT specifications.

Next-Generation Digital Terrestrial Broadcasting

The DVB forum developed a second generation standard, known as DVB - Terrestrial Second Generation (DVB-T2) [12], which provides a 50% increase of spectral efficiency compared to DVB-T. It permits to use a more advanced configuration of parameters to transmit, including a wider set of coding rates. DVB-T2 employs a serial concatenation of inner Low Density Parity Check (LDPC) codes and outer Bose Chadhuri Hocquenghem (BCH) codes. It is also based on the multi-carrier OFDM modulation, and permits the use of a single or multiple Physical Layer Pipes (PLP) that allow to transmit different services with specific capacity and robustness. The DVB-T2 specification provides an extended interleaving that increases robustness in both time and frequency domains. It also supports the concept of Rotated Constellations (RC) and includes an additional 256QAM constellation.

Standardization activities were also addressed on the development of mobile broadcasting systems, despite the lack of market and financing needed [13]. The handheld evolution of DVB-T2, Digital Video Broadcasting - Next Generation Handheld (DVB-NGH), is the state-of-the-art standard for DTT mobile communications, and includes some of the most advanced transmission techniques to cope with adversities and characteristics of mobile channels [14]. It was the first broadcasting system including the concept of one-dimensional Non-Uniform Constellation (NUC), for 64 and 256 orders. Another relevant technique included in DVB-NGH was the use of Multiple-Input Multiple-Output (MIMO). The concept of MIMO is based on the use of several transmit and receive antennas to transmit different signals at the same

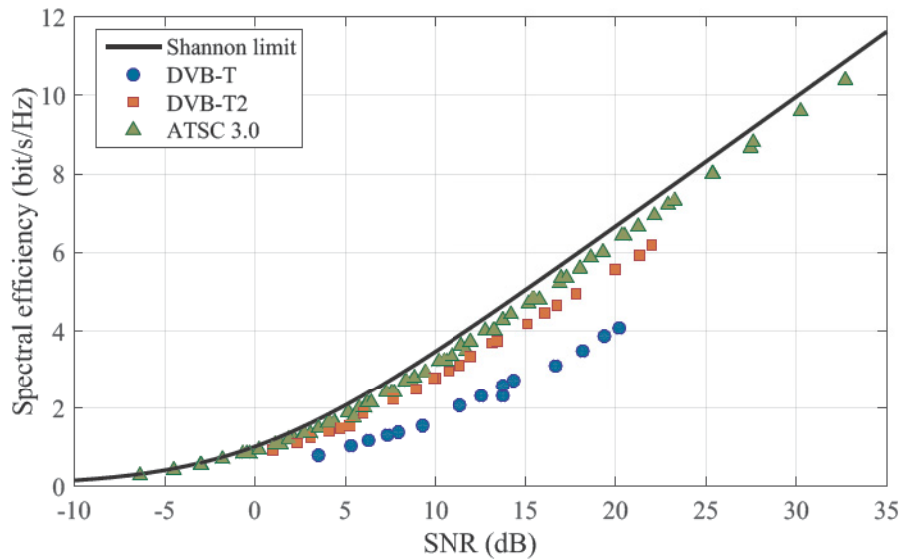


Figure 1.1: Spectral efficiency of DVB-T, DVB-T2 and ATSC 3.0 specifications compared to the Shannon capacity limit, for AWGN channel.

time. The transmission of two or more streams in parallel permits to increase transmission capacity, but also robustness.

The use of new digital standards along with more efficient video coding arises as an opportunity to introduce two new features simultaneously, guaranteeing an efficient use of the remaining spectrum. The state-of-the-art terrestrial broadcasting standard, ATSC - Third Generation (ATSC 3.0), tries to solve this problem. It focuses on shortening the gap to Shannon limit through more efficient constellations and very-low coding rates, the aggregation of multiple RF channels in which is known as Channel Bonding (CB), or the combined provision of fixed and mobile services, among others [15]. Fig. 1.1 shows the performance achieved with ATSC 3.0 in terms of spectral efficiency (bit/s/Hz) vs. SNR (dB), for AWGN channel. ATSC 3.0 is also compared with some of its antecessors, i.e. DVB-T and DVB-T2. ATSC 3.0 includes some of the newest techniques developed in broadcasting such as MIMO or Layered Division Multiplexing (LDM) [16]. LDM enables the efficient provision of mobile and fixed services by superposing two independent signals with different power levels in a single RF channel. With ATSC 3.0, it is also possible to split service data across two RF channels, so that peak data rate can be doubled. ATSC 3.0 also includes two-dimensional (2D) NUCs from 16 to 256 constellation symbols, and 1D-NUC for new high-orders such as 1024NUC (or 1kNUC) and 4096NUC (or 4kNUC) [17].

1.2 Preliminaries

The problem of designing a system that operates close to the unconstrained Shannon theoretical limit has been one of the most important and challenging problems in information/communication theory [11]. As reference [18] states, one straightforward answer to the question of how to efficiently transmit more than one bit per symbol is a Coded Modulation (CM) scheme, where the channel encoder is combined with a modulator and several bits are mapped into a symbol. What is not straightforward is how to configure a system that operates close to the Shannon capacity limit, but with low complexity. In [19], the idea of jointly design the channel encoder and modulator was firstly proposed, which inspired several CM schemes such as trellis-coded modulations [20] or multilevel codes [21]. Since both schemes aimed to maximize the Euclidean distances to symbols, they performed considerably well for the AWGN channel. However, their performance in fading channels is insufficient.

Bit-Interleaved Coded Modulation (BICM) is the pragmatic approach for combining channel coding and digital modulations in fading transmission channels. The core of the BICM encoder consists of the serial concatenation of a Forward Error Correction (FEC) code, a Bit Interleaver (BIL), and a memoryless mapper that assigns blocks of bits to constellation symbols. BICM aims to increase the coding diversity (the key performance measure in fading channels) and therefore, outperforms the CM schemes mentioned above, for this scenario [22], [23]. BICM is very robust to variations of the channel characteristics, and very attractive from an implementation point view due to its low complexity and flexibility, since the channel encoder and the modulator can be selected independently. This dissertation focuses on modulation, one of the most important parts to consider when designing BICM systems.

With uniform QAM constellations, the symbols are regularly spaced in the constellation diagram, i.e. with the same distance between symbols in both in-phase (I) and quadrature-phase (Q) components. This uniform distance allows for an easy design of the modulation module that also needs a very simple demapping process. As a main drawback, it entails a performance loss due to the two constraints imposed by assuming a rectangular shape and equally spaced levels [17]. This difference to the capacity limit also increases with the modulation order. For that reason, NUCs can be used to reduce the gap between the BICM capacity of uniform Gray-labelled constellations and the unconstrained Shannon limit. With NUCs, the constellation symbols are optimized by means of signal shaping techniques to provide an improved performance compared to uniform QAM constellations. These constellations are designed for a particular SNR and channel model. As stated before, NUCs are categorized into two different groups: 1D-NUCs and 2D-NUCs. 1D-NUCs

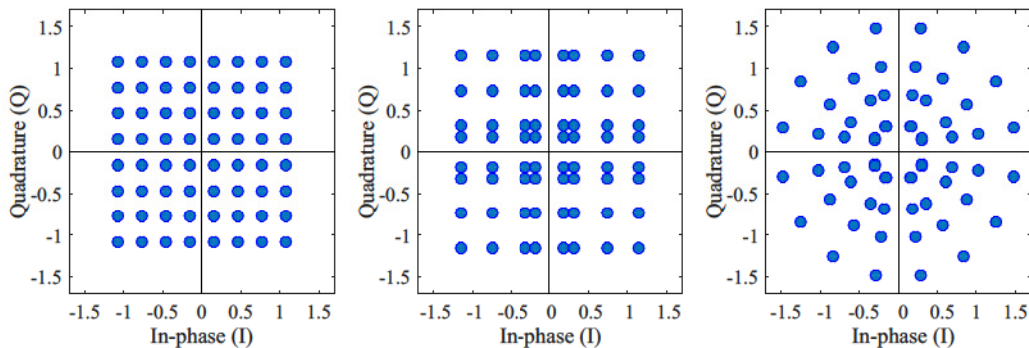


Figure 1.2: Different constellations considered. Uniform 64QAM (left), 1D-64NUC (center) and 2D-64NUC (right), optimized for a SNR of 10 dB and AWGN channel.

have a squared shape with non-uniform distance between constellation symbols, while 2D-NUCs are designed by relaxing the square shape constraint, with a better SNR performance than 1D-NUCs but with higher demapping complexity. Fig. 1.2 depicts two examples of 1D- and 2D-64NUCs optimized for a SNR of 10 dB in a Additive White Gaussian Noise (AWGN) channel. QAM is also shown for comparison.

At low SNRs, NUCs collapse into lower orders of constellation, where almost identical symbols are grouped in clusters. These constellations are known as condensed NUCs. With the condensation, the Most Significant Bits (MSB) provide similar robustness as the positions of low-order constellations. On the other hand, the Least Significant Bits (LSB) cannot be resolved from the overlapping points, since they offer a very weak information, close to zero [17].

Note that the gain provided by NUCs becomes almost non-existent at high SNRs, especially when optimizing for fading channels [24]. In this particular case, Signal Space Diversity (SSD) techniques can be used to improve the overall system performance. The most widespread SSD technique is the use of RC. With RC, a certain rotation angle is applied to the constellation, so that the binary information is transmitted simultaneously in different I and Q components. In order to ensure that each component undergoes independent fading, a component interleaver is needed after the rotation [25]. Moreover, RCs become especially effective when using multi-RF techniques such as CB or Time-Frequency Slicing (TFS), providing very high performance gains. TFS was proposed in DVB-T2 and adopted in DVB-NGH. With TFS the data is transmitted in a slot-by-slot manner by frequency hopping across an RF-Mux of two or more RF channels (in practice, up to 6). On the other hand, CB consists of splitting service data across two RF channels, so that peak data rate can be

doubled. In such case, it is desirable that each component is transmitted in a different RF channel.

One of the main drawbacks when using 2D-NUCs is the demapping complexity. The complexity with QAM constellations and 1D-NUCs can be drastically reduced by using a one-dimensional demapper [26], thanks to the squared shape of these constellations. This demapper, nevertheless, cannot be used with 2D-NUCs. In this case, demappers need to evaluate the distances in both dimensions (real and imaginary parts) for all possible symbols. The same occurs with RCs, where the binary information is transmitted simultaneously in different I and Q components, and the demapper has to consider all symbols in two dimensions, regardless of the constellations shape.

Another important bottleneck in receivers is the quantization of digital signals. As reference [27] mentions, quantization is a basic operation that is applied in digital receivers, and permits transformation of continuous to discrete digital signals to be processed, transmitted and stored in conventional digital processors. In DTT receivers, memory requirements at the Time De-Interleaver (TDIL) are much higher than mobile communications [28]. The TDIL interlaces multiple constellation symbols to increase the signal time diversity, and hence to increase the protection against time fading. The memory required to store all the received symbols of the block depends on the number of quantization levels and their distribution, and consequently on the use of these new constellations.

NUCs can be also efficiently used for multi-antenna configurations. By using more than one single antenna in both the transmitter and the receiver, MIMO improves the transmission robustness via additional spatial diversity, or increases capacity by sending multiple data streams in the same bandwidth via spatial multiplexing [29]. Fig. 1.3 shows a generic block diagram of a MIMO system with N_T transmit and N_R receive antennas. While Single-Input Multiple-Output (SIMO) exploits diversity and array gains, and Multiple-Input Single-Output (MISO) only retains the spatial diversity gain, the Spatial Multiplexing (SM) gain is achieved only when using two or more transmit and receive antennas. The SM allows MIMO to overcome the capacity limits of SISO communications without any increase in the total transmission power or channel bandwidth [30]. An impending problem of MIMO is the extremely high demapping complexity when using optimum Maximum Likelihood (ML) or max-log demappers, since it grows exponentially with the number of antennas and the constellation order. To reduce this complexity, different suboptimum demappers have been proposed in the current literature. With the use of suboptimum demappers, the complexity can be drastically reduced, while maintaining a good performance, compared to the optimum ML demapper.

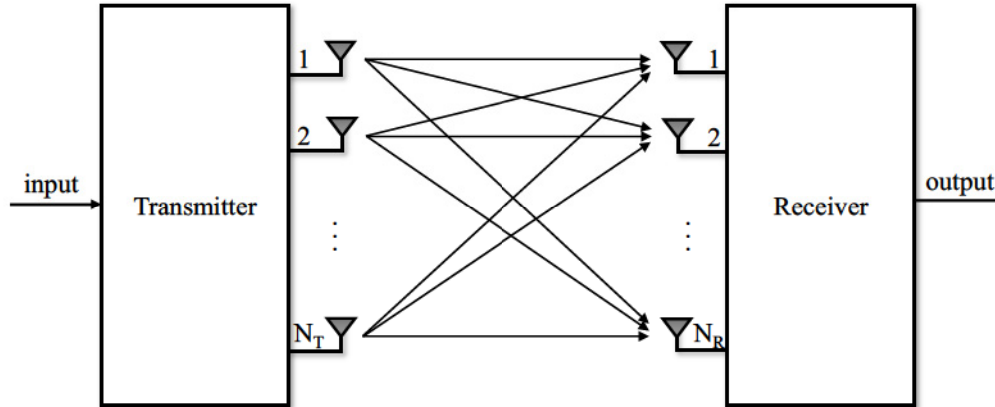


Figure 1.3: Block diagram of a generic MIMO system, with N_T transmit and N_R receive antennas.

1.3 Research Challenges on Non-Uniform Constellations

This thesis focuses on *Non-Uniform Constellations (NUC)*, one of the most innovative techniques included in last broadcasting specifications. Two main key performance indicators define these constellations, depending on the number of dimensions in which they are optimized:

- Improved SNR performance.
- Demapping complexity.

In this dissertation, the implementation aspects of these constellations are investigated from both transmitter and receiver point of views. The challenge is to design constellations that increase the system performance, and to use simplified sub-optimum demappers that reduce the demapping complexity at the receiver without any significant loss. Different orders of 1D- and 2D-NUCs are designed. The optimization process is performed so the BICM capacity is maximized for each considered configuration. This is equivalent to an optimization process in which SNR values are reduced, but with reduced computation complexity. The use of rotated NUCs combined with multi-RF techniques is another aspect to take into account. At the receiver, optimum demappers calculate the distances from the received signal to all constellation symbols. In that sense, a suboptimum algorithm with very low complexity is proposed to reduce the number of distances to compute, while keeping a good performance. Another problem when using NUCs is signal quantization. Quantization has

been always related in the literature with traditional communications systems, and therefore, uniform QAM constellations. Hence, it is necessary to explore how quantization values are modified when using NUCs, and to provide reduced algorithms that simplify the number of operations required.

As a matter of fact, the use of NUCs opens a wide range of possibilities to explore. In this thesis, NUCs are also effectively combined with advanced signal processing techniques such as RC or multi-RF averaging. Rotated NUCs may become especially effective when using techniques that combine the information transmitted over several RF channels. NUCs can be also effectively combined with MIMO. The combination of NUCs and MIMO is a relatively new research topic in the literature, and further investigation is needed, both at the transmitter and receiver sides.

1.4 Objectives and Scope

The **main objective** of this dissertation is **to investigate and assess the performance of the combination of non-uniform constellations with advanced signal processing techniques**, with the goal of maximizing the spectral efficiency and signal robustness, while reducing the overall demapping complexity in next-generation DTT systems. In particular, the following are the partial objectives of the dissertation:

Single-Antenna Transmission

- **To design and optimize NUCs, assessing their performance gain compared to uniform QAM constellations.** The aim is to obtain different constellations that provide additional shaping gain, which allows reception at lower SNRs. This study also aims to identify the capacity and performance gains over QAM, using ideal receivers. NUCs are designed for different constellation orders and SNR values, directly related to specific coding rates. Different channel models, types of reception, and the use of an optimization algorithm that better approaches the final solution are also investigated.
- **To analyze the use of rotated 2D-NUCs combined with multi-RF technologies.** Rotation gains for a single RF transmission (default mode in broadcasting) are first investigated. Afterwards, rotated NUCs are analyzed in connection with multi-RF techniques, where they may become a good solution to increase robustness. This dissertation provides an optimization method, in which the rotation angle is considered as

an additional variable. The potential NUC rotation gains in multi-RF transmissions are also investigated.

Single-Antenna Reception

- **To provide a generic low-complexity demapping algorithm for 2D-NUCs.** One of the bottlenecks in real receiver implementations is the use of demappers that calculate the distances to all constellation symbols. It is necessary to reduce the demapping complexity in order to use high-orders of constellation, while obtaining a reduced performance loss. Two different strategies can be considered. The first one takes advantage of the symmetry that constellations provide, and the second exploits the condensation of some constellations, whose constellation symbols almost repeat the same position.
- **To evaluate the influence of NUCs on soft-quantized LLR and I/Q components.** The use of NUCs instead of QAM implies the use of non-uniform complex values in the I/Q space, and therefore modified output LLR values. The aim is to compute memory savings of this new type of constellation, considering both uniform and non-uniform quantization. The objective is to reduce memory while keeping a good performance. An additional objective is to study the performance and in-chip memory trade-off of soft-quantized receivers designed.

Multi-Antenna Communications

- **To assess the use of multi-antenna MIMO systems for NUC optimization.** In the ATSC 3.0 standardization, constellation designed for SISO were also adopted for MIMO. However, since constellations are optimized for a particular SNR and channel model, a new re-optimization process may be needed. Moreover, NUCs can be optimized for MIMO also taking into account the new parameters introduced by these systems, such as the power imbalance or the cross-polar discrimination between antennas.
- **To propose a new suboptimum algorithm for an efficient demapping of 2D-NUCs in MIMO.** At the receiver, the number of possible received symbols grows exponentially with the number of antennas and the constellation order. The objective is to propose an efficient approach that reduces the demapping complexity at the receiver. The proposed demapping technique needs also to be compared with optimum demappers, in terms of distances to be computed and SNR performance.

1.5 State-of-the-Art

Bit-Interleaved Coded Modulation

BICM was first introduced by reference [31] in 1992, where it was shown that the performance of coded modulation over fading channels is improved with a $\log(M)$ bit interleaver at the encoder output, and by using soft-decision metrics as inputs to the decoder. However, the discussions provided in it were restricted to a rate $2/3$ coded system with a 8-PSK modulation. In [22], the information-theoretical view of BICM and the necessary tools for evaluating its performance were provided. More recent references [18] and [32] paid special attention to different bit-to-symbol labeling strategies. Both references analyzed the BICM capacity vs. Signal-to-Noise Ratio (SNR), showing that for a specific labeling this relation is not a function, where the same SNR maps to more than one capacity value.

Nowadays, state-of-the-art BICM broadcasting systems are currently very close to the Shannon limit. In [33], the structure of the BICM module in DVB-T2 was widely described, which is formed by the serial concatenation of a FEC code, a bit interleaver, and a QAM mapper. It also presented the modifications and the new elements that were introduced in DVB-NGH. A more recent study [34] summarizes and expounds the choices made for the BICM part of the ATSC 3.0 standard. The result is a BICM chain that provides the largest operating range (more than 30 dB, with the most robust mode operating below -5 dB of SNR), and the highest spectral efficiency compared to any digital terrestrial system so far. FEC coding techniques employed in this standard are further explained in [35]. This reference presents two different structures of LDPC codes: irregular repeat accumulate structure and multi-edge type structure, which are used for a wide range of coding rates.

Non-Uniform Constellations

Previous works in the literature outline the design of NUCs and their potential gains. In 1974, reference [36] noted the capacity shortfall for uniform QAM constellations, and introduced the non-uniform concept, obtaining several constellations which offer a capacity improvement. It was the first approach to the constellations nowadays known as NUCs, and constituted the basis for all the studies performed up to now. More recent studies [37] and [38] tackled the optimization of one-dimensional NUCs with 16 to 1024 symbols, in an AWGN channel. Here, the concept of a condensed constellation is presented for the first time. In [24], high-order 1D- and 2D-NUCs are optimized up to 1024 symbols as well, also for AWGN channel. The presented constellations approach the Shannon limit up to 0.036 bit/s/Hz at 29 dB of SNR, corresponding to a short-

coming of approximately 0.1 dB. In [39], high-order NUCs with constellation sizes of up to 4096 symbols are also investigated.

Different NUC optimizations and analysis were also made for specific systems and techniques. Reference [40] presented a complete analysis of the DVB-T2 system performance when using the proposed 2D-NUCs, and compared with QAM constellations. Reference [17] studies the use of NUCs within ATSC 3.0, which is the first major broadcasting standard that completely uses this type of constellations. Both 1D- and 2D-NUCs are considered in this work. Results in this reference show that shaping gains of more than 1.5 dB are possible, which can be seen as a major step towards the ultimate limits of broadcast communications. In [41], the authors investigate the effect of NUCs on the performance of Iteratively Decoded Bit-Interleaved Coded Modulation (BICM-ID) systems with different FEC coding schemes, in which NUCs also provide additional gains up to 0.2 dB. In [42], constellations are designed for the DVB-T2 L1Post signal, providing a potential improvement of 0.55 dB for the overall signaling performance using 64NUCs, for AWGN channel. Slightly lower gains are also obtained for Rayleigh channel.

Different demappers can be also found in the current literature to reduce complexity of 2D-NUCs. A first approach was provided in [43], which analyzes the quadrant symmetry of the constellations, in order to pre-compute the LLR values in a Look-Up Table (LUT) and completely avoid the demapping process. A demapper exploiting the condensation of NUCs was first proposed in [37]. It works especially well at low SNRs, where some of the constellation symbols almost repeat the same position in the I/Q plane. Such condensed constellations lead to reduce the number of effective bits. Since Log-Likelihood Ratios (LLR) of the least significant bits are negligible, these non-effective bits are not necessary to be decoded. This demapper was further analyzed in [44]. Following the same strategy, authors in [45] propose high order low-complexity 2D-NUCs with cardinality points 1024 and 4096. Low complexity is achieved via condensation of the closest symbols, and the improvement in the performance compared to 1D comes from the two-dimensional optimization.

Combination with Advanced Signal Processing Techniques

NUC optimization can be particularized for different techniques, as long as the SNR or channel conditions under study are accordingly modified. For instance, authors in [46] propose a new strategy to design NUCs for future television broadcast systems supporting LDM. The proposed method optimizes the BICM capacity simultaneously for two configurations performing at different SNR values [47]. LDM has been adopted for the first time in ATSC 3.0, and defined in [16]. In [48], authors illustrate a performance comparison between

LDM and Frequency Division Multiplexing (FDM)/Time Division Multiplexing (TDM), in terms of capacity-coverage tradeoff of the mobile service. For a given reduction of fixed service capacity, authors keep the coverage constant.

Regarding constellation rotation, it was first presented in [49], and further studied in [50]. In both studies, very high diversity orders were achieved, obtaining an almost Gaussian performance over the fading channel under study. It was shown that the average mutual information between the signal after rotation and the signal before or after the demapper varies with the rotation angle. Reference [51] provided substantial gains with respect to classical BICM broadcasting systems, under several channel conditions. The resulting improvement in performance varies from 0.2 dB to several dBs, depending on the order of the constellation, the CR and the channel model. Thanks to the advantages studied, this technique was adopted in the DVB-T2 standard. In [25] and [52], authors also tackled the use of RCs in broadcasting systems. In particular, the manuscript investigates the potential gains that can be obtained with rotated constellations in DVB-NGH.

Several low-complexity demappers have been proposed for the use of RCs as well. The demapper proposed in [53] and [54] takes advantage of the symmetry that constellations provide, selecting a reduced cluster of symbols to compute the LLRs. It reduces up to 78% the number of required operations with almost no performance degradation compared to optimum demappers. Another technique is also provided in [55]. In the proposed approach, only a subset of the constellation symbols close to the received samples is considered for demapping. The concept is similar to a sphere demapper [56], which also selects a cluster of symbols to compute the LLRs. An additional complexity-reduced max-log demapper for RCs was proposed in [57]. The proposed demapper allows to find the ML symbols with a search spanning, calculating only \sqrt{M} signal constellation symbols and guaranteeing the same LLR metrics as the original max-log demapper.

Constellation rotation can be efficiently combined with multi-RF techniques such as TFS or CB [58]. Reference [59] provides a brief introduction to TFS and its realization within the standard DVB-T2. Simulation results and theoretical analysis also show the potential gains and limits of TFS. The use of this multi-RF technique is also studied in [60]. The papers investigate the potential advantages of TFS by means of field measurements as well as simulations and discusses practical implementation aspects and requirements regarding transmission and reception. A complete study on this field can be also found in [61], which shows that, in addition to a potential capacity gain, TFS can provide very important coverage gains of around 4.5 dB for a 4 RF channels multiplex, according to field measurements. On the other hand, the use of CB in ATSC 3.0 is explained in [62]. In [63], CB is combined with LDM. A more

recent approach for multi-RF combining has been proposed in [64], where all frequencies within the UHF band are used on all transmitter sites. This approach allows for a dramatic reduction in fundamental power/cost and about 37-60% capacity increase. Note that the use of rotated NUCs has not yet been studied in connection with multi-RF techniques, where they may become a good solution to increase robustness. In this dissertation, rotated 2D-NUCs are designed using a new method, in which the rotation angle is considered as an additional variable. The potential gains obtained, both in single-RF and multi-RF transmissions, are also provided.

Signal Quantization

Quantization has been widely studied in the literature. In [65], the authors discuss the problem of the minimization of the distortion of a signal by a quantizer when the number of output levels of the quantizer is fixed. Equations are derived for the parameters of a quantizer with minimum distortion, and an algorithm is developed to simplify their numerical solution. Optimization under the restriction that both input and output levels are equally spaced is also treated. In [66], and in a more extended work [67], the whole concept of quantization is explained, surveying the fundamentals of the theory and many of the popular techniques for quantization. Reference [68] considers mutual-information-optimal quantization of LLRs. An efficient algorithm, reminiscent of the famous Lloyd-Max algorithm, is presented for the design of LLR quantizers based either on the unconditional LLR distribution or on LLR samples, which can be used to design LLR quantizers during data transmission. In [69], authors reduce the memory size with a negligible increase in computational complexity by quantizing LLRs with bit-specific quantizers and compressing the quantized output. Numerical results show that the proposed solution enables a memory saving up to 30%. Reference [27] presents two different quantization methods for multi-antenna broadcasting receivers, using QAM constellations. In this reference, the influence of quantization on LLR values and I/Q symbols is evaluated. The numerical evaluations show that non-uniform quantizers adapted to the signal statistics provide significant improvements in terms of system performance or alternatively in-chip memory savings.

MIMO Signal Processing

As reference [70] states, the use of MIMO for terrestrial broadcasting in the UHF band requires co-located antennas with cross-polar polarization (horizontal and vertical) in order to maintain the SM capability in Line-of-Sight (LoS) condition. The biggest difference when comparing MIMO broadcasting and

unicast transmissions, is that no Channel State Information (CSI) is shared between transmitter and receiver. This condition logically reduces the potential gain. Nevertheless, even under this condition the MIMO broadcasting gain is still very large, especially for high SNRs [29]. An efficient option to improve the SNR in this case is the use of a channel precoder as presented in [71]. This precoder is optimized according to broadcast channel statistics by linearly combining the data streams across the transmit antennas. The proposed precoder can provide significant capacity improvements for users with a strong LoS component and correlated MIMO paths, and is potentially transparent to consumer receivers. Another precoder was proposed in [72]. It is designed using amplitude and phase parameters, and is suitable for practical environments. The proposed scheme is especially beneficial in MIMO channels with random phase correlation. Different field tests have been also performed in [73] to demonstrate the use of MIMO for DTT. These 2×2 MIMO field tests involved terrestrial 8K transmissions over a single RF channel. The SNR degradation compared to laboratory measurements was under 3 dB even in Non-Line-of-Sight (NLoS) conditions. Reference [74] provides a performance comparison of soft-output and hard-output demodulators in the context of non-iterative MIMO systems. Results obtained give new insights for a MIMO-BICM system design, including antenna configuration, constellation symbols, and demodulation for a specific CR.

MIMO has been adopted in new generation DTT specifications such as DVB-NGH and ATSC 3.0, as an optional technology. The DVB-NGH technical specification [14] was the first terrestrial broadcasting standard supporting MIMO [75]. In DVB-NGH, field measurements were also used to develop representative channel models for mobile and fixed receptions, which can be found defined in [27]. These channel models are used in this dissertation, and are detailed in Appendix A. MIMO may become a key technology for ATSC 3.0, since the DVB-T2 standard [12] does not include this feature. Reference [76] provides an overview of the optional MIMO antenna system adopted in ATSC 3.0, intended for 2×2 cross-polarized MIMO. This means that at least two antennas with horizontal and vertical polarization are present at both transmitter and receiver sides. The MIMO scheme adopted in ATSC 3.0 re-uses the SISO antenna baseline constellations, and hence it introduces the use of MIMO with NUCs. In [77], simulations demonstrated that NUCs are advantageous for MIMO, compared with conventional uniform QAM constellations. NUCs were implemented on both MIMO-OFDM modulator and demodulator prototypes, and investigated under laboratory measurements and field testing. Results showed that high-order NUCs improved the required SNR by 1 dB, compared to QAM. However, the use of this constellations is not optimum for MIMO, since they were optimized for SISO, with a different SNR and chan-

nel model. This dissertation provides additional constellations optimized for MIMO, and compares their performance with original constellations optimized for SISO.

As main disadvantage, the use of MIMO drastically impacts the demodulation at the receiver, being necessary the use of suboptimum demappers to reduce complexity. In [78], the presented demapper applies a simplification when calculating the Euclidean distances needed to compute the LLRs. This step avoids almost all multiplications and presents a performance loss under 0.1 dB. Reference [79] presents the Decision Threshold (DT) algorithm, which only requires a single Euclidean distance in the I/Q components to calculate each LLR, regardless of the number of constellation symbols. The computational complexity is drastically decreased with DT, with a maximum SNR degradation of approximately 0.4 dB. Results show that the LLR approximation is applicable to transmission systems with high-orders of 1D-NUC. In [80], additional commonly used solution techniques are reviewed, and their computational complexity is discussed. Among heuristic algorithms, the authors focus on cancelling techniques, and their fast implementations based on linear estimation theory. Some examples are Zero Forcing (ZF), nulling and cancelling, or nulling and cancelling with optimal ordering.

Another possibility to reduce complexity is the use of an Sphere Decoder (SD). The original idea behind SD is to reach the optimum demapping solution with lower complexity than the exhaustive search. This is done by looking for the optimum solution just within a subset of the total possible symbols. As explained in [81], this subset is a hyper-sphere centered at the received signal vector with a certain radius. All SD insights are detailed graphically and mathematically in [82]. SD involves a high number of variations. For instance, Soft Fixed-Complexity Sphere Decoders (SFSD) represent a good approach, since they achieve a sub-optimum max-log performance, while keeping a very reduced fixed complexity that is reasonably close to that of hard-output sphere decoding [83]. Single tree search, ordered QR decomposition, channel matrix regularization, and LLR clipping are the key ingredients for realizing this type of MIMO detectors, as reference [84] mentions. With SFSD, it is necessary to perform a previous step called Successive Interference Cancellation (SIC) that needs to be performed in separated I and Q components. With 1D-NUCs, thanks to the squared shape, both components can be separated. However, this is not possible with 2D-NUCs. In this thesis, we propose an efficient pre-processing approach for 2D-NUCs based on the Voronoi regions, which has never been done in the current literature.

1.6 Thesis Outline and Contributions

This thesis is divided in six chapters and two appendices. The methodology approach of the investigations is partially covered in each of the chapters of the dissertation. The reader should refer to Section 1.7 for a complete reference of the publications originated from the work carried out in the thesis. Chapter 2 explains the fundamentals of the technologies employed, which do not represent an original contribution of this dissertation. Chapters 3, 4 and 5 are the core chapters of this thesis, where key contributions are explained in detail. Chapter 6 presents the main conclusions of this dissertation, and provides additional recommendations about the use of these constellations.

Appendix A describes the physical layer simulator implemented to evaluate and assess the objectives considered in this thesis. It is based on the ATSC 3.0 specification, and has been validated during the standardization process. Both the transmitter and the receiver are explained in detail. Specific differences and commonalities between SISO and MIMO, for each of the transmit/receive blocks are described. Channel models used are also explained. This appendix provides the definition of some basic channels widely used in broadcast systems, and then proceeds with channel models extracted from measurement campaigns. Appendix B presents the NUC optimization algorithm employed and illustrates its application with some examples.

The key contributions of the core chapters of this thesis are the following:

Chapter 3: Optimization and Performance Evaluation of Non-Uniform Constellations

This chapter first investigates the optimization of non-uniform constellations. This thesis designs 1D-NUC constellations with modulation orders until 4096 symbols. In order to perform 1D-demapping in each component, the symmetry of the constellations is kept. Quadrant symmetric 2D-NUCs are also optimized in this chapter. They are designed with modulation orders until 256 symbols, as done in the ATSC 3.0 specification, improving the SNR performance of 1D-NUCs. Two different channel models are considered: AWGN and independent and identically distributed (i.i.d.) Rayleigh. Another main contribution of this chapter is the design and implementation of a new algorithm to optimize a so-called Non-Uniform Rotated Constellation (NURC). The algorithm introduces the rotation angle as a new variable and further optimizes the capacity gain, since constellation symbols are optimized without capacity loss because of the rotation. In ATSC 3.0, NURCs were barely studied, since the use of multi-RF techniques was not considered. In this thesis, the designed NURCs are also combined with these technologies, using either 2 or 4 RF channels, and

CHAPTER 1. INTRODUCTION

observing the performance gain compared to non-rotated NUCs and single-RF transmissions. These results represent the first studies of NURCs with multi-RF techniques published in the literature. Publication [J3], listed in Section 1.7, is derived from this chapter.

Chapter 4: Low-Complexity Demapping and Quantization Algorithms

Two main contributions are collected in this chapter. The first part introduces a generic demapping algorithm that reduces the number of operations to compute. The proposed demapper can be extrapolated to any constellation order. The chapter focuses on 256NUC constellations, which represent the highest modulation order of 2D-NUC, i.e. the most complex case, considered in this dissertation and in the ATSC 3.0 specification. The proposed algorithm is based on two different strategies. The first one takes advantage of the symmetry that constellations provide, selecting a cluster of points to compute the LLR. The second strategy exploits the condensation of NUCs, especially at low SNRs where some of the constellation symbols almost repeat the same position in the I/Q plane. Both strategies can be combined in order to reduce the number of required distances with almost no performance loss compared to the optimum ML demapper. Moreover, the proposed demapper can be combined with RC without any additional complexity. Publication [J2], listed in Section 1.7, is derived from this section. It is the first manuscript analyzing the complexity of NUCs, and some publications have been derived from this work.

The second contribution of this chapter presents an optimization method for uniform and non-uniform quantization of I/Q symbols and LLR values when using NUCs. Quantization has never been studied when using NUCs, to the best of the authors' knowledge. Although the method is applied to NUCs, can be employed using any type of constellation. The number of bits to quantize is reduced to the extent possible, while maintaining a good SNR performance. This chapter evaluates the optimized reproduction values for I/Q symbols and LLR, and investigates their influence on NUC, compared to uniform QAM constellations, in a mobile reception scenario. Publication [J5], listed in Section 1.7, is derived from this section.

Chapter 5: Non-Uniform Constellations for MIMO Communications

Chapter 5 comprehends two different contributions. First, low-order 1D-NUCs and 2D-NUCs are optimized for 2×2 MIMO systems. The concrete parameters that affect the optimization process by the use of two transmit and receive antennas are investigated. In particular, this chapter analyzes the optimization of NUCs in one or two antennas, the influence of different demappers, and the

use of several channel models. It also analyzes whether NUCs optimized for SISO are also optimum for MIMO, which was not considered in the ATSC 3.0 standardization process. It also provides new re-optimized constellations for multi-antenna systems and high power imbalances, which is shown to be the MIMO parameter that affects to a greater extent the NUC optimization.

The second contribution is a complete analysis from the demapping complexity point of view. The objective is to observe the difference when using NUCs instead conventional QAM constellations, and provide some guidelines for an efficient use of these constellations in MIMO. An additional solution for 2D-NUCs and fixed sphere decoders is also proposed, in order to reduce the complexity burden while keeping a good performance compared to the optimum ML demapper. Publications [J1] and [J4], listed in Section 1.7, are derived from this chapter.

1.7 List of Publications

1.7.1 Publications and Activities Related to this Thesis

International Journals

- [J1] D. Gómez-Barquero, D. Vargas, **M. Fuentes**, P. Klenner, S. Moon, J. Y. Choi, D. Schneider, and K. Murayama, “MIMO for ATSC 3.0,” *IEEE Trans. Broadcast.*, vol. 62, no. 1, pp. 298-305, March 2016.
- [J2] **M. Fuentes**, D. Vargas, and D. Gómez-Barquero, “Low-Complexity Demapping Algorithm for Two-Dimensional Non-Uniform Constellations,” *IEEE Trans. Broadcast.*, vol. 62, no. 2, pp. 375-383, June 2016.
- [J3] **M. Fuentes**, J. J. Giménez, and D. Gómez-Barquero, “Optimization and Performance of Non-Uniform Rotated Constellations with Multi-RF Transmission Techniques,” *IEEE Trans. Broadcast.*, vol. 62, no. 4, pp. 855-863, Dec. 2016.
- [J4] C. Barjau, **M. Fuentes**, T. Shitomi, and D. Gómez-Barquero, “MIMO Solution for Successive Interference Cancellation and Two-Dimensional Non-Uniform Constellations,” *IEEE Communications Letters*, Jan. 2017.
- [J5] **M. Fuentes**, M. Meidlinger, D. Gómez-Barquero, and G. Matz, “Receiver Quantization in Wireless Broadcasting Systems with Non-Uniform Constellations,” *submitted to the IEEE Trans. Broadcast.*, 2017.

International Research Visits

- [V1] Technische Universität Wien - Institute of Telecommunications, Vienna (Austria). February - April 2016 (3 months).

Standardization Activities

- [S1] 9 contributions to the TG3/S32-2 Ad-hoc group on Modulation and Coding in the standardization process of ATSC 3.0:
 - Performance evaluation and validation of BICM components: LDPC codes, bit-interleavers and NUCs.
 - Evaluation of rotated NUCs for the baseline profile.
 - Modulation and coding rate reduction.
 - Transmit diversity techniques for MISO systems.
 - Performance evaluation and optimization of MIMO precoders.

Research Projects

- [P1] Non-Uniform Constellations for Next-Generation Digital Terrestrial Broadcast System ATSC 3.0 (SP20140540).
- Funding institution: Universitat Politecnica de Valencia, Spain.
 - Start date: 01/01/2015
 - Duration: 12 months
- [P2] Tecnologías de Radiodifusión Digital Extra-Terrestres (ET-Broadcast) (TEC2014-56483-R-AR).
- Funding institution: Ministerio de Economía, Industria y Competitividad, Spain. Co-funded by the European FEDER found.
 - Start date: 01/01/2015
 - Duration: 36 months
- [P3] The Information Bottleneck Principle in Multiterminal Communications and Inference (TINCOIN) (ICT12-54).
- Funding institution: Wiener Wissenschafts-, Forschungs- und Technologiefonds (WWTF), Austria.
 - Start date: 01/06/2014
 - Duration: 24 months

1.7.2 Other Publications

International Journals

- [J6] **M. Fuentes**, C. García-Pardo, E. Garro, D. Gómez-Barquero, and N. Cardona, “Coexistence of Digital Terrestrial Television and Next Generation Cellular Networks in the 700 MHz Band,” *IEEE Wireless Communications*, vol. 21, no. 6, pp. 63-69, Dec. 2014.
- [J7] J. Ribadeneira, C. García-Pardo, **M. Fuentes**, D. Gómez-Barquero, and N. Cardona, “Interference Analysis for DVB-T2 Network Planning in Colombia with other Television Broadcasting Technologies,” *IEEE Latin America Transactions*, vol. 14, no. 3, pp. 1162-1168, March 2016.

CHAPTER 1. INTRODUCTION

International Conferences

- [C1] C. García-Pardo, **M. Fuentes**, D. Gómez-Barquero, E. Garro, and N. Cardona, “Coexistence of Broadcast and Mobile Technologies in UHF bands,” *23rd Session European Conference on Networks and Communications*, Bologna, Italy, May 2014.

COST Technical Documents

- [TD1] **M. Fuentes**, E. Garro, C. García-Pardo, D. Gómez-Barquero, and N. Cardona, “Coexistence of LTE and DVB Technologies in the Digital Dividend Band. A contribution to Transmission Parameters Optimization,” *9th MC and Scientific Meeting, European COST IC1004 action*, Ferrara, Italy, Feb. 2014.
- [TD2] **M. Fuentes**, E. Garro, C. García-Pardo, D. Gómez-Barquero, and N. Cardona, “Coexistence of LTE and DTT Services in the First and Second Digital Dividends. Planning Studies and Potential Approaches,” *10th MC and Scientific Meeting, European COST IC1004 action*, Aalborg, Denmark, May 2014.
- [TD3] G. Martínez, **M. Fuentes**, C. García-Pardo, and N. Cardona, “Spectrum Sharing for LTE and DTT: Indoor LTE-A Femtocell in DVB-T2 service area,” *12th MC and Scientific Meeting, European COST IC1004 action*, Dublin, Ireland, Jan. 2015.

National Journals

- [NJ1] D. Gómez-Barquero J. López-Sánchez, G. Martínez, J. Ribadeneira, E. Garro, C. García-Pardo, **M. Fuentes**, and N. Cardona, “Frequency and Network Planning and Optimization of the Digital Terrestrial Television DVB-T2 Networks in Colombia,” *Waves*, year 6, pp. 5-19, Sept. 2014.

Chapter 2

Background

This chapter presents the fundamental ideas and concepts on broadcasting communications utilized in this dissertation. The theoretical definitions presented in following sections constitute the basis of Chapters 3, 4 and 5, and permit to introduce minutely the different contributions of this work. Section 2.1 provides a general system overview and describes the different transmit to receive components used. The basics of BICM systems are also explained in detail, providing a general description of the three parts in which these systems are divided: FEC, BIL and modulation. This section also presents the fundamentals of MIMO systems. This includes some implementation aspects, the different gains obtained and the channel matrix description. Section 2.2 introduces the BICM capacity limits, for both SISO and MIMO systems. Implications on wireless communication systems using uniform QAM constellations are here identified. The last part of this chapter is devoted to the receiver side. In Section 2.3, the optimum ML demapper is first presented. This section also explains the suboptimum demappers that reduce complexity at the expense of some performance loss. This chapter approaches an additional feature on practical receiver implementations, i.e. quantization of the received signal. Finally, Section 2.4 extends the work to MIMO receivers.

2.1 System Model Overview

In DTT systems, the source of information (typically video or audio) is digitally transformed into bits and fed to the transmitter. Digital signals are adapted to the channel so the transmission mode selected maximizes to the extent possible the capacity-coverage trade-off of the system. From reference [27], one can assume that a continuous time signal $s(t)$ is transmitted over a channel $h(t)$.

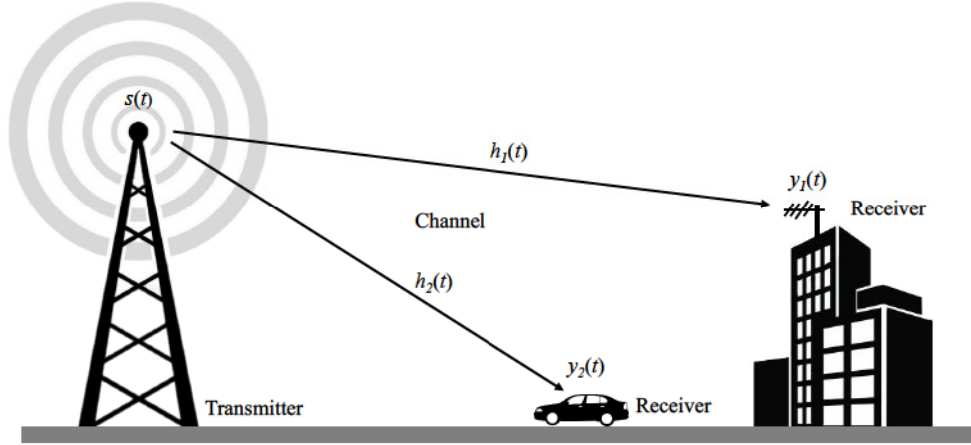


Figure 2.1: Simplified broadcasting communication system model.

As Fig. 2.1 shows, the channel distorts the signal characteristics producing a signal $y(t)$, which is different for each possible receiver. The received signal $y(t)$ is calculated as follows:

$$y(t) = h(t) * s(t) + w(t) \quad (2.1)$$

where $w(t)$ represents a white Gaussian noise and the operator $*$ denotes the convolution. Note that in broadcasting transmissions, there is a lack of feedback from users to the transmitter. Systems do not permit an adaptive configuration that maximizes the capacity of each individual user, and different channel realizations are obtained at the different network locations. Therefore, systems have to be configured considering the worst channel conditions and signal received. As main advantage, there is no limit in the number of users that can receive the service provided.

In digital communications, the information is transmitted every T seconds, which implies an information rate of $1/T$ Hz proportional to the signal bandwidth. To retrieve the transmitted information, receivers need to sample the signal $y(t)$ at every $0, T, 2T, \dots$. Assuming that the Nyquist rate criterion is fulfilled [85], the digital received signal can be represented by the discrete time baseband model, shown in Eq. 2.2.

$$y[n] = h[n]s[n] + w[n] \quad (2.2)$$

where n denotes the n th sample. The described system can be easily modeled using a basic communication system block diagram, as presented in Fig. 2.2. From the sampled digital signal $y[n]$, the receiver may have to correct part of the information, corrupted due to the $h[n]$ and $w[n]$ terms.



Figure 2.2: Simplified communication system block diagram.

2.1.1 Multi-Antenna Considerations

When N_T transmit and N_R receive antennas are used in a multi-antenna system, the discrete received signal is modeled as follows:

$$\mathbf{y}[n] = \mathbf{H}[n]\mathbf{s}[n] + \mathbf{w}[n] \quad (2.3)$$

where \mathbf{s} is the $N_T \times 1$ transmitted vector, \mathbf{y} is the $N_R \times 1$ received vector, \mathbf{H} is the channel matrix, and \mathbf{w} is the $N_R \times 1$ additive circularly symmetric complex Gaussian noise. In particular, \mathbf{H} is a $N_T \times N_R$ matrix, with the expression:

$$\mathbf{H} = \begin{bmatrix} h_{11} & h_{12} & \dots & h_{1N_T} \\ h_{21} & h_{22} & \dots & h_{2N_T} \\ \vdots & \vdots & \ddots & \vdots \\ h_{N_R1} & h_{N_R2} & \dots & h_{N_RN_T} \end{bmatrix} \quad (2.4)$$

where, for instance, the index h_{12} refers to the channel between first receive antenna and second transmit antenna. This is also shown in Fig. 2.3. Note that all h indexes are distributed as $\mathcal{CN}(\mathbf{0}, 1)$. From now, the variable n is omitted for simplicity.

In this dissertation, only 2×2 MIMO systems are evaluated, i.e. two receive and transmit antennas are considered. This implies a transmitted vector \mathbf{s} with 2×1 elements, a received \mathbf{y} with 2×1 elements, and \mathbf{H} adopting the following form:

$$\mathbf{H} = \begin{bmatrix} h_{11} & h_{12} \\ h_{21} & h_{22} \end{bmatrix} \quad (2.5)$$

Note that the channel power is normalized using the squared Frobenius matrix norm, as shown in Eq. 2.6.

$$\|\mathbf{H}\|_F^2 = \sum_{i,j}^{2,2} |h_{i,j}|^2 = |h_{1,1}|^2 + |h_{1,2}|^2 + |h_{2,1}|^2 + |h_{2,2}|^2 \quad (2.6)$$

Moreover, indexes in each receive antenna are normalized to one, as shown in Eq. 2.7.

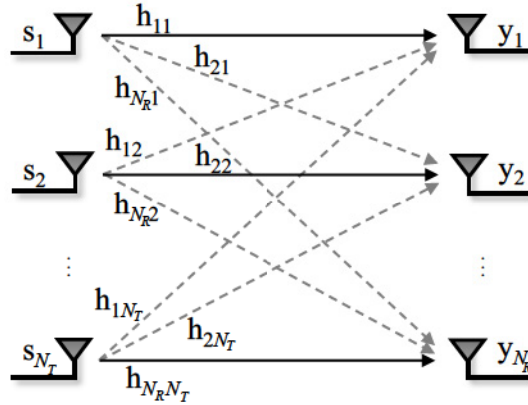


Figure 2.3: $N_T \times N_R$ MIMO channel diagram.

$$\sum_i^2 |h_{i,j}|^2 = 1 \quad (2.7)$$

With this expression, the total channel power $\|\mathbf{H}\|_F^2$ is equal to 2, which is valid for the 2×2 MIMO scheme considered in this thesis. The matrix \mathbf{H} considers that one transmit/receive antenna has vertical polarization and the other transmit/receive antenna has horizontal polarization, or vice-versa. Power Imbalance (PI) between the two transmit antennas can be also introduced. The matrix \mathbf{H} can be multiplied by two additional factors, obtaining a modified channel model $\tilde{\mathbf{H}}$:

$$\tilde{\mathbf{H}} = \mathbf{X} \odot \mathbf{P} \odot \mathbf{H} \quad (2.8)$$

where \mathbf{X} is the Cross-Polar Discrimination (XPD) factor, \mathbf{P} is the PI between antennas, \mathbf{H} is the channel model matrix, and \odot represents the Hadamard element-wise multiplication. The cross-polarization matrix, represents the average power ratio of the direct co-polar term that is introduced in the cross-polar term. For the case under study with two transmit and receive antennas, the matrix \mathbf{X} is calculated as:

$$\mathbf{X} = \begin{bmatrix} 1 & \frac{|h_{12}|^2}{|h_{11}|^2} \\ \frac{|h_{21}|^2}{|h_{22}|^2} & 1 \end{bmatrix} \quad (2.9)$$

In this case, $XPD = 1/X = |h_{11}|^2/|h_{21}|^2 = |h_{22}|^2/|h_{12}|^2$. High or low XPD values represent low or high coupling between polarizations, respectively. For the extreme case with full coupling, the XPD value is 1, while for no coupling

$XPD = \infty$. On the other hand, the power imbalance introduced between the two transmitting antennas can be modeled with the following diagonal matrix:

$$\mathbf{P} = \begin{bmatrix} \sqrt{\beta} & 0 \\ 0 & \sqrt{1-\beta} \end{bmatrix} \quad (2.10)$$

The matrix \mathbf{P} varies the power allocated at each transmit antenna according to the parameter $\beta \in [0, 1]$. PI is included as part of the channel to provide a generic approach that takes into account either intentional imbalances introduced at the transmitter, or imbalances produced as part of the channel. The last element of \mathbf{H} is the matrix $\tilde{\mathbf{H}}$, which depends on the channel model used, and is explained in Appendix A. Logically, the use of a single antenna in both transmitter and receiver drastically simplifies the channel model under study, since no cross-polarization discrimination and power imbalance terms are considered and therefore $h = \tilde{h}$.

2.1.2 BICM Components

BICM is the state-of-the-art pragmatic approach for combining channel coding with digital modulations in fading transmissions [23]. In BICM systems, the modulation constellation can be chosen independently of the CR. The structure of the BICM block consists of the serial concatenation of a FEC code, a bit-interleaver and a modulation mapper. It is one of the most important modules in a broadcast physical layer, since it provides error correction capabilities to the system, allowing the transmitter multiple choices to trade-off robustness for capacity. As explained in [34], the improvements achieved in this module represent one of the major reasons for improvements in efficiency, which is a key performance indicator to make an efficient use of the scarce radio spectrum. Fig. 2.4 presents a system block diagram based on the BICM architecture. In the following, details and a description of the functionalities and structure of each block in the chain is provided. For a complete transmit to receive block diagram, readers can refer to Appendix A.

FEC Coding

The input to the channel encoder is a bit stream b with data size N_b . The channel encoder adds redundant bits, in order to increase the signal against errors generated by the channel. The encoder generates N_c coded bits, from the N_b original ones ($N_c > N_b$), so the information part is contained within the codeword. The ratio N_b/N_c represents the coding rate. For instance, 1/3 means that just a third part of the codeword contains source information, while the rest contains parity data. In this dissertation, coding techniques based on

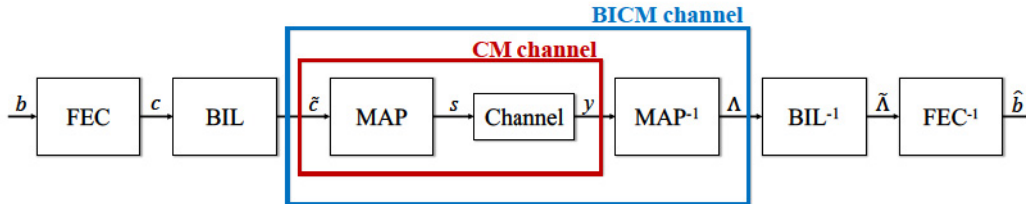


Figure 2.4: Transmit to receive BICM system block diagram.

ATSC 3.0 are used. Concretely, we use the serial concatenation of an outer BCH code and a inner LDPC code. Two different LDPC code lengths are defined, i.e. $L = 16200$ bits (short codes) and $L = 64800$ bits (long codes), with 12 possible coding rates to use, from $2/15$ to $13/15$, with step $1/15$.

Bit-Interleaving

The encoded bits c are then bit-interleaved by using a permutation sequence that has been previously loaded, obtaining \tilde{c} with size N_c . It is used to break the dependencies introduced by the channel encoder, increasing the robustness of the current transmission, i.e. improving the performance. As a drawback, BIL affects the hardware implementation. In this dissertation, a 3-stage BIL is used, which has been defined in ATSC 3.0 [15] and DVB-NGH [14] specifications. This BIL consists of a parity interleaver, a group-wise interleaver and a block interleaver. The role of the parity interleaver is to convert the staircase structure of the parity-part of the LDPC parity-check matrix into a quasi-cyclic structure similar to the information-part of the matrix enabling parallel decoding. The group-wise interleaving allows optimizing the combination between the FEC code and the constellation, and hence it is different for each constellation and CR. The block interleaver finally provides the allocation from bits to constellation symbols.

Mapping

Finally, the bit-interleaved bits \tilde{c} are mapped in groups to constellation symbols \mathbf{s} . As Fig. 2.4 shows, groups of m bits are mapped to complex symbols via a one-to-one mapping function $\mu \triangleq 0, 1 \rightarrow \chi$, where χ is the set of possible constellation symbols with cardinality $|\chi| = 2^m$. The optimum shape of the constellation, i.e. how the symbols are located along the I/Q plane, depends directly on the channel, the modulation order and the coding rate, and represents the core research area of this dissertation.

Retrieving Information at the Receiver

The received signal vector y is sent to the demapper, which provides soft information about the transmitted information bits \tilde{c} in the form of log-likelihood ratios Λ . The stream Λ is de-interleaved, obtaining $\hat{\Lambda}$. Then, it is passed to the channel decoder, which outputs an estimate vector \hat{b} of the transmitted bits b . In BICM, demodulation and decoding are separated into independent processing blocks, thanks to the use of a bit-wise interleaving with feasible computational complexity. Solving both tasks separately introduces an information loss because bit interdependencies introduced by the channel code are no longer exploited.

2.2 BICM Capacity Limits

This section first introduces the Shannon theory, and then explains the capacity limits applicable when sending data modulated in the form of QAM constellations. Expressions obtained in the corresponding subsections are afterwards extrapolated to MIMO.

2.2.1 The Unconstrained Shannon Limit

From Eq. 2.2, a channel only perturbed by AWGN noise at the n th sample can be simplified to $h[n] = 1$. In this case, the received signal y can be expressed as follows:

$$y[n] = s[n] + w[n] \tag{2.11}$$

where $w[n] \sim \mathcal{CN}(0, \sigma^2)$ is additive circularly symmetric complex Gaussian noise, and σ^2 is the noise power. this expression represents a simple and straightforward model that can be used in a wide group of communication channels. The capacity (bit/s) of a AWGN channel of band W (Hz), whose average power is N , where a transmitted signal with an average power P is transmitted, is given by Eq. 2.12.

$$C(\text{bit/s}) = W \cdot \log_2 \frac{P + \sigma^2}{\sigma^2} \tag{2.12}$$

This expression can be further simplified to relate normalized capacity, calculated as C/W , to SNR.

$$C(\text{bit/s/Hz}) = \log_2(1 + SNR) \tag{2.13}$$

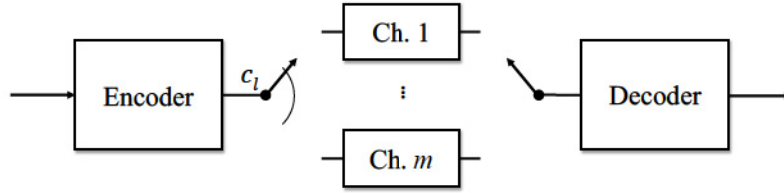


Figure 2.5: Parallel channel model for a BICM transmission.

where SNR is the signal-to-noise ratio in linear units, also expressed as P/σ^2 , with $P = |s|^2$ being the variance of the transmitted signal. This model is directly not applicable to practical environments. It is just an upper limit, applicable to an idealized scenario [37].

2.2.2 Capacity Calculation for BICM

This subsection presents the mathematical expressions for the CM and BICM capacities that denote the maximum rates achievable for a particular channel model. Let x denote the transmitted signal and y the received signal. Given a communication system with channel h , the received signal is calculated as $y = hx$. From reference [22], BICM systems can be modeled as a set of m parallel binary-input channels, which are connected to the encoder output by a switch modeling an ideal interleaver, as Fig. 2.5 depicts. Each channel m corresponds to a position in the signal label of the constellation χ . The channel capacity is calculated as the maximum achievable rate under the constraint of uniform input distribution, and is given by Eq. 2.14 [20].

$$C_{CM} = I(x; y|h) = m - E_{x,y,h} \left[\log_2 \frac{\sum_{x' \in \chi} p(y|x', h)}{p(y|x, h)} \right] \quad (2.14)$$

where $E_{x,y,h}$ denotes expectation with respect to x , y and h , χ is the set of possible constellation symbols of the transmitted signal x , and $m = \log_2(M)$, with M being the number of symbols per constellation. The BICM capacity formula can be derived from Eq. 2.14. After some modifications, and considering m parallel independent channels, the BICM achievable rate can be calculated as:

$$C_{BICM} = \sum_{l=1}^m I(c_l; y|h) = m - \sum_{l=1}^m E_{x,y,h} \left[\log_2 \frac{\sum_{x' \in \chi} p(y|x', h)}{\sum_{x' \in \chi_l^b} p(y|x', h)} \right] \quad (2.15)$$

where $b \in \{0, 1\}$ is equiprobable, and χ_l^b denotes the set of symbols in the constellation χ for which the code bit c_l equals b . The conditional probability density function (pdf) $p(y|x, h)$ depends on the demapper used. Demappers are described in Section 2.3.1. This expression holds in general for all signal sets χ , and for all memoryless vector channels such as AWGN, Rice or Rayleigh. It should be noted that the CM capacity is the upper-bound to the BICM capacity, as shown in the following inequality [74]:

$$C_{\text{CM}} \geq C_{\text{BICM}} \quad (2.16)$$

Despite the performance loss introduced by BICM systems, significant improvements can be obtained when using iterative decoding. As shown in [27], the BICM with iterative demapping can even reach the CM bound. However, the use of the iterative decoding is out of the scope of this dissertation.

2.2.3 BICM Limits for Uniform QAM Constellations

In previous calculations, no specification was provided on how to transmit constellation symbols. In this section, we follow the approach given by [38], where coded bits are mapped to the symbols using one of the many familiar ways possible: QAM. Using this type of constellations, each conventional form of MQAM has asymptotic BICM capacity at high SNRs of $\log_2(M)$ bit/s/Hz. Due to the limited number of different constellation symbols, the information that can be transmitted is bounded. Each successively larger QAM constellation offers a capacity increase, although it might be very small at low SNRs. However, as the author in [38] explains, there is a general trend of increasing divergence from the classic Shannon capacity at higher SNRs, even though higher orders of QAM are taken.

As an example, a Gray-coded 16QAM constellation is assumed. The Gray code is a binary system where two successive values differ in just one bit. Gray codes are used to facilitate error correction and improve the system capacity. With the considered 16QAM, 4 different coded bits are mapped to symbols, 2 to each of the independent I and Q axis. Prior to power normalization, the constellation positions on a single I/Q component are $\{-3, -1, +1, +3\}$, as Fig. 2.6 shows. Thus, symbols are mapped as $\{0, 0, 1, 1\}$ for the MSB and $\{1, 0, 0, 1\}$ for the LSB, in each component. Mapping the I component, bits 1 and 3 will take these values. When mapping Q, bits 2 and 4 are selected. Note that the capacity for each bit-level depends on the χ_l^0 and χ_l^1 alphabets, i.e. depends on the mapping chosen.

From now, it is assumed that the bits mapped to constellation symbols are independent, and that possible values are 0 or 1. For instance, if MSB takes 0 as a value, then the transmitted symbol can be either +1 or +3. Therefore,

CHAPTER 2. BACKGROUND

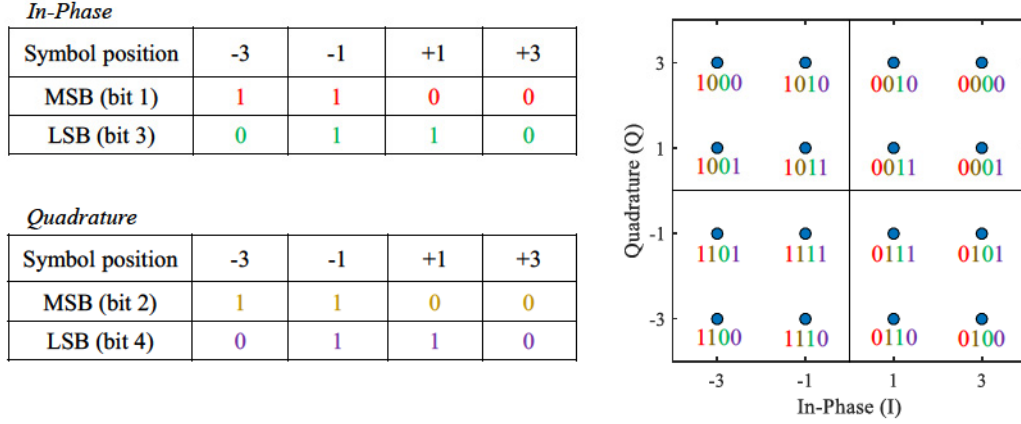


Figure 2.6: Gray mapping for 16QAM constellations.

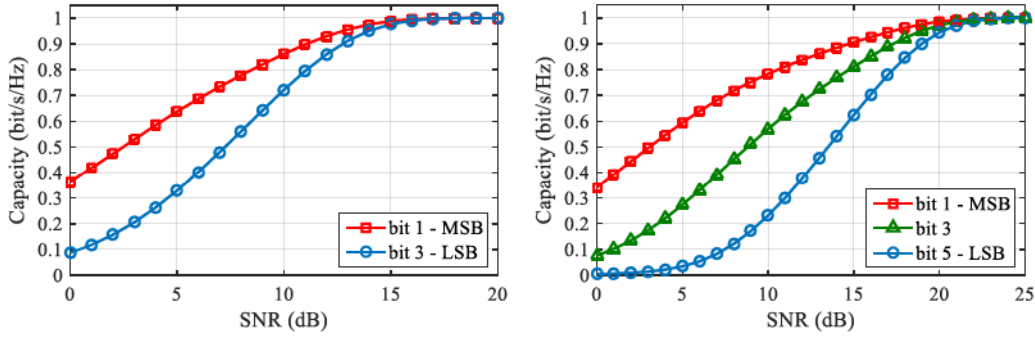


Figure 2.7: Bit-level BICM capacities in uniform 16QAM (left) and 64QAM (right) constellations, AWGN channel.

the pdf for the MSB of the received signal $p(y|MSB = 0)$ has identical peaks at $y = +1$ and $y = +3$. The BICM capacity can be obtained for each bit level separately by applying the mutual information formula (given by Eq. 2.15) to each one. The total BICM capacity can be calculated as the sum of all bit-level capacities.

Fig. 2.7 depicts the bit-level capacities calculated for two different Gray-coded 16QAM and 64QAM constellations. For the sake of simplicity, only odd bits are shown (I component). The capacity curves for even bits are identical, since QAM constellations have squared shape. As Fig. 2.7 shows, in every case the bit-level capacity reaches an asymptotic value of 1 bit/s/Hz, when the SNR is sufficiently high. On the other hand, MSB provides the highest capacity, and LSB tends to zero at low SNRs. This feature will be exploited by non-uniform constellations, as described in Chapter 3.

2.2 BICM Capacity Limits

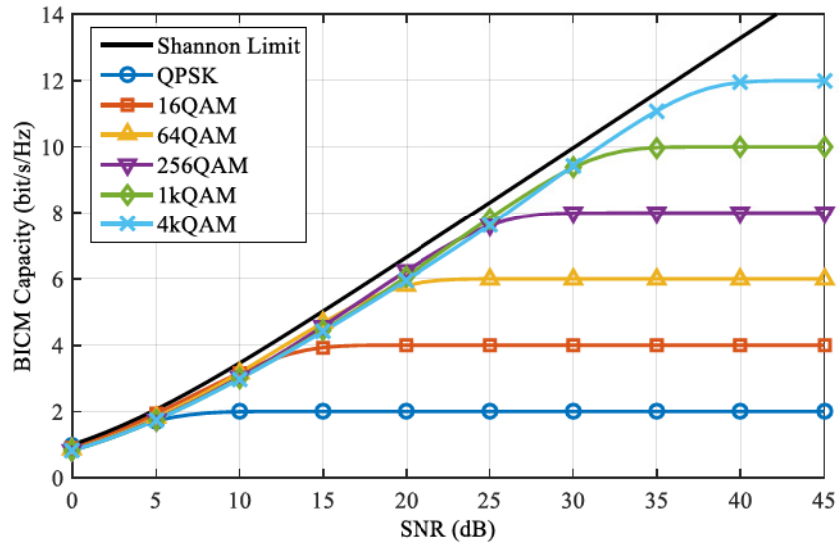


Figure 2.8: BICM capacity of uniform QAM constellations in AWGN channel.

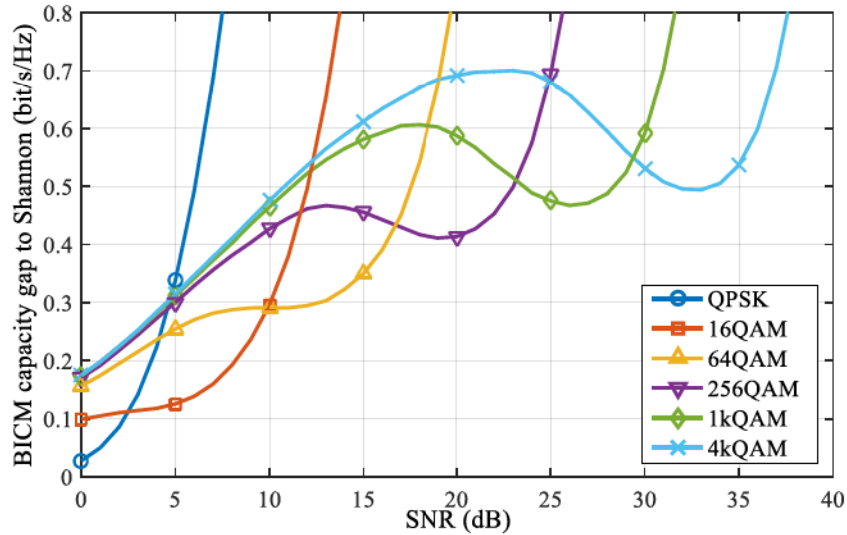


Figure 2.9: BICM capacity shortfall of uniform QAM constellations from the Shannon theoretical limit, AWGN channel.

Fig. 2.8 depicts the total BICM capacity obtained for different orders of constellations under AWGN channel. In particular, QAM constellations with 4, 16, 64, 256, 1024 and 4096 symbols are shown. It is interesting to observe that the BICM limit for each constellation is not always higher than the previous one. In other words, successive QAM constellations take turns to provide the

best BICM capacity, so depending on the SNR range in which the system works, it will be better to use a particular order of constellation. For instance, 64QAM is the best option around 12 dB, while 256QAM works better at 18 dB. This trend continues towards higher orders of constellation.

This is better shown plotting the shortfall of the BICM capacity from the unconstrained Shannon limit. Fig. 2.9 reveals clearly the way in which the successive QAM constellation orders take turns to provide the best capacity [38]. In this figure, it is easy to see that the capacity shortfall increases with the SNR, and also with the order of constellation. This gap to Shannon reveals that uniform distributions of QAM symbols are not optimum. Non-uniform distributions are a good solution to reduce this gap, and will be studied in next chapter.

2.2.4 Extension to MIMO-BICM Systems

When using multiple antennas, the channel capacity perturbed by AWGN noise can be derived from Eq. 2.13 using the Telatar expression proposed in [86]. For a channel matrix \mathbf{H} , the MIMO capacity when the channel coefficients are only available at the receiver, i.e. with no feedback to the transmitter, is shown in the following expression:

$$C_{\text{MIMO}}(\text{bit/s/Hz}) = \log_2(\mathbf{I}_{N_R} + \frac{SNR}{N_T} \mathbf{H}\mathbf{H}^\dagger) \quad (2.17)$$

The channel capacity for MIMO can be also expressed using the singular value decomposition of \mathbf{H} as follows [87]:

$$\mathbf{H} = \mathbf{U}\mathbf{\Sigma}\mathbf{V}^\dagger \quad (2.18)$$

where \mathbf{U} and \mathbf{V} are $N_R \times N_R$ and $N_T \times N_T$ unitary matrixes respectively, and $\mathbf{\Sigma}$ is a rectangular matrix with size $N_R \times N_T$ and positive real numbers on the diagonal. Formula 2.18 can be used in 2.17, which can be reformulated as:

$$\tilde{\mathbf{y}} = \mathbf{\Sigma}\tilde{\mathbf{x}} + \tilde{\mathbf{w}} \quad (2.19)$$

where $\tilde{\mathbf{y}} = \mathbf{U}^\dagger\mathbf{y}$, $\tilde{\mathbf{x}} = \mathbf{V}^\dagger\mathbf{x}$, and $\tilde{\mathbf{w}} = \mathbf{U}^\dagger\mathbf{w}$. Taking into account that $\tilde{\mathbf{w}}$ is equally distributed as \mathbf{w} , the channel capacity can be also expressed as a function of the singular values of \mathbf{H} , as shown in Eq. 2.20.

$$C_{\text{MIMO}}(\text{bit/s/Hz}) = \sum_{i=1}^{N_{\min}} \log_2(1 + \frac{SNR}{N_T} \lambda_i^2) \quad (2.20)$$

where λ_i is the i th diagonal entry of $\mathbf{\Sigma}$. Note that in Eq. 2.20 the channel can be divided into parallel channels. In this case, both individual channels are

given by the singular values of the channel matrix \mathbf{H} . In the above expression, n_{min} is the number of non-zero values that depend on the rank of the channel matrix. The higher the value of n_{min} , the larger the number of parallel channels in which information can be transmitted through. Therefore, the maximum MIMO capacity can be achieved only when \mathbf{H} is full rank. In other words, when columns or rows are linearly independent, i.e. when $N_R > N_T$ or $N_T > N_R$, respectively.

The coded modulation maximum achievable rate can be also extended to MIMO. In this case, the channel capacity under the constraint of uniform input distribution is given by the following expression:

$$C_{CM}^{MIMO} = I(\mathbf{x}; \mathbf{y}|\mathbf{H}) = m - E_{\mathbf{x}, \mathbf{y}, \mathbf{H}} \left[\log_2 \frac{\sum_{\mathbf{x}' \in \chi} p(\mathbf{y}|\mathbf{x}', \mathbf{H})}{p(\mathbf{y}|\mathbf{x}, \mathbf{H})} \right] \quad (2.21)$$

where $E_{\mathbf{x}, \mathbf{y}, \mathbf{H}}$ denotes expectation with respect to \mathbf{x} , \mathbf{y} and \mathbf{H} , and χ is the set of possible constellation symbols. Taking into account this expression, the BICM achievable rate can be also extrapolated to MIMO as follows:

$$C_{BICM}^{MIMO} = \sum_{l=1}^m I(c_l; \mathbf{y}|\mathbf{H}) = m - \sum_{l=1}^m E_{\mathbf{x}, \mathbf{y}, \mathbf{H}} \left[\log_2 \frac{\sum_{\mathbf{x}' \in \chi} p(\mathbf{y}|\mathbf{x}', \mathbf{H})}{\sum_{\mathbf{x}' \in \chi_l^b} p(\mathbf{y}|\mathbf{x}', \mathbf{H})} \right] \quad (2.22)$$

As occurred for SISO, this expression holds in general for all signal sets χ , and for all memoryless vector channels such as AWGN, Rice or Rayleigh, depending on the choice of $p(\mathbf{y}|\mathbf{x}', \mathbf{H})$. Both equations 2.21 and 2.22 are the maximum achievable rates for a CM and BICM communication system with N_T and N_R antennas, and vanishing error probability.

2.3 Single-Antenna Receivers

This section describes first two different demappers for demodulation. The presented demappers evaluate the distance from the received symbol y to all possible constellation symbols x . The 1D-demapping strategy, which can be combined with both demappers, is presented afterwards. This section also introduces the basics of quantization.

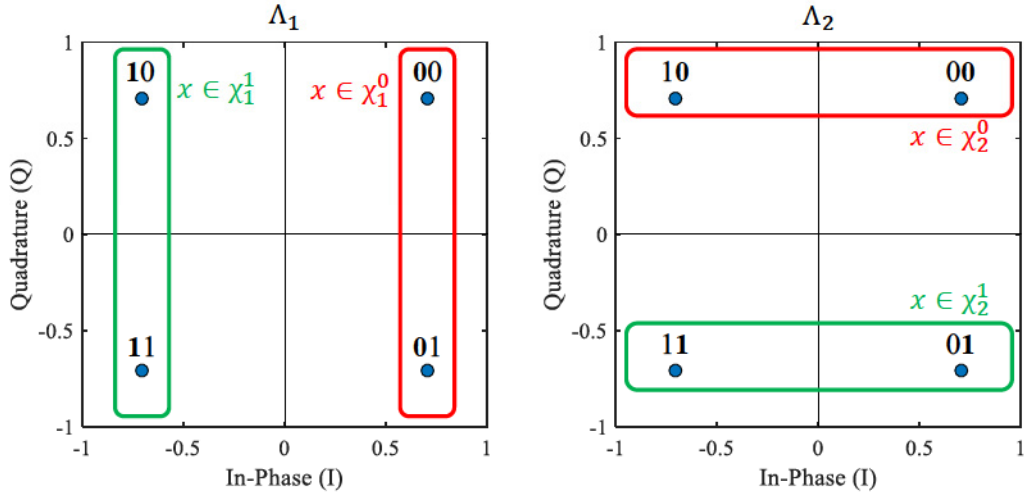


Figure 2.10: Complementary sets of transmitted symbols to compute Λ_1 and Λ_2 , using a QPSK constellation.

2.3.1 Demapping Algorithms

Optimum Maximum-Likelihood Demapper

The optimum ML demapper minimizes the probability of error of the transmitted code bits, and it is expressed in the form of LLRs. From the received symbol vector y , and the channel vector h , each log-likelihood ratio (LLR) Λ_l is computed for all code bits c_l , $l = 1, \dots, B$, with B as the number of bits that affect each dimension of a constellation. B does not refer to the number of bits per symbol (m). For the LLR computation, a total number of M Euclidean distances between the received symbol y and all constellation symbols x is calculated. A single output Λ_l can be computed using Eq. 2.23.

$$\Lambda_l \triangleq \log \frac{p(c_l = 1|y, h)}{p(c_l = 0|y, h)} = \log \frac{\sum_{x \in \chi_l^1} p(y|x, h)}{\sum_{x \in \chi_l^0} p(y|x, h)} \quad (2.23)$$

where $p(c_l = 1|y, h)$ is the probability function of the transmitted coded bits conditioned to the received vector y and the channel matrix h , x is a possible transmitted symbol, and \log refers to the natural logarithm. χ_l^1 and χ_l^0 denote the complementary sets of transmit vector x for which $c_l = 1$ and $c_l = 0$ respectively. The amount of complementary sets χ_l^1 and χ_l^0 has to be B . Fig. 2.10 shows an example of the complementary sets for a QPSK constellation, where two different Λ_1 and Λ_2 are computed. The optimum ML demapper

has therefore to consider $M = 2^B$ symbols to previously calculate all possible distances, and then calculate the LLRs. The conditional $p(y|x, h)$ is given by the following expression:

$$p(y|x, h) = \frac{1}{(\pi\sigma^2)} \exp\left(\frac{-|y - hx|^2}{\sigma^2}\right) \quad (2.24)$$

where σ^2 represents the noise variance. From Eq. 2.24, and after some expression manipulations [28], each LLR Λ_l can be computed as:

$$\Lambda_l = \log \frac{\sum_{x \in \mathcal{X}_l^1} \exp\left(-\frac{|y - hx|^2}{\sigma^2}\right)}{\sum_{x \in \mathcal{X}_l^0} \exp\left(-\frac{|y - hx|^2}{\sigma^2}\right)} \quad (2.25)$$

With ML, the complexity increases exponentially with the constellation order. For each demapping execution the complexity order is $\mathcal{O}(M)$, where M is the cardinality of the symbol constellation. This complexity is usually considered too high when using real receivers, which have to compute a huge number of distances in real-time transmissions. In that sense, suboptimum demappers may be useful to reduce complexity in the sense of distances to compute, while keeping a good performance. In Chapter 4, different suboptimum demappers are proposed.

Max-log Demapper

The max-log approximation is one of the most common algorithms used to reduce the ML demapping complexity. Max-log demappers substitute the logarithm and exponential functions using the following approximation:

$$\log\left(\sum_i \exp(x_i)\right) \approx \max_i x_i \quad (2.26)$$

From this expression, the demapping process is reduced to a minimum distance problem. Applying the max-log approximation to Eq. 2.25, each LLR Λ_l can be computed with max-log as:

$$\Lambda_l = \min_{x \in \mathcal{X}_l^0} \left(\frac{|y - hx|^2}{\sigma^2}\right) - \min_{x \in \mathcal{X}_l^1} \left(\frac{|y - hx|^2}{\sigma^2}\right) \quad (2.27)$$

Although the amount of calculations is reduced, the complexity burden for each execution of max-log demappers has still order $\mathcal{O}(M)$, which scales linearly with the number of demodulation executions, as ML does. As demonstrated in

[88], the use of max-log entails a performance loss compared to ML that depends on the SNR. Note that both ML and max-log demappers can be combined with 1D-demapping, reducing the complexity order down to $\mathcal{O}(\sqrt{M})$. The use of this demapper is explained in the following section.

1D-demapping

Prior to expressions 2.25 (ML) and 2.27 (max-log), the demapper has to consider 2^B symbols in a two-dimensional space, calculating all M distances from the received symbol y to all possible constellation symbols x . However, this calculation can be simplified by just calculating the distances in both components individually.

As reference [26] proposes, it is possible to use the mapping feature that the original constellation points in the same row or column belong to the same subset for a specific even or odd bit (i.e., the subset with the bit value c_l being 0 or 1). The idea is to select the best candidate in each row and column, finding the minimum Euclidean distance just in one dimension. In a constellation with M symbols, only \sqrt{M} -best candidates or distances are needed for the LLR calculation of all even bits. The same condition applies to all odd bits. This provides significant complexity reduction, while the final result is exactly the same as searching from the full set. With 1D-demapping, the complexity can be reduced to $\mathcal{O}(\sqrt{M})$. The difficulty arises in how to quickly find the closest symbols in the faded constellation after the I and Q components are distorted by a different fading.

Taking even bits as an example of calculation, the straightforward method to find the best candidate in each column is to project the received signal to the column, and to select the closest one. Parallel columns to the received symbol can be calculated as follows:

$$Y = -\frac{h_Q \cos \alpha}{h_I \sin \alpha} X + \left(x_Q + \frac{h_Q \cos \alpha}{h_I \sin \alpha} x_I \right) \quad (2.28)$$

where (a_I, a_Q) is the coordinate of a faded constellation symbol $a = hx$ located in the column, α is the angle of h , and X and Y are the straight line variables (different from the constellation symbol x and the received symbol y). The perpendicular line which passes through the received signal y can be expressed as:

$$Y = -\frac{h_I \sin \alpha}{h_Q \cos \alpha} X + \left(y_Q + \frac{h_I \sin \alpha}{h_Q \cos \alpha} y_I \right) \quad (2.29)$$

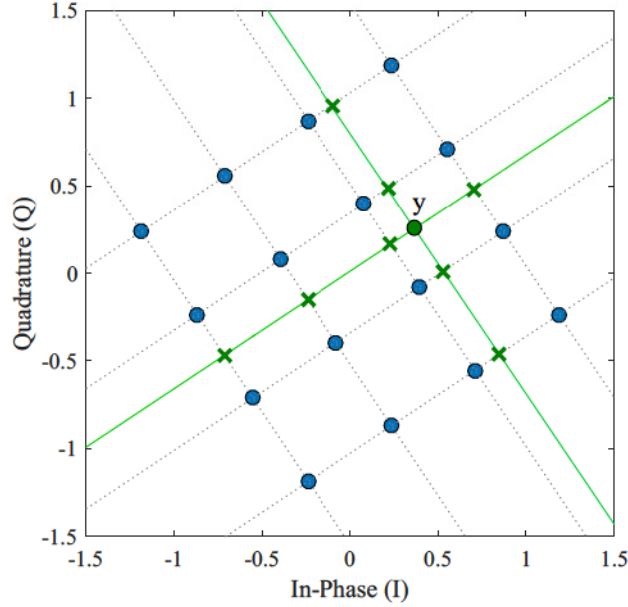


Figure 2.11: 16QAM constellation with transmitted symbols x , received symbol y and cross points c calculated.

For the sake of simplicity, $\beta_{IS} = h_I \sin \alpha$ and $\beta_{QC} = h_Q \cos \alpha$. Then, the cross points (c_I, c_Q) of the lines calculated in 2.28 and 2.29 can be calculated as:

$$c_I = \frac{y_I \beta_{IS}^2 + a_I \beta_{QC}^2 - (y_Q - a_Q)(\beta_{IS} \beta_{QC})}{\beta_{IS}^2 + \beta_{QC}^2} \quad (2.30)$$

$$c_Q = \frac{y_Q \beta_{QC}^2 + a_Q \beta_{IS}^2 - (y_I - a_I)(\beta_{IS} \beta_{QC})}{\beta_{IS}^2 + \beta_{QC}^2} \quad (2.31)$$

Eqs. 2.30 and 2.31 are repeated for \sqrt{M} symbols in each direction, obtaining the different \sqrt{M} cross points as Fig. 2.11 shows. In a final step, distances $|y - hx|$ are computed, and LLRs are calculated from those distances using expressions 2.25 and 2.27, when using ML and max-log demappers respectively. For the odd bits, β_{IS} is substituted by $\beta_{IC} = h_I \cos \alpha$, and β_{QC} by $\beta_{QS} = h_Q \sin \alpha$, and the rest of the process is repeated.

2.3.2 Signal Quantization

Quantization is a basic operation that transforms continuous to discrete signals. Naturally, quantization follows a performance-complexity trade-off, that

CHAPTER 2. BACKGROUND

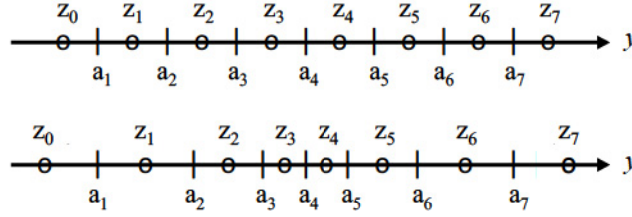


Figure 2.12: Example of uniform (top) and non-uniform (bottom) quantizers, with $a_0 = a_8 = \infty$.

is, signal accuracy increases with the number of quantization bits. However, high resolution signals are more costly to store and process. A low quantization resolution is highly beneficial for hardware implementations since it entails a reduction of chip area, which in turn yields a lower manufacture cost and power consumption. Several processing blocks at the receiver need a certain amount of samples in order to compute the specific algorithm implemented.

In terrestrial broadcasting receivers, the highest memory requirements are always needed in the TDIL [28]. As reference [27] denotes, systems have to cope with signal strength fluctuations over time occurring during the motion of the receiver terminals. The TDIL interlaces multiple constellation symbols to increase the signal time diversity, and hence to increase the resilience against fading. The memory required to store all the received symbols of the TDIL block will depend on the number of quantization levels and their distribution. More levels imply greater fidelity but also need more memory to store. The total amount of memory needed at the TDIL, denoted in this dissertation as Δ , can be calculated as expressed in Eq. 2.32.

$$\Delta = \Gamma \times Q = \Gamma \times \sum_{l=1}^L q_l \quad (2.32)$$

where Γ represents the interleaving depth, Q denotes the total number of bits, q_l is the number of bits per reproducer, and L is the number of elements to quantize.

A scalar quantizer can be defined as a set of intervals, $S = \{s_i; i \in I\}$, where the index set I is a collection of consecutive integers beginning with 0 or 1, together with a set of reproduction values $R = \{z_i; i \in I\}$ [67]. We also define a_i as the thresholds or boundaries to define each region i . The set of reproduction values presented in Fig. 2.12 can be equally or non-equally spaced, considering uniform or non-uniform quantization. Note that this concept is totally different from uniform and non-uniform constellations, where the distribution refers to constellation symbols.

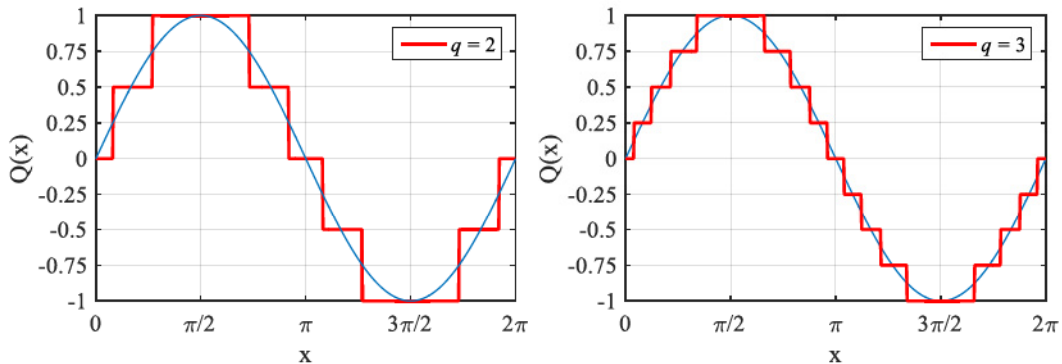


Figure 2.13: Example of uniform-quantized signals, using 2, or 3 bits, i.e. 4 and 8 possible levels.

With uniform quantization, real and imaginary parts are quantized separately and uniformly. A quantizer is said uniform when the levels z_i are equispaced. Fig. 2.12 shows an example of uniform quantization (top). With non-uniform quantization, reproducers are no longer equispaced. The thresholds a_i are just calculated as the middle point between two symbols. The use of non-uniform quantizers further improves the system performance, since they can adapt reliably to the signal statistics, providing more faithful results. Non-uniform quantizers may need less quantization levels, i.e. lower implementation complexity at the receiver, while keeping the same performance.

The reproducers z_n and boundaries a_n are designed to represent efficiently the input random variable y , as Fig. 2.13 depicts. In Chapter 4, optimum quantizers in the sense of maximum BICM capacity are investigated. Specific quantization values are obtained using the Nelder-Mead algorithm [89], as done for constellation optimization. This algorithm is widely described in Appendix B, and obtains the optimum reproducers and boundaries that maximize the BICM capacity of the system when considering quantization at the TDIL. These quantizers are applied to LLR values or single I and Q components, and evaluated depending on system parameters such as number of bits, code rate and constellation order.

2.4 Multi-Antenna Receivers

In this section, extensions of the two different demapping algorithms presented for SISO are first provided. Although these demappers obtain optimum performance, they entail a high demapping complexity, which increases with the order of constellation and number of antennas. In this dissertation, three addi-

tional algorithms are used to reduce complexity: ZF, Minimum Mean Square Error (MMSE) and SD demodulators, which are also described in following subsections. Please note that quantization for MIMO systems is out of the scope of this thesis.

2.4.1 ML and Max-Log Demappers

When using multiple antennas, the optimum ML demapper computes LLRs Λ_l for all code bits c_l , $l = 1, \dots, B \times N_T$. B refers to the number of bits per symbol used in a single antenna, and N_T is the number of transmit antennas. For the LLR computation, a total number of M^{N_T} Euclidean distances between the received vector \mathbf{y} and constellation symbols \mathbf{x} is calculated. A single output Λ_l can be computed as:

$$\Lambda_l = \log \frac{\sum_{\mathbf{x} \in \mathcal{X}_l^1} \exp\left(-\frac{\|\mathbf{y} - \mathbf{H}\mathbf{x}\|^2}{\sigma^2}\right)}{\sum_{\mathbf{x} \in \mathcal{X}_l^0} \exp\left(-\frac{\|\mathbf{y} - \mathbf{H}\mathbf{x}\|^2}{\sigma^2}\right)} \quad (2.33)$$

With MIMO, the complexity increases exponentially with the constellation order and the number of antennas. Please note that in this dissertation, the case of iterative detection with a priori information is not considered. For each demapping execution the complexity order is $\mathcal{O}(M^{N_T})$, where M is the cardinality of the symbol constellation. The complexity is further increased when comparing with SISO, since the demapping process has to be extended to all possible N_R antennas. In other words, every antenna has to be considered in the demapper, since every y_n with $n = 1, \dots, N_R$ contains information about all transmitted signals s_t , with $t = 1, \dots, N_T$. Hence, it is not possible to perform separated demapping processes in each antenna without cancelling part of the information and losing performance.

The same reasoning can be extended to max-log demappers, just reducing the process to a minimum distance problem. With MIMO, the LLRs can be computed with max-log as:

$$\Lambda_l = \min_{\mathbf{x} \in \mathcal{X}_l^0} \left(\frac{\|\mathbf{y} - \mathbf{H}\mathbf{x}\|^2}{\sigma^2} \right) - \min_{\mathbf{x} \in \mathcal{X}_l^1} \left(\frac{\|\mathbf{y} - \mathbf{H}\mathbf{x}\|^2}{\sigma^2} \right) \quad (2.34)$$

The complexity burden for each execution of max-log demappers has still order $\mathcal{O}(M^{N_T})$.

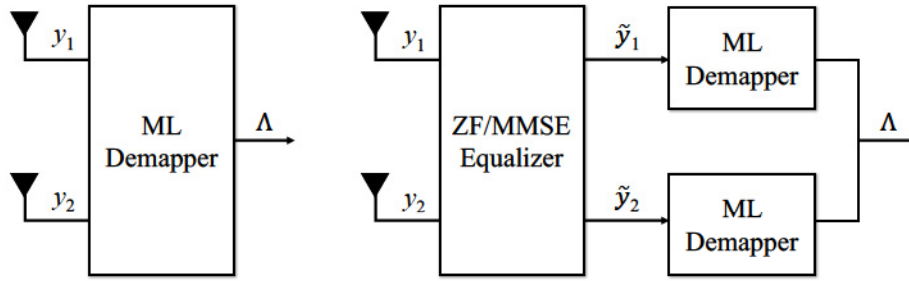


Figure 2.14: Two demapping configurations considered. Optimum ML (left) vs. ZF/MMSE (right).

2.4.2 ZF and MMSE Detectors

Linear demodulators represent a good alternative to the optimum MIMO demapper, since they reduce drastically the complexity while maintaining a good performance. This type of demodulators transform the joint MIMO demapping process into independent single-antenna demapping blocks. For instance, in a 2×2 MIMO system, a demapper with complexity M^2 is transformed into two independent demappers with complexity M . To do this, linear demodulators such as ZF or MMSE use an equalizer that suppresses the cross components of the channel (h_{12} , h_{21} , etc.) that act as an interference, and provides an estimate of the transmitted symbols [90]. Fig. 2.14 shows two different demappers, with and without ZF/MMSE.

The ZF detector sets the interferers amplitude to zero, which is simply done by inverting the channel response and rounding the result to the closest symbol in the constellation alphabet that is transmitted [82]. There are two ways of performing ZF. In case $N_R > N_T$, the pseudo-inverse of the channel matrix is used, as shown in Eq. 2.35.

$$\tilde{\mathbf{y}} = \mathcal{Q}\{(\mathbf{H}^\dagger \mathbf{H})^{-1} \mathbf{H}^\dagger \mathbf{y}\} \quad (2.35)$$

where $\mathcal{Q}(\cdot)$ stands for component-wise quantization, \mathbf{y} is the received vector, and \mathbf{H} is the MIMO channel matrix. The estimated transmit vector is denoted by $\tilde{\mathbf{y}}$. The matrix that pre-multiplies the received vector is often called as nulling matrix. As a second and simpler option, when the MIMO channel matrix is square, i.e $N_R = N_T$, and invertible, ZF just uses the inverse of the channel matrix, as shown in Eq. 2.36.

$$\tilde{\mathbf{y}} = \mathcal{Q}\{\mathbf{H}^{-1} \mathbf{y}\} \quad (2.36)$$

In this dissertation, since only 2×2 MIMO systems are considered, formula 2.36 is used. The main drawback of ZF detectors is the fact that they only

focus on cancelling completely the channel interference, which enhances the noise. As a solution, MMSE detectors can be used since they counteract the noise enhancement problem of the ZF detectors. MMSE detectors estimate \mathbf{y} , minimizing the error due to the noise and the interference combined. MMSE detectors use the following estimation step [91].

$$\tilde{\mathbf{y}} = \mathcal{Q}\{(\mathbf{H}^\dagger \mathbf{H} + \sigma^2 \mathbf{I})^{-1} \mathbf{H}^\dagger \mathbf{y}\} \quad (2.37)$$

The use of MMSE equalization was firstly proposed in [92] and [93] for reducing the Inter-Symbol Interference (ISI) in communications, and afterwards applied in [94], [33] to wireless systems.

2.4.3 Sphere Decoding Techniques

The main idea under Sphere Decoders (SD) comes from the expression of the N_T -dimensional squared Euclidean distance in Eq. 2.33 as an addition of one-dimensional squared Euclidean distances [95]. SD methods look for the ML solution, but using just a subset of the total M^{N_T} constellation symbols. This subset is a N_T -dimensional sphere centered at the received signal vector y , with a certain radius (ρ) [56], [81]. The sphere radius constraint ρ is included in the ML detection formula as in Eq. 2.38

$$\Lambda_l = \log \frac{\sum_{\mathbf{x} \in \chi_l^1} \exp\left(-\frac{1}{\sigma^2} (\|\mathbf{y} - \mathbf{H}\mathbf{x}\|^2 \leq \rho)\right)}{\sum_{\mathbf{x} \in \chi_l^0} \exp\left(-\frac{1}{\sigma^2} (\|\mathbf{y} - \mathbf{H}\mathbf{x}\|^2 \leq \rho)\right)} \quad (2.38)$$

In SD, only distances that accomplish $\|\mathbf{y} - \mathbf{H}\mathbf{x}\|^2 \leq \rho$ are considered. Fig. 2.15 depicts an example of SD with two particular radius ρ_1 and ρ_2 , using a QPSK constellation with $M = 4$. AWGN channel, ($\mathbf{H} = \mathbf{I}$) and a 2×2 MIMO system are assumed. In this example, depending on the sphere radius chosen, there are four or just one symbol that lie inside the sphere to calculate the ML solution. These symbols represent the candidate solutions that would fulfill Eq. 2.38. The ML solution would then be the closest lattice point of the list of candidate points to the received vector y . The use of ρ_1 and ρ_2 implies a complexity reduction of 93.75% and 75% respectively. Note that the complexity reduction increases with the constellation order. However, the selection of a suitable radius ρ is not an easy task. Several methods have been provided to estimate the sphere radius, which can be found in [56].

In SD, a SIC detection with QR factorization of the channel matrix is employed ($\mathbf{H} = \mathbf{QR}$). This factorization transforms the ML demapping process into an analog method that is solved through a tree structure. Once the tree

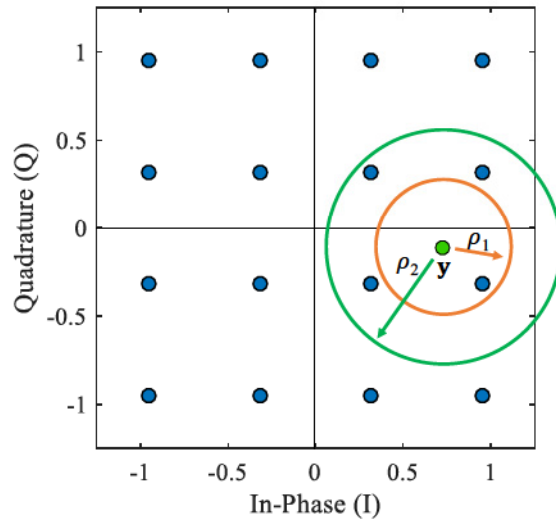


Figure 2.15: Sphere Decoding of a QPSK in a 2x2 MIMO system, with two different radius ρ_1 and ρ_2 , AWGN channel. The selection of a particular radius will define the performance loss introduced by SD.

is defined, different algorithms can be used to reach the SD solution. Many tree-search strategies are proposed in the current literature. Some of them are described in references [96] and [97].

The main problem of SD methods from an implementation point of view is the variable complexity. To overcome that problem, Fixed-Complexity Sphere Decoders (FSD) can be used. As reference [82] explains, FSD combines a pre-processing stage followed by a predetermined tree-search stage. The symbols are detected following a specific ordering as proposed in [98]. The predetermined tree-search stage is divided in turn in two different phases: full expansion in the first T tree levels, and single-path expansion in the remaining $N_T - T$ levels. It is really important to select a suitable T value. In [99], the chosen value is always:

$$T \geq \sqrt{N_T} - 1 \quad (2.39)$$

Although FSD does not guarantee to find the ML estimate in all cases, it achieves the maximum detection diversity when choosing this value. At the full expansion phase, all possible values of the constellation are assigned to the symbol at the current level. The single-path expansion phase starts from each retained path, and continues calculating the solution of the remaining SIC problem in the tree. Note that FSD achieves quasi-ML hard detection performance.

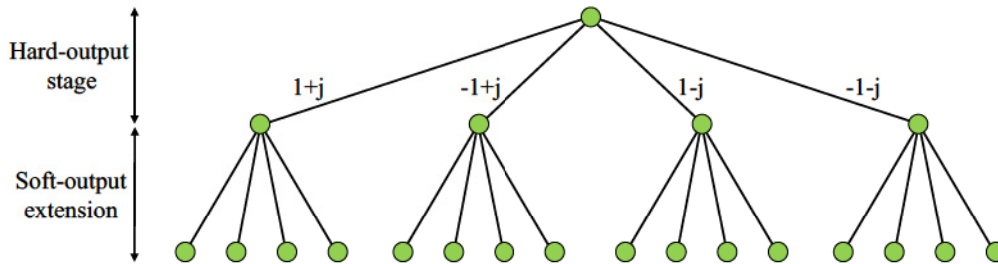


Figure 2.16: Decoding tree of the SFSD algorithm for a 2×2 MIMO system with a QPSK constellation, $N_{iter} = 2$, $T = 1$.

An interesting approach to provide soft information after the FSD search is the SFSD algorithm, proposed in [83]. As reference [82] denotes, the SFSD demapper first carries out a conventional hard-output FSD tree-search. This search gives as a result M SIC branches of M symbols each, from where the path with the minimum accumulated partial Euclidean distance is selected as the ML solution. In a second step, the SFSD extends the FSD tree search in order to obtain the minimum distances. The SFSD starts from the candidate list obtained in the first stage, and adds new candidates for the counter-hypotheses. Since the first level is already expanded, LLR values of symbol bits in this level are all available. To start with the list expansion, the best N_{iter} paths are selected from the initial list. The symbols belonging to these paths are picked up from the root, up to a specific level l . At level $l - 1$, additional $\log_2(M)$ branches are explored, each of them having one of the bits of the initial path symbol negated. The new partial paths are then completed using the SIC path, and the same operation is repeated until the lowest level is reached. An example of the SFSD tree search is shown in Fig. 2.16, for a 2×2 MIMO system with $N_{iter} = 2$, $T = 1$ and QPSK is the constellation used.

As main drawback, SFSD cannot be used when transmitting 2D-NUCs. The hard-output stage that provides the SIC solutions needs to be performed in separated I and Q components. With 2D-NUCs, both components cannot be separated, and a different approach is needed in this case. In Chapter 5, we propose a solution based on the Voronoi regions that solves the problem and allows SFSD with these constellations.

Chapter 3

Optimization and Performance Evaluation of Non-Uniform Constellations

This chapter presents the main procedures and results examined in this thesis for NUC optimization. These constellations are evaluated from the transmitter point of view, for single-antenna communications. The chapter is divided into four sections. Section 3.1 investigates two optimization shaping techniques, depending on the number of real-valued dimensions considered in the optimization process: one-dimensional and two-dimensional NUCs. It also presents the improvements achieved in terms of BICM capacity. Section 3.2 provides two different methods for the optimization of rotated NUCs, and Section 3.3 explains in detail the multi-RF technique utilized in this thesis, i.e. channel bonding. Performance results and SNR gains achieved are also provided in Section 3.4. Finally, the main findings of this work are summarized in 3.5.

3.1 Non-Uniform Constellations Optimization

The theoretical approach given by Shannon in [11] indicates that the best capacity for an AWGN channel is only obtained if the received signal y has Gaussian distribution. However, broadcast communications traditionally have used QAM constellations, which imply received signals with nearly rectangular

CHAPTER 3. OPTIMIZATION AND PERFORMANCE EVALUATION OF NON-UNIFORM CONSTELLATIONS

distributions. As reference [38] indicates, this distribution becomes more and more rectangular as the constellation order increases. Furthermore, the use of discrete distributions in which is known as constellations clearly affects the transmitted signal itself. The main idea under non-uniform constellations is to adapt the discrete distribution, i.e. constellation symbols to the channel, adopting a Gaussian-like shape that maximizes the capacity. The study of these constellations for broadcast transmissions has been explored in several studies. Reference [38] was the first research approaching the concept of 1D-NUCs, and the most important contributions that explain the use of 2D-NUCs are [17], [24] and [43].

With NUCs, the constellation symbols are optimized by means of signal shaping techniques to provide an improved performance compared to uniform QAM constellations. These constellations are designed for a particular SNR and specific channel model. NUCs make the transmitted constellation distribution more Gaussian, and the gain obtained from this change is called shaping gain. In [100], it was shown that the shaping gain introduced by discrete constellations in AWGN channels cannot exceed $10 \log(\pi e/6) \approx 1.53$ dB, where e represents the Euler's number. However, this asymptotic value only can be reached if high-order constellations are used, at high SNR values. These constellations will be the basis for the rest of the thesis. Note that NUCs are obtained for ideal systems in which estimation and hardware implementation aspects are not considered. For real transmissions, an additional performance loss is introduced, and therefore the SNR changes [28]. However, differences in constellation symbols are almost negligible within SNR ranges of 1-2 dB, as following sections show. The optimization process of both types of constellation as well as the performance gains obtained are explained in following sections.

3.1.1 One-Dimensional Non-Uniform Constellations

The total Degrees of Freedom (DoF) in the 1D-NUC optimization are $\frac{\sqrt{M}}{2} - 1$, where M represents the number of symbols of the constellation under evaluation. Optimizing higher order constellations requires to increase the number of variables, which also increments the optimization burden. The number of optimization parameters for constellations with cardinality of 16, 64, 256, 1024, and 4096 points, require: 1, 3, 7, 15 and 31 optimization variables, respectively. In general, the optimization starts from Gray mapping and calculates the constellation symbols on one axis from the parameters indicated in Table 3.1.

Following the approach given by [38], the aim is to identify the optimum parameters $\mathbf{a} = [a_0, a_1, \dots, a_N]$ that indicate the positive symbol values in a specific component I or Q (real or imaginary part, respectively), where N

3.1 Non-Uniform Constellations Optimization

Constellation	DoF	Parameters to optimize
16NUC	1	a_1
64NUC	3	a_1, a_2, a_3
256NUC	7	a_1, a_2, \dots, a_7
1024NUC	15	$a_1, a_2, \dots, a_{14}, a_{15}$
4096NUC	31	$a_1, a_2, \dots, a_{30}, a_{31}$

Table 3.1: Degrees of freedom and constellation symbols to optimize with 1D-NUCs.

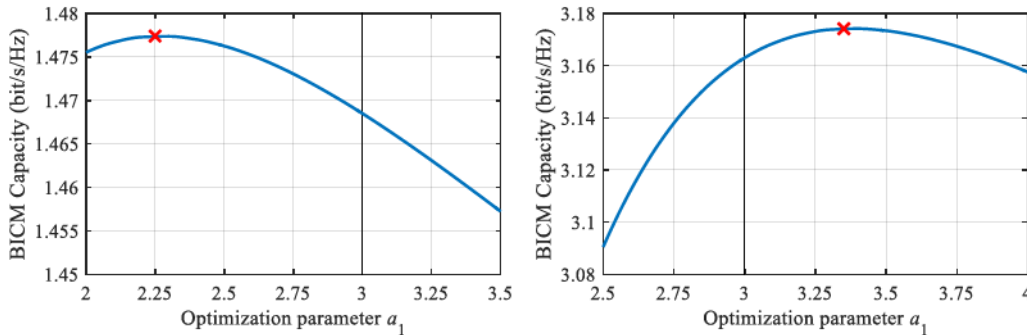


Figure 3.1: BICM capacity values obtained for different parameters a_1 , for 1D-16NUC in AWGN at 3 and 10 dB of SNR. The value $a_1 = 3$ represents the uniform QAM value.

represents the total DoF. Due to the constraint of power normalization, the smallest value a_0 is set to 1. For an SNR target, the BICM capacity is calculated as a function of \mathbf{a} . From this parameter, it is necessary to generate the sequence $\{-a_N, -a_{N-1}, \dots, -a_1, -1, 1, a_1, \dots, a_{N-1}, a_N\}$ that gives the particular positions of constellation symbols in each component. Note that with QPSK the DoF is $N = \frac{\sqrt{4}}{2} - 1 = 0$, and there is no possible optimization with this constellation. Constellations with 16 cardinality points are the simplest case to evaluate.

The Simplest Use Case: 1D-16NUC

Assuming a uniform 16QAM with positions $\{-3, -1, +1, +3\}$ on each axis, prior to power normalization, then it is possible to optimize a 1D-16NUC with positions $\{-a_1, -1, +1, +a_1\}$, using a single parameter a_1 . For example, Figure 3.1 shows the BICM capacity of a 16NUC at SNRs of 3 and 10 dB, for AWGN channel. A parameter a_1 equal to 3 corresponds to the uniform case, while the maximum capacity is obtained for values of a_1 of 2.25 and 3.35 respectively. After obtaining a_1 , the set of constellations can be pertinently normalized.

It is very important to highlight that the optimization process is burdensome, especially when increasing the number of parameters. Rather than con-

CHAPTER 3. OPTIMIZATION AND PERFORMANCE EVALUATION OF NON-UNIFORM CONSTELLATIONS

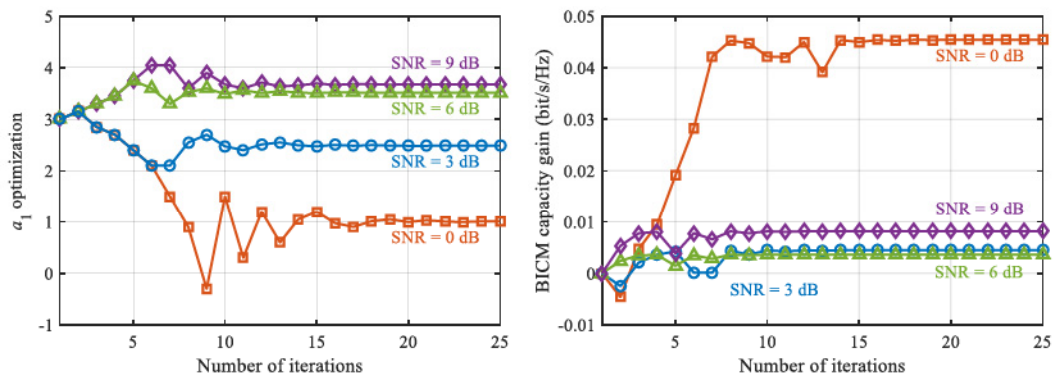


Figure 3.2: Optimization of a_1 with the Nelder-Mead algorithm, for 1D-16NUC in AWGN at different SNRs (left). BICM capacity improvements are also shown (right).

Considering all possible values, it is better to use an algorithm that automatically finds the optimum parameters, maximizing the BICM capacity for each SNR by numerical optimization. In this dissertation, we use the Nelder-Mead algorithm, which is detailed in [89] and proposed in [38] for designing NUCs. As reference [101] mentions, the method minimizes a function of n variables, based on the comparison of function values at the $(n + 1)$ vertices of a general simplex, followed by the replacement of the vertex with the highest value by another point. The simplex adapts itself to the local landscape, searching for the final minimum. The mathematical approach of this method is detailed in Appendix B, where it is shown to be efficient and computationally compact.

Fig. 3.2 provides four examples of optimization using this algorithm. From QAM values ($a_1 = 3$) and after 25 iterations, the method reaches the optimum solution. The BICM capacity gain achieved along the whole search is also shown for comparison. It can be observed that 16NUCs optimized for very low SNRs provide higher gains than the rest. Selecting the values of a_1 yielding the maximum capacity for a large range of SNRs can provide the basis for the construction of a 16NUC adaptive to a particular channel model [33]. As a consequence of the dependence of the NUC symbols on the SNR, each constellation cannot provide the maximum gain for all operation points, and therefore CRs. Hence, a specific NUC is defined for each CR from the evaluated SNR. In particular, when considering strong error correcting codes such as an LDPC, the target SNR of the NUC is selected for each CR according to the SNR of the waterfall region.

One can ideally think of designing a combined NUC that provides the best possible capacity for fixed and mobile receptions at the same time. The left part of Fig. 3.3 depicts the optimum parameter for channel models typical from

3.1 Non-Uniform Constellations Optimization

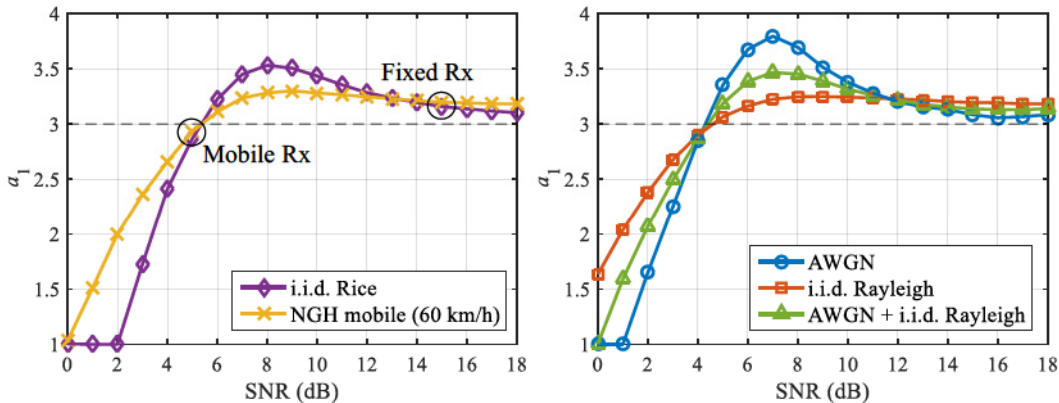


Figure 3.3: Optimization parameter a_1 , as a function of the SNR, for i.i.d. Rice and NGH mobile channels (left). Results are also provided for AWGN, i.i.d. Rayleigh, and their combination (left).

broadcasting communications, i.e. NGH mobile with speed 60km/h and i.i.d. Rice, which are defined in Appendix A. Assuming values of 5 and 15 dB for mobile and fixed channels respectively, we seek the optimum parameter that provides the best combination of both capacities, i.e. $a_1 = 3.12$. However, since both modes require totally different SNR ranges, this combination is not optimum at all. It is better to simply focus on a particular SNR.

The right part of the figure depicts the results for AWGN and i.i.d. Rayleigh channels. In this case, two different approaches are considered. The first option is to optimize constellations for each channel separately. The resulting constellations provide the maximum capacity for the case under study, but they do not give an optimum result when considering another channel model. As a compromise, both optimizations can be combined in a single calculation, for each SNR, where the average capacity of both channels is maximized. As can be observed, the parameter obtained when considering both channels is approximately the average of the parameters obtained in separated optimizations. In this section, we always calculate the combined values for these two channel models, which were already considered in the ATSC 3.0 standardization process [17].

Note that in any case, the parameter a_1 converges to 1 at low SNRs. Constellations collapse to QSPK, and identical symbols are grouped in clusters. The idea is to transmit a QPSK-like constellation but with more bits per symbol, since the MSB provide similar robustness but the LSB are used to give additional information. On the contrary, the use of a traditional QPSK allows to double the coding rate, so in practice both constellations provide similar performance [34]. Another feature to take into account is power consumption.

CHAPTER 3. OPTIMIZATION AND PERFORMANCE EVALUATION OF NON-UNIFORM CONSTELLATIONS

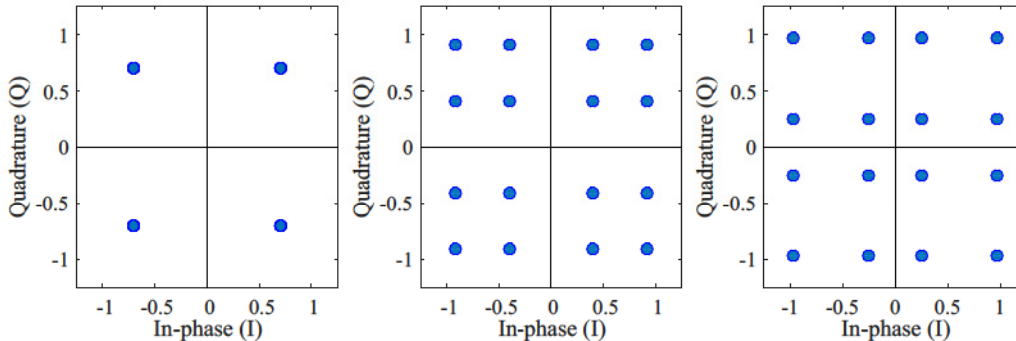


Figure 3.4: Different one-dimensional 16NUCs, optimized for SNRs of 0, 3 and 6 dB, for AWGN and i.i.d. Rayleigh channels.

Although condensed, high-order constellations increase the power necessary to transmit all possible symbols. From this point of view, it is better to transmit low constellation orders that allow to use similar spectral efficiencies by using higher CRs. At high SNRs, the positions converge toward a uniform shape. Without a robust CR, the best option is to pack the constellation symbols as uniformly spaced as possible. The overall tendency can be found in Fig. 3.4, where we show different 1D-16NUCs designed for SNR values of 0, 3 and 6 dB and both AWGN and i.i.d Rayleigh channels, after power normalization.

Extrapolation to High-Order Constellations

Larger number of DoF gives much greater improvement than 16NUC, compared with their uniform versions. Consequently, larger NUCs get progressively closer to the theoretical Shannon limit, but the algorithm needs for additional iterations to find the optimum solution.

When 64NUCs are considered, 3 different parameters (a_1, a_2, a_3) need to be optimized, as Table 3.1 shows. As done with 16NUCs, we consider the QAM positions as initial variables, since the complexity is not really high and therefore no local minimums are reached by the algorithm. Fig. 3.5 depicts the variation in the optimum symbol positions when the BICM capacity of the particular NUC is optimized at different SNRs. The dashed lines with values 3, 5 and 7 indicate the conventional uniform QAM position. Overall, variations with SNR are similar to 16NUC, but obtaining a higher level of condensation. At 5 dB, the constellation fully converges to a 16NUC. At 0 dB, 64NUCs collapse into QPSK constellations if the SNR is low enough, so there are two levels of condensation. On the other hand, at high SNR values the positions converge towards the uniform QAM values.

3.1 Non-Uniform Constellations Optimization

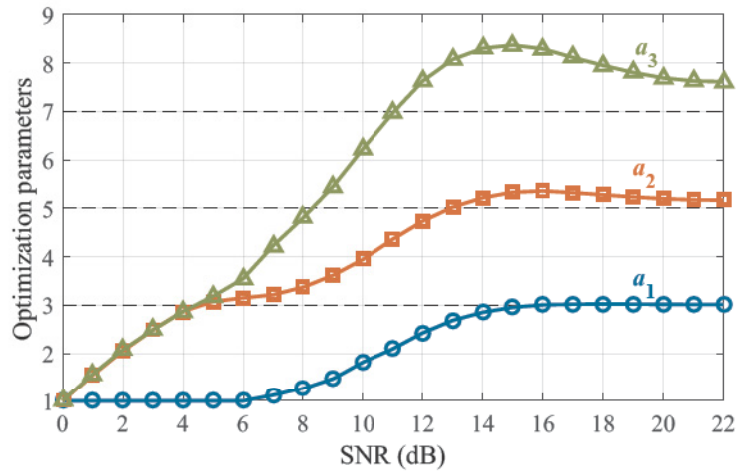


Figure 3.5: Optimization parameters for 64NUC, as a function of the SNR, for the combination of AWGN and i.i.d. Rayleigh channels.

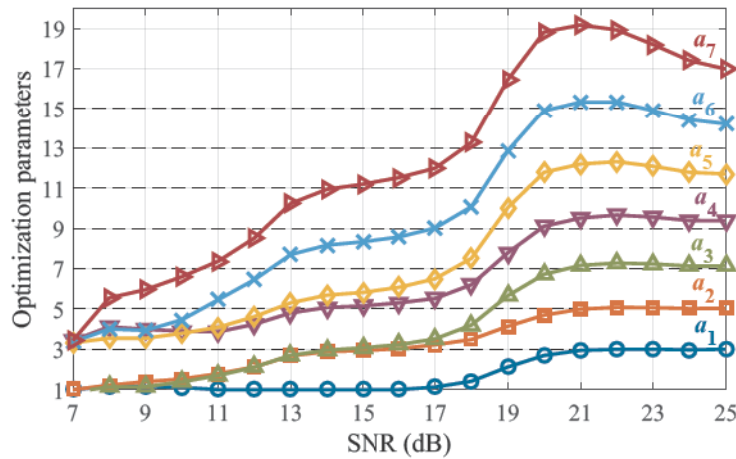


Figure 3.6: Optimization parameters for 256NUC, as a function of the SNR, AWGN channel model.

256NUCs follow a similar tendency, as Fig. 3.6 shows. Several regions can be differentiated. As occurred in previous results, 256NUC constellations tend to approach the uniform QAM values at high SNRs, and at the same time, while the SNR decreases the symbol positions become condensed and symbols with lower values begin to merge. The constellation does in effect reduce its number of symbols, grouping them in clusters, going from 256QAM positions down to non-uniform values of 16NUC, at about 7 dB SNR.

CHAPTER 3. OPTIMIZATION AND PERFORMANCE
EVALUATION OF NON-UNIFORM CONSTELLATIONS

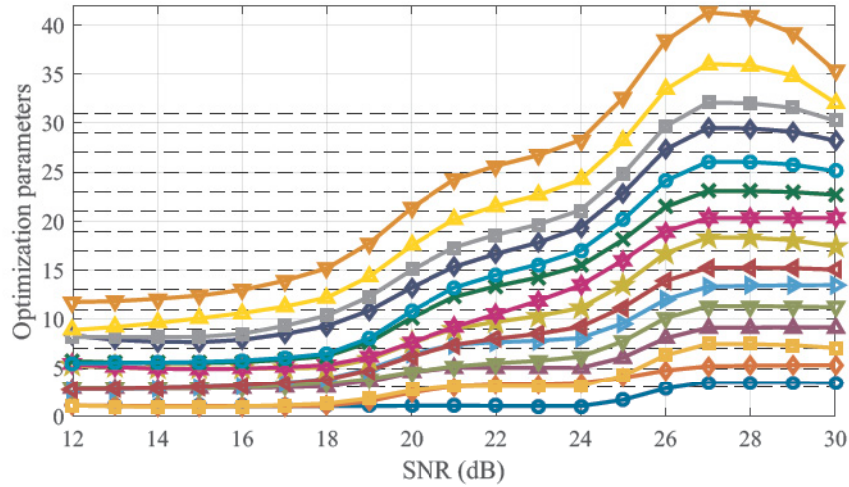


Figure 3.7: Optimization parameters for 1024NUC, as a function of the SNR, AWGN channel model.

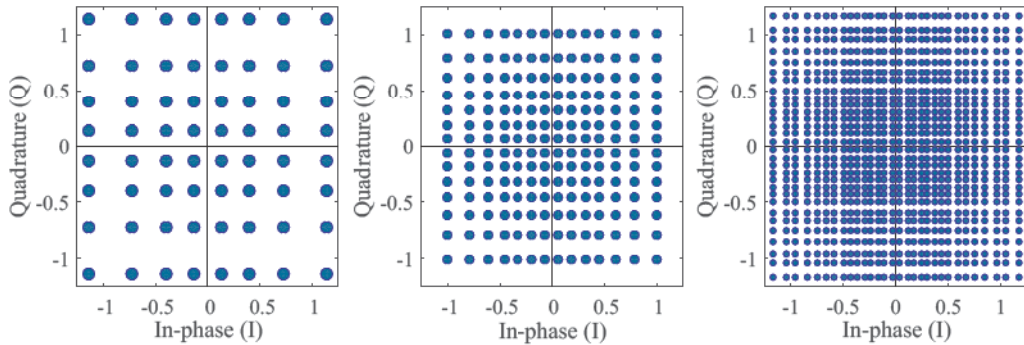


Figure 3.8: Examples of 64NUC, 256NUC and 1kNUC optimized for SNRs of 15, 20 and 25 dB respectively, for the combination of AWGN and i.i.d. Rayleigh channels.

With 1024NUCs, the number of parameters becomes higher, with $N = 15$. Fig. 3.7 shows the optimum parameters for these constellations, optimized for SNRs from 12 to 30 dB, and AWGN channel. Three different regions can be differentiated here. First, at low SNRs (range from 12 to 20 dB) half or more of the symbols collapse and merge. Concretely, a_1, a_2 and a_3 have a similar value 1; a_4, a_5, a_6 and a_7 merge to 3; a_8, a_9, a_{10} and a_{11} converge to 5, and the rest keep different values, although much lower than QAM. The second region between 21 and 25 dB expands some of the symbols, with a lower compression but still under the uniform conventional QAM. Finally, above 25 dB, all the constellation symbols are different, so there is no condensation in this case.

3.1 Non-Uniform Constellations Optimization

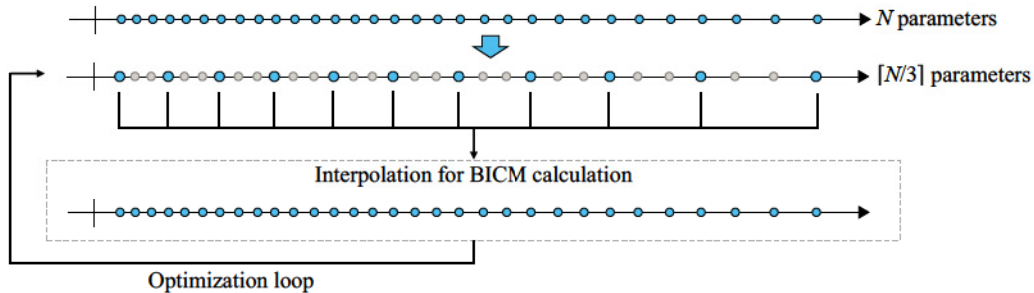


Figure 3.9: Optimization N/D_R method, with $D_R = 3$. Reduction from 31 to 11 parameters to be optimized.

Fig. 3.8 shows three different examples for the different orders considered, i.e. 64NUC, 256NUC and 1kNUC optimized for SNRs of 15, 20 and 25 dB respectively.

The Particular Case of 4096NUC: A Different Approach

As mentioned in previous section, the use of very high-order constellations requires a large number of variables to optimize. As a consequence, the optimization burden is incremented, and also to find a global minimum in the optimization algorithm becomes harder. Up to 1024NUC, the number of optimization parameters is lower enough. However, with 4096NUC things get complicated. To optimize 31 parameters guides sometimes the algorithm to local minimums that do not reach the optimum solution. In order to avoid it, and to reduce the number of iterations, a new low-complexity method can be used. We call this method the *Optimization N/D_R* , where N is the initial number of degrees of freedom and D_R is the decimate ratio. Fig. 3.9 helps to understand the proposed method, when $D_R = 3$. Initial N parameters are reduced to $\lceil N/D_R \rceil$, where $\lceil \cdot \rceil$ represents the first integer rounded up. In other words, instead of taking all parameters as inputs to the optimization algorithm, it is only necessary to take 1 out of D_R . Afterwards, the optimization loop starts, and the rest of parameters are just derived with a shape preserving piecewise cubic interpolation [102] inside the algorithm, when constellations are configured. The BICM capacity is then calculated and used as output, and the process is repeated iteratively as usual.

A more elaborated optimization method reduces the possibility of obtaining a local minimum. It also halves, on average, the number of iterations to reach the optimum solution. In this dissertation, we use this method to reach a suboptimum solution. Afterwards, the positions obtained for all 31 parameters

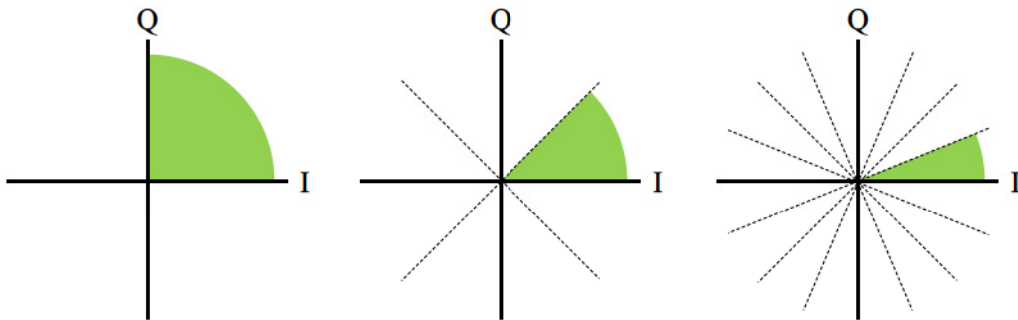


Figure 3.10: 2D-NUC optimization when considering different symmetries: 4 sectors (left), 8 sectors (center) and 16 sectors (right).

are used in a new re-optimization, which obtains the optimum constellation and slightly increases the BICM capacity.

3.1.2 Two-Dimensional Non-Uniform Constellations

The use of one-dimensional NUCs has different advantages when optimizing. First, imposing a squared shape where both I and Q components can be separated drastically reduces the number of parameters to optimize. The simple symmetry imposed about the center further simplifies the process. Both simplifications facilitated the optimization of constellations up to 4096 symbols. However, these advantages cause some limitations at lower SNRs, where larger gains could be obtained.

With 2D-NUCs, constraints imposed change and therefore the process has to be redefined. In this thesis, we follow the approach given by [43], where 2D-NUCs are designed by relaxing the square shape constraint of 1D-NUCs and QAM constellations. Thanks to that, it is possible to obtain a better performance but with a higher receiver complexity, since 2D-NUCs cannot be separated into two independent I/Q components. It is assumed that constellations retain left-right and up-down symmetry. The design process can be reduced by defining just the first quarter of the complex symbols, with the rest being derived by just using both I/Q axes as mirrors. This entails a large reduction in both the DoF, as shown in Fig. 3.10 (left), and the number of iterations.

Additional symmetries can be added at the expense of some SNR loss, but still obtaining better capacities than those obtained for 1D-NUCs. It is possible to add greater levels to the optimization algorithm, so that the computation complexity can be highly reduced, being able to optimize high-orders of constellations [43]. In principle, the highest BICM capacity is obtained when opti-

3.1 Non-Uniform Constellations Optimization

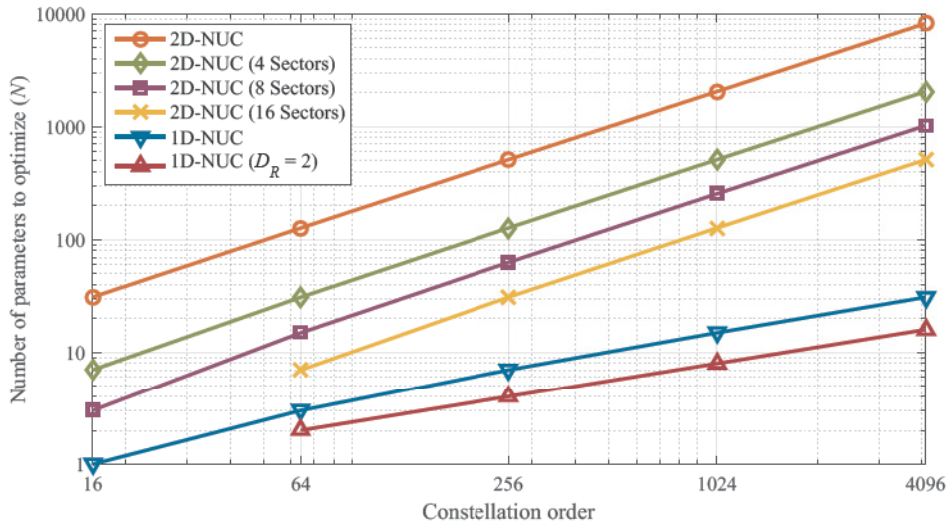


Figure 3.11: Number of parameters to optimize, for different orders of constellation.

mizing an unconstrained 2D-NUC, but computing it extremely complex, while the capacity improvement is negligible. In this dissertation, some constellations are first optimized using 4, 8 and 16 sectors, depending on the order and SNR, and afterwards re-optimized for a lower number of sectors (in order to avoid local minimums). Fig. 3.10 shows the constellation diagrams and the different symmetries considered. Green areas represent the symbols that are optimized.

The total degrees of freedom increase, compared to 1D-NUCs. Optimizing in one dimension maximizes the BICM capacity by changing the positions of $N = \left(\frac{\sqrt{M}}{2} - 1\right)$ symbols. This number can be further simplified if the proposed optimization N/D_R is applied, for different values of D_R . With 2D-NUCs, the symbols need to be specified in two dimensions, so two free real variables are considered. Real and imaginary parts constitute the new variables to optimize, i.e. $2M - 1$ (due to the constraint of power normalization). The number of variables when using the different symmetries presented above is reduced to $\left(\frac{2M}{S} - 1\right)$, where S represents the number of sectors. The use of 4, 8 or 16 sectors reduces the number of variables to $\left(\frac{M}{2} - 1\right)$, $\left(\frac{M}{4} - 1\right)$ and $\left(\frac{M}{8} - 1\right)$ respectively. A good comparison between the different types of optimization already proposed can be found in Fig. 3.11. In this dissertation, we first optimize constellations so the total number of parameters is 31 or less. For those cases in which the optimization may reach a suboptimum solution, a new re-optimization with more variables to look for the optimum solution is done.

CHAPTER 3. OPTIMIZATION AND PERFORMANCE EVALUATION OF NON-UNIFORM CONSTELLATIONS

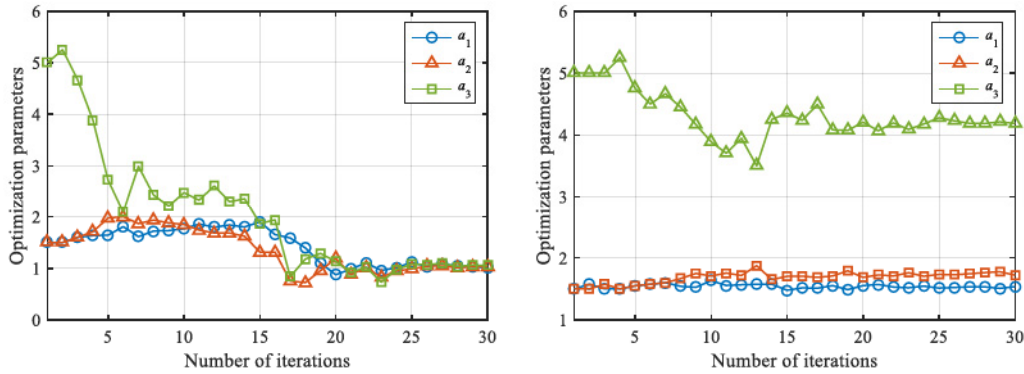


Figure 3.12: 8 sectors optimization with the Nelder-Mead algorithm, for 2D-16NUC in AWGN with two different SNR values: 0 dB (left) and 5 dB (right).

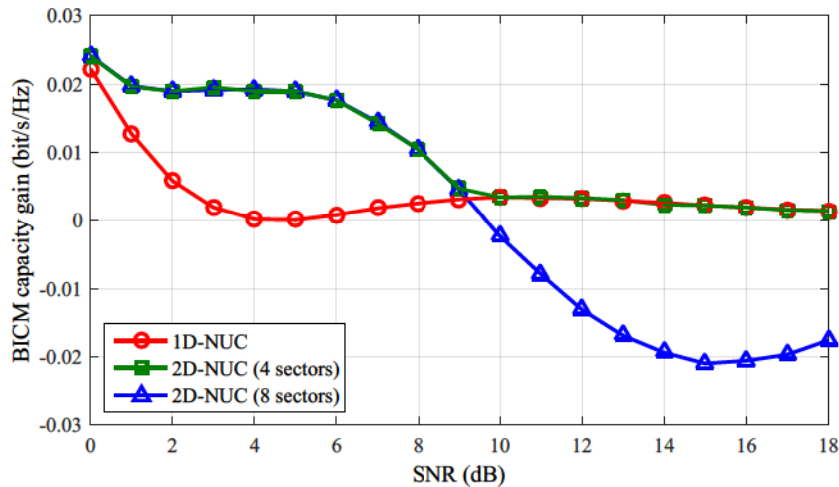


Figure 3.13: BICM capacity gain achieved with 1D-NUC and 2D-NUC (considering 4 and 8 sectors).

2D-16NUC Optimization

At low SNRs, constellations collapse into a QPSK, as occurred with 1D-NUC. The BICM capacity improvement is therefore the same for both cases. At medium SNR values, constellations change towards a Gaussian shape that satisfies the 8 sectors symmetry, so the optimization burden can be further reduced. In this region, the highest BICM capacity improvements are achieved.

Fig. 3.12 provides two examples of optimization when considering this symmetry, for SNRs of 0 and 5 dB. From the same random initial values and after 30 iterations, the method reaches the optimum solution. In the examples

3.1 Non-Uniform Constellations Optimization

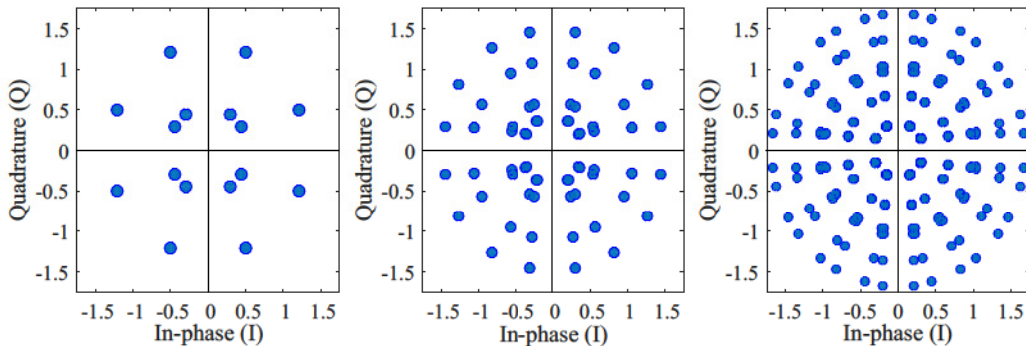


Figure 3.14: Two-dimensional 16NUC, 64NUC and 256NUC, optimized for SNRs of 5, 10 and 15 dB, for the combination of AWGN and i.i.d. Rayleigh channels.

provided, three different parameters are required. Note that all parameters tend to 1 for a SNR of 0 dB, collapsing towards a QPSK and thus having the same shape than 1D-NUC. The optimized 2D-NUC for the SNR value of 5 dB is shown in 3.14 (left). As the SNR increases, 16NUCs undergo a clear modification in shape between 9 and 10 dB, changing from a Gaussian shape to a square 1D constellation. This concrete evolution can be seen in Fig. 3.13.

The optimum solution at high SNR ranges is therefore a 16NUC with squared shape, similar to 1D, where almost in all cases constellation symbols can be separated into two different I and Q components. The behavior comes from the relationship between high SNRs and high CRs. At very high SNRs, coding tends to unity where no redundancy bits are employed. Since there is no benefit from that coding, a uniform separation between symbols ensures the minimum distances between them, minimizing the errors as much as possible.

2D-64NUC Optimization

Two-dimensional optimizations of 64NUC constellations need a total of $N = 31$ parameters, if 4-sectors symmetry is considered. In case of further simplification, where 8 sectors are taken into account, the number of parameters is reduced to 16. In this thesis, we first design 2D-64NUCs in a more-constrained 8-sectors optimization. Afterwards, a 4-sectors re-optimization is performed, in which some symbols change their position in order to achieve higher capacities.

Fig. 3.14 (center) shows a 2D-64NUC optimized for a SNR of 10 dB. As reference [43] affirms, these constellations have a circular shape composed of rings and radials, but in fact radials are not radials, since they do not pass through the origin. They do not have rings either, due to the re-optimization performed in 4 sectors, which gives a higher freedom to constellation symbols to find other positions. As occurred with 1D, at low SNRs constellations collapse

CHAPTER 3. OPTIMIZATION AND PERFORMANCE EVALUATION OF NON-UNIFORM CONSTELLATIONS

into low-order NUCs. In this case, symbols are grouped so that the constellation has a 16NUC-like shape. If the SNR is low enough, these constellations tend to QPSK. Results derived from both methods are identical for all SNRs below 12 dB. The re-optimization in 4 sectors starts to take effect from 13 dB. Note that, unlike 16NUCs, 64NUCs do not tend to the one-dimensional version of these constellations, even for very high SNRs. Despite the circular shape, all symbols keep a good almost-uniform spacing, which is also a good way to achieve the highest capacity at these SNR values. What happens with 16NUCs is that they have less margin, so the best option is just to merge to 1D-NUC.

2D-256NUC Optimization

The optimization process becomes really hard from 256NUC on. In fact, only up to 2D-256NUCs were considered in the ATSC 3.0 standardization process. Observing Fig. 3.11, the number of parameters to optimize in a 256NUC when only 4 sectors are considered goes up to 127, which is not feasible from an optimization point of view. The very large number of input variables yields into finding local minimums, after a very long number of iterations (orders of 1000). Moreover, the use of a two-dimensional demapper in which 256 distances need to be computed, increases the complexity burden even more. For this reason, some assumptions must be taken, in order to reduce the optimization complexity and obtain realistic results. It is therefore clear that these constellations need higher degrees of symmetry, and even sometimes prior-condensation assumptions.

In this dissertation, we first assume 16 sectors, in order to reduce the number of variables to 31. For low SNRs, and observing the tendencies in low-order constellations, some symbols were grouped in clusters, reducing the number of variables down to 15-20 (depending on the particular SNR). Imposing 16-sectors symmetry results in optimization complexity comparable to 2D-64NUC, or 1D-4096NUC, although with different demapping complexities. Once those preliminary constellations are obtained, two additional steps are performed. First, a new re-optimization with 8 sectors and therefore 63 parameters is performed. This re-optimization sometimes does not give an additional capacity, due to the very high number of parameters. The second step is to look for the optimum positions of the inner symbols (from the two first rings of the constellation), since they usually change their position and break the symmetries imposed, especially for high SNRs. Fig. 3.14 (right) shows an example of a 2D-256NUC optimized for a SNR of 15 dB. As occurred with 64NUCs, they seem to have a circular shape, with several rings and radials, but in fact they do not keep those constraints. As usual, the 2D-NUC optimized for low SNR values tends to lower orders of constellations. As denoted in [43], the 256NUC

3.1 Non-Uniform Constellations Optimization

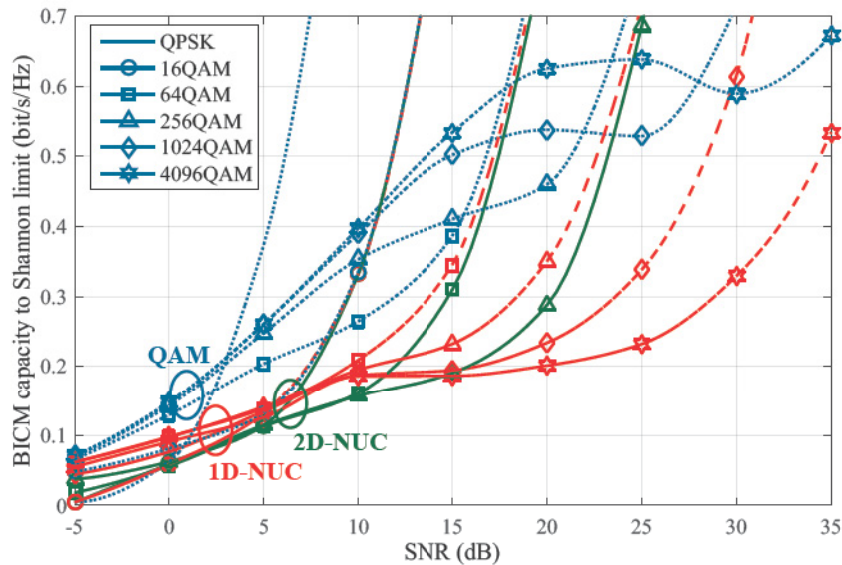


Figure 3.15: Shortfall of the BICM capacity from the unconstrained Shannon capacity, for the i.i.d. Rayleigh channel and a range of Gray-mapped QAM and 1D/2D-NUC constellations.

optimized for a SNR of 10 dB is in practice very similar to a 64NUC, where the three first rings of inner symbols repeat several positions. Paying more attention, there are 18 different and recognizable symbols per quadrant, so the constellation has in practice 72 different symbol positions. For a medium SNR of 15 dB, the number of recognizable symbols goes up to 120, and even at high SNRs some symbols still share some positions.

3.1.3 BICM Capacity Improvements

Up to now, this chapter has explained the optimization process for both 1D- and 2D-NUCs, as well as shown some examples of the final constellations obtained. In this section, the BICM gain in bit/s/Hz provided by these constellations is shown. 1D constellations from 16 to 4096 cardinality symbols, and 2D from 16 to 256 are considered. Fig. 3.15 shows the BICM capacity to the Shannon limit given by uniform QAM vs. optimized NUCs. In this case, all 1D- and 2D-NUCs are properly optimized for a range of SNR values from -5 to 35 dB. Results are shown for the i.i.d. Rayleigh channel. The use of this channel model is justified since terrestrial channels are typically Rice or Rayleigh distributed, as a consequence of terrestrial multi-path propagation. Each NUC performs better at its design SNR than its uniform variant, overall at high orders. Moreover, at any SNR, there is always a particular NUC that maximizes the greatest BICM capacity. The blue pointed lines denote the uniform QAM constellations, which

CHAPTER 3. OPTIMIZATION AND PERFORMANCE EVALUATION OF NON-UNIFORM CONSTELLATIONS

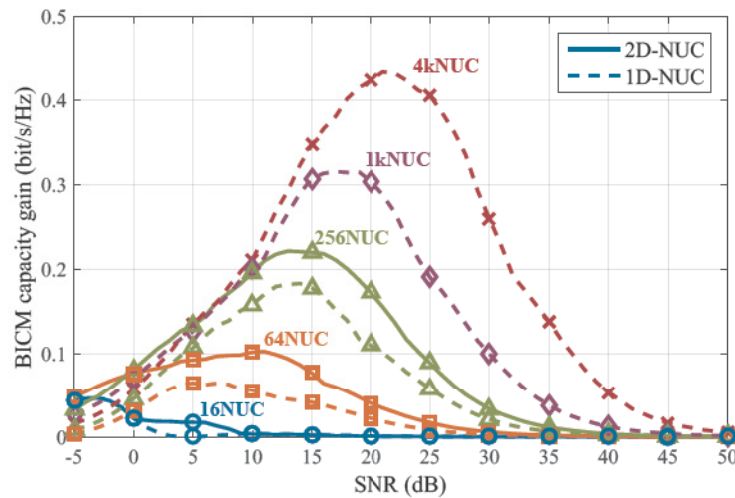


Figure 3.16: Gain of 1D/2D-NUC over QAM, for the i.i.d. Rayleigh channel model, and a range of SNR values between -5 and 50 dB.

shows how the successive uniform sizes take turns to be the best option as the SNR increases. The red dashed lines and green solid lines show the results for 1D and 2D-NUCs respectively.

As Fig. 3.15 shows, 2D-NUCs are always a better option than 1D-NUCs from the capacity point of view. In general terms, two general conclusions can be formulated. First, the BICM capacity gain increases with the constellation order, regardless of the type of NUC used. Second, the relative gain between 2D- and 1D-NUCs is always higher for the medium range of SNRs in which each order of constellation works. Logically, the SNR range also increases with the constellation order. This behavior can be better observed in Fig. 3.16, which shows the BICM capacity gain of 1D-NUCs (pointed lines) and 2D-NUCs (solid lines) for a complete range of SNRs, from -5 to 50 dB.

From the results for 16NUC in Fig. 3.16, it is possible to affirm that both 1D and 2D optimization give the same gain at low SNRs. This is due to the condensation that both suffer, reaching the same result independently on the parameters optimized, i.e. a QPSK constellation. In the range of 2 to 8 dB, 2D significantly outperforms 1D. Note that in the range where the capacity gain is really useful, there is no penalty for the use of a 8-sector optimization. At high SNRs, both 16NUCs converge to the uniform QAM distribution, and the gain becomes zero. Similar results are obtained for 64NUCs, although the SNR range changes. In this case, there is wide range where 2D offer significant gains compared to 1D, from -5 to 25 dB. At very low SNRs, they collapse into QPSK and, therefore, the BICM capacity gain provided is the same than 16NUC. 2D-

64NUCs offer a high benefit up to 15 dB. From that value, 2D constellations gain merges towards the 1D results. However, even at the highest SNRs of 30 or 40 dB, 2D does give a tiny advantage over 1D. Observing the curves obtained for 256NUC, the 2D gain compared to 1D is maintained from -5 to 20 dB, being around 0.03 bit/s/Hz. It is interesting to see that at very low SNRs, the gains obtained are lower than those reached by 16 and 64NUCs. At high SNRs, as occurred with 64NUCs, 2D constellations gains tend towards the 1D results. Both higher SNR ranges and BICM capacity gains are obtained for 1kNUC and 4kNUC. Observing Fig. 3.16, gains up to 0.43 bit/s/Hz are obtained for medium SNRs with 4kNUCs, which can give performance gains on the order of 1-1.5 dB, if the SNR target and CR are accordingly selected. Performance results for the optimized constellations are shown in Section 3.4.

3.2 Non-Uniform Rotated Constellations

Results in previous sections have shown that the gain of NUCs becomes almost non-existent at high SNRs, especially when optimizing for fading channels. In this particular case, rotated constellations can be used to improve the overall system performance [25]. With RCs, a certain rotation angle is applied to the constellation, so that the binary information is transmitted simultaneously in different I and Q components. In order to ensure that each component undergoes independent fading, a Component Interleaver (CIL) is applied after the rotation to separate both components in time and frequency domains. Thus, it is possible to retrieve all the information at the receiver side even when one of the components has been erased by the channel. With NUCs, it is required to optimize different rotation angles, since they are optimized so that the diversity experimented by both I and Q components is maximized.

When applying an additional rotation to a NUC, there are two different possibilities [103]. The simplest way is to optimize first the constellation symbols and apply afterwards a rotation, at the expense of a penalty loss (constellations are optimized without including the rotation). We call this method Optimization Before Rotation (OBR). As an improved solution, it is possible to include the rotation angle as a new variable in the optimization process. This second method is called Optimization with Additional Rotation (OAR). Both methods are explained in the following sections.

In a single RF transmission, the rotation gain is only significant for some particular combinations, i.e. low order constellations and high code rates, as reference [104] shows. However, RCs may become especially effective when using multi-RF techniques, such as Channel Bonding (CB) [62], providing very high performance gains. CB has been adopted in ATSC 3.0 and consists of

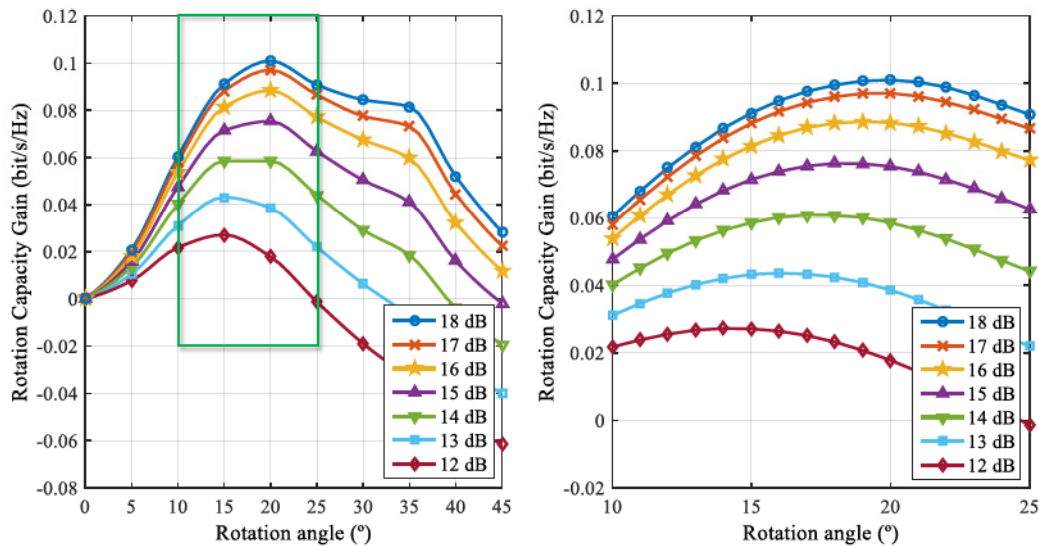


Figure 3.17: BICM Capacity gain of 2D-16NURCs, depending on the rotation angle and SNR.

splitting service data across two RF channels, so that peak data rate can be doubled. In such case, it is desirable that each component is transmitted in a different RF channel using a proper CIL, which must be redesigned. Results can be also extended to any multi-RF technology, such as Time-Frequency Slicing (TFS) [60]. TFS was proposed in DVB-T2 and adopted in DVB-NGH (Next-Generation Handheld) [14]. With TFS the data is transmitted in a slot-by-slot manner by frequency hopping across an RF-Mux of two or more RF channels (in practice, up to 6). The use of NURCs in connection with multi-RF techniques may become a good solution to increase robustness.

3.2.1 Optimization Before Rotation

Generally speaking, with rotated constellations the demapper has to consider all symbols in both dimensions, regardless of the constellations shape. Comparing 1D- and 2D-NURCs, it is better to use 2D-NURCs, as they always provide the best capacity for a given SNR, as shown in Fig. 3.16. In addition, the rotation of 2D-NURCs does not increase the demapping complexity, since a 2D-demapper is also needed. A typical 2D rotation is performed by multiplying two real (I and Q) components by an orthogonal rotation matrix of size 2×2 , as shown in Eq. 3.1.

3.2 Non-Uniform Rotated Constellations

$$\begin{bmatrix} \text{Re}(y) \\ \text{Im}(y) \end{bmatrix} = \begin{bmatrix} +a & -b \\ +b & +a \end{bmatrix} \begin{bmatrix} \text{Re}(x) \\ \text{Im}(x) \end{bmatrix} \quad (3.1)$$

where x is the original symbol, y is the resulting rotated symbol, $a = \cos\left(\frac{2\pi\theta}{360}\right)$ and $b = \sin\left(\frac{2\pi\theta}{360}\right)$, being θ the rotation angle in degrees. Selected angles are those that provide the maximum BICM capacity using the i.i.d. Rayleigh channel model.

To understand the effect of the rotation angle on constellations, Fig. 3.17 (left) depicts the BICM capacity obtained when rotating from 0° to 45° the 2D-16NUCs designed in Section 3.1.1 for SNRs from 12 to 18 dB. It also shows a zoom to the particular SNR range in which the rotation may become highly beneficial (right), i.e. from 10° to 25° . Observing the figure in detail, higher SNR values require larger rotation angles. For example, an SNR of 13 dB requires an angle of 16° while an SNR of 16 dB maximizes the capacity with 19° .

These results are the basis for the rest of the section, but it seems obvious that as done for NUC optimization, it is better to use an algorithm that automatically finds the optimum angle. As an example of application, Fig. 3.18 shows the rotation angle optimization process for 16NURC, from an initial angle of 15° (utilized for QAM constellations in DVB-T2 [12]) and using the Nelder-Mead algorithm [89]. A complete SNR range from 8 to 18 dB was selected. As occurred before, the higher the SNR target, the larger the rotation angle, with an upper bound of 20° . By contrast, when the SNR is significantly lower, the rotation angle becomes 0° , which implies better to use a non-rotated NUC.

It should be noted that RCs can be specified in two (2D) or four (4D) dimensions, depending on the number of real components in which the rotation is applied. A typical 4D rotation is performed by multiplying 4 real (two I and Q) components by an orthogonal rotation matrix of size 4×4 . With a 4D rotation, two different symbols are combined. Hence, the demapping complexity is drastically increased, compared to 2D. For this reason, 4D rotation was only adopted for QPSK in the DVB-NGH specification [14]. In this thesis, we only consider a 2D rotation with NURCs, since they require a very high demapping complexity compared with QPSK. For further information on 4D rotation, please refer to [25].

Fig. 3.19 shows two examples of 2D-NURCs optimized with the OBR method. On the left, a 16NURC optimized for a SNR target of 15 dB, for i.i.d. Rayleigh channel, with a rotation angle of 18.5° . On the right, a 64NURC optimized for 20 dB, with a rotation angle of 12° . For this purpose, a CIL must be implemented after the rotation. For instance, when using a single RF channel, this could be achieved by a simple time shifting of the Q component (Q-delay,

CHAPTER 3. OPTIMIZATION AND PERFORMANCE
EVALUATION OF NON-UNIFORM CONSTELLATIONS

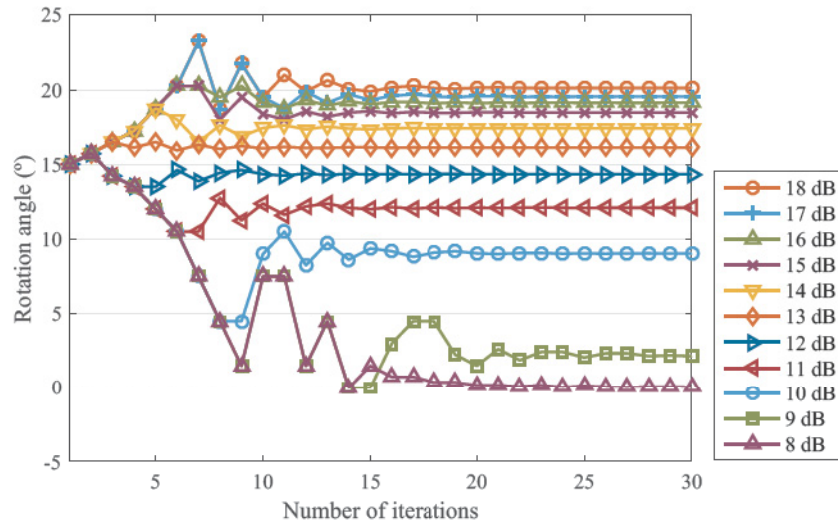


Figure 3.18: Rotation angle optimization process with method OBR and Nelder-Mead. 16NURC for a SNR range from 8 to 18 dB.

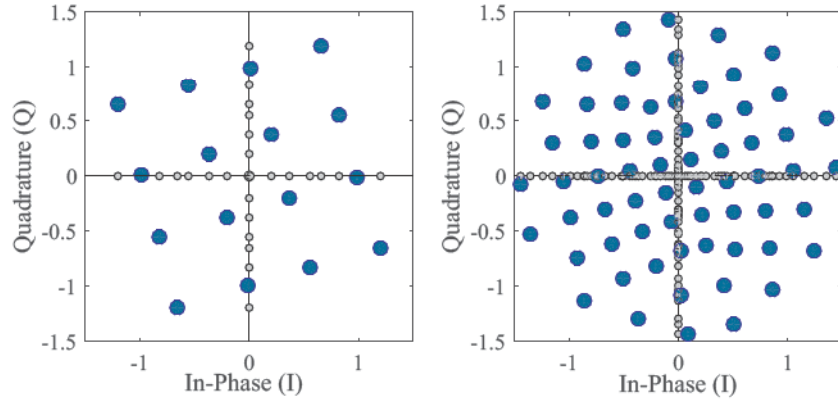


Figure 3.19: 16NURC and 64NURC optimized for i.i.d. Rayleigh channel and SNR targets of 15 and 20 dB, with rotation angles of 18.5° and 12° , respectively.

as specified in DVB-T2), so that the Q component of symbol n is transmitted with the I component of the symbol $n + 1$. This ensures each component of the same symbol experiences a different fading realization.

3.2.2 Optimization with Additional Rotation

Unlike OBR, with OAR the rotation angle is included as a new variable in the optimization process. The constellations need to be re-optimized taking this

3.2 Non-Uniform Rotated Constellations

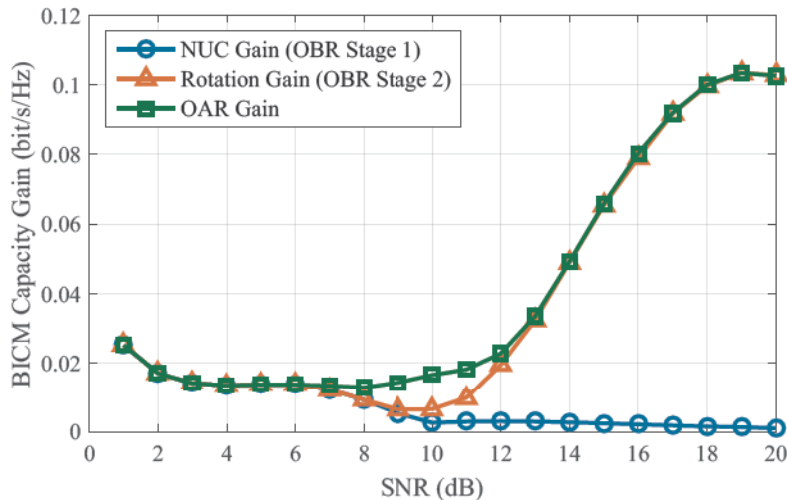


Figure 3.20: BICM capacity gain of 16NURC compared to non-rotated QAM, obtained with OBR and OAR methods for i.i.d. Rayleigh channel. The two contributions of OBR are shown by separate.

Code Rate	7/15	8/15	9/15	10/15	11/15	12/15	13/15
QPSK	15.2	23.6	25.5	26.4	27.1	27.4	27.6
16NURC	—	8.4	10.3	14.4	16.1	18.4	19.5
64NURC	—	—	—	—	5.5	9.7	12.1
256NURC	—	—	—	—	—	7.5	10.2

Table 3.2: Rotation angles ($^{\circ}$) optimized for 2D-NURCs, for i.i.d Rayleigh channel.

new value into account, and the total number of DoF in this case is $\frac{M}{2}$. Compared to OBR, the optimization burden complexity only increases in a single DoF, and both stages are performed in a single optimization step. Moreover, the constellation symbols are optimized without capacity loss because of the rotation.

As an example, Fig. 3.20 shows the capacity gain achieved for 16NURCs with both OBR and OAR methods, compared to non-rotated QAM constellations. Note that the two contributions of the OBR method are considered by separate, i.e., the NUC optimization (blue) and the following rotation (orange), while the only contribution of OAR is shown in gray. Observing Fig. 3.20, the maximum BICM capacity is significantly higher using the second method OAR, especially for medium SNRs, region where the rotation starts to provide a slight gain (range from 9 to 11 dB). In addition, optimizing NURCs with OAR increases the SNR range where there is a gain with the rotation (7 and 8 dB). Thus, NURCs optimized with the OAR method are used in following

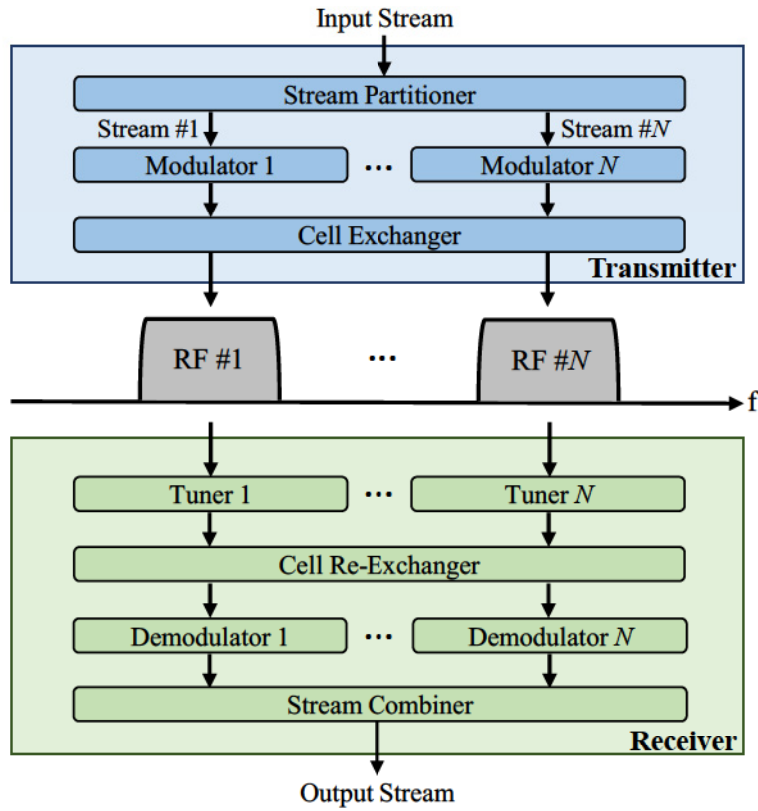


Figure 3.21: Channel Bonding concept extended to N RF channels.

sections. Table 3.2 shows the resulting rotation angles, for CRs that provide a rotation gain (7/15 to 13/15) higher than 0.1 dB. A hyphen indicates that the best option is not to apply the rotation, for the particular case of single-RF transmissions, since the gain obtained is almost negligible. As can be observed, the optimum rotation angle is higher for low-order constellations and high CRs. Rotation gains obtained using the selected angles are provided in next sections.

3.3 Application of NURC to Multi-RF Techniques

CB consists of the reception of data in parallel from two RF channels and enables doubling peak service data rate. There are two different operation modes. The basic mode is known as plain CB, in which reception is performed by means of two tuners. The second operation mode, known as SNR averaging, exploits

3.3 Application of NURC to Multi-RF Techniques

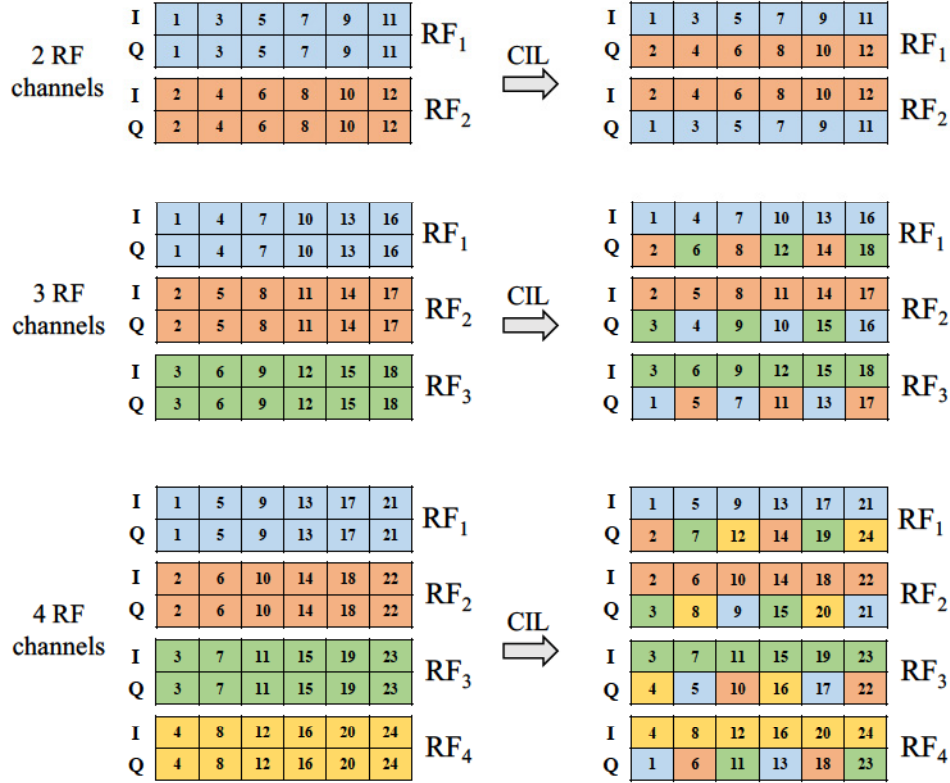


Figure 3.22: Component Interleaver designed for multi-RF techniques, using 2, 3 or 4 RF channels. It is only applied to the Q component. The I component keeps the same distribution.

increased frequency diversity by means of frequency interleaving of the service data among two RF channels, thus improving transmission robustness [62]. On the other hand, TFS distributes the data of each service across multiple RF channels by means of time slicing. Data is received by means of frequency hopping [60]. With TFS, frequency interleaving is achieved by a time interleaving duration that covers the transmission over multiple RF channels. With CB and SNR averaging, a cell exchanger is used so that one half of data is sent over each RF channel, as Fig. 3.21 shows. The symbols are then received using an cell re-exchanger. Afterwards, each output signal has to be sent to a different demodulator stage, where decoding process takes place. In this thesis, we only consider CB with SNR averaging for potential combination with constellation rotation.

The main advantage of CB with SNR averaging is the increased RF performance. Studies in [105] reveal the typical signal PI between RF channels in the

CHAPTER 3. OPTIMIZATION AND PERFORMANCE EVALUATION OF NON-UNIFORM CONSTELLATIONS

UHF (Ultra-High Frequency) band. In a single-RF transmission, the reception of the complete delivered set of services is limited by the RF channel with the lowest SNR. If one of the RF channels cannot be decoded, the services carried within are lost, regardless of better conditions of the other channels. With a cell exchanger, all services are received with a global SNR corresponding to an averaged SNR among the RF channels [59]. As a matter of considering the gain provided by CB or TFS ($G_{Multi-RF}$), Eq. 3.2 accounts for the additional SNR margin provided by multi-RF ($SNR_{Multi-RF}$) over the SNR of the worst received RF channel (SNR_{worst}).

$$G_{Multi-RF}[dB] = SNR_{Multi-RF} - SNR_{worst} \quad (3.2)$$

Additional gains can be exploited by the combination of rotated constellation and multi-RF techniques. In such case, it is desirable that each component is transmitted in a different RF channel. In this thesis, we apply the CIL only to the Q component, and the design becomes different depending on the number of RF channels currently used in the transmission. It is based on the CIL specified in the DVB-NGH (Next-Generation Handheld) standard [14], since ATSC 3.0 does not implement this type of interleaving. The Q components are shifted from RF channel to RF channel as shown in Fig. 3.22.

3.4 Performance Analysis Based on Physical Layer Simulations

In the following section, the gain of the different NUCs designed (with and without rotation) is presented in terms of SNR (dB), under AWGN and i.i.d. Rayleigh channels. Note that the design and implementation of these constellations only affect the mapping and demapping processes. For the rest of blocks implemented in both the transmitter and receiver, the ATSC 3.0 specification was used. An optimum ML demapper was employed in all cases, since the use of suboptimum demappers to reduce the complexity is explored in Chapter 4. A low-density parity-check (LDPC) code length of 64800 bits was used, with bit and frequency interleavers activated [15]. The Time Interleaver (TIL) is deactivated in this section, since no gain can be obtained under the conditions of channel models considered (entries of the channel matrixes are independent amongst each other in time and space, with zero-mean). Ideal channel estimation is also considered. The complete transmit to receive simulation chain is defined in Appendix A. Regarding the stopping criterion, for each SNR a maximum number of 10^4 and a minimum number of 10^3 TIL blocks are simulated. Finally, the selected quality of service for comparisons is a bit error rate Bit Error Rate (BER) of 10^{-4} after BCH decoding.

3.4 Performance Analysis Based on Physical Layer Simulations

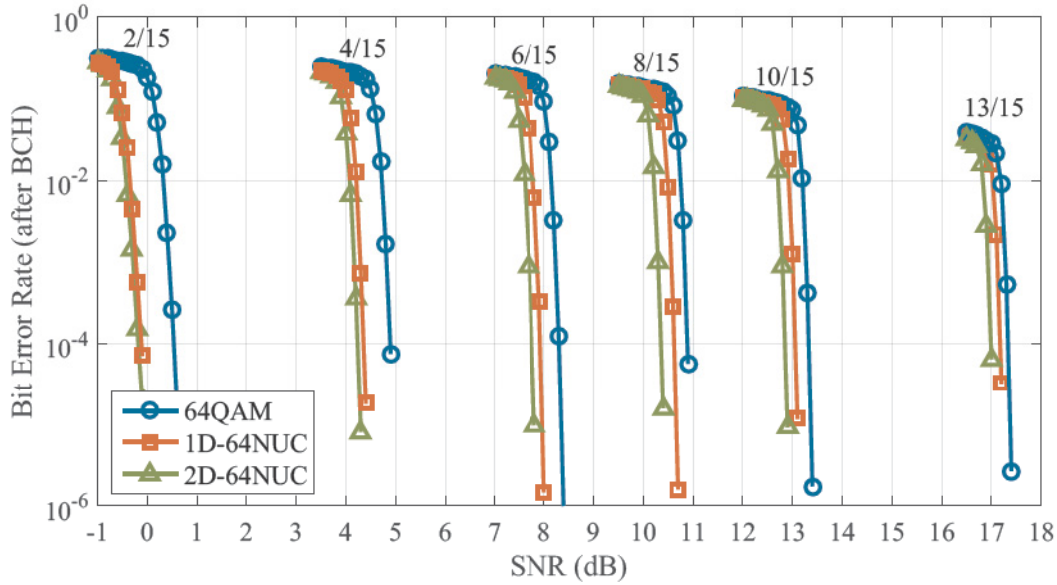


Figure 3.23: SNR Performance of different types of constellation: 64QAM, 1D-64NUC and 2D-64NUC, for different CRs and AWGN channel.

3.4.1 Non-Uniform Constellations Gain

Fig. 3.23 presents an example of the performance gain achieved using the 1D- and 2D-64NUCs optimized in Section 3.3, for AWGN channel and some representative CRs. On the other hand, Figs. 3.24 and 3.25 summarize the performance gains for all constellation orders and for AWGN and i.i.d. Rayleigh channels, respectively. Blue bars represent the SNR gain obtained with 1D-NUCs, while yellow gains are obtained using 2D-NUCs. In general, three different conclusions can be formulated. First, the higher the constellation order, the larger the maximum gain achieved. Since the difference to the unconstrained Shannon limit with QAM constellations grows with the constellation order, there is more room for a possible optimization. Second, 2D-NUCs always obtain same or better gains than 1D-NUCs. A two-dimensional optimization permits the symbols a higher freedom to reach their optimum position (even they can evolve towards the squared shape), thus obtaining higher gains. Last but not least, we can affirm that, in general terms, medium CRs give the higher SNR gain. The only exception is given for 16QAM, where the best results are obtained for low CRs, due to the very small gap existent from QAM to the Shannon limit. In general, the gains obtained are very similar to those obtained in ATSC 3.0 [17], since we follow a similar approach and constellations are designed for the same channel models.

CHAPTER 3. OPTIMIZATION AND PERFORMANCE EVALUATION OF NON-UNIFORM CONSTELLATIONS

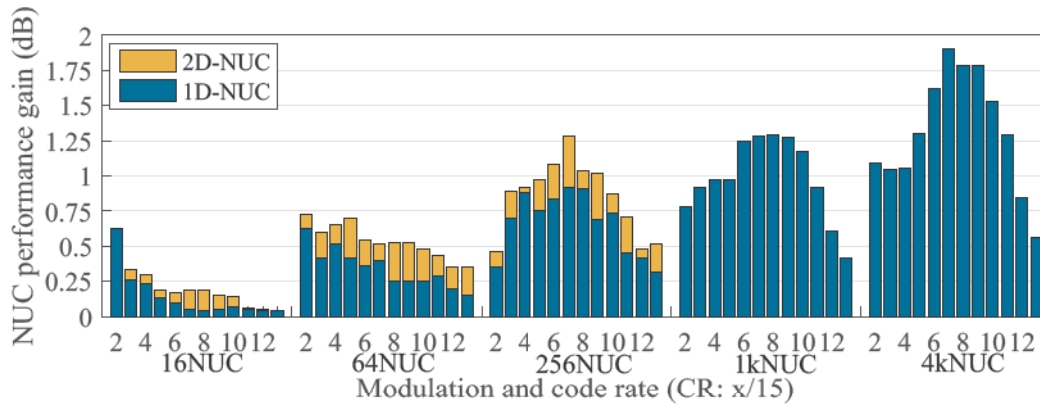


Figure 3.24: NUC Performance gain under AWGN channel. Constellations from 16 to 4096 symbols, CRs from 2/15 to 13/15.

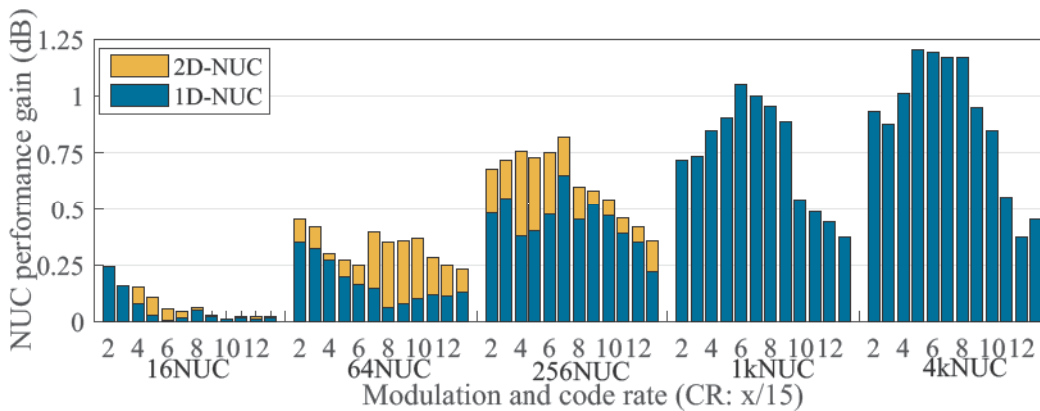


Figure 3.25: NUC Performance gain under i.i.d. Rayleigh channel. Constellations from 16 to 4096 symbols, CRs from 2/15 to 13/15.

The SNR gains obtained for AWGN are, for all constellations and coding rates considered, higher than those obtained for i.i.d. Rayleigh. Maximum differences are obtained for high constellation orders and medium CRs, where higher gains are obtained. The difference in this case is up to 0.6 dB. The use of a more realistic channel with fading statistics hampers the non-uniform constellations to approach the theoretical limit. Note that differences could be even higher if constellations were optimized only for AWGN channel, instead of the combination of both of them. Tables 3.3 and 3.4 show the relationship between each CR and SNR for which constellations were designed, for AWGN and i.i.d. Rayleigh channels, respectively. For the sake of simplicity, only even CRs are shown.

3.4 Performance Analysis Based on Physical Layer Simulations

Constellation	Code Rate					
	2/15	4/15	6/15	8/15	10/15	12/15
16NUC	-3	2	5	7	9	11
64NUC	0	5	8	11	13	16
256NUC	2	7	11	14	17	21
1kNUC	4	9	14	18	21	25
4kNUC	5	11	16	21	26	30

Table 3.3: SNR (dB) assumed for each constellation and CR combination, AWGN channel.

Constellation	Code Rate					
	2/15	4/15	6/15	8/15	10/15	12/15
16NUC	-2	3	6	9	12	15
64NUC	1	6	10	13	16	20
256NUC	3	9	13	17	20	24
1kNUC	5	11	16	21	25	29
4kNUC	7	13	19	24	29	34

Table 3.4: SNR (dB) assumed for each constellation and CR combination, i.i.d. Rayleigh channel.

3.4.2 Rotation Gain

Fig. 3.26 depicts the rotation gain, i.e. the improvement in the required SNR due to the constellation rotation. We consider the NURCs optimized with the OAR method, from 16 to 256 symbols, and also the QPSK constellation (without any possible optimization). The OBR method is not used in this section, since the capacity results obtained with OAR are always the same or better than those achieved with this method. As in previous section, LDPCs and BILs from ATSC 3.0 are used. The highest rotation gain is obtained for low-order constellations and high CRs. The additional diversity introduced by RCs improves the performance for higher CRs, whereas for lower CRs it is preferable to rely on the error-correction capabilities of the FEC code. In this case, a maximum gain of 1.7 dB is obtained using QPSK 13/15.

3.4.3 Non-Uniform Rotated Constellations with Multiple RF Channels

This section focuses on the gain of rotated constellations when making use of inter-RF frequency diversity, transmitting the I/Q components of each rotated symbol in different RF channels. First, we only consider 2 RF channels. The study is extended to 4 RF channels. In order to model these RF channels,

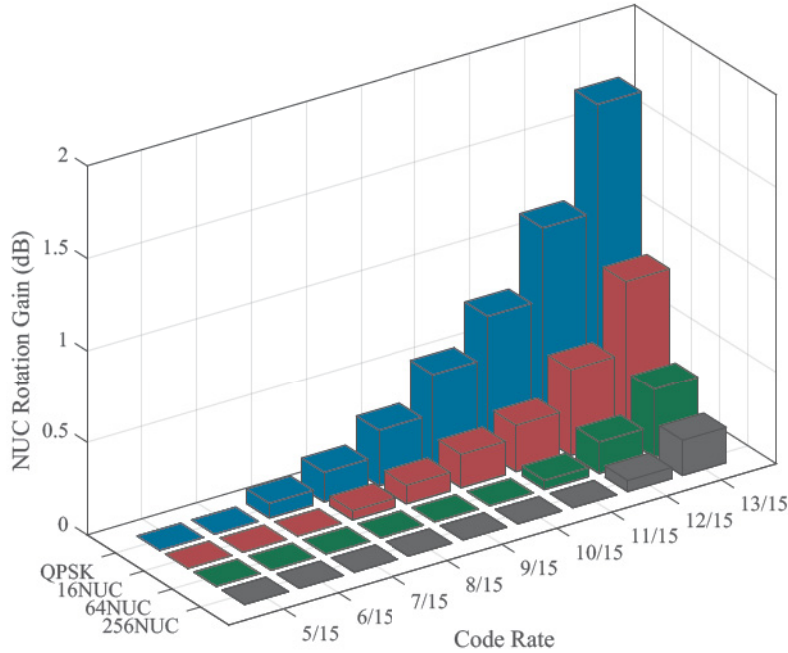


Figure 3.26: Rotation gain (dB) of 2D-NURCs designed with OAR for i.i.d. Rayleigh channel, when a Q-delay is applied. CRs from 5/15 to 13/15.

two different power imbalances are defined, i.e. 3 and 9 dB. We consider 3 dB to simulate that the RF channels are close in the same frequency range, and transmitted under similar channel conditions. An imbalance of 9 dB is also studied as a worst-case scenario. Studies in [105] reveal that it is possible to find imbalances up to 10 dB in certain locations.

Gain with 2 RF Channels

Fig. 3.27 summarizes the multi-RF gain ($G_{multi-RF}$) obtained for all NUCs, optimized for a single RF transmission, and the two considered scenarios (imbalances of 3 and 9 dB). The multi-RF gain is calculated using Eq. 3.2. It should be noted that the higher the PI between RF channels, the larger the gain. The gain also depends on two additional parameters: CR and order of constellation. Regardless of the PI between RF channels and without applying any rotation to the constellation, the highest gains are for very robust LDPC codes (low CR) with a low-order modulation, e.g. QPSK, obtaining a maximum gain of 5.9 dB. As a half-way point, CRs such as 7/15 or 8/15 provide a gain which is approximately the half of the PI between RF channels. From

3.4 Performance Analysis Based on Physical Layer Simulations

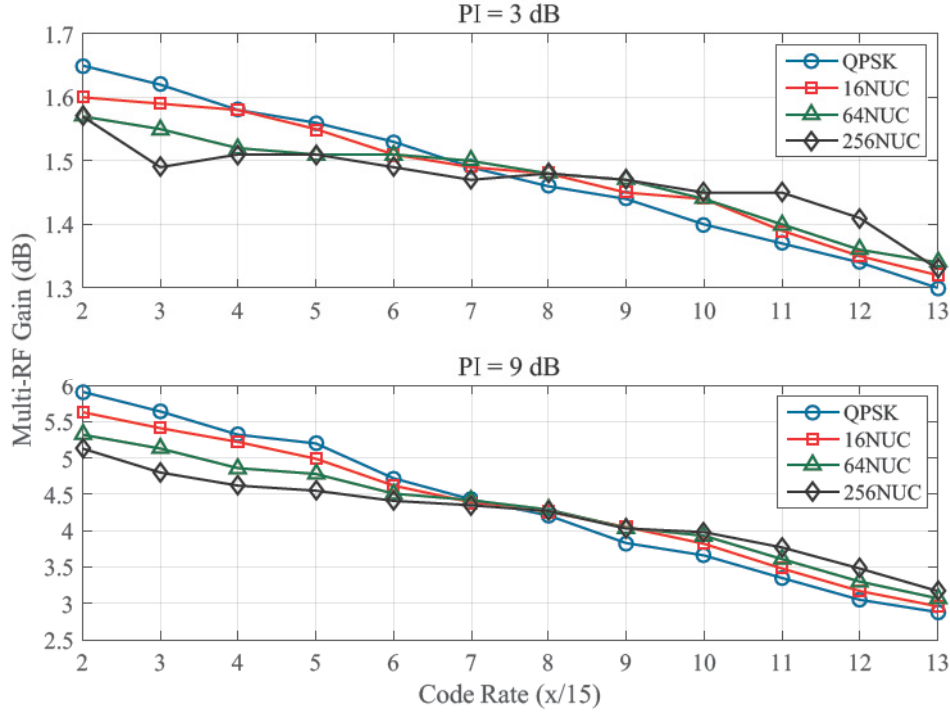


Figure 3.27: Multi-RF Gain (dB) for two RF channels, depending on the CR and modulation, i.i.d. Rayleigh channel. Two different scenarios are studied, i.e. PI of 3 and 9 dB.

this point, we assume the worst considered scenario (9 dB of imbalance) for further results.

Fig. 3.28 shows the rotation gain (G_{ROT}) of NURCs when using multi-RF techniques. As occurred with a single RF channel, the additional diversity introduced by RCs improves the SNR performance only for high CRs, but the range of CRs with additional gain is increased. In particular, there are two more combinations where a rotation gain can be achieved in multi-RF scenarios. These two combinations are QPSK with CRs 5/15 and 6/15, with rotation angles of 10.5° and 12° respectively. Moreover, the obtained gains become significantly higher. The maximum SNR gain, obtained with a QPSK constellation and CR 13/15, is 3.9 dB, which implies an increase of 2.2 dB compared to the single-RF case.

Fig. 3.29 depicts the total gain (continuous lines) achieved when combining both the rotation and multi-RF procedures ($G_T = G_{multi-RF} + G_{ROT}$), with a PI of 9 dB, compared to the non-rotated case (dashed lines). In contrast to non-rotated constellations, the highest gain is achieved with the largest possible CR, when using the QPSK modulation. In this case, the SNR gain obtained is up

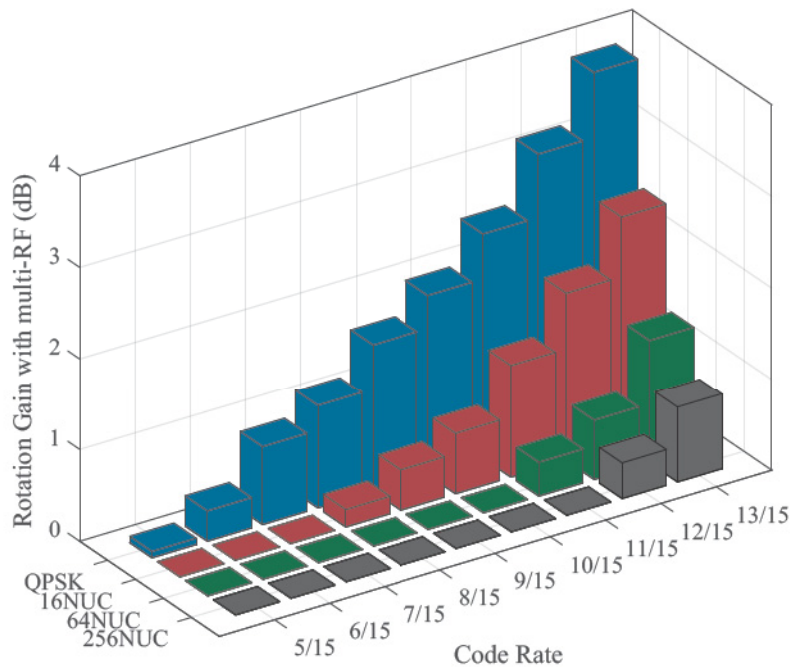


Figure 3.28: Rotation SNR gain (G_{ROT}) of NURCs with multi-RF techniques and 2 RF channels, for i.i.d Rayleigh channel and PI of 9 dB.

to 6.7 dB, from a total of 9 dB of imbalance. With higher-order constellations, even though the rotation provides a considerable gain, low CRs remain as the better option. The total gain G_T is always over 4 dB for all cases. Thanks to the SNR averaging combined with the rotation, almost the half of power imbalance between RF channels could be recovered, for any configuration. To better explain the potential gains achieved, Fig. 3.30 shows an example of the performance obtained when considering CB and/or constellation rotation, for the particular case of a QPSK constellation and CR 13/15.

Gain with 4 RF Channels

In this section, the potential gain of NURCs with SNR averaging over 4 RF channels is analyzed. We consider 3 different scenarios, depending on the number of channels with a very low SNR compared to the best RF channel: when 1/4, 2/4 or 3/4 RF channels are transmitted with a PI of 9 dB, as shown in Fig. 3.31. From the diversity point of view, the case of 2/4 RF channels is analog to 1/2 with 2 RF channels, studied in previous section.

From the two possible remaining scenarios, the most relevant result can be derived from the 3/4 case, i.e. when 3 RF channels present a low performance

3.4 Performance Analysis Based on Physical Layer Simulations

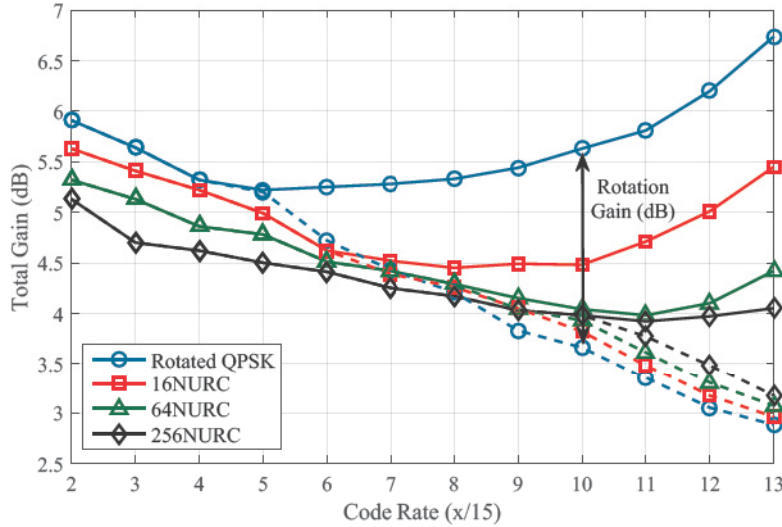


Figure 3.29: Total gain (G_T) of NURCs with multi-RF techniques, for i.i.d Rayleigh channel and PI of 9 dB between the 2 RF channels. Dashed lines represent the multi-RF gain ($G_{multi-RF}$), without rotation.

compared to the best one. Thanks to multi-RF techniques and SNR averaging, the minimum required SNR can be drastically reduced, at the expense of requiring a higher SNR in the RF channel with the best performance. When rotated constellations are also employed, the SNR gain becomes higher especially with high CRs and low-order constellations, as occurred with 2 RF channels (see the top of Fig. 3.32). For instance, with QPSK 13/15, a total gain of 3.8 dB is achieved in the 3 worst RF channels. Reducing the SNR performance in these 3 channels implies an increase of 5.1 dB in RF1. As expected, the SNR gain is lower than the 6.7 dB obtained with 2 RF channels (equivalent to 2/4).

On the other hand, with 1/4 a single RF channel is transmitted with a SNR imbalance compared to the rest of channels. In this case, CB provides very-high gains, especially with low CRs. Without rotation, the maximum SNR gain obtained ranges between 7.5 and 7.8 dB (the maximum possible gain is 9 dB), regardless of the constellation (see the bottom of Fig. 3.32). When using NURCs, the SNR range is increased (from 4/15 to 13/15), and the rotation gain becomes slightly higher, up to 3.2 dB. Using QPSK 13/15, the total gain is 8.7 dB, which means that the RF channel with poor performance is almost fully recovered, as long as the SNR of the rest of channels is maintained.

CHAPTER 3. OPTIMIZATION AND PERFORMANCE
EVALUATION OF NON-UNIFORM CONSTELLATIONS

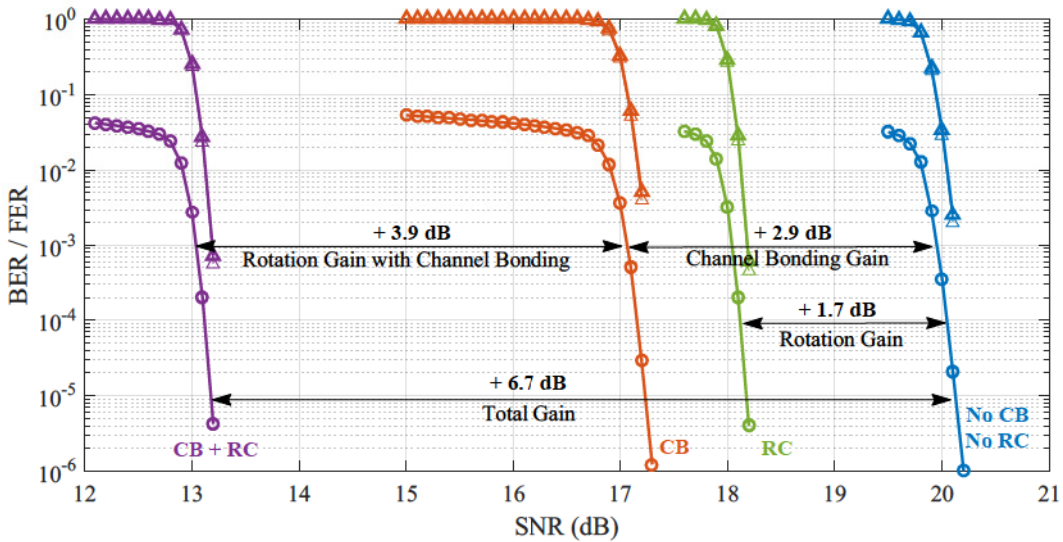


Figure 3.30: SNR performance with channel bonding and/or rotation. Two RF channels, for a QPSK CR 13/15 and i.i.d. Rayleigh channel, PI of 9 dB.

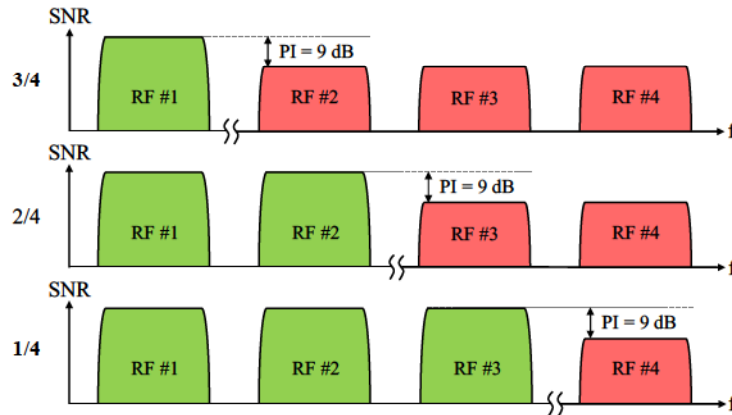


Figure 3.31: Three considered scenarios where multi-RF with SNR averaging and 4 RF channels can be potentially beneficial. PI is fixed to 9 dB.

Gain with Erasures

As an additional result, in this section we evaluate the potential gains when the RF channels present co-channel interferences that are simulated as erasures [28]. With erasures, there is a direct relationship between CR and the quality of the channels, which can be explained by considering the amount of erased information symbols during a co-channel interfered transmission. In other words, the presence of erasures limits the maximum CR for which error-free commu-

3.4 Performance Analysis Based on Physical Layer Simulations

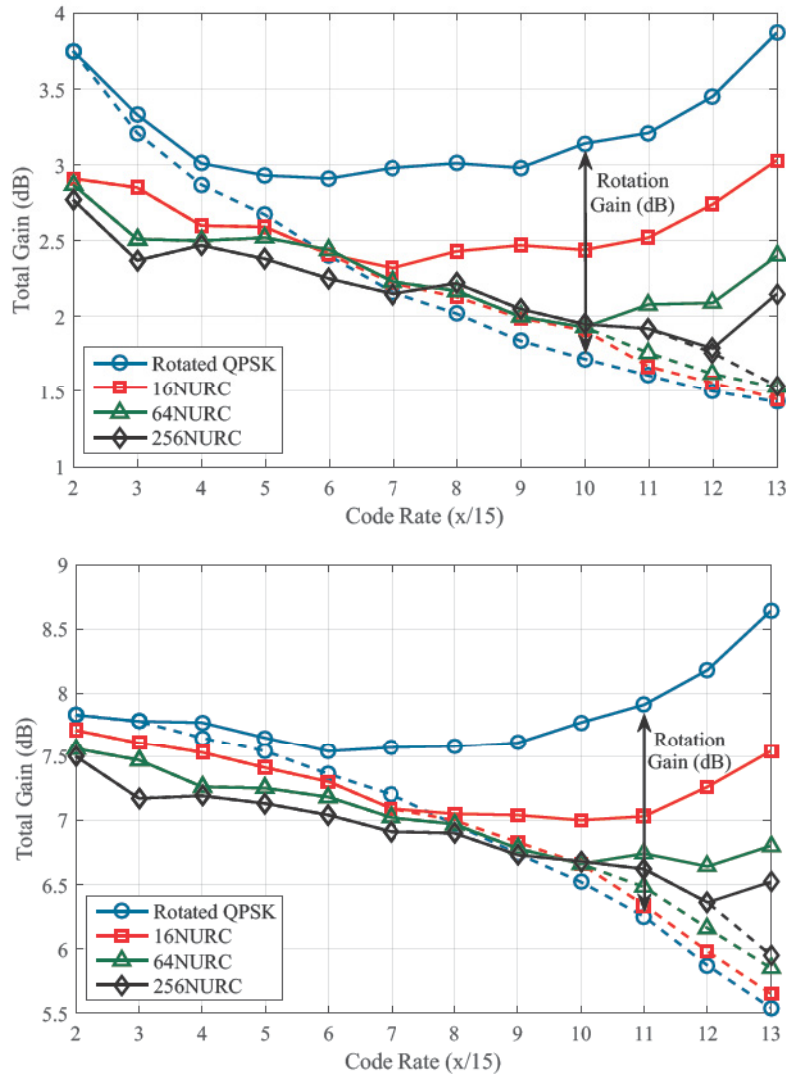


Figure 3.32: Total gain (G_T) of NURCs with multi-RF and 4 RF channels, for i.i.d Rayleigh channel. 3/4 (top) and 1/4 (bottom) RF channels require higher a SNR. Dashed lines represent the multi-RF gain (G_{CB}), without rotation.

nication is possible. A 25%, 50% and 75% of erasures require CRs lower than 3/4, 1/2 and 1/4 respectively in order to repair the loss of information.

Fig. 3.33 depicts the minimum SNR required at the receiver when using 4 different RF channels, with SNR averaging and the presence of erasures in 1, 2 or 3 channels, without rotation (dashed lines). As mentioned before, the higher the CR, the larger the SNR required. With erasures and high CRs the SNR tends to infinite, which makes the demodulation process impossible. The use

CHAPTER 3. OPTIMIZATION AND PERFORMANCE
EVALUATION OF NON-UNIFORM CONSTELLATIONS

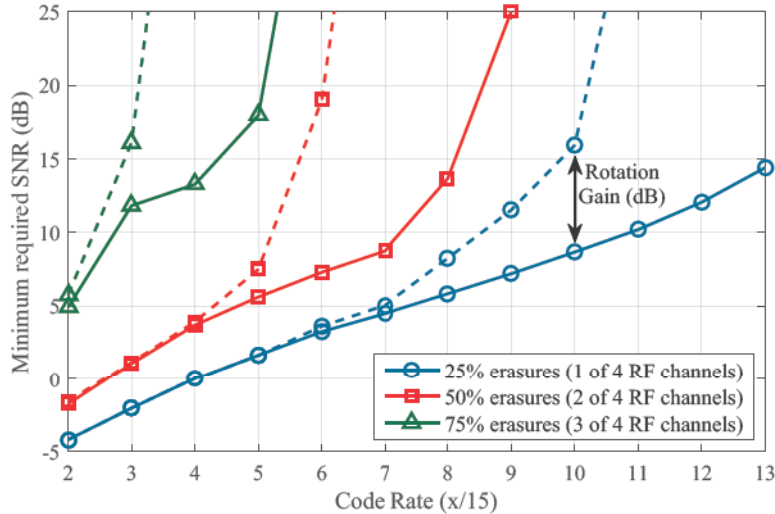


Figure 3.33: Minimum required SNR of rotated QPSK with multi-RF and erasures in the 25%, 50% or 75% of the 4 RF channels. Dashed lines represent the SNR required without rotation.

of RC (continuous lines) allows extending the SNR range where it is possible to recover the desired capacity. Whereas it was not possible to recover the capacity lost by the imbalance on RF2 with CRs higher than 1/2 for QPSK, with RC it is possible to recover the lost RF channel for higher SNR values, at the expense of a higher SNR requirement. With RCs, a 25%, 50% and 75% of erasures allow to use CRs lower than 13/15, 9/15 and 6/15, respectively.

3.5 Conclusion

In this chapter, different orders of one- and two-dimensional non-uniform constellations have been designed. Constellation symbols are optimized so the average BICM capacity is maximized, using the Nedel-Mead simplex algorithm [89]. The algorithm iteratively looks for the optimum constellation symbols, modifying their positions in the I/Q plane. In this thesis, 1D-NUCs from 16 to 4096 symbols were designed, while 2D-NUCs were optimized up to 256 symbols. This assumption was also taken into account in the ATSC 3.0 standardization process [15]. The optimization of higher constellation orders is not feasible for the algorithm considered. The complexity of the optimization process is extremely high and the method does not find the optimum solution, reaching local minimums that do not provide the best result.

1D-NUCs from 16 to 4096 symbols were designed, while 2D-NUCs were optimized up to 256 symbols. Results in this chapter show that the maximum BICM capacity gain obtained with 1D-NUCs is 0.04, 0.07, 0.18, 0.32 and 0.43 bit/s/Hz with 16, 64, 256, 1k and 4kNUC, respectively. The gain is increased when using 2D-NUCs up to 0.05, 0.1, 0.22 bit/s/Hz with 16, 64 and 256NUC. Naturally, there is a direct relation to the performance gain obtained, if the CR is accordingly selected taking into account the waterfall region of SNRs for which constellations were designed. The maximum performance gain achieved in i.i.d. Rayleigh channel with 1D-NUCs is 0.05, 0.32, 0.65, 1.05 and 1.2 dB with 16, 64, 256, 1k and 4kNUC, respectively. Regarding 2D-NUCs, the gains are increased to 0.16, 0.45 and 0.8 dB. These gains are very similar to those obtained in the ATSC 3.0 standardization, since constellations are designed for the same channel models. Note that the use of AWGN and i.i.d. Rayleigh channel models has been considered in a single optimization. Selecting different channel models affects the final constellation, with symbols located on the intermediate positions obtained in separated optimizations. Constellations for two transmission modes, i.e. fixed and mobile receptions, were also investigated. Since both modes require totally different SNR values, the combination is not optimum. It is better to focus on a particular SNR. Another interesting concept is the use of condensed constellations. The idea is to transmit several symbols grouped in clusters, allowing to use more bits per symbol. In this case, the most significant bits provide similar robustness but the least significant bits are used to give additional information. On the other hand, the use of lower-order constellations allows to increase the CR, so in practice both constellations provide similar performance [34].

2D-NUCs can be rotated to further increase the gain at high SNRs. This chapter has first described the optimization process of Non-Uniform Rotated Constellations (NURC) and analyzed the performance in a single-RF transmission. Even though the demapping complexity is not increased, the SNR gain of NURCs in this case is not significant. The highest rotation gain is obtained for low-order constellations and high CRs, obtaining a maximum of 1.7 dB using QPSK 13/15. However, with multi-RF techniques such as Channel Bonding (CB) and Time-Frequency Slicing (TFS), the SNR gain is drastically increased, since I and Q components are transmitted in different RF channels. Hence, we have provided the multi-RF gain of NUCs with and without rotation. Without rotating NUCs, the higher the PI between RF channels, the larger the gain. The gain also depends on the CR and order of constellation. Regardless of the PI between RF channels, the highest gains are for very robust LDPC codes (low CR) with a low-order modulation. When applying an additional rotation, the highest gain is achieved with the largest possible CR, when using the QPSK modulation. In this case, the SNR gain obtained is up to 6.7 dB, with a PI of

CHAPTER 3. OPTIMIZATION AND PERFORMANCE EVALUATION OF NON-UNIFORM CONSTELLATIONS

9 dB. When extending the results to 4 RF channels, we have considered two additional scenarios: $3/4$ and $1/4$ RF channels with poor performance. The most important result derives from the second scenario, where the RF channel with poor performance obtains up to 8.7 dB of SNR gain using QPSK $13/15$. Additional results to these scenarios have been provided, when the RF channels present co-channel interferences. A 25%, 50% and 75% of erasures require CRs lower than $3/4$, $1/2$ and $1/4$ respectively in order to repair the loss of information. With an additional rotation, the maximum CR is increased to $13/15$, $9/15$ and $6/15$, respectively.

Chapter 4

Low-Complexity Demapping and Quantization Algorithms

The use of NUCs has different implications when implementing real receivers. Digital demodulators need to process all the received information, in order to retrieve the data that originally was transmitted. A wide range of techniques such as demodulation, bit de-interleaving or decoding needs to be performed. Most of these techniques have been widely studied in the current literature, but the use of non-uniform constellations affects some of them when retrieving the original data. The first technique is demapping. With NUCs, optimum demappers calculate the distances from the received signal to all constellation symbols in a different manner, since the shape of the constellation changes. In that sense, Section 4.1 analyzes the demapping complexity, while in Section 4.2 we propose a new low-complexity demapping algorithm that reduces the amount of distances to calculate the LLRs [104]. As an example of application, we provide the results for NUCs optimized in Chapter 3. The section focuses on the two-dimensional 256NUC constellations, which is the highest modulation order of 2D-NUCs optimized in this thesis, also considered in the ATSC 3.0 specification [15]. Section 4.3 provides performance results for code rates from $2/15$ to $13/15$.

Another study identified is signal quantization. The use of NUCs affects the quantization process, since constellation symbols and therefore LLR values are different from those obtained with QAM. Two possibilities are explored in Section 4.4, i.e. quantization of I/Q components and LLRs in the time de-

CHAPTER 4. LOW-COMPLEXITY DEMAPPING AND QUANTIZATION ALGORITHMS

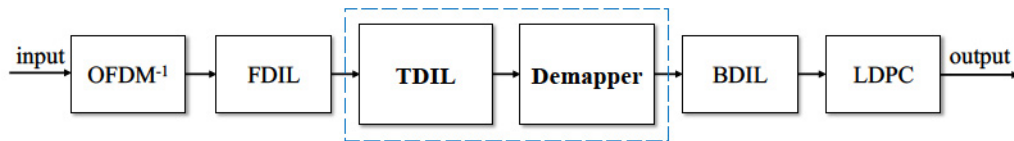


Figure 4.1: General receiver architecture. Time de-interleaving and demapping blocks are explored in this chapter.

interleaver, which needs the highest memory requirements. In this section, a low-complexity quantization method is also proposed. Performance results and memory requirements are presented in Section 4.5. The main findings of this chapter are summarized in Section 4.6.

4.1 Demapping Complexity at the Receiver

It is necessary to differentiate between two elements when comparing demapping complexity: the number of required distances to calculate each LLR and the complexity for the calculation of the distance itself. That is, the metric is calculated with a different dimensionality for 1D and 2D demapping. From the received symbol y , and the channel estimate h , each LLR Λ_l is computed for all code bits c_l , $l = 1, \dots, B$, with B as the number of bits that affect each dimension of a constellation. B does not refer to the number of bits per symbol, also expressed as bits per cell (*bpc*). For the LLR computation with the optimum ML demapper, a total number of N Euclidean distances between the received symbol y and all constellation symbols x is calculated. A single output Λ_l can be computed as in Eq. 4.1. Note that this expression was already introduced in Chapter 2 (Section 2.3).

$$\Lambda_l \triangleq \log \frac{p(c_l = 1|y, h)}{p(c_l = 0|y, h)} = \log \frac{\sum_{x \in \chi_l^1} \exp\left(-\frac{|y-hx|^2}{\sigma^2}\right)}{\sum_{x \in \chi_l^0} \exp\left(-\frac{|y-hx|^2}{\sigma^2}\right)} \quad (4.1)$$

where σ^2 represents the noise variance, y is the received symbol, x is a possible transmitted symbol, h is the channel fading coefficient, and \log refers to the natural logarithm. χ_l^1 and χ_l^0 denote the complementary sets of transmit symbols for which $c_l = 1$ and $c_l = 0$ respectively. The amount of complementary sets χ_l^1 and χ_l^0 has to be B . A ML optimum demapper has therefore to consider 2^B symbols in a D -dimensional (real-valued) space. Hence, the complexity Q can be computed as follows:

4.1 Demapping Complexity at the Receiver

Constellation symbols	16	64	256	1024	4096
QAM	4	8	16	32	64
1D-NUC	4	8	16	32	64
2D-NUC	32	128	512	2048	8192
RC	32	128	512	2048	8192

Table 4.1: Demapping complexity of uniform QAM, 1D-NUC, 2D-NUC and RC, for different bits per cell, in terms of mathematical operations to compute the LLRs.

$$Q = \mathcal{O}(D \cdot 2^B) \tag{4.2}$$

where \mathcal{O} represents the complexity order. It is also clear that the complexity depends on the type of constellation. Uniform QAM constellations can be split into two PAM constellations. Therefore, the demapper has to consider the half of symbols ($B = \frac{bpc}{2}$) in one dimension ($D = 1$). With 1D-NUCs, the one-dimensional demapping is also possible, and the complexity is maintained. In both cases, the complexity is calculated as:

$$Q_{\text{QAM}} = Q_{\text{1D}} = \mathcal{O}\left(2^{\frac{bpc}{2}}\right) \tag{4.3}$$

On the other hand, with 2D-NUCs the demapper has to evaluate for all symbols ($B = bpc$), and the distances in two dimensions (real and imaginary parts, $D = 2$) need to be calculated. The same occurs with RCs, where the binary information is transmitted simultaneously in different I and Q components. The demapper has to consider all symbols in two dimensions, regardless of the constellations shape. With RCs, it is not possible to use a 1D-demapper in any case. Therefore, the complexity with rotated constellations is maintained. The complexity in both options is given by Eq. 4.4.

$$Q_{\text{2D}} = Q_{\text{RC}} = \mathcal{O}(2^{bpc+1}) \tag{4.4}$$

Table 4.1 presents the demapping complexity in terms of mathematical operations to compute the LLRs, depending on the type and order of constellation. The complexity order with 2D-NUCs becomes especially high from $bpc = 8$. The proposed demapping algorithm reduces the number of distances N necessary to compute each LLR with this type of constellations, and it is explained next.

4.2 Low-Complexity Demapping Algorithm

The proposed algorithm to demodulate 2D-NUCs is based on two different strategies. The first one is called Quadrant Search Reduction (QSR) and computes the LLRs discarding those distances with low probability of being computed. It takes advantage of the symmetry that constellations provide, selecting a cluster of points to compute the LLRs. It is based on the demappers proposed in [53] and [54] for RCs. The concept is similar to the sphere demapper [56], which also selects a cluster of points to compute the LLRs. From the received point, SD only selects the constellation points that are inside a fixed radius. The second strategy is called Condensed Symbols Reduction (CSR), and exploits the condensation of NUCs, especially at low CRs where some of the constellation symbols almost repeat the same position in the I/Q plane. It omits the computation of those distances which are similar to others already calculated, and replicates them. Both strategies can be combined in order to reduce from 69% to 93% the number of required distances, depending on the CR, with almost no performance loss compared to the optimal ML demapper. The proposed demapper can be combined with RCs, in order to improve the SNR requirement for high CRs with no additional complexity.

4.2.1 Quadrant Search Reduction (QSR)

The first strategy discards those distances that provide scarce information to the LLR computation. In this section, we apply QSR for 2D-NUCs, but the QSR algorithm can be used with any quadrant-symmetric constellation. The algorithm is divided into two main steps. The first step consists of calculating the probability of each symbol received, when they are transmitted from a particular quadrant of the constellation. The probability (from 0 to 1) of receiving a particular constellation symbol is calculated as the number of times the symbol is received divided by the total number of transmitted symbols. Then, the received symbols are organized by probability order. A total number of 10^9 points is transmitted, over an i.i.d. Rayleigh channel. This number is confirmed in [54], and provides enough accuracy in the calculations. The rest of quadrants can be derived by symmetry. This step can be done off-line, storing the symbols by probability order in a look-up table. Then, the algorithm can compute the distances to the most probable symbols N when necessary.

Fig. 4.2 shows two examples of the histograms achieved for 2D-256NUC in the first stage, for CRs 2/15 and 13/15, designed in i.i.d Rayleigh channel for SNRs of 3 and 26 dB respectively. Both histograms have been obtained for the first quadrant (Q1). Note that in the figure, each symbol is represented in the horizontal axis using the integer number. For example, a symbol located in Q1

4.2 Low-Complexity Demapping Algorithm

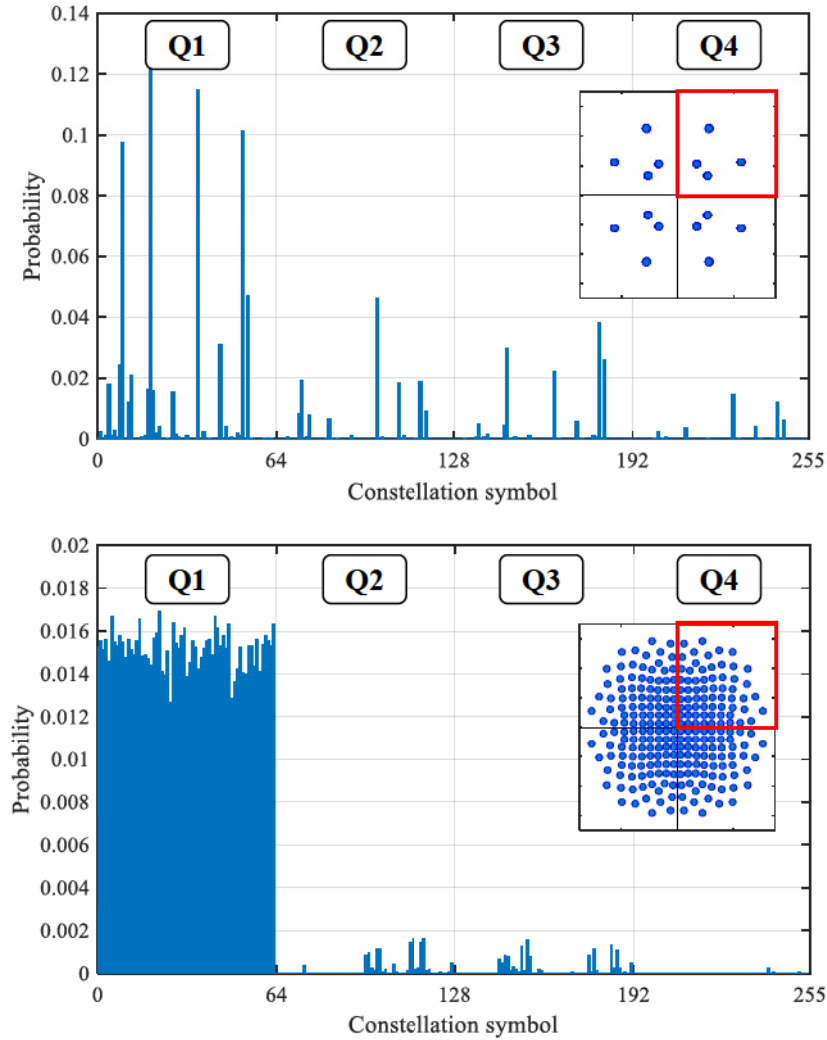


Figure 4.2: Histogram of the received constellation symbols for 2D-256NUC in i.i.d. Rayleigh channel, with code rates 2/15 (top) and 13/15 (bottom).

with binary value 00110100 is directly related to the result given in position 52. For a given CR, the transmission is done for the threshold SNR that provides a bit error rate (BER) of 10^{-4} . As Fig. 4.2 shows, the probability of receiving a constellation point from the Q1 is higher for high SNRs (bottom). On the other hand, at low SNRs (top) and because of the high noise level, constellation points from other quadrants (especially Q2 and Q3) are received with a higher probability.

In a second step, the minimum number of distances with significant probability, necessary to implement the algorithm, is obtained. In order to select the

CHAPTER 4. LOW-COMPLEXITY DEMAPPING AND QUANTIZATION ALGORITHMS

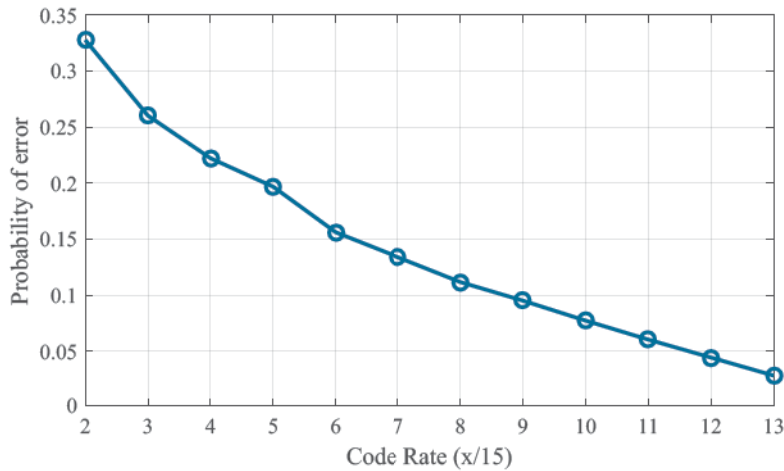


Figure 4.3: Probability of selecting an erroneous quadrant (p_e) with 2D-256NUCs in i.i.d. Rayleigh channel, with code rates from 2/15 to 13/15.

final subset N , it is necessary to observe its impact on the system performance through a BER analysis. The smaller the number of distances N considered, the worse the performance, but with a lower complexity. The proposed criteria is to select the smallest possible N that ensures a performance loss smaller than 0.1 dB.

With QSR, it is assumed that a symbol is received in the same quadrant that was transmitted. Hence, it is necessary to know the transmitted quadrant. The quadrant is determined using the sign of the I/Q components of the received symbol. Let define the variable p_e as the probability of selecting an erroneous quadrant. The constellation symbols that are in the edge of each quadrant provide less reliable results, and they usually lead to errors. The probability p_e is higher for low CRs, with higher levels of noise power, as Fig. 4.3 shows. However, precisely those constellations with a very high probability of obtaining an erroneous quadrant suffer a significant condensation. The second strategy, which is explained next, takes advantage of this condensation and calculates only distances for symbols that are not repeated.

4.2.2 Condensed Symbols Reduction (CSR)

At low CRs, NUCs converge to lower orders of constellation. In this case, the constellation symbols share the MSB, maximizing the Euclidean distance and maintaining independent dimensions for each bit, while the LSB have almost no impact in the LLR computation. The information provided by the LSB is close to zero and will remain so, as long as the SNR value is sufficiently low.

4.2 Low-Complexity Demapping Algorithm

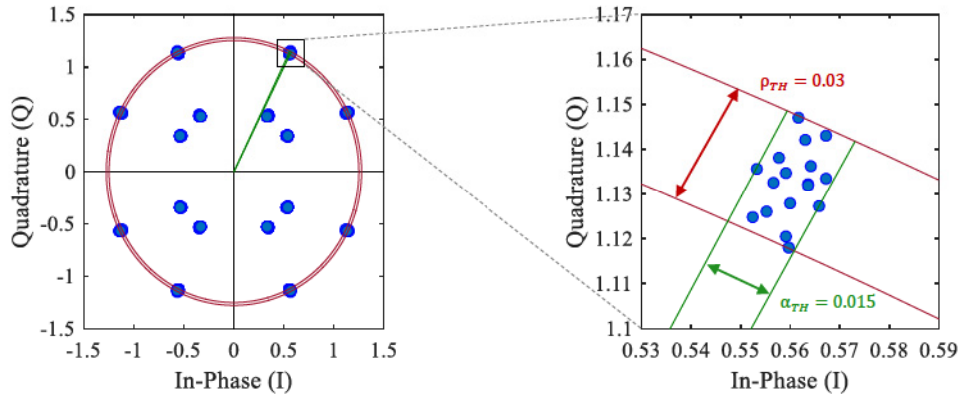


Figure 4.4: I/Q diagram of a 256NUC optimized for a CR 2/15 (left), with a zoom to one of the clusters detected by CSR (right), in which 16 symbols are grouped into one cluster.

As mentioned in other chapters, these constellations are called condensed constellations. They collapse to lower orders and symbols are grouped in clusters. Using this condensation, it is possible to transmit more bits per symbol. As main drawback, lower coding rates need to be used to keep the same spectral efficiency, so in practice both constellations provide similar performance [34].

For example, with a 2D-256NUC designed for a CR 2/15, which can be seen in the upper part of Fig. 4.2, only sixteen symbols are apparently visible, resembling a 16NUC. However, there are sixteen clusters with sixteen constellation symbols in almost identical positions. The CSR algorithm is based on this condensation and calculates a single distance for a complete cluster of symbols. The rest of distances are derived by replicating those previously calculated. In order to determine which symbols are grouped together and which not, it is necessary to define a minimum gap between them. The higher the gap selected, the bigger the number of symbols grouped together in a single distance to compute. This step introduces an insignificant loss in performance, since lineal Euclidean distances among condensed symbols in normalized NUCs are almost negligible, lower than 10^{-2} . In order to detect clusters, an array L with polar coordinates (radius and angle) is defined, for each constellation symbol. The algorithm evaluates each element in L individually. The difference is obtained for two threshold variables, ρ_{TH} (radius) and α_{TH} (angle in radians). If the difference is lower in both cases, a cluster is detected. Then, all remaining symbols fulfilling these criteria are removed from L , leaving the evaluated symbol as the representative one. It was observed through simulations that the selected symbol hardly affects the final performance. This process is repeated until reaching the end of the array L . Simulations have shown that 0.05 and

CHAPTER 4. LOW-COMPLEXITY DEMAPPING AND QUANTIZATION ALGORITHMS

0.03 are suitable values for ρ_{TH} and α_{TH} respectively. L is then converted back to Cartesian coordinates and the remaining constellation symbols are stored. As an example, Fig. 4.4 depicts a 256NUC optimized for a CR 2/15. Looking at the left side, it seems that only 4 constellation symbols are transmitted in the first quadrant. However, thanks to a deep zoom it is possible to distinguish up to 16 different symbols in a single position. As Fig. 4.4 shows, the maximum difference in ρ_{TH} among all symbols is 0.03, while the maximum angle is just 0.015. Thus, all symbols would be grouped inside the same cluster, following the process described above.

4.2.3 Quadrant Condensed Search Reduction (QCSR)

It is possible to combine both QSR and CSR into a single algorithm. We call this algorithm Quadrant Condensed Search Reduction (QCSR). The algorithm consists of taking the N constellation symbols obtained with QSR and group them together as done with CSR. At low SNRs, the CSR algorithm is more dominant because the optimized 2D-NUCs are condensed, which also complicates the quadrant search. At high SNRs the noise impact is lower and the constellations are not condensed, and hence the QSR algorithm is dominant. A complete description is given in Algorithm 1.

Algorithm 1 Quadrant Condensed Search Reduction (QCSR)

Require: (y, h, σ_v^2, x, R) $\{y$: received symbol, h : channel coefficient, σ_v^2 : noise variance, x : constellation, R : coding rate $\}$

Ensure: Λ $\{\text{LLR computed}\}$

```
1: for  $n_{\text{symp}} = 1$  to  $\text{size}(y)$  do
2:   calculate the received quadrant  $Q$ 
3:   load  $N(Q, R)$   $\{\text{Number of distances to be computed, depending on the quadrant and code rate}\}$ 
4:    $x_{\text{new}} \leftarrow x(1:N)$   $\{N$  most probable constellation symbols $\}$ 
5:   for  $n_{\text{dist}} = 1$ :  $\text{size}(x_{\text{new}})$  do
6:     loop that computes the non-repeated distances  $\text{dist}(y, h, \sigma_v^2, x_{\text{new}})$ 
7:   end for
8:   replicate the rest of distances
9:   for  $n_{\text{llr}} = 1$  to  $\text{bpc}$  do
10:    loop that computes the LLRs:  $\Lambda(\text{dist})$ 
11:   end for
12: end for
```

In the proposed algorithm, y is the received symbol, h is the channel fading coefficient, σ_v^2 represents the noise variance, x is a possible transmitted symbol, and R refers to the coding rate (from 0 to 1). Λ denotes each LLR computed.

4.3 Performance Evaluation: Minimum Number of Distances

This section compares first, in terms of BER performance, the results obtained with the optimum ML and the proposed QCSR demapper, providing the minimum number of N distances that need to be calculated, for i.i.d. Rayleigh channel. Afterwards, the performance loss obtained for different channel models is shown. In the simulations, 2D-NUCs optimized in Chapter 3 are used. We also use bit-interleavers from ATSC 3.0 [15], with a LDPC code length of 64800 bits and FEC codes from 2/15 to 13/15. No time and frequency interleavers are applied in this case.

4.3.1 Calculation of the Minimum Number of Distances

We define N_{QSR} , N_{CSR} and N_{QCSR} as the number of distances necessary for the QSR, CSR and QCSR demappers, respectively. As an example, Fig. 4.5 shows the performance of the proposed strategies QSR and CSR for 2D-256NUCs and CR 6/15, depending on the number of distances N . The selected criterion is to compare the SNR of each option that provides a BER of 10^{-4} , selecting the smallest possible N that ensures a performance loss smaller than 0.1 dB. For this particular CR of 6/15, both strategies QSR and CSR provide a reasonable performance degradation compared to ML, using a number of distances $N_{QSR} = 135$ and $N_{CSR} = 88$ (selected N are marked in bold). In this SNR range of 13 dB, the noise impact is significantly low, allowing the QSR strategy to work. On the other hand, the constellation keeps a good condensation as well, so the CSR strategy provides a high reduction. As already mentioned in previous sections, both strategies can be combined by using the QCSR algorithm. For the symbols obtained with QSR, only those distances that are not repeated are computed, and the rest are replicated, as CSR does. In this case, the final reduction comes to $N_{QCSR} = 66$ distances.

Fig. 4.6 shows the performance comparison with the final selected parameters N , using 4 representative CRs: a low CR 2/15, a medium CR 6/15 (recently analyzed) and two high CRs 10/15 and 13/15. The idea is to show separately the contribution of each strategy to the proposed algorithm, observing the impact on the system performance.

CHAPTER 4. LOW-COMPLEXITY DEMAPPING AND QUANTIZATION ALGORITHMS

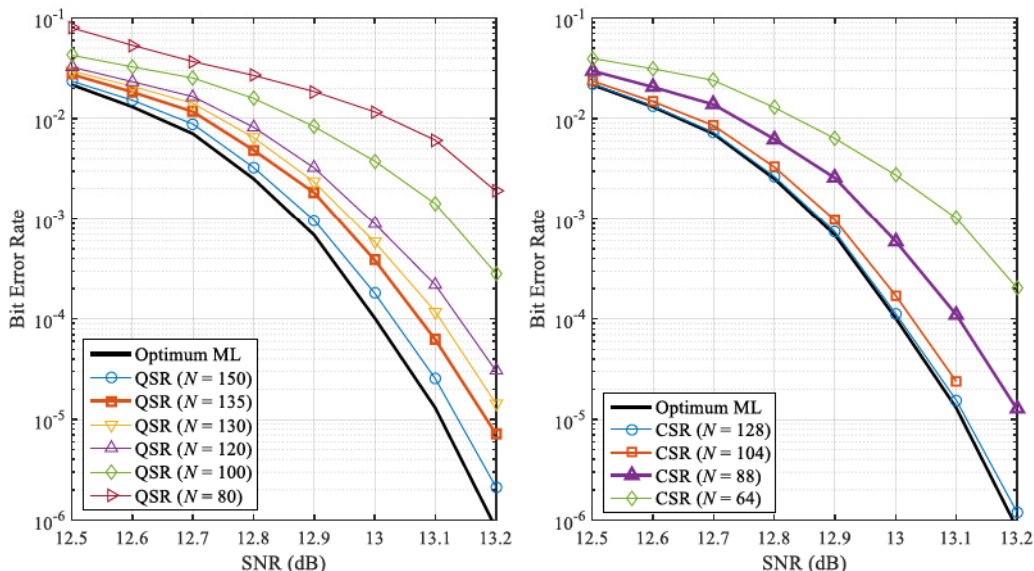


Figure 4.5: Performance of QSR (left) and CSR (right) demappers, depending on the number of distances N and compared with the optimum ML demapper. Results presented for a CR 6/15, under i.i.d. Rayleigh channel.

With low CRs such as 2/15 the SNR required is very low, and then the constellations are compressed. The compression allows the CSR strategy to work especially well, obtaining a reduction in the number of distances from up to $N_{CSR} = 16$, with no performance loss. However, precisely the low SNR hampers the quadrant search. The QSR strategy often is erroneous, and needs to calculate almost all distances, having $N_{QSR} = 235$. Therefore, in this particular case the QCSR algorithm works also with only $N_{QCSR} = 16$. Although the quadrant search fails, the algorithm only needs to consider the 16 unique distances that are not repeated, replicating the rest and providing the correct information to the LLR computation. With the high CR 10/15, the CSR strategy hardly works, as the constellations are barely condensed. With CSR, it is necessary to use $N_{CSR} = 224$ distances. Nevertheless, the low noise impact allows QSR to work better, needing just $N_{QSR} = 90$. Combining both techniques, the final reduction is $N_{QCSR} = 77$. On the other hand, the constellation optimized for the CR 13/15 is not condensed at all, considering that each constellation symbol is unique in the I/Q plane. Hence, the QCSR algorithm is based only in the QSR strategy for this case, calculating $N_{QCSR} = 80$ distances.

Fig. 4.7 summarizes the minimum number of distances N for the proposed algorithm, for all CRs from 2/15 to 13/15. With CSR, the higher contribution

4.3 Performance Evaluation: Minimum Number of Distances

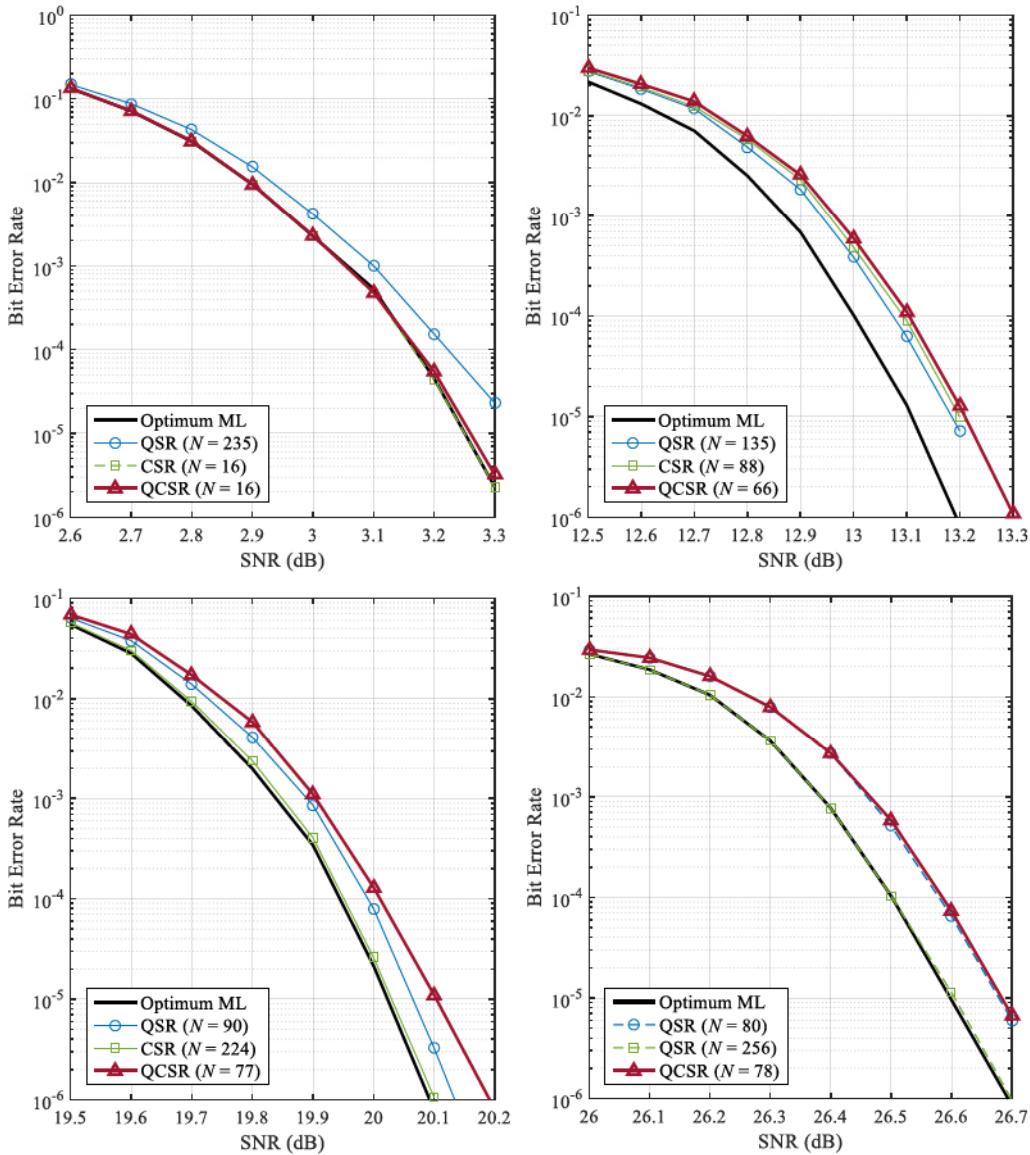


Figure 4.6: Performance comparison of ML and QCSR demappers. QSR and CSR strategies are also shown by separate. Results presented for code rates 2/15 (top left), 6/15 (top right), 10/15 (bottom left) and 13/15 (bottom right), under i.i.d. Rayleigh channel.

is achieved for low CRs, where the number of operations can be reduced up to $N_{CSR} = 16$, which represents a reduction of 93%. Regarding the contribution of QSR, it can be seen that the curve is directly related with the probability of selecting an erroneous quadrant (p_e), shown in Fig. 4.3. However, the performance of QSR becomes better for high CRs, especially from 8/15 to

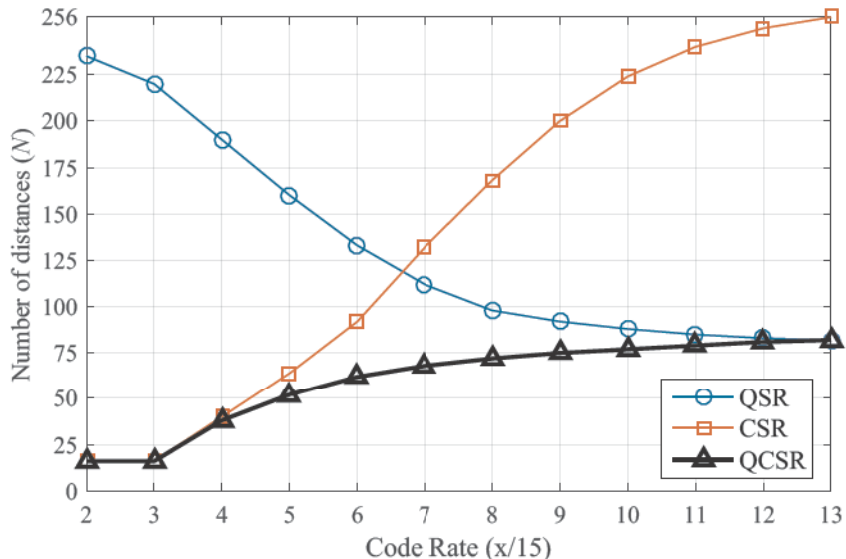


Figure 4.7: Minimum number of distances N required for all proposed algorithms. 2D-256NUC and CRs from 2/15 to 13/15, under i.i.d. Rayleigh channel.

13/15. When combining the two strategies into one single algorithm, it becomes especially effective for medium CRs, where both advantages can be taken into account. Fig. 4.8 shows the final reduced constellations used with QCSR when the first quadrant is transmitted, for the representative CRs analyzed: 2/15, 6/15, 10/15 and 13/15. In a real receiver, the complexity reduction is determined by the maximum number of distances N to be computed. With the combined QCSR demapper, the maximum value was obtained for the CR 13/15, with $N_{QCSR} = 80$, which implies a reduction in the number of required operations of 69%.

4.3.2 Performance Loss with Alternative Channel Models

This section provides the performance loss of QCSR for different channel models, for which the algorithm has not been optimized, under ideal and realistic channel estimation conditions. The idea is to keep the same number of distances, N_{QCSR} , computed for i.i.d. Rayleigh channel and ideal channel estimation (see Fig. 4.7), and observe the additional loss introduced. Table 4.2 shows the performance loss obtained with white Gaussian noise (AWGN), F_1 Ricean-fading and P_1 Rayleigh-fading channel models, defined in [28], compared to the results obtained in the analysis for i.i.d. Rayleigh channel model, under ideal channel estimation conditions. Note that the F_1 channel is used to describe

4.3 Performance Evaluation: Minimum Number of Distances

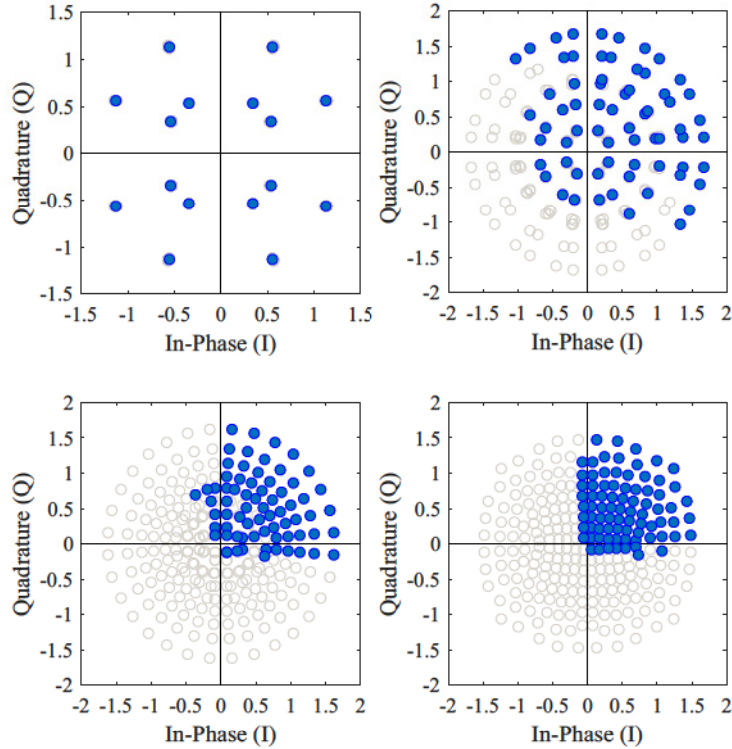


Figure 4.8: Result of reduced 2D-256NUCs with QCSR, for CRs 2/15 (top left), 6/15 (top right), 10/15 (bottom left) and 13/15 (bottom right), i.i.d. Rayleigh channel.

the fixed outdoor rooftop-antenna reception conditions, and the P_1 channel is used to describe the portable indoor or outdoor reception conditions.

With AWGN, the performance loss remains under 0.1 dB for all considered CRs. The SNR required is lower than the obtained for i.i.d. Rayleigh channel, allowing the QCSR algorithm to work better. The F_1 channel model with fixed reception, and therefore with a direct path (line-of-sight ray) also permits lower SNRs than the i.i.d. Rayleigh channel. For this reason, the performance loss of QCSR also remains under 0.1 dB. However, the same does not occur with the P_1 portable channel. Having a less selective channel implies higher SNRs. Higher noise levels entail a worse result of the QCSR algorithm. In this case, the performance loss is up to 0.2 dB with high CRs.

Table 4.3 shows the performance loss of QCSR obtained under realistic channel estimation conditions. With real channel estimation, the channel fading h received is different from the transmitted one. In order to obtain h , a linear frequency and time interpolation from the Pilot Pattern (PP) is done.

CHAPTER 4. LOW-COMPLEXITY DEMAPPING AND QUANTIZATION ALGORITHMS

Channel	Parameter (dB)	Code Rate			
		2/15	6/15	10/15	13/15
i.i.d. Rayleigh	ML: SNR	3.2	13	19.9	26.5
	QCSR: Loss	< 0.1	< 0.1	< 0.1	< 0.1
AWGN	ML: SNR	1.8	10.6	17.1	22.2
	QCSR: Loss	< 0.1	< 0.1	< 0.1	< 0.1
F_1	ML: SNR	2.7	11.3	18	23.2
	QCSR: Loss	< 0.1	< 0.1	< 0.1	< 0.1
P_1	ML: SNR	4.6	13.6	21.3	28.7
	QCSR: Loss	< 0.1	0.2	0.2	0.2

Table 4.2: QCSR performance loss under ideal channel estimation conditions.

Channel	Parameter (dB)	Code Rate			
		2/15	6/15	10/15	13/15
F_1	ML: SNR	3.7	12.2	18.8	24
	QCSR: Loss	< 0.1	< 0.1	< 0.1	< 0.1
P_1	ML: SNR	5.6	14.2	22	29.1
	QCSR: Loss	< 0.1	0.2	0.2	0.3

Table 4.3: QCSR performance loss under realistic channel estimation conditions.

In the case of study, two different pilot patterns, i.e. SP24.4 and SP12.2 from ATSC 3.0 [15], are used for the F_1 and P_1 channel models respectively [28].

The higher performance loss of QCSR is obtained for the P_1 channel model, with 0.3 dB of difference in relation to the optimum ML demapper for the CR 13/15. These results confirm the robustness of the QCSR algorithm. QCSR requires, for all studied cases, SNRs nearby to the optimum ML demapper, feasible for its implementation in real receivers where the obtained performance loss is almost negligible.

4.3.3 QCSR with Non-Uniform Rotated Constellations

The QCSR algorithm can be also applied to the non-uniform rotated constellations optimized in Chapter 3. Note that there is no complexity increase when rotating 2D-NUCs. The QCSR demapper can be used in order to reduce the complexity in a similar way than in previous sections. The rotation does not influence the condensation, so this part of the algorithm remains identical. Only a slight change in the first stage of QSR is required, since it is necessary to reorganize the new N rotated symbols by probability order, i.e., to obtain new histograms.