

OFDM Wireless Multimedia Communications

Richard van Nee
Ramjee Prasad



Artech House
Boston • London

Universal Personal Communications
this book.

Library of Congress Cataloging-in-Publication Data

Nee, Richard van.

OFDM for wireless multimedia communications / Richard van Nee, Ramjee Prasad
p. cm. — (Artech House universal personal communications library)

Includes bibliographical references and index.

ISBN 0-89006-530-6 (alk. paper)

1. Wireless communications systems. 2. Multimedia systems. 3. Multiplexing. I.
Prasad, Ramjee. II. Title III. Series

TK5103.2.N44 2000
621/3845—dc21

99-052312
CIP

British Library Cataloguing in Publication Data

Nee, Richard van

OFDM wireless multimedia communications. — (Artech House
universal personal communications library)

1. Wireless communications systems 2. Multimedia systems

I. Title II. Prasad, Ramjee

621.3'82

ISBN 0-89006-530-6

Cover design by Igor Vladman

© 2000 Richard van Nee and Ramjee Prasad

All rights reserved. Printed and bound in the United States of America. No part of this book may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying, recording, or by any information storage and retrieval system, without permission in writing from the authors.

All terms mentioned in this book that are known to be trademarks or service marks have been appropriately capitalized. Artech House cannot attest to the accuracy of this information. Use of a term in this book should not be regarded as affecting the validity of any trademark or service mark.

International Standard Book Number: 0-89006-530-6

Library of Congress Catalog Card Number: 99-052312

10 9 8 7 6 5 4 3 2 1

CHAPTER 6

The Peak Power Problem

6.1 INTRODUCTION

An OFDM signal consists of a number of independently modulated subcarriers, which can give a large peak-to-average power (PAP) ratio when added up coherently. When N signals are added with the same phase, they produce a peak power that is N times the average power. This effect is illustrated in Figure 6.1. For this example, the peak power is 16 times the average value. The peak power is defined as the power of a sine wave with an amplitude equal to the maximum envelope value. Hence, an unmodulated carrier has a PAP ratio of 0 dB. An alternative measure of the envelope variation of a signal is the *Crest factor*, which is defined as the maximum signal value divided by the rms signal value. For an unmodulated carrier, the Crest factor is 3 dB. This 3 dB difference between PAP ratio and Crest factor also holds for other signals, provided that the center frequency is large in comparison with the signal bandwidth.

A large PAP ratio brings disadvantages like an increased complexity of the analog-to-digital and digital-to-analog converters and a reduced efficiency of the RF power amplifier. To reduce the PAP ratio, several techniques have been proposed, which basically can be divided in three categories. First, there are signal distortion techniques, which reduce the peak amplitudes simply by nonlinearly distorting the OFDM signal at or around the peaks. Examples of distortion techniques are clipping, peak windowing and peak cancellation. The second category is coding techniques that use a special forward-error correcting code set that excludes OFDM symbols with a large PAP ratio. The third technique is based on scrambling each OFDM symbol with different scrambling sequences and selecting that sequence that gives the smallest PAP ratio. This chapter discusses all of these techniques, but first makes an analysis of the PAP ratio distribution function. This will give a better insight in the PAP problem and will explain why PAP reduction techniques can be quite effective.

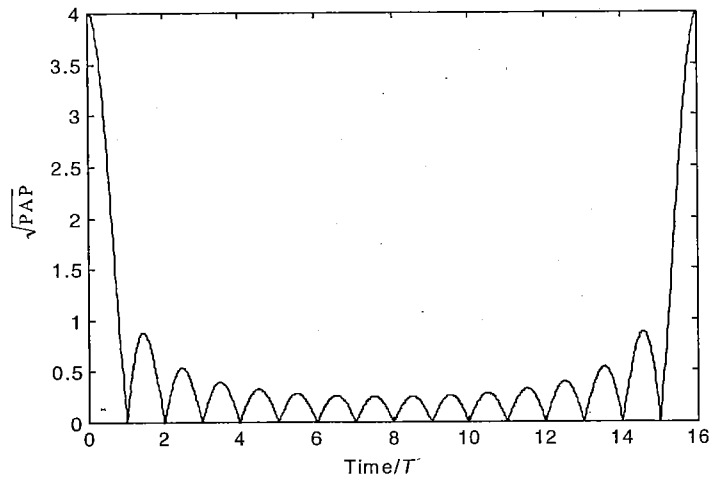


Figure 6.1 Square root of peak-to-average power ratio for a 16-channel OFDM signal, modulated with the same initial phase for all subchannels.

6.2 DISTRIBUTION OF THE PEAK-TO-AVERAGE POWER RATIO

For one OFDM symbol with N subcarriers, the complex baseband signal can be written as

$$x(t) = \frac{1}{\sqrt{N}} \sum_{n=1}^N a_n \exp(j\omega_n t) \quad (6.1)$$

Here, a_n are the modulating symbols. For QPSK, for instance, $a_n \in \{-1, 1, j, -j\}$. From the central limit theorem it follows that for large values of N , the real and imaginary values of $x(t)$ become Gaussian distributed, each with a mean of zero and a variance of $1/2$. The amplitude of the OFDM signal therefore has a Rayleigh distribution, while the power distribution becomes a central chi-square distribution with two degrees of freedom and zero mean, with a cumulative distribution given by

$$F(z) = 1 - e^{-z} \quad (6.2)$$

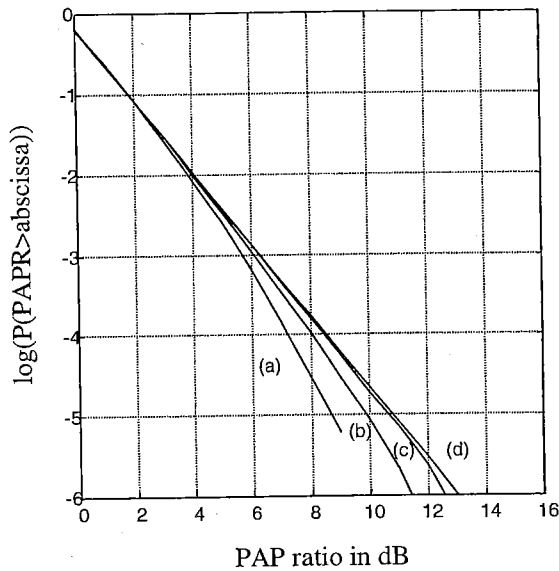


Figure 6.2 PAP distribution of an OFDM signal with (a) 12, (b) 24, (c) 48 and (d) an infinite number of subcarriers (pure Gaussian noise). Four times oversampling used in simulation, total number of simulated samples = 12 million.

Figure 6.2 shows the probability that the PAP ratio exceeds a certain value. We can see that the curves for various numbers of subcarriers are close to a Gaussian distribution (d) until the PAP value comes within a few dB from the maximum PAP level of $10\log N$, where N is the number of subcarriers.

What we want to derive now is the cumulative distribution function for the peak power per OFDM symbol. Assuming the samples are mutually uncorrelated—which is true for non-oversampling—the probability that the PAP ratio is below some threshold level can be written as

$$P(\text{PAPR} \leq z) = F(z)^N = (1 - \exp(-z))^N \quad (6.3)$$

This theoretical derivation is plotted against simulated values in Figure 6.3 for different values of N .

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.