

Fig 17. (A and B). The distal femoral cutting block device is placed in the frontal plane during the computer-assisted technique. The tibial cut is then made. The dashed line indicates ideal cut. The full line indicates the jig frontal position.

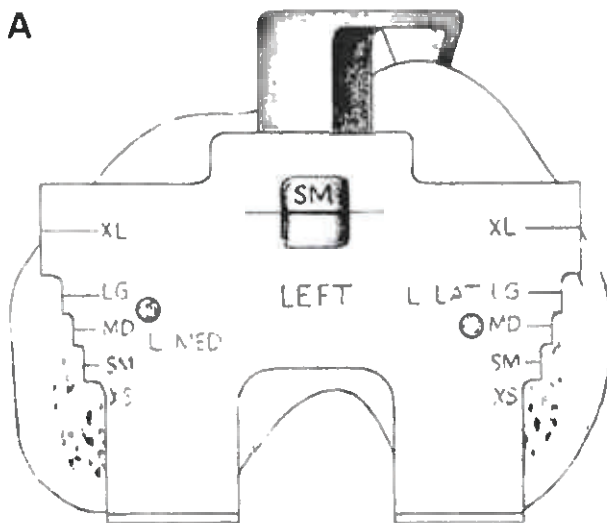


Exhibit 2002
Smith & Nephew v.
Bonutti Skeletal
Innovations LLC
Trial: IPR2013-00629



Fig 18. (A and B). Sizing of the femoral implant and establishing femoral component rotation during the mechanical technique.