



US008718158B2

(12) **United States Patent**
Tzannes

(10) **Patent No.:** **US 8,718,158 B2**
(45) **Date of Patent:** **May 6, 2014**

(54) **SYSTEM AND METHOD FOR SCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM**

(75) Inventor: **Marcos C. Tzannes**, Orinda, CA (US)

(73) Assignee: **TQ Delta, LLC**, Austin, TX (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 9 days.

(21) Appl. No.: **13/303,417**

(22) Filed: **Nov. 23, 2011**

(65) **Prior Publication Data**

US 2012/0069878 A1 Mar. 22, 2012

Related U.S. Application Data

(63) Continuation of application No. 12/783,725, filed on May 20, 2010, now Pat. No. 8,090,008, which is a continuation of application No. 12/255,713, filed on Oct. 22, 2008, now Pat. No. 7,769,104, which is a continuation of application No. 11/863,581, filed on Sep. 28, 2007, now Pat. No. 7,471,721, which is a continuation of application No. 11/211,535, filed on Aug. 26, 2005, now Pat. No. 7,292,627, which is a continuation of application No. 09/710,310, filed on Nov. 9, 2000, now Pat. No. 6,961,369.

(60) Provisional application No. 60/164,134, filed on Nov. 9, 1999.

(51) **Int. Cl.**
H04K 1/10 (2006.01)
H04L 27/28 (2006.01)

(52) **U.S. Cl.**
USPC **375/260; 375/222; 375/219; 375/220; 375/295; 375/316; 370/203; 370/527; 370/208**

(58) **Field of Classification Search**
USPC **375/222, 219, 220, 295, 316, 259, 260; 370/203, 527, 208**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,898,566 A 8/1975 Switzer et al.
3,955,141 A 5/1976 Lyon et al.

(Continued)

FOREIGN PATENT DOCUMENTS

EP 0584534 3/1994
EP 0719004 6/1996

(Continued)

OTHER PUBLICATIONS

Invitation to Pay Additional Fees for International (PCT) Patent Application No. PCT/US00/30958, mailed Mar. 23, 2001.

(Continued)


Primary Examiner — Phuong Phu

(74) *Attorney, Agent, or Firm* — Jason H. Vick; Sheridan Ross, PC

(57) **ABSTRACT**

A system and method that scrambles the phase characteristic of a carrier signal are described. The scrambling of the phase characteristic of each carrier signal includes associating a value with each carrier signal and computing a phase shift for each carrier signal based on the value associated with that carrier signal. The value is determined independently of any input bit value carried by that carrier signal. The phase shift computed for each carrier signal is combined with the phase characteristic of that carrier signal so as to substantially scramble the phase characteristic of the carrier signals. Bits of an input signal are modulated onto the carrier signals having the substantially scrambled phase characteristic to produce a transmission signal with a reduced PAR.

30 Claims, 2 Drawing Sheets

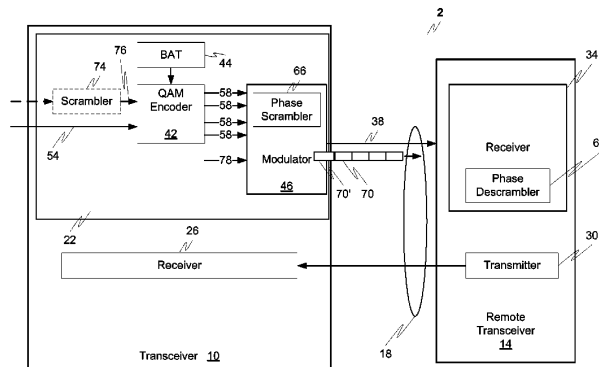

(56)

References Cited

U.S. PATENT DOCUMENTS

4,069,392 A 1/1978 Goldenberg et al.
 4,358,853 A 11/1982 Qureshi
 4,985,900 A 1/1991 Rhind et al.
 5,381,449 A 1/1995 Jasper et al.
 5,682,376 A 10/1997 Hayashino et al.
 5,694,395 A 12/1997 Myer et al.
 5,742,679 A * 4/1998 Olafsson 370/527
 5,748,677 A 5/1998 Kumar
 5,870,016 A 2/1999 Shrestha
 5,903,614 A 5/1999 Suzuki et al.
 5,914,932 A 6/1999 Suzuki et al.
 5,937,010 A 8/1999 Petranovich et al.
 5,991,262 A 11/1999 Laird et al.
 6,128,350 A 10/2000 Shastri et al.
 6,256,355 B1 7/2001 Sakoda et al.
 6,259,685 B1 7/2001 Rinne et al.
 6,366,555 B1 4/2002 Gatherer et al.
 6,507,585 B1 1/2003 Dobson
 6,519,292 B1 2/2003 Sakoda et al.
 6,590,860 B1 7/2003 Sakoda et al.
 6,704,317 B1 3/2004 Dobson
 6,757,299 B1 6/2004 Verma
 6,781,951 B1 * 8/2004 Fifield 370/203
 6,961,369 B1 11/2005 Tzannes
 6,967,997 B2 11/2005 Humphrey
 7,257,168 B2 8/2007 Goldstein et al.
 7,286,614 B2 10/2007 Goldstein et al.
 7,292,627 B2 11/2007 Tzannes
 7,471,721 B2 12/2008 Tzannes
 7,610,028 B2 10/2009 Cimini, Jr. et al.
 7,769,104 B2 8/2010 Tzannes
 8,073,041 B1 12/2011 Tzannes
 2002/0172146 A1 * 11/2002 Wu et al. 370/208
 2003/0128673 A1 7/2003 Lee et al.
 2005/0141410 A1 6/2005 Zhang et al.
 2006/0092902 A1 5/2006 Schmidt
 2006/0140288 A1 6/2006 Holden
 2010/0190507 A1 7/2010 Karabinis et al.
 2010/0290507 A1 11/2010 Tzannes
 2012/0195353 A1 8/2012 Tzannes
 2013/0136160 A1 5/2013 Tzannes

FOREIGN PATENT DOCUMENTS

EP 1542488 6/2005
 GB 2330491 4/1999
 JP H08-321820 12/1996
 JP H10-084329 3/1998
 WO WO 98/32065 7/1998
 WO WO 99/22463 5/1999
 WO WO 99/29078 6/1999

OTHER PUBLICATIONS

Invitation to Restrict or to Pay Additional Fees for International (PCT) Patent Application No. PCT/US00/30958, mailed Nov. 14, 2001.
 Notice of Allowance for U.S. Appl. No. 13/284,549, mailed Mar. 20, 2012.

Notice of Allowance for U.S. Appl. No. 13/439,605, mailed Sep. 14, 2012.
 U.S. Appl. No. 13/284,549, filed Oct. 28, 2011, Tzannes.
 Bäuml et al., "Reducing the Peak-To-Average Power Ratio of Multicarrier Modulation by Selected Mapping," Electronics Letters, GB, IEE Stevenage, vol. 32(22), Oct. 24, 1996, pp. 2056-2057, XP000643915 ISSN: 0013-5194.
 Henkel, "Analog Codes for Peak-to-Average Ratio Reduction," in Proceedings 3rd ITG Conf. Source and Channel Coding, Munich, Germany, Jan. 2000, 5 pages.
 Narahashi et al., "New phasing scheme of N multiple carriers for reducing peak-to-average power ratio," Electronics Letters, Aug. 1994, vol. 30(17), pp. 1382-1383.
 Tellado et al., "Revisiting DMT's Peak-to-Average Ratio," Antwerp, Apr. 20-24, 1998, pp. 1-14.
 Tellambura, "A coding technique for reducing peak-to-average power ratio in OFDM," In the Proceedings of Global Telecommunications Conference, IEEE, Nov. 1998, pp. 2783-2787.
 Tellambura, "Phase optimisation criterion for reducing peak-to-average power ratio in OFDM," Electronics Letters, Jan. 1998, vol. 34(2), pp. 169-170.
 Van Eetvelt et al., "Peak to average power reduction for OFDM schemes by selective scrambling," Electronics Letters, Oct. 1996, vol. 32(21), pp. 1963-1964.
 Annex to Form PCT/ISA/206 for PCT/US00/30958, Mar. 23, 2001, 3 pages (5550-47-PCT).
 International Search Report for International (PCT) Patent Application No. PCT/US00/30958, mailed Jun. 12, 2001.
 International Preliminary Examination Report for International (PCT) Patent Application No. PCT/US00/30958, completed Mar. 4, 2002.
 Written Opinion for International (PCT) Patent Application No. PCT/US00/30958, mailed Dec. 18, 2001.
 Notification of Reasons for Refusal (including translation) for Japanese Patent Application No. 2001-537217, date of dispatch, Mar. 3, 2008.
 Decision of Refusal (including translation) for Japanese Patent Application No. 2001-537217, date of dispatch, Nov. 4, 2008.
 Notice of Preliminary Rejection (translation only) for Korean Patent Application No. 7005830/2002 dated Nov. 22, 2006.
 Office Action for U.S. Appl. No. 09/710,310, mailed May 4, 2004.
 Notice of Allowance for U.S. Appl. No. 09/710,310, mailed Jul. 5, 2005.
 Notice of Allowance for U.S. Appl. No. 11/211,535, mailed Sep. 6, 2007.
 Notice of Allowance for U.S. Appl. No. 11/860,080, mailed Oct. 17, 2011.
 Official Action for U.S. Appl. No. 11/863,581, mailed Feb. 6, 2008.
 Notice of Allowance for U.S. Appl. No. 11/863,581, mailed Oct. 8, 2008.
 Official Action for U.S. Appl. No. 12/255,713, mailed Oct. 15, 2009.
 Notice of Allowance for U.S. Appl. No. 12/255,713, mailed May 18, 2010.
 Notice of Allowance for U.S. Appl. No. 12/783,725, mailed Nov. 17, 2011.
 Official Action for U.S. Appl. No. 13/718,016, mailed May 9, 2013.
 Official Action for U.S. Appl. No. 13/718,016, mailed Feb. 4, 2014.

* cited by examiner

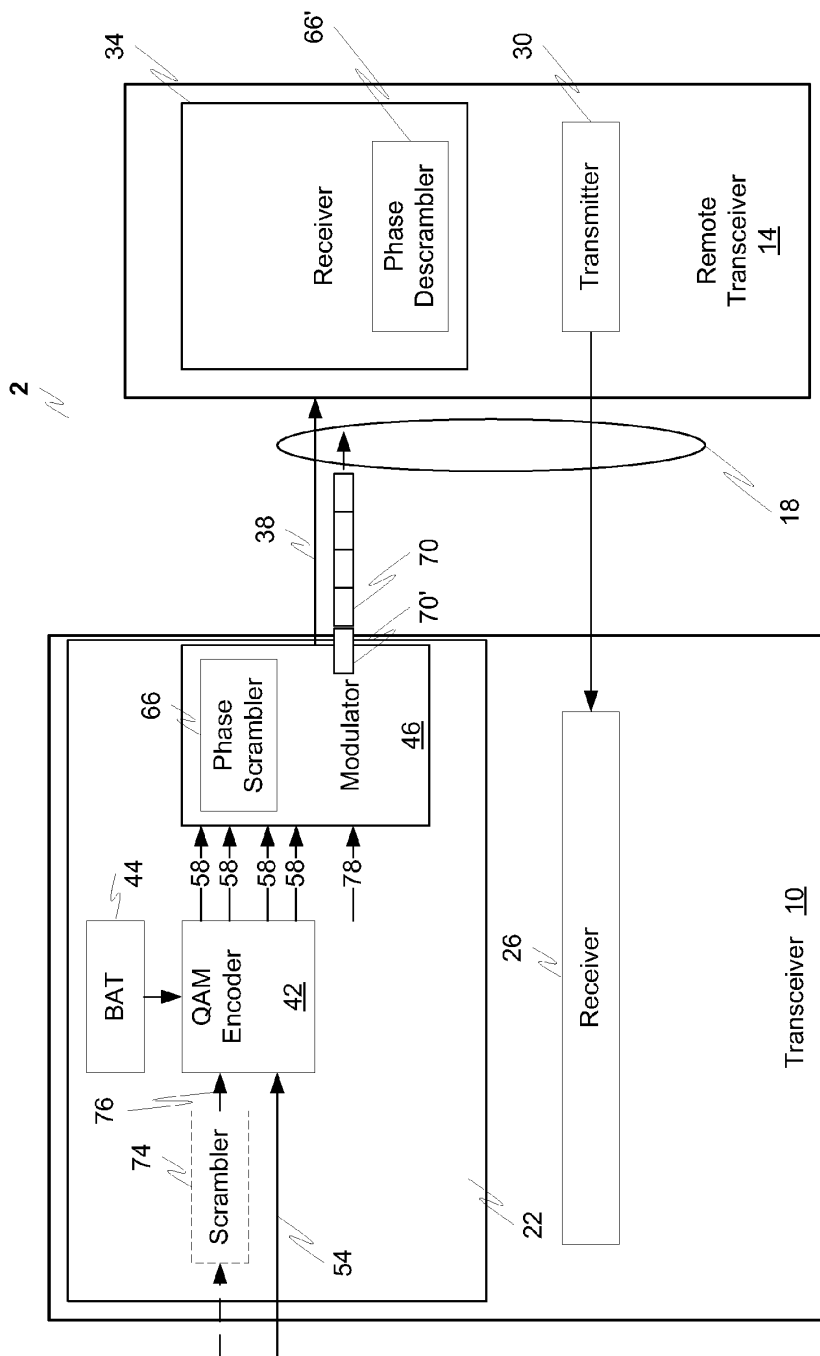


FIG. 1

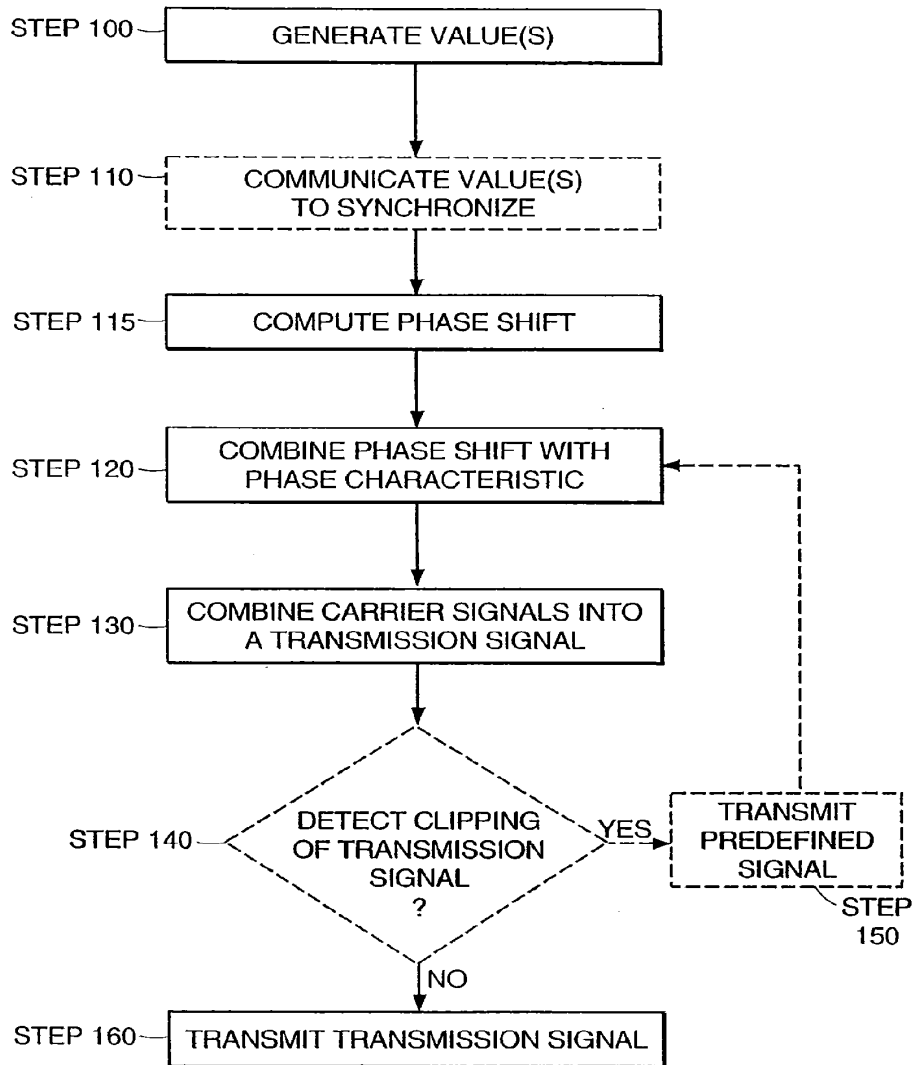


FIG. 2

1

**SYSTEM AND METHOD FOR SCRAMBLING
THE PHASE OF THE CARRIERS IN A
MULTICARRIER COMMUNICATIONS
SYSTEM**

RELATED APPLICATION

This application is a Continuation of U.S. patent application Ser. No. 12/783,725, filed May 20, 2010, now U.S. Pat. No. 8,090,008, which is a Continuation of U.S. patent application Ser. No. 12/255,713, filed Oct. 22, 2008, now U.S. Pat. No. 7,769,104, which is a Continuation of U.S. patent application Ser. No. 11/863,581, filed Sep. 28, 2007, now U.S. Pat. No. 7,471,721, which is a Continuation of U.S. application Ser. No. 11/211,535, filed Aug. 26, 2005, now U.S. Pat. No. 7,292,627, which is a Continuation of U.S. patent application Ser. No. 09/710,310, filed Nov. 9, 2000, now U.S. Pat. No. 6,961,369, which claims the benefit of the filing date of copending U.S. Provisional Application Ser. No. 60/164,134, filed Nov. 9, 1999, entitled "A Method For Randomizing The Phase Of The Carriers In A Multicarrier Communications System To Reduce The Peak To Average Power Ratio Of The Transmitted Signal," each of which are incorporated herein by reference in their entirety.

FIELD OF THE INVENTION

This invention relates to communications systems using multicarrier modulation. More particularly, the invention relates to multicarrier communications systems that lower the peak-to-average power ratio (PAR) of transmitted signals.

BACKGROUND OF THE INVENTION

In a conventional multicarrier communications system, transmitters communicate over a communication channel using multicarrier modulation or Discrete Multitone Modulation (DMT). Carrier signals (carriers) or sub-channels spaced within a usable frequency band of the communication channel are modulated at a symbol (i.e., block) transmission rate of the system. An input signal, which includes input data bits, is sent to a DMT transmitter, such as a DMT modem. The DMT transmitter typically modulates the phase characteristic, or phase, and amplitude of the carrier signals using an Inverse Fast Fourier Transform (IFFT) to generate a time domain signal, or transmission signal, that represents the input signal. The DMT transmitter transmits the transmission signal, which is a linear combination of the multiple carriers, to a DMT receiver over the communication channel.

The phase and amplitude of the carrier signals of DMT transmission signal can be considered random because the phase and amplitude result from the modulation of an arbitrary sequence of input data bits comprising the transmitted information. Therefore, under the condition that the modulated data bit stream is random, the DMT transmission signal can be approximated as having a Gaussian probability distribution. A bit scrambler is often used in the DMT transmitter to scramble the input data bits before the bits are modulated to assure that the transmitted data bits are random and, consequently, that the modulation of those bits produces a DMT transmission signal with a Gaussian probability distribution.

With an appropriate allocation of transmit power levels to the carriers or sub-channels, such a system provides a desirable performance. Further, generating a transmission signal with a Gaussian probability distribution is important in order to transmit a transmission signal with a low peak-to-average ratio (PAR), or peak-to-average power ratio. The PAR of a

2

transmission signal is the ratio of the instantaneous peak value (i.e., maximum magnitude) of a signal parameter (e.g., voltage, current, phase, frequency, power) to the time-averaged value of the signal parameter. In DMT systems, the PAR of the transmitted signal is determined by the probability of the random transmission signal reaching a certain peak voltage during the time interval required for a certain number of symbols. An example of the PAR of a transmission signal transmitted from a DMT transmitter is 14.5 dB, which is equivalent to having a 1E-7 probability of clipping. The PAR of a transmission signal transmitted and received in a DMT communication system is an important consideration in the design of the DMT communication system because the PAR of a signal affects the communication system's total power consumption and component linearity requirements of the system.

If the phase of the modulated carriers is not random, then the PAR can increase greatly. Examples of cases where the phases of the modulated carrier signals are not random are when bit scramblers are not used, multiple carrier signals are used to modulate the same input data bits, and the constellation maps, which are mappings of input data bits to the phase of a carrier signal, used for modulation are not random enough (i.e., a zero value for a data bit corresponds to a 90 degree phase characteristic of the DMT carrier signal and a one value for a data bit corresponds to a -90 degree phase characteristic of the DMT carrier signal). An increased PAR can result in a system with high power consumption and/or with high probability of clipping the transmission signal. Thus, there remains a need for a system and method that can effectively scramble the phase of the modulated carrier signals in order to provide a low PAR for the transmission signal.

SUMMARY OF THE INVENTION

The present invention features a system and method that scrambles the phase characteristics of the modulated carrier signals in a transmission signal. In one aspect, a value is associated with each carrier signal. A phase shift is computed for each carrier signal based on the value associated with that carrier signal. The value is determined independently of any input bit value carried by that carrier signal. The phase shift computed for each carrier signal is combined with the phase characteristic of that carrier signal to substantially scramble the phase characteristics of the carrier signals.

In one embodiment, the input bit stream is modulated onto the carrier signals having the substantially scrambled phase characteristic to produce a transmission signal with a reduced peak-to-average power ratio (PAR). The value is derived from a predetermined parameter, such as a random number generator, a carrier number, a DMT symbol count, a superframe count, and a hyperframe count. In another embodiment, a predetermined transmission signal is transmitted when the amplitude of the transmission signal exceeds a certain level.

In another aspect, the invention features a method wherein a value is associated with each carrier signal. The value is determined independently of any input bit value carried by that carrier signal. A phase shift for each carrier signal is computed based on the value associated with that carrier signal. The transmission signal is demodulated using the phase shift computed for each carrier signal.

In another aspect, the invention features a system comprising a phase scrambler that computes a phase shift for each carrier signal based on a value associated with that carrier signal. The phase scrambler also combines the phase shift computed for each carrier signal with the phase characteristic of that carrier signal to substantially scramble the phase char-

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.