



Performance from Experience

Telcordia Notes on the Networks

Telcordia Technologies Special Report
SR-2275
Issue 4
October 2000

Telcordia Notes on the Networks

SR-2275 replaces SR-2275, *Bellcore Notes on the Networks*, Issue 3, December 1997.

Related documents:

SR-NOTES-SERIES-01, *Telcordia Notes on the Synchronous Optical Network (SONET)*

SR-NOTES-SERIES-02, *Telcordia Notes on Dense Wavelength-Division Multiplexing (DWDM) and Optical Networking*

SR-NOTES-SERIES-03, *Telcordia Notes on Number Portability and Number Pooling*

SR-NOTES-SERIES-04, *Telcordia Notes on the Evolution of Enhanced Emergency Services.*

To obtain copies of this document, contact your company's document coordinator or your Telcordia account manager, or call +1 800.521.2673 (from the USA and Canada) or +1 732.699.5800 (all others), or visit our Web site at www.telcordia.com. Telcordia employees should call +1 732.699.5802.

Copyright © 2000 Telcordia Technologies, Inc. All rights reserved. This document may not be reproduced without the express written permission of Telcordia Technologies, and any reproduction without written authorization is an infringement of copyright.

Trademark Acknowledgments

Telcordia is a trademark of Telcordia Technologies, Inc.

CLCI, CLEI, CLFI, CLLI, ISCP, NMA, and SEAS are trademarks of Telcordia Technologies, Inc.

COMMON LANGUAGE, SPACE, TELEGATE, AIRBOSS, and TIRKS are registered trademarks of Telcordia Technologies, Inc.

CLASS is a service mark of Telcordia Technologies, Inc.

Appletalk is a registered trademark of Apple Computer, Inc.

DECNet is a trademark of Digital Equipment Corporation.

1/1AESS, 4ESS, 5ESS, Dataphone, and SLC are registered trademarks of Lucent Technologies, Inc.

DMS-10, DMS-100F, DATAPATH, and TOPS are trademarks of Nortel.

DMS-100 is a registered trademark of Nortel.

NEAX-61E is a trademark of NEC America, Inc.

EWSD is a registered trademark of Siemens AG.

Any other companies and products not specifically mentioned herein are trademarks or service marks of their respective trademark and service mark owners.

prevents repetitive call attempts to reach distant busy lines, reducing inefficient use of circuits.

- TCAP supports cellular switching functions such as automated user registration.
- There is an ability to protect the transfer of TCAP information against a variety of security threats, as needed.

14.2.2.5 Operations, Maintenance, and Administration Part (OMAP)

OMAP is the layer of the SS7 protocol that is specified for managing the CCS network by using SS7 to transport operation and maintenance information between SPs. Architecturally, OMAP lies above TCAP in the SS7 protocol stack and uses the remote operations service of TCAP to communicate between OMAP applications. OMAP functions include network monitoring, routing updates, signaling network management, automatic call gapping, and consolidation of Operations, Administration, and Maintenance (OA&M) information. OMAP currently performs these functions through the following procedures:

- MTP Routing Verification Test (MRVT) — verifies MTP routing data for a Destination Point Code (DPC).
- SCCP Routing Verification Test (SRVT) — verifies SCCP routing data for a global title address.
- Link Equipment Failure (LEF) — notifies an SP of a signaling terminal or interface equipment failure at the far end of a signaling link.
- Link Fault Sectionalization (LFS) — identifies the failed component on a signaling link.
- Circuit Validation Test (CVT) — ensures that two exchanges have sufficient and consistent translation data for placing a call on a specific circuit of an interexchange circuit group.

More details on the SS7 protocol can be found in Section 6 of this document and in GR-246-CORE.

14.2.3 CCS Call Setup

This section describes an example of basic intraLATA Plain Old Telephone Service (POTS) call setup using CCS and gives additional information on interLATA and ISDN calls.


The ISDNUP portion of the SS7 protocol is used to support call setup. The Initial Address Message (IAM) is a mandatory message sent in the forward direction to initiate seizure of an outgoing circuit and to transmit address and other information relating to the routing and handling of a call. The Address Complete Message (ACM) is a message sent in the backward direction indicating that all the address signals

required for routing the call to the called party have been received. The Answer Message (ANM) is a message sent in the backward direction indicating that the call has been answered. The Release Message (REL) is a message sent in either direction indicating that the circuit identified in the message is being released due to the reason (cause) supplied and is ready to be put in the idle state on receipt of the Release Complete Message (RLC). The RLC is a message sent in either direction in response to the receipt of an REL.

The following describes how these messages are used for setup of an intraLATA interoffice call. This call scenario is for an intraLATA call switched through an Access Tandem (AT) where a Continuity Check Message (COT) is required. Refer to Figure 14-4 for a diagram of the scenario.

When the customer dials an intraLATA interoffice call, the originating office sends an IAM over the SS7 signaling link to the AT via the STP pair. The AT then sends an IAM to the terminating office indicating the circuit to be used for the call between the AT and the terminating office. When the terminating office receives the IAM and the COT, it sends an ACM to the AT and applies power ringing to the called party's line. When the AT receives the ACM, it sends an ACM to the originating end office. When the called party goes off-hook, an ANM is sent from the terminating end office to the AT. When the AT receives the ANM, it sends an ANM to the originating end office. After the calling and called party finish their conversation, one party will go on-hook. If the calling party goes on-hook, the originating end office sends an REL to the AT. When the access tandem receives the REL, it sends an RLC to the originating office, and sends an REL to the terminating office. When the terminating office receives the REL, it sends an RLC to the AT.

CCS-based POTS call setup to ICs uses the same switch-to-switch message flow as described above for an intraLATA call. For calls routed to ICs, however, additional optional parameters may be included in the IAM depending on which IC has been selected. Examples of these additional optional parameters include Charge Number (containing Automatic Number Identification [ANI]), Carrier Identification Parameter (containing the 3- or 4-digit Carrier Identification Code [CIC] for the call), and Calling Party Number (CPN).

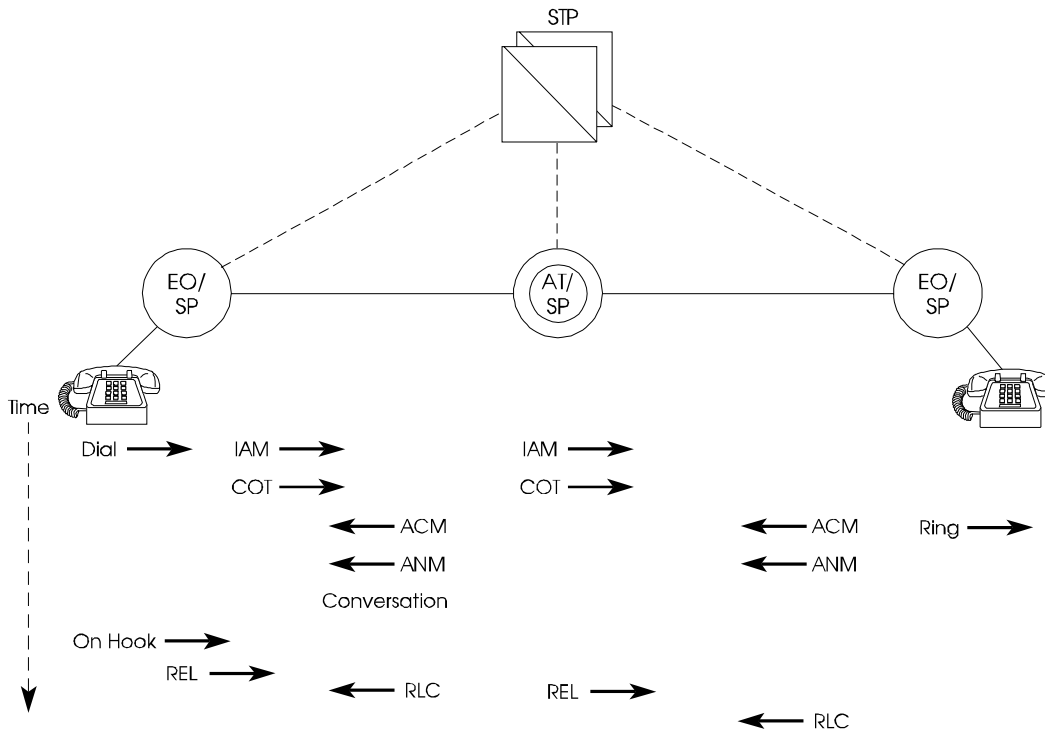

Legend:

- ACM = Address Complete Message
- ANM = Answer Message
- AT = Access Tandem
- COT = Continuity Check Message
- EO = End Office
- IAM = Initial Address Message
- REL = Release Message
- RLC = Release Complete Message
- SP = Signaling Point
- STP = Signaling Transfer Point

Figure 14-4. CCS IntraLATA Call Setup

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.