

[54] OCCLUDER FOR PROSTHETIC HEART VALVE ASSEMBLY

[75] Inventor: Gerald W. Wolfe, Paradise, Calif.

[73] Assignee: InterMed, Inc., Wayne, Pa.

[22] Filed: Mar. 26, 1976

[21] Appl. No.: 670,690

[52] U.S. Cl. 3/1.5; 137/847

[51] Int. Cl.² A61F 1/22

[58] Field of Search 3/1.5; 137/846, 847

[56] References Cited

UNITED STATES PATENTS

3,308,798	3/1967	Snider	137/846 X
3,513,485	5/1970	Davila	3/1.5
3,556,122	1/1971	Laerdal	137/846 X
3,717,883	2/1973	Mosher	3/1.5
3,839,741	10/1974	Haller	3/1.5

FOREIGN PATENTS OR APPLICATIONS

482,441 12/1969 Switzerland 3/1.5


Primary Examiner—Ronald L. Frinks

Attorney, Agent, or Firm—Weiser, Stapler & Spivak

[57] ABSTRACT

An occluder for a prosthetic heart valve assembly adapted within a seating-ring passage having a body including a downstream sealing section comprising a plurality of cusps which engage each other to define a closed sealing section when the occluder is in its closed position and which flex outwardly relative to each other when the occluder is in its open position to define a central open passage through the occluder, and an armature reinforcing the body. The armature includes an annular ring and a plurality of reinforcing arms hingedly connected to the ring and extending through each cuspid to permit flexure of each arm relative to the annular ring.

9 Claims, 11 Drawing Figures

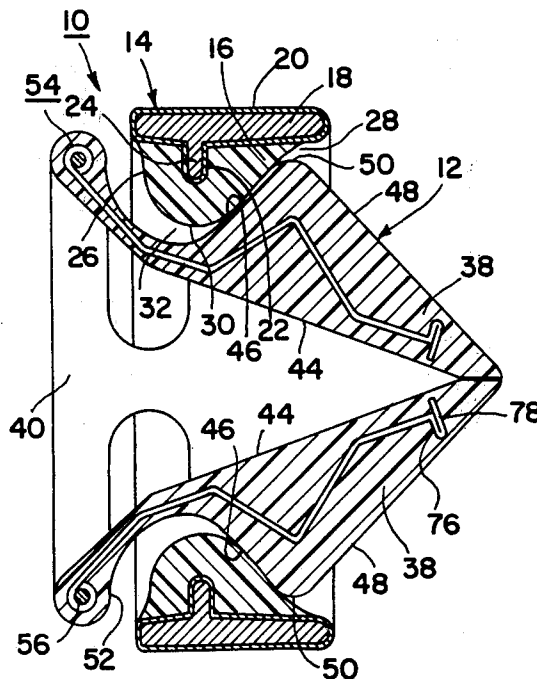

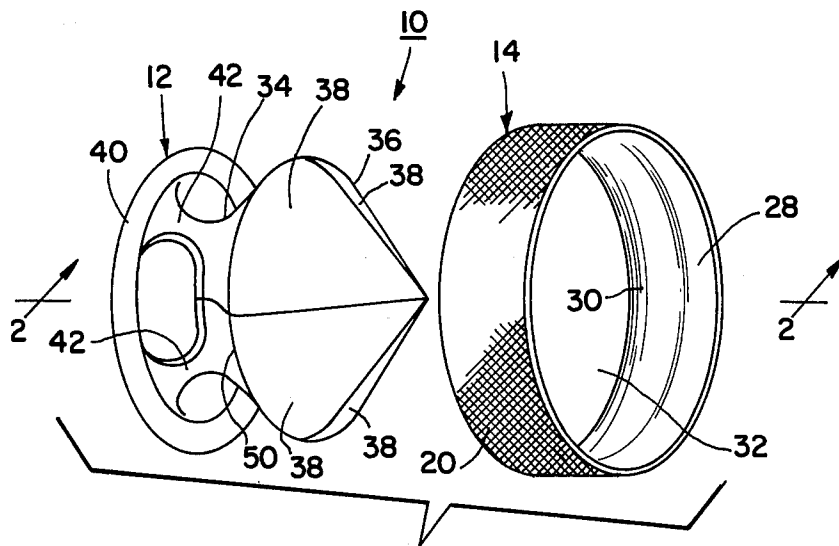


FIG. 1

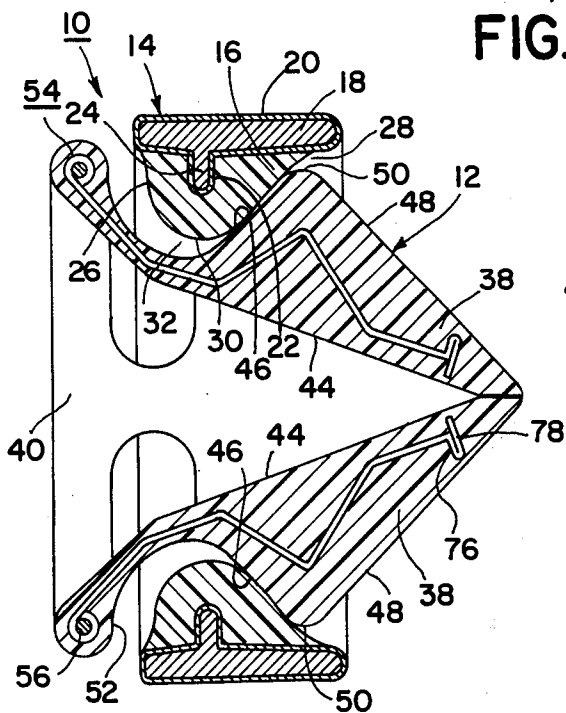


FIG. 2A

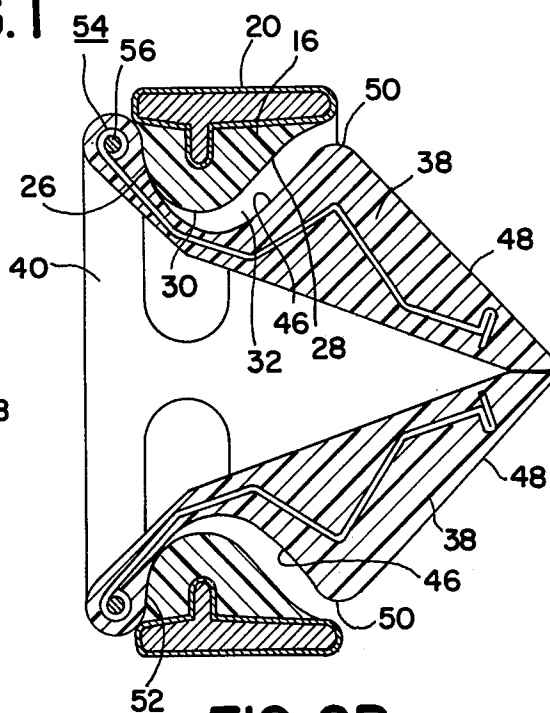


FIG. 2B

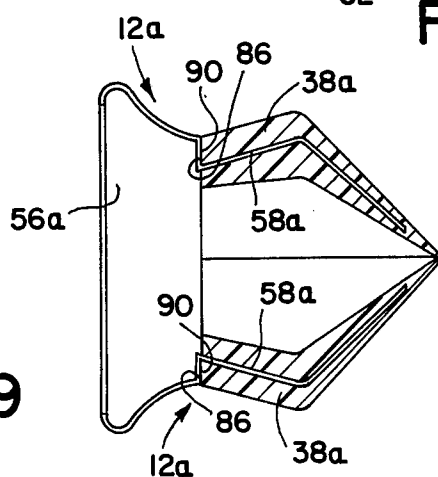


FIG. 9





FIG. 8

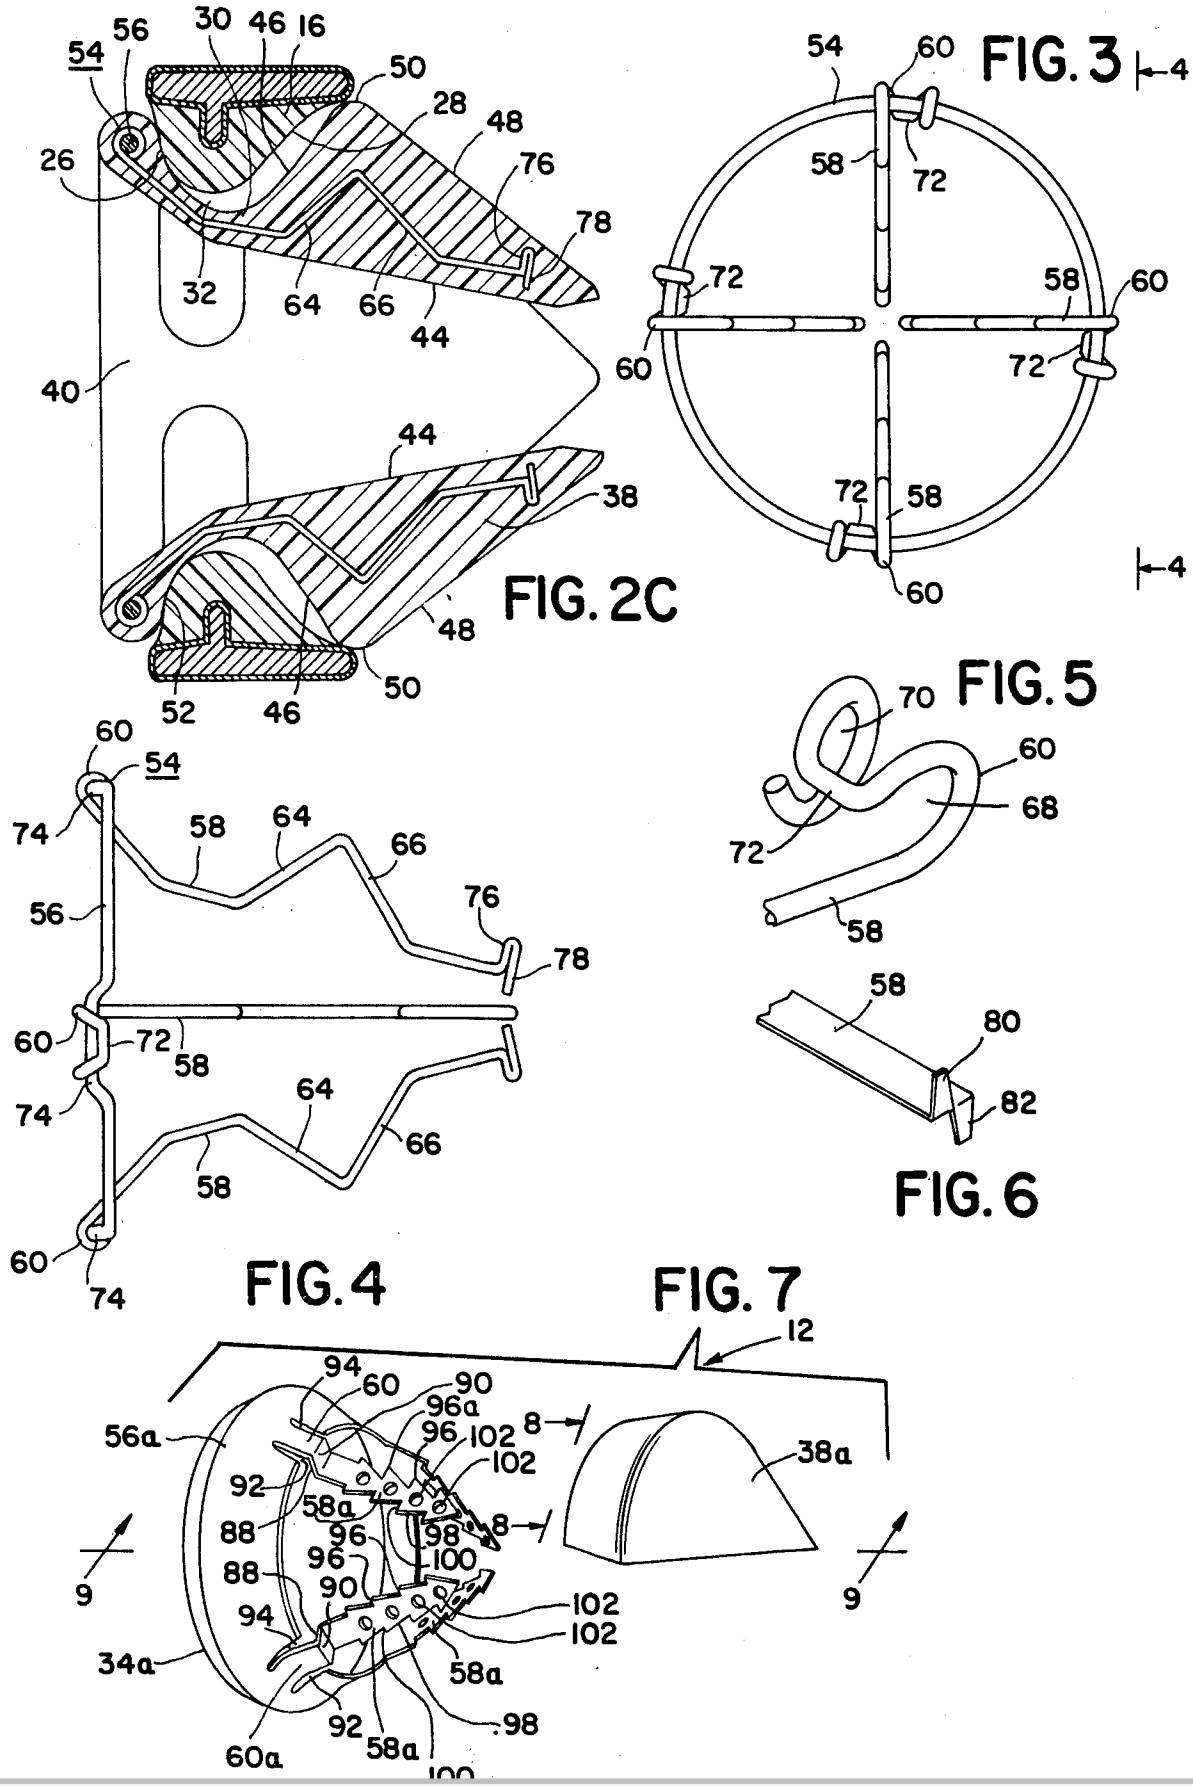

OCCLUDER FOR PROSTHETIC HEART VALVE ASSEMBLY

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates to prosthetic heart valve assemblies, and more specifically to a unique center-flow occluder of such assemblies.

2. Description of the Prior Art

It is known in the prior art to replace a diseased defective valve in the human heart with a prosthetic, or artificial heart valve assembly. In many cases, a patient has continued to live for many years with such a prosthetic heart valve assembly.

Prosthetic heart valve assemblies which most closely approximate the action of natural heart valves are of the center-flow type. Specifically, these prosthetic heart valve assemblies include an elongate occluder which is movable between closed and opened positions within a seating-ring passage of a valve seat assembly. The occluder includes a plurality of cusps which are movable radially which respect to each other between a closed condition when the occluder is in a closed position, and an opened condition when the occluder is in an opened position. When the cusps are in their opened condition blood can flow through the interior thereof to simulate the action of a natural heart valve.

The center-flow occluders disclosed in prior art prosthetic heart valve assemblies preferably are formed of a plastic material, such as polypropylene, since such a material is generally lightweight and easily formable into the desired configuration for use in heart valve assemblies. It has been discovered that these center-flow occluders, and particularly the cusps thereof, become deformed after continued usage. Deformation of the cusps prevents the occluder from effectively sealing the opening through the valve seat assembly when the occluder is in its closed position. This ineffective sealing of the heart valve assembly causes an undesirable leakage of blood through the seating-ring passage.

SUMMARY OF THE INVENTION

This invention relates to improvements in center-flow occluders of prosthetic heart valve assemblies. The heart valve assemblies of this invention are especially designed for implantation in the human heart to replace the natural mitral valve; however, the valve assemblies of this invention also can be adapted to replace the tricuspid and/or aortic valves.

An elongate occluder of this invention is adapted to be positioned through a seating-ring passage for movement in its direction of elongation between closed and opened positions. The occluder includes an upstream annular section and a downstream sealing section, both of which have a maximum diameter that is larger than the minimum diameter of the seating-ring passage. This dimensional relationship prevents the occluder from moving out of the seating-ring passage. The downstream sealing section of the occluder is of a split construction provided by a plurality of cusps. The cusps are connected to the upstream annular section through flexible stems, and are movable radially with respect to each other between a closed condition in which they engage each other, and an opened condition in which they are radially spaced apart to provide a passage through the occluder for the flow of blood.

At least the cusps of the occluder are formed of a plastic material, such as polypropylene, which is light in weight, and easily formable into the desired configuration.

An armature construction having greater dimensional stability than the cusps of the occluder includes an upstream annular ring and a plurality of arms which extends downwardly from said ring in circumferentially spaced-apart relationship to each other. The upstream end of each arm is connected to the annular ring through a hinge section, and each arm extends in a downstream direction through the interior of a respective cuspid. Since each of the arms is connected through a hinge to the upstream annular ring the required flexing action of the plastic cusps is not impaired by the reinforcing arms. Moreover, since the arms have greater dimensional stability than the plastic cusps they will reinforce the cusps to ensure that deformation of said cusps does not take place. The unique cooperation between the reinforcing arms and cusps, as described above, represents a considerable improvement over prosthetic heart valve assemblies employing center-flow occluders, and is neither shown nor suggested by any of the prior art that applicant is aware of.

In one embodiment of this invention the upstream annular section, flexible stems and cusps of the occluder are molded about the armature construction as a unitary plastic body. In this embodiment the annular ring of the armature construction is disposed within the interior of the upstream annular section of the plastic body, and the downwardly extending arms of the armature construction are disposed within the interior of the flexible stem and cusps of the plastic body.

In an alternative embodiment of this invention the plastic cusps are molded individually, and the armature construction is formed as a unitary member. In this embodiment the arms of the armature construction are disposed within the interior of respective cusps to properly position the cusps relative to each other. The upstream annular section and flexible stems of the occluder are provided by sections of the unitary armature construction.

It is an object of this invention to provide a center-flow occluder for a heart valve assembly in which a plurality of radially movable cusps are dimensionally reinforced without impairing the required movement of the cusps.

It is a further object of this invention to provide a center-flow occluder for a heart valve assembly which promotes unrestricted, streamlined, hydraulic flow of blood through the interior thereof in a manner simulating the action of a natural heart valve.

Other objects and a fuller understanding of the invention will become apparent by referring to the following description, taken in conjunction with the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an exploded isometric view of a prosthetic heart valve assembly employing a unique occluder in accordance with this invention;

FIG. 2A is a sectional view taken along line 2—2 of the heart valve assembly shown in FIG. 1 with the elements assembled and disposed in a valve-closing position;

FIG. 2B is a sectional view similar to FIG. 2A, but showing the valve assembly in an opened position;

FIG. 2C is a sectional view similar to FIG. 2B, but with the valve assembly in a different condition in its opened position;

FIG. 3 is a rear view of an armature construction employed in the occluder shown in FIG. 1;

FIG. 4 is a side elevation view of the armature construction taken along line 4—4 of FIG. 3;

FIG. 5 is an enlarged isometric view of the upstream hinge end of an arm employed in the armature construction;

FIG. 6 is a partial isometric view showing a modified construction of the downstream end of the arms employed in the armature construction;

FIG. 7 is an exploded isometric view of a second embodiment of an occluder according to this invention with only one cuspid shown for purpose of clarity;

FIG. 8 is a plan view of a cuspid taken along line 8—8 of FIG. 7; and

FIG. 9 is a sectional view taken along line 9—9 of FIG. 7 with the elements of the occluder assembled.

DESCRIPTION OF THE PREFERRED EMBODIMENTS OF THE INVENTION

The center-flow occluders of this invention preferably are employed in prosthetic heart valve assemblies adapted to replace the natural mitral valve in the human heart. The prosthetic mitral valve is inserted between the left atrium and left ventricle of the heart. Blood flows into the left atrium from the lungs through the pulmonary veins, and then through the prosthetic mitral heart valve assembly into the left ventricle from where it is pumped through the aortic valve for distribution through the body. When the ventricle contracts to pump the blood through the aortic valve, the resulting pressure should close the heart valve assembly to prevent the reverse flow of blood back into the atrium. Upon relaxation, or expansion of the ventricle, the pressure built up by blood entering the atrium through the pulmonary veins should open the heart valve assembly to permit blood to flow from the atrium into the ventricle. The above-described sequence is repeated continuously during normal operation of the heart.

Referring to FIG. 1, a prosthetic mitral heart valve assembly 10 includes a unique center-flow occluder 12 disposed for movement within a valve seat assembly 14. The valve seat assembly 14, in accordance with the broadest aspects of this invention, can be of any suitable construction which provides a passageway in which the occluder 12 is movable.

Referring to FIG. 2A, a preferred valve seat assembly 14 includes a soft seating ring 16, a hard, rigid, cast supporting ring 18 and a fixation cover 20. The seating ring 16 preferably is made of silicone, or other equivalent material, and is molded with a recess 22 disposed continuously about its outer periphery. The supporting ring 18 can be formed of a hard plastic or metallic material, and includes an inwardly directed annular projection 24 which is disposed within the recess 22 of the seating ring 16 to maintain the seating ring in its desired configuration. The fixation cover 20, which is a Dacron mesh cloth or other suitable material, is secured about the supporting ring 18, and is initially secured to the heart tissue by suturing. After the fixation cover 20 has been sutured to the heart tissue, thrombosis, which is the formation of clots, is relied upon to retain the valve seat assembly 14 in its proper position within the heart.

Referring to FIGS. 2A—2C, the seating ring 16 has an outwardly flared section 26 facing in an upstream direction, and an outwardly flared section 28 facing in a downstream direction. The flared sections 26 and 28 are connected at a junction 30 which establishes the minimum diameter of a passageway 32 through the seating ring 16.

Referring again to FIG. 1, the center-flow occluder 12, in accordance with one embodiment of this invention, includes a one-piece plastic body 34 of a suitable synthetic material such as polypropylene. The occluder 12 includes a downstream sealing section 36 of a split construction providing a plurality of cuspids 38. The occluder 12 shown in FIG. 1 has four cuspids 38; however, the number of cuspids can be varied as desired. The more practical designs include from two to four cuspids. Each of the cuspids 38 is joined to an upstream annular section 40 through a stem section 42.

Each of the cuspids 38 includes a substantially smooth inner surface 44 which is free of sharp angles or bends to aid in providing a streamlined flow path for blood when said cuspids are in an open condition as shown in FIG. 2C. Each cuspid 38 also includes an outer surface which is defined by upstream and downstream flared sections 46 and 48, respectively. These flared sections are joined through a rounded apex 50 which, when the cuspids 38 are in a closed condition as shown in FIGS. 2A and 2B, define a continuous circle of a greater diameter than the circle defined by junction 30 of the seating ring 16 (FIG. 1). Accordingly, the occluder 12 cannot move out of the seating ring in an upstream direction. Moreover, the upstream flared sections 46, when the cuspids 38 are in a closed condition, define a continuous annular surface which is substantially complimentary to the outwardly flared section 28 of the seating ring 16. Accordingly, in the closed position of the heart valve assembly 10 as shown in FIG. 2A, the flared sections 46 of the cuspids 38 will seat on the outwardly flared section 28 of the seating ring 16 to seal off the atrium from the ventricle as the ventricle contracts.

The upstream annular section 40 of the occluder 12 has an outwardly flared surface 52 which overlies the outwardly flared section 26 of the seating ring 16. The flared surface 52 is substantially complimentary in shape to the flared section 26. Accordingly, the upstream annular section 40 of the occluder seats on the flared section 26 of the seating ring 16 when the occluder 12 is in its opened position (FIGS. 2B and 2C) to prevent the occluder from moving out of the seating ring passageway 32 in a downstream direction.

When the ventricle contracts the back pressure acts against the downstream flared sections 48 of the cuspids 38 to force the occluder into its valve sealing position shown in FIG. 2A. The camming action between upstream flared section 46 of each cuspid 38 and the inner surface of the seating ring 16 assists in forcing the cuspids 38 into engagement with each other to seal off the central passage through the occluder 12. When the ventricle expands, or relaxes, blood entering the atrium through the pulmonary veins will establish a pressure drop across the heart valve assembly 10 to move the occluder 12 into its opened condition shown in FIG. 2C. In this opened condition the cuspids 38 are flexed radially outwardly from each other to provide an uninterrupted flow path through the center of the occluder 12. As the highest pressure in the heart shifts from the ventricle to the atrium during operation of the heart an

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.