

4G

LTE / LTE-Advanced for Mobile Broadband

Erik Dahlman
Stefan Parkvall
Johan Sköld



4G LTE/LTE-Advanced for Mobile Broadband

**Erik Dahlman, Stefan Parkvall, and
Johan Sköld**



AMSTERDAM • BOSTON • HEIDELBERG • LONDON • NEW YORK • OXFORD
PARIS • SAN DIEGO • SAN FRANCISCO • SINGAPORE • SYDNEY • TOKYO

Academic Press is an imprint of Elsevier



Academic Press is an imprint of Elsevier
The Boulevard, Langford Lane, Kidlington, Oxford, OX5 1GB, UK
30 Corporate Drive, Suite 400, Burlington, MA 01803, USA

First published 2011

Copyright © 2011 Erik Dahlman, Stefan Parkvall & Johan Sköld. Published by Elsevier Ltd. All rights reserved

The rights of Erik Dahlman, Stefan Parkvall & Johan Sköld to be identified as the authors of this work has been asserted in accordance with the Copyright, Designs and Patents Act 1988.

No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or any information storage and retrieval system, without permission in writing from the publisher. Details on how to seek permission, further information about the Publisher's permissions policies and our arrangement with organizations such as the Copyright Clearance Center and the Copyright Licensing Agency, can be found at our website: www.elsevier.com/permissions

This book and the individual contributions contained in it are protected under copyright by the Publisher (other than as may be noted herein).

Notices

Knowledge and best practice in this field are constantly changing. As new research and experience broaden our understanding, changes in research methods, professional practices, or medical treatment may become necessary.

Practitioners and researchers must always rely on their own experience and knowledge in evaluating and using any information, methods, compounds, or experiments described herein. In using such information or methods they should be mindful of their own safety and the safety of others, including parties for whom they have a professional responsibility.

To the fullest extent of the law, neither the Publisher nor the authors, contributors, or editors, assume any liability for any injury and/or damage to persons or property as a matter of products liability, negligence or otherwise, or from any use or operation of any methods, products, instructions, or ideas contained in the material herein.

British Library Cataloguing-in-Publication Data

A catalogue record for this book is available from the British Library

Library of Congress Control Number: 2011921244

ISBN: 978-0-12-385489-6

For information on all Academic Press publications
visit our website at www.elsevierdirect.com

Typeset by MPS Limited, a Macmillan Company, Chennai, India
www.macmillansolutions.com

Printed and bound in the UK

11 12 13 14 10 9 8 7 6 5 4 3 2 1

Working together to grow
libraries in developing countries

www.elsevier.com | www.bookaid.org | www.sabre.org

ELSEVIER

BOOK AID
International

Sabre Foundation

DOCKET
ALARM

Find authenticated court documents without watermarks at docketalarm.com.

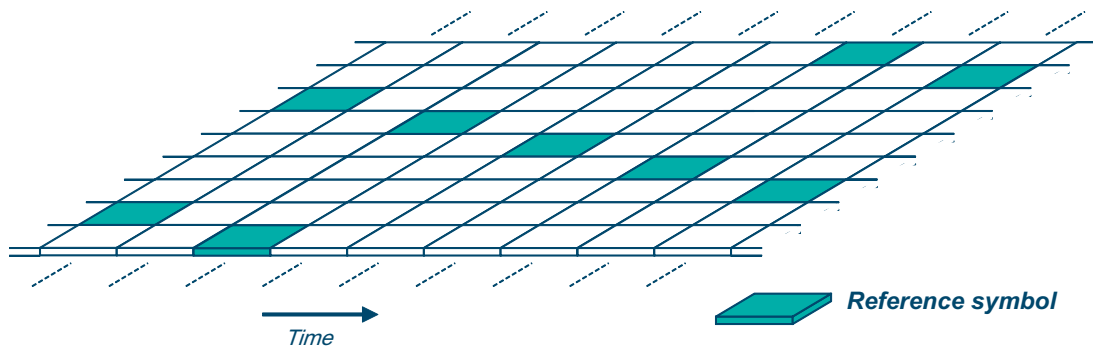


FIGURE 3.12

Time–frequency grid with known reference symbols.

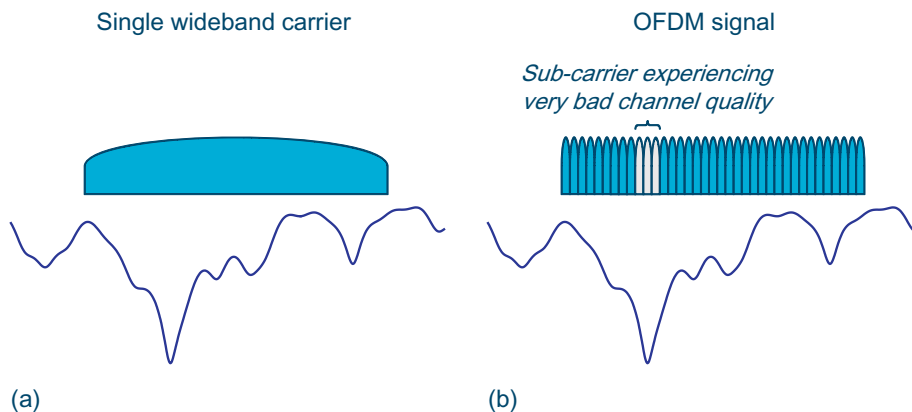


FIGURE 3.13

(a) Transmission of single wideband carrier. (b) OFDM transmission over a frequency-selective channel.

3.7 FREQUENCY DIVERSITY WITH OFDM: IMPORTANCE OF CHANNEL CODING

As discussed in Section 2.3 in the previous chapter, a radio channel is always subject to some degree of frequency selectivity, implying that the channel quality will vary in the frequency domain. In the case of a single wideband carrier, such as a WCDMA carrier, each modulation symbol is transmitted over the entire signal bandwidth. Thus, in the case of the transmission of a single wideband carrier over a highly frequency-selective channel (see Figure 3.13a), each modulation symbol will be transmitted both over frequency bands with relatively good quality (relatively high signal strength) and frequency bands with low quality (low signal strength). Such transmission of information over multiple frequency bands with different instantaneous channel quality is also referred to as *frequency diversity*.

On the other hand, in the case of OFDM transmission each modulation symbol is mainly confined to a relatively narrow bandwidth. Thus, for OFDM transmission over a frequency-selective channel, certain modulation symbols may be fully confined to a frequency band with very low instantaneous

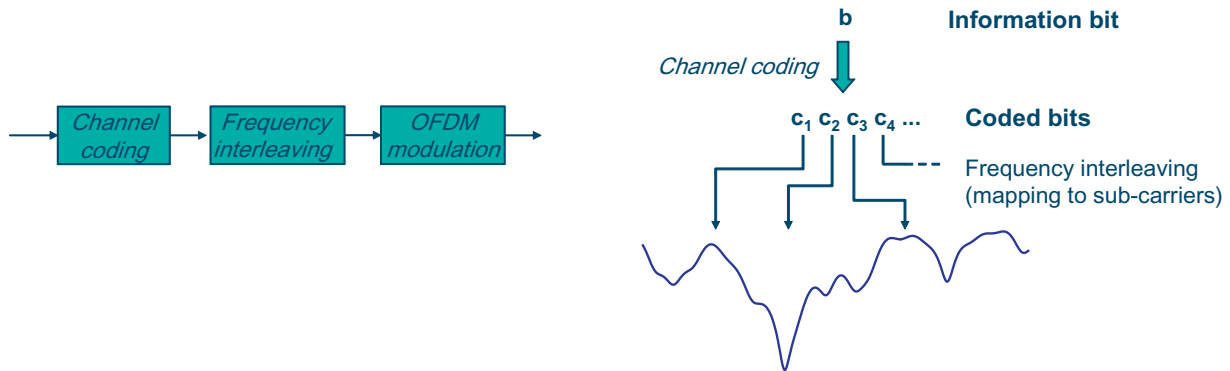


FIGURE 3.14

Channel coding in combination with frequency-domain interleaving to provide frequency diversity in the case of OFDM transmission.

signal strength, as illustrated in Figure 3.13b. Thus, the individual modulation symbols will typically not experience any substantial frequency diversity even if the channel is highly frequency selective over the overall OFDM transmission bandwidth. As a consequence, the basic error-rate performance of OFDM transmission over a frequency-selective channel is relatively poor and especially much worse than the basic error rate in the case of a single wideband carrier.

However, in practice channel coding is used in most cases of digital communication and especially in mobile communication. Channel coding implies that each bit of information to be transmitted is spread over several, often very many, code bits. If these coded bits are then, via modulation symbols, mapped to a set of OFDM subcarriers that are well distributed over the overall transmission bandwidth of the OFDM signal, as illustrated in Figure 3.14, each information bit will experience frequency diversity in the case of transmission over a radio channel that is frequency selective over the transmission bandwidth, despite the fact that the subcarriers, and thus also the code bits, will not experience any frequency diversity. Distributing the code bits in the frequency domain, as illustrated in Figure 3.14, is sometimes referred to as *frequency interleaving*. This is similar to the use of time-domain interleaving to benefit from channel coding in the case of fading that varies in time.

Thus, in contrast to the transmission of a single wideband carrier, channel coding (combined with frequency interleaving) is an essential component in order for OFDM transmission to be able to benefit from frequency diversity on a frequency-selective channel. As channel coding is typically used in most cases of mobile communication this is not a very serious drawback, especially taking into account that a significant part of the available frequency diversity can be captured already with a relatively high code rate.

3.8 SELECTION OF BASIC OFDM PARAMETERS

If OFDM is to be used as the transmission scheme in a mobile-communication system, the following basic OFDM parameters need to be decided upon:

- The subcarrier spacing Δf .
- The number of subcarriers N_c , which, together with the subcarrier spacing, determines the overall transmission bandwidth of the OFDM signal.