



Binary PAM Modulation : Unit Circle Representation

Also known as on/off keying



Data Sequence : [1 1 0 0 0 1 1 0]

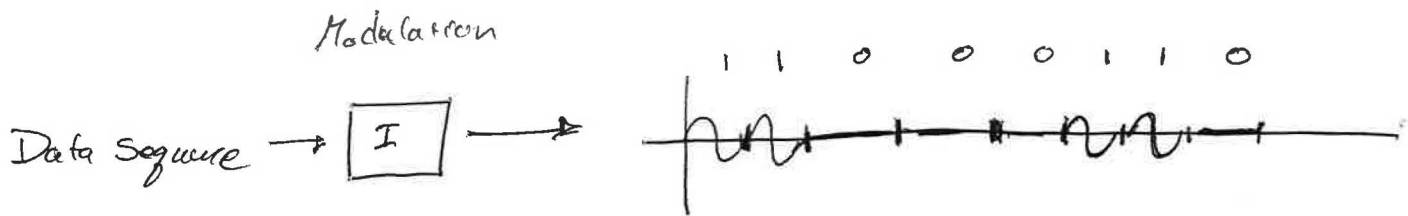

Uses Carrier amplitude of 0 or 1 to encode

$f_c = f_s$  for ease of drawing

No spreader