



US006408238B1

(12) **United States Patent**
Lamm et al.

(10) **Patent No.:** **US 6,408,238 B1**
(45) **Date of Patent:** **Jun. 18, 2002**

(54) **METHOD AND APPARATUS OF CONTROLLING A SLIDING ROOF**

(75) Inventors: **Hubert Lamm, Kappelrodeck; Guenter Haderer, Buehl, both of (DE)**

(73) Assignee: **Robert Bosch GmbH, Stuttgart (DE)**

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **09/486,035**

(22) PCT Filed: **May 27, 1999**

(86) PCT No.: **PCT/DE99/01552**

§ 371 (c)(1),
(2), (4) Date: **May 12, 2000**

(87) PCT Pub. No.: **WO99/65717**

PCT Pub. Date: **Dec. 23, 1999**

(30) **Foreign Application Priority Data**

Jun. 18, 1998 (DE) 198 27 110

(51) **Int. Cl.**⁷ **H02H 7/085; B60J 7/057**

(52) **U.S. Cl.** **701/49; 701/36**

(58) **Field of Search** **701/36, 49; 324/468, 324/469, 283; 49/26, 28**

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,723,960 A	*	3/1998	Harada	318/469
5,801,501 A	*	9/1998	Redelberger	318/283
5,977,732 A	*	11/1999	Matsumoto	318/283
6,239,610 B1	*	5/2001	Knecht et al.	324/772

FOREIGN PATENT DOCUMENTS

DE	196 15 123	7/1997
JP	59 190020	10/1984
JP	10054175	2/1998
WO	WO-39508 A1	* 10/1997

* cited by examiner


Primary Examiner—Michael J. Zanelli

(74) *Attorney, Agent, or Firm*—Kenyon & Kenyon

(57) **ABSTRACT**

A method of controlling a sliding roof, where braking of a vehicle is detected by a controller of the sliding roof device, and the pinch protection, i.e., the closing force limiter, is corrected so that faulty reversal of the sliding roof is suppressed when the vehicle is decelerating and the roof is being closed at the same time.

10 Claims, 2 Drawing Sheets

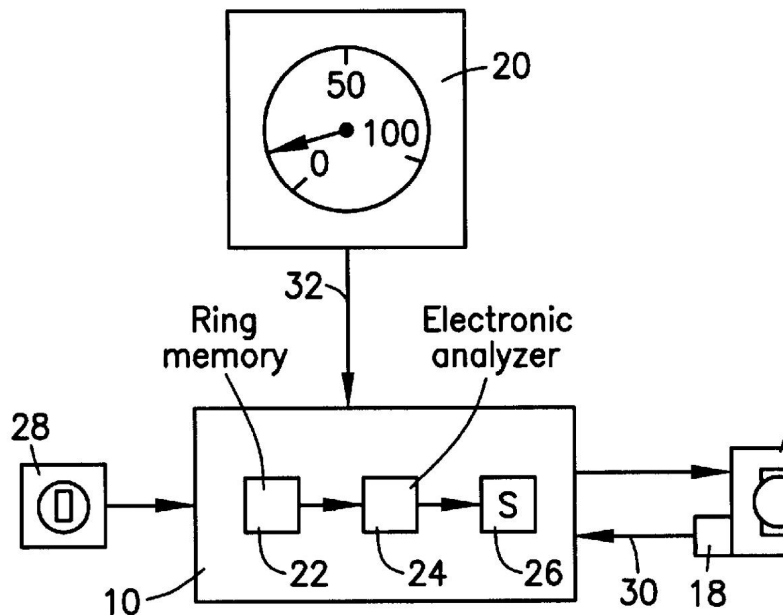

UUSI, LLC
Exhibit 2026

WEBASTO ROOF SYSTEMS, INC.
Petitioner
v.
UUSI, LLC
Patent Owner

Case:
IPR2014-00648
Patent: 8,217,612



US006408238B1

(12) **United States Patent**
Lamm et al.

(10) **Patent No.:** **US 6,408,238 B1**
(45) **Date of Patent:** **Jun. 18, 2002**

(54) **METHOD AND APPARATUS OF CONTROLLING A SLIDING ROOF**

(75) Inventors: **Hubert Lamm, Kappelrodeck; Guenter Haderer, Buehl, both of (DE)**

(73) Assignee: **Robert Bosch GmbH, Stuttgart (DE)**

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **09/486,035**

(22) PCT Filed: **May 27, 1999**

(86) PCT No.: **PCT/DE99/01552**

§ 371 (c)(1),
(2), (4) Date: **May 12, 2000**

(87) PCT Pub. No.: **WO99/65717**

PCT Pub. Date: **Dec. 23, 1999**

(30) **Foreign Application Priority Data**

Jun. 18, 1998 (DE) 198 27 110

(51) **Int. Cl.**⁷ **H02H 7/085; B60J 7/057**

(52) **U.S. Cl.** **701/49; 701/36**

(58) **Field of Search** **701/36, 49; 324/468, 324/469, 283; 49/26, 28**

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,723,960 A	*	3/1998	Harada	318/469
5,801,501 A	*	9/1998	Redelberger	318/283
5,977,732 A	*	11/1999	Matsumoto	318/283
6,239,610 B1	*	5/2001	Knecht et al.	324/772

FOREIGN PATENT DOCUMENTS

DE	196 15 123	7/1997
JP	59 190020	10/1984
JP	10054175	2/1998
WO	WO-39508 A1	* 10/1997

* cited by examiner


Primary Examiner—Michael J. Zanelli

(74) *Attorney, Agent, or Firm*—Kenyon & Kenyon

(57) **ABSTRACT**

A method of controlling a sliding roof, where braking of a vehicle is detected by a controller of the sliding roof device, and the pinch protection, i.e., the closing force limiter, is corrected so that faulty reversal of the sliding roof is suppressed when the vehicle is decelerating and the roof is being closed at the same time.

10 Claims, 2 Drawing Sheets

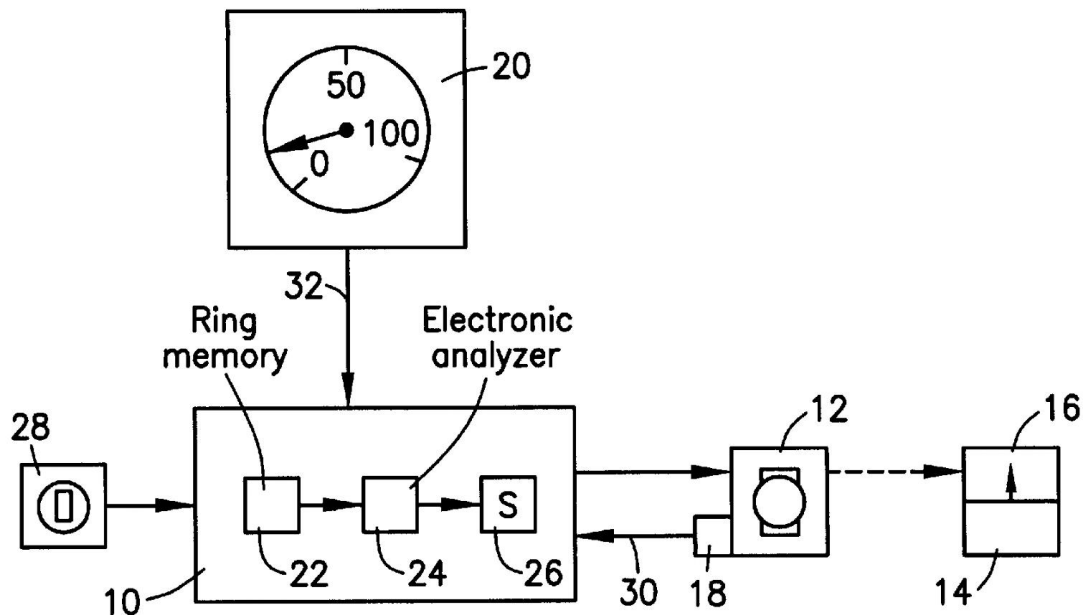

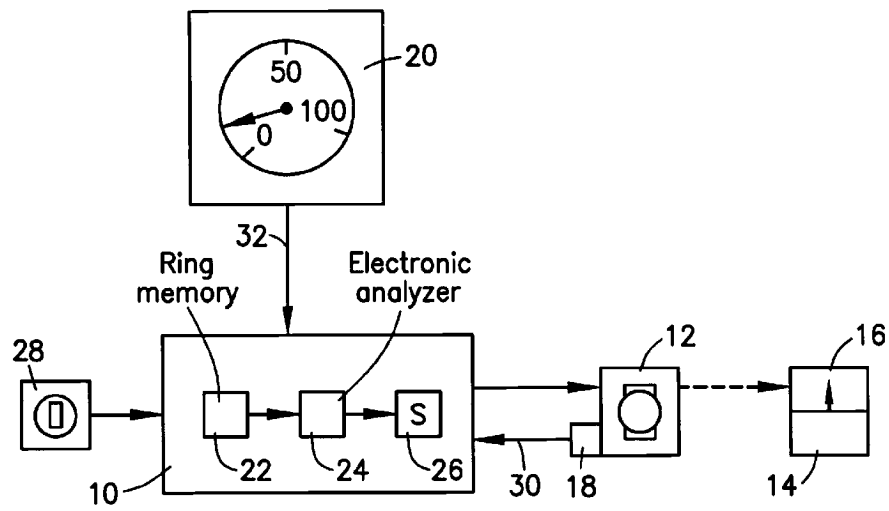


Fig. 1

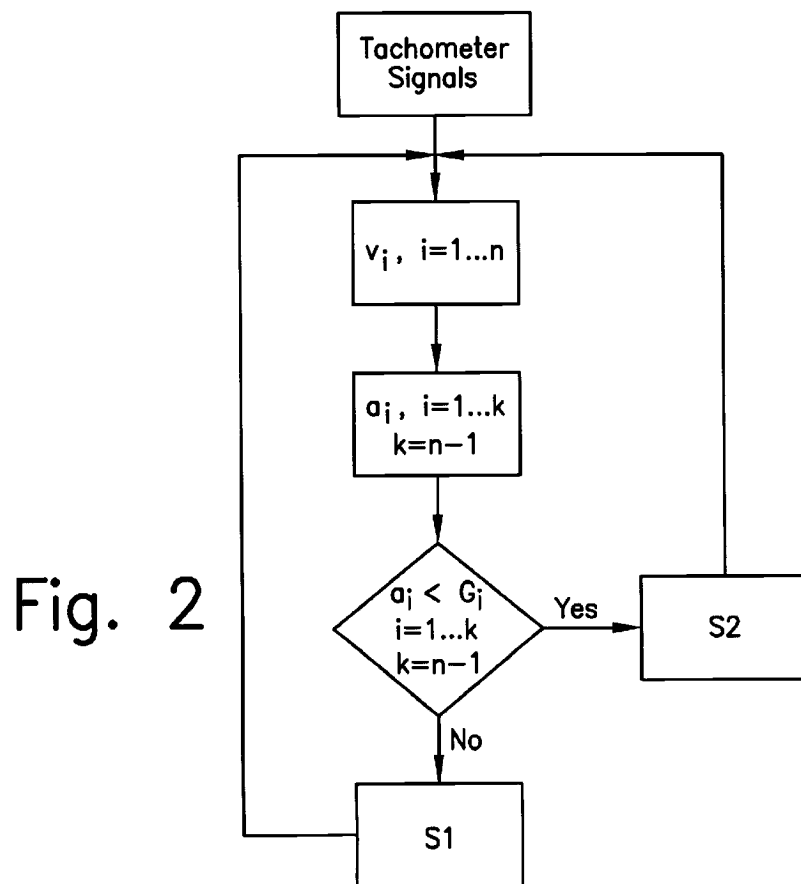


Fig. 2

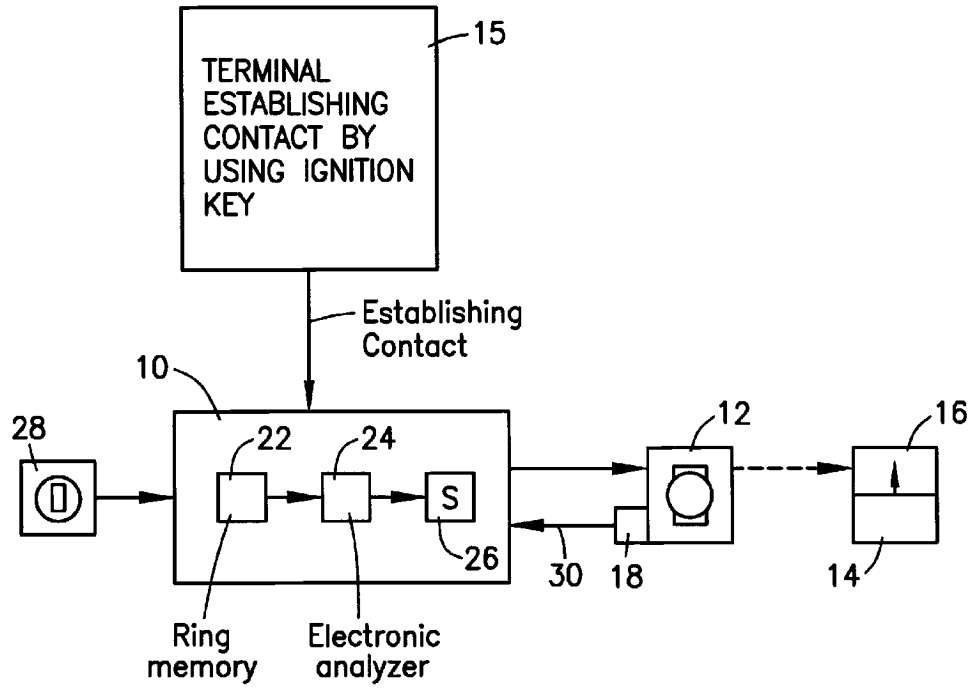


Fig. 3

METHOD AND APPARATUS OF CONTROLLING A SLIDING ROOF

BACKGROUND INFORMATION

The present invention is based on a method of controlling a sliding roof.

A method of electronic monitoring of an adjusting drive arranged in a motor vehicle, in particular a sliding roof drive, is known from German Published Patent Application No. 196 15 123, where a measured quantity detected by a sensor in closing the roof is compared with a threshold value for the closing force limiter for the purpose of guaranteeing, pinch protection, and when the threshold value is reached, the drive motor is turned off and/or reversed. Reaching, the threshold value thus represents a pinch criterion and leads to release of the object, such as an arm or neck, pinched between the adjusting part and a stop of the adjusting part.

In addition, the threshold value is adapted to the speed-dependent force and pressure conditions on the adjusting part, i.e., the sliding roof cover, in that the vehicle velocity is analyzed by using a tachometer signal sent to the adjusting drive. This prevents unwanted triggering of the closing, force limiter, i.e., the pinch protection, because of the forces occurring on the adjusting part at high speeds without there being an actual pinch situation. Consequently, threshold values can be adjusted as a function of speed.

However, this does not detect acceleration of the vehicle, e.g., full braking. The closing of a sliding, roof takes place more easily in negatively accelerated systems than in unaccelerated systems. This leads to the problem that the positive acceleration of the sliding roof cover in the closing direction caused by a negative acceleration of the vehicle during the closing operation of a sliding roof and consequently also the related increase in rotational speed of the drive motor are not detected. A subsequent reduction in acceleration, in particular due to stopping the vehicle, leads to a reduction in rotational speed of the sliding roof motor. This reduction in rotational speed is interpreted as a pinch criterion, so the pinch protection responds and the sliding roof is stopped and/or reversed in an unwanted manner.

SUMMARY OF THE INVENTION

The method according to the present invention has the advantage that braking of a vehicle is detected by a controller of the sliding roof device, and the pinch protection, i.e., the closing force limiter, is corrected so that faulty reversal of the sliding roof is suppressed when the vehicle is decelerating or stops in particular while the roof is closing.

It is especially advantageous that the controller determines from the input signals at least one acceleration value of the vehicle and compares this value with a limit value. Reaching the limit value is interpreted as full braking of the vehicle and leads to correction of the pinch protection. This correction of the pinch protection is reversed by the controller after braking.

The method is improved because not only one acceleration value is used but instead a plurality of acceleration values is used, preferably two, each of which is compared with a predetermined limit value. On reaching both limit values, full braking of the vehicle is then deduced and the pinch protection is corrected.

Preferably the acceleration values are obtained from a speed signal in particular a tachometer signal which is sent to the controller. The tachometer signals are stored temporarily in succession in a ring memory. The acceleration

values are determined by forming the difference in an electronic analyzer.

The determination of a pinch situation is based, for example, on a determination of the rotational speed of a motor armature shaft and a comparison of the rotational speed with a threshold value for the closing force limiter, so that a correction of the pinch protection is performed by correcting the threshold value, preferably increasing it.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 shows a block diagram of the device for controlling a sliding roof.

FIG. 2 shows a flow chart for one embodiment of the method according to the present invention for controlling a sliding roof.

FIG. 3 shows a flow chart for an alternative embodiment of the method according to the present invention for controlling a sliding roof.

DETAILED DESCRIPTION

FIG. 1 shows a schematic diagram of a device for controlling a sliding roof with a controller 10 which an electric drive motor 12 for moving a sliding roof 14 within an adjustment path. Sliding roof 14 closes or opens a sliding roof opening 16. A sensor 18, e.g., a Hall sensor or an incremental value pickup that delivers rpm-dependent pulses 30 to controller 10 for determination of the position and/or rotational speed of sliding roof 14 is arranged on motor 12. These pulses are compared with a threshold value S in a comparator 26 to guarantee pinch protection.

In one embodiment, additional input signals 32 from a tachometer 20 are sent to controller 10 as a means for detecting the vehicle speed, are stored temporarily in a ring memory 22 of controller 10 and are analyzed in an electronic analyzer 24 of controller 10 to detect braking of the vehicle.

In addition, a setpoint position of sliding roof 14 is preselected by an operating element 28, thus causing the roof to be opened or closed by the user. Determination of the rotational speed of motor 12 is usually used for regulating the position or rotational speed of sliding, roof 14 by controller 10 according to the setpoint preselected by the user.

The device of the present invention may also be used to control a sliding roof, preferably on a motor vehicle, having a reversible drive motor (12) and a controller (10) for controlling the motor (12) having a pinch protection (18,30, 26) and also having means (20) for detecting the vehicle speed and/or acceleration of the vehicle, where the means (20) deliver signals (32) to the controller (10). According to one aspect of the present invention, a tachometer of the vehicle can be used as the means (20) for detecting the vehicle speed and/or acceleration of the vehicle. The controller (10) detects braking of the vehicle, in particular full braking, on the basis of the signals (32) and corrects the pinch protection on the basis thereof.

FIG. 2 shows a flow chart for detecting negative acceleration a of the vehicle from tachometer signals 32.

The method according to the present invention will now be described on the basis of the device according to FIG. 1. In the first step, the start of the method is initiated by establishing contact (terminal 15) by using an ignition key in the ignition lock, for example, or controller 10 receives tachometer signals 32. Input signals 32 are usually in the form of a pulse train which is assigned a time base in controller 10, so that speed values v can be calculated from

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.