

**United States Patent** [19]  
**Pickett et al.**

[11] **Patent Number:** 4,463,701  
[45] **Date of Patent:** Aug. 7, 1984

[54] **PARAVANE WITH AUTOMATIC DEPTH CONTROL**

[75] **Inventors:** David M. Pickett, Clarksburg;  
Richard K. Knutson; William  
VonFeldt, both of Gaithersburg, all  
of Md.

[73] **Assignee:** The United States of America as  
represented by the Secretary of the  
Navy, Washington, D.C.

[21] **Appl. No.:** 125,735

[22] **Filed:** Feb. 28, 1980

[51] **Int. Cl.<sup>3</sup>** ..... B63B 21/00

[52] **U.S. Cl.** ..... 114/245; 114/331

[58] **Field of Search** ..... 114/244, 245, 274, 331,  
114/332, 126

[56] **References Cited**

**U.S. PATENT DOCUMENTS**

2,709,981	6/1955	Wilcoxon	114/245
3,703,876	11/1972	Michelsen	114/244
3,842,770	10/1974	Hedbawny et al.	114/245 X
4,019,453	4/1977	Boswell	114/245


4,215,862 8/1980 Yoshikawa et al. .... 114/245 X



*Primary Examiner*—Trygve M. Blix  
*Assistant Examiner*—Stephen P. Avila  
*Attorney, Agent, or Firm*—R. F. Beers; L. A. Marsh

[57] **ABSTRACT**

A paravane includes an elongated fuselage; a wing section of spaced wing members attached to an intermediate portion of the fuselage; stabilizer fins for maintaining the paravane lined-up with the direction of tow; a depth control flap positioned adjacent the wing section and having a pivot axis extending closely adjacent to the towing point; and depth control means for controlling the position of the control flap. The wing members have a straight leading edge portion, a straight trailing edge portion and a curved intermediate portion wherein the wing members are arranged such that the chord lines extend at oblique angles with the longitudinal axis of the fuselage and such that the resultant hydrodynamic lift force vector acting on the wing section passes through the tow point.

**15 Claims, 6 Drawing Figures**

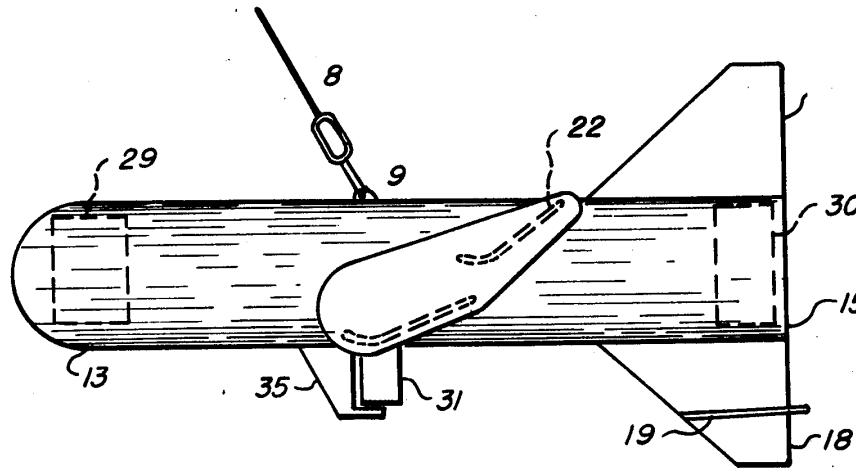

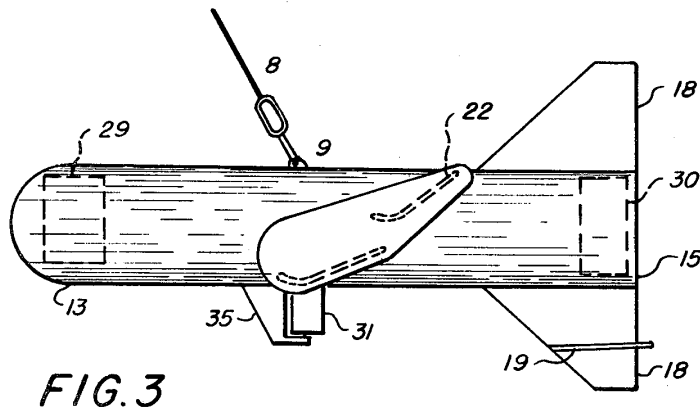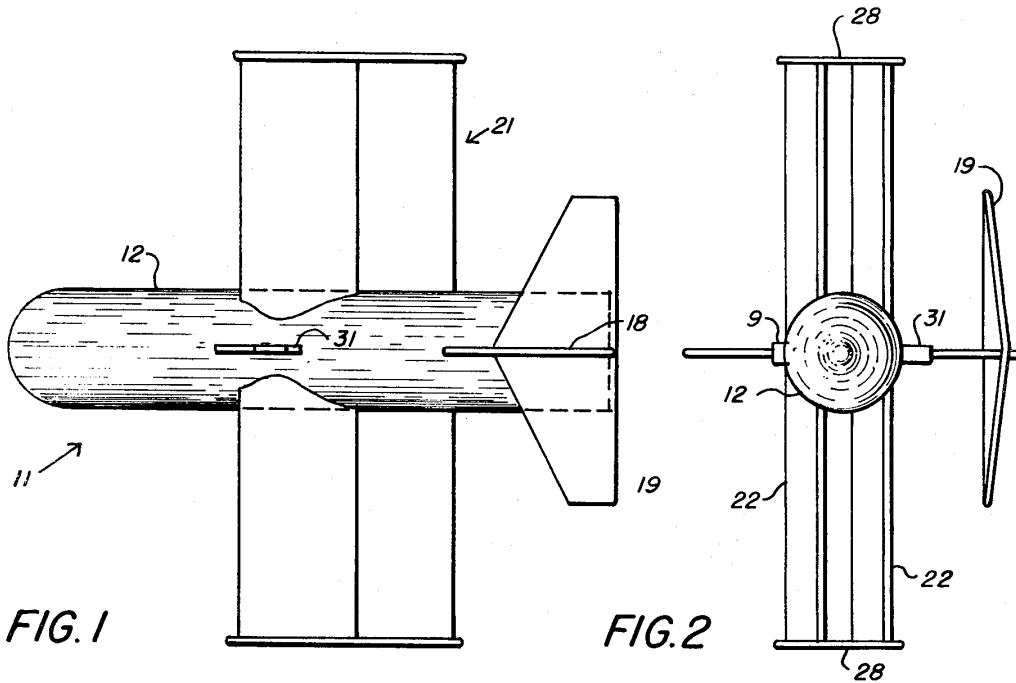

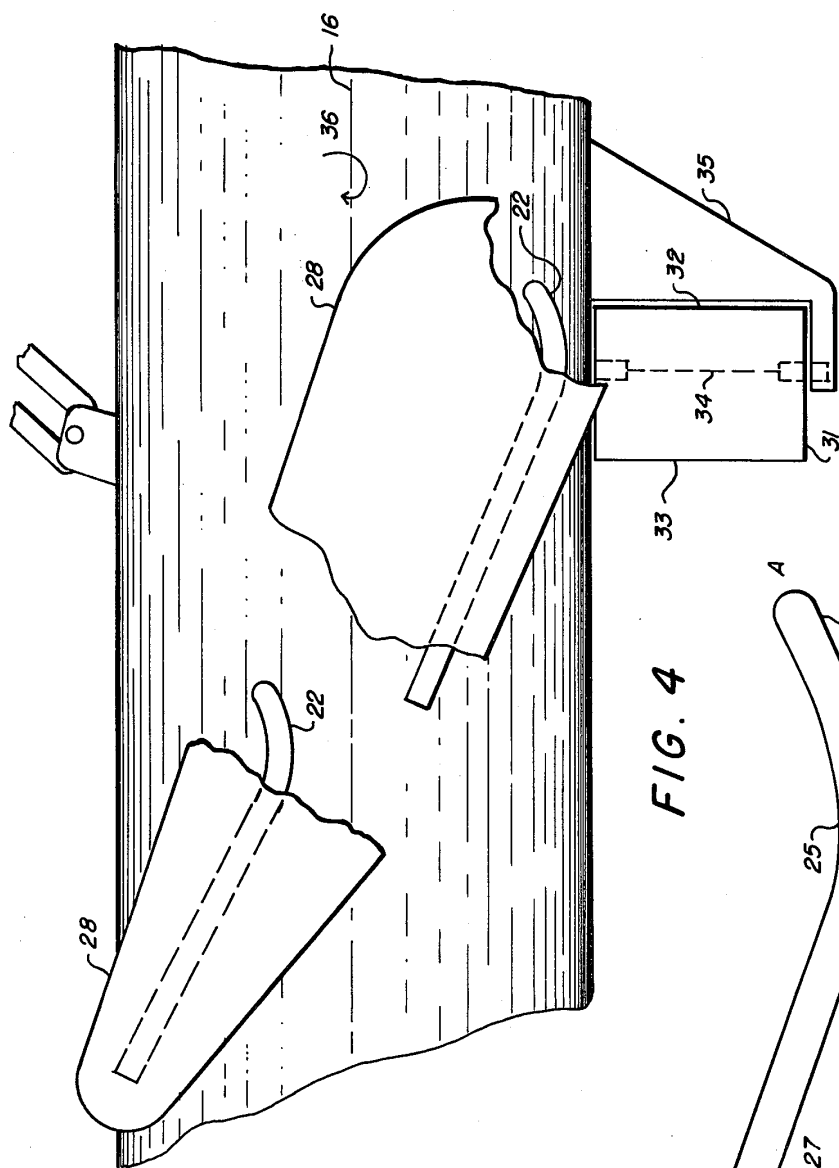


FIG. 4

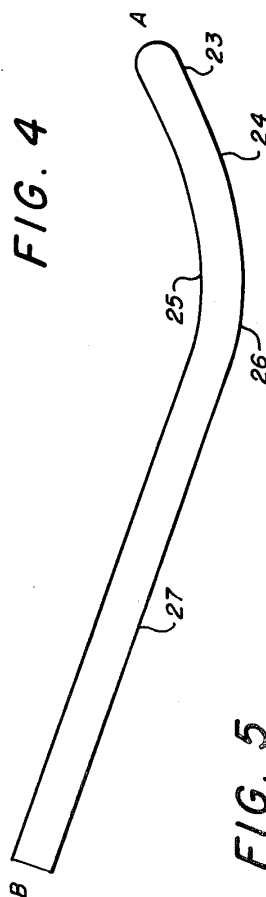


FIG. 5

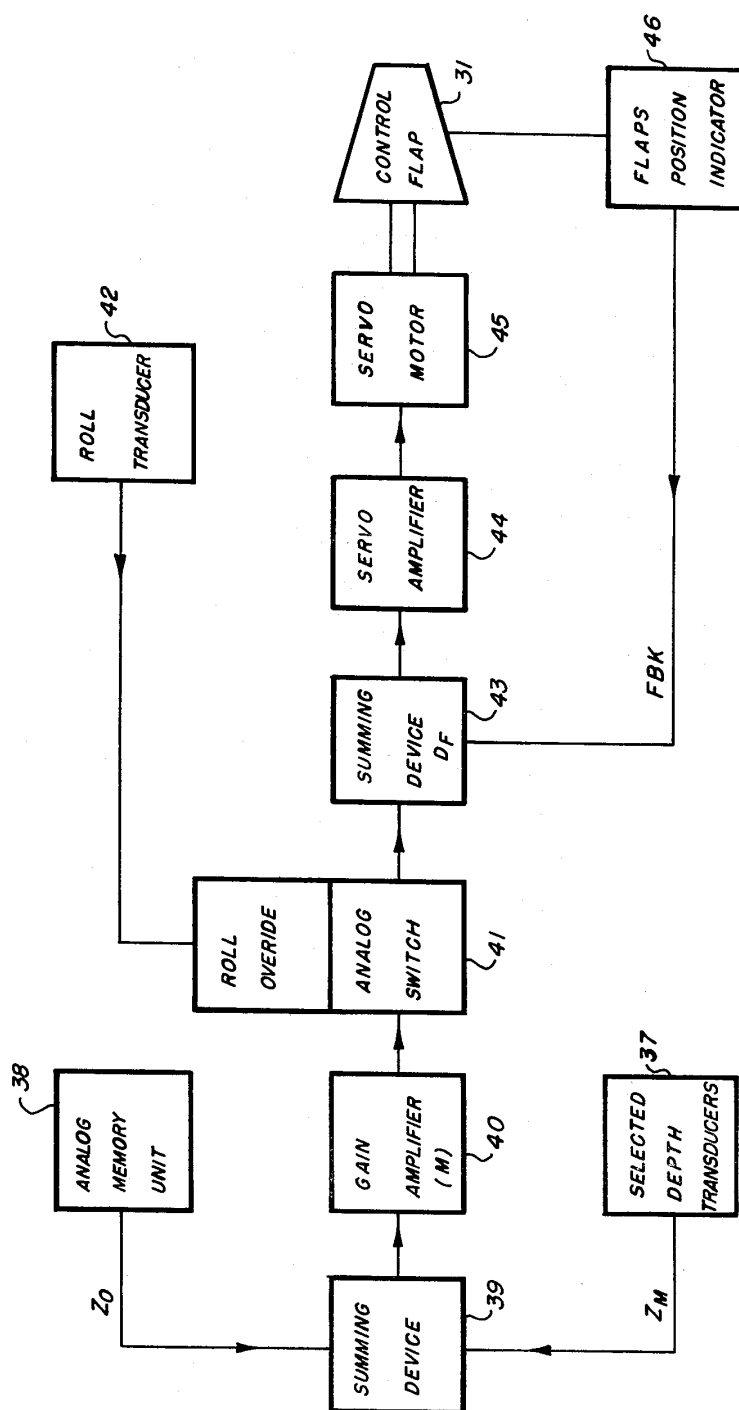


FIG. 6

## PARAVANE WITH AUTOMATIC DEPTH CONTROL

The invention described herein may be manufactured and used by or for the Government of the United States of America for governmental purposes without the payment of any royalties thereon or therefor.

### BACKGROUND OF THE INVENTION

The present invention generally relates to paravanes and other underwater towed apparatus and more particularly to paravanes having wing sections with high lift-to-drag and high lift-to-weight ratios and provided with means for maintaining the paravanes at a predetermined ordered depth.

Generally, paravanes towed by minesweepers are connected to a cable system so that the paravanes are positioned behind and laterally offset from the tow point of the minesweeper to maximize the sweep area. Various depth control means have been utilized to maintain the paravanes at a predetermined depth. One type of depth control means utilizes a float device with a length of cable extending between the float and the paravane such that the operating depth of the paravane is controlled by changing the length of the cable. However, the cable length often limits the effective working depth, and the float and cable assembly tends to impose undesirable drag forces on the towing vessel. Another depth control means which overcomes some of the drawbacks with the abovementioned float controls utilizes a depth sensor which is coupled with a rudder or control flap, the movement of which causes the paravane to ascend or descend. However, some of these depth control means as utilized in conventional paravane construction have caused the paravane to oscillate excessively or "hunt" in the water in finding the equilibrium position at the desired working depth. Such oscillating action produces dynamic loads and undesirable stresses in the cable system.

Paravanes and other underwater apparatus which include various depth control means are generally exemplified by U.S. Pat. Nos. 2,709,981; 2,879,737; 2,981,220; 3,560,912; and 3,703,876.

### SUMMARY OF THE INVENTION

The present invention overcomes many drawbacks of the prior art by providing a compact, efficient paravane having a high lift coefficient, a low drag coefficient, good stability over a wide range of towing speeds and means for preventing undesired roll motions. This is generally accomplished by attaching a wing section of highly efficient staggered wing members to the fuselage such that the resultant lift force vector for the wing section is favorably arranged with respect to the towing point. The internal space of the fuselage is optimized to accommodate various power and control means as well as lightweight ballasting materials so that the paravane can be made almost neutrally buoyant. Counterweight means can be attached to one of the wing members so that the wing section assumes a vertical orientation in the water. Horizontal and lateral stabilizers are attached to the tail end portion of the fuselage to provide the paravane with stability against pitching and yawing motions. A pivotal control flap is positioned relative to the wing section such that a high degree of roll motion is generated for small deflections of the control flap. Depth control means containing a roll override feature

for preventing roll motions greater than a preselected value are provided which enable the paravane to operate with a high degree of stability.

Accordingly, it is an object of the present invention to provide a simple, yet efficient towed underwater apparatus capable of achieving and maintaining a controlled depth, possessing a high degree of stability, and which may be manufactured inexpensively and does not require skilled personnel to operate.

Another object of this invention is the provision of a towed underwater device which develops a high outward lift force relative to its size and buoyancy in water and which is capable of seeking and maintaining a predetermined depth and towing orientation.

A further object of the present invention is to provide a towed underwater apparatus which is highly stable over a wide range of speeds and which is capable of assuming a predetermined orientation irregardless of its initial position.

Yet another object of this invention is to provide a towed underwater apparatus which includes means for stabilizing the apparatus with respect to undesirable rolling, yawing and pitching actions and means for enabling the paravane to maintain a predetermined depth without undue stress on the towing apparatus.

Still another object of the present invention is to provide a towed underwater apparatus which utilizes depth control means, whereby a large vertical lift force can be generated to support the weight of the towing cable and attached devices so that depth can be maintained even at a low towing speed.

### BRIEF DESCRIPTION OF THE DRAWINGS

The novel features which are believed to be characteristic of this invention are set forth with particularity in the appended claims. The invention itself, however, both as to its organization and method of operation, together with further objects and advantages thereof, may be best understood by reference to the following description taken in connection with the accompanying drawings, in which:

FIG. 1 is a side view of the paravane in its normal operating position;

FIG. 2 is a front view of the paravane of FIG. 1;

FIG. 3 is a plan view of the paravane of FIG. 1;

FIG. 4 is a sectional view, partially broken away, of the paravane, depicting the wing members and the control flap;

FIG. 5 is a sectional view of a wing member; and

FIG. 6 is a diagram of the depth control system employed in the paravane.

### DETAILED DESCRIPTION OF THE DRAWINGS

Referring now to the drawings, wherein like reference characters designate corresponding parts throughout the several figures, and particularly to FIGS. 1 through 3, there is shown a paravane 11 attached to a towing cable 8 (see FIG. 3). The paravane 11, which resembles a biplane, includes a cylindrical fuselage 12 or body; a wing section 21 of spaced wing members 22 secured to the central portion 14 of the fuselage 12; and a control flap 31 pivotally connected to the fuselage 12 and extending generally normal to the planes defined by the wing members 22. A lateral stabilizer 18 is attached to the tail portion 15 of the fuselage 12 and extends in a generally perpendicular relationship with the planes defined by the wing members 22 for maintaining the

# Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

## Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

## Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

## Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

## API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

## LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

## FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

## E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.