

CMOS Video Cameras

G. Wang, D. Renshaw, P. B. Denyer and M. Lu

University of Edinburgh
Department of Electrical Engineering
Mayfield Road
Edinburgh, EH9 3JL, UK.

Abstract

A single chip CMOS video camera is presented, along with design technique and characterization results. The chip comprises a 312×287 pixel photodiode array together with all the necessary sensing, addressing and amplifying circuitry, as well as a 1,000 gate logic processor, which implements synchronization timing to deliver a fully-formatted composite video signal and a further 1,000 gate logic processor, which implements automatic exposure control over a wide range. There are also simple solutions for γ correction and test.

1. Introduction

We introduce a new capability that extends the CMOS ASIC marketplace in a sector of high growth rates. This market sector is that of image sensing and processing, covering applications from electronic cameras to 'smart' vision systems.

Camera and vision systems addressed by today's CCD technology appear cumbersome, power-hungry and expensive. The experimental work reported here demonstrates that high-quality image sensors can be implemented entirely in commodity ASIC CMOS technology, operating from single 5v supplies.

The reported chip is a highly-integrated CMOS VLSI camera, shown in Figure 1. Most of the core area is a 312×287 pixel image sensor array, together with the necessary sensing, addressing and amplifying circuitry. The output signal can be either linear or γ corrected. γ correction is achieved by a simple solution which uses the nonlinear I_D - V_{GS} characteristic of an MOS

transistor. The layout of the sensor is custom designed to make it as compact as possible.

At the top (Figure 1) is the 2,000 gate logic processor, laid out using a semi-custom standard-cell compiler. Half of these gates generate synchronization timing, including line-sync and frame-sync signals to format a 625line/50Hz standard composite video output. The other half of the gates are included to electronically control exposure over a wide range (40,000:1), enabling the use of a single fixed-aperture lens. The chip measures $7.58\text{mm} \times 7.56\text{mm}$, using $1.5\ \mu\text{m}$, 2 level metal CMOS technology.


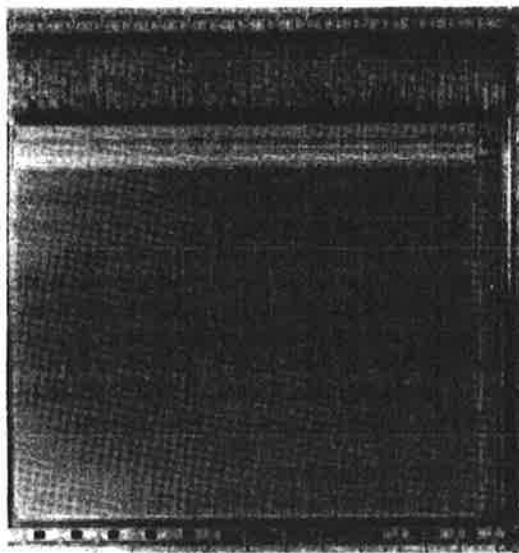


Figure 1. Photo-micrograph of single chip video camera

A video camera has been built using this chip along with a 6 MHz clock source, a 5 volt power supply, plus one bipolar transistor and a small number of resistors and capacitors required to match the line impedance to the monitor and decouple the power supply. The picture quality is subjectively excellent, and compares well with commercially available cameras.

2. Image Sensor Block

The architecture of the image sensor is shown in Figure 2. The light sensing area consists of a 312×287 diode array matrix, schematically indicated by the columns and rows of individual photodiodes. The pixel size is $19.6 \mu m \times 16 \mu m$, giving a light sensing area of $6.12 mm \times 4.59 mm$. This corresponds to the standard 1/2" format.

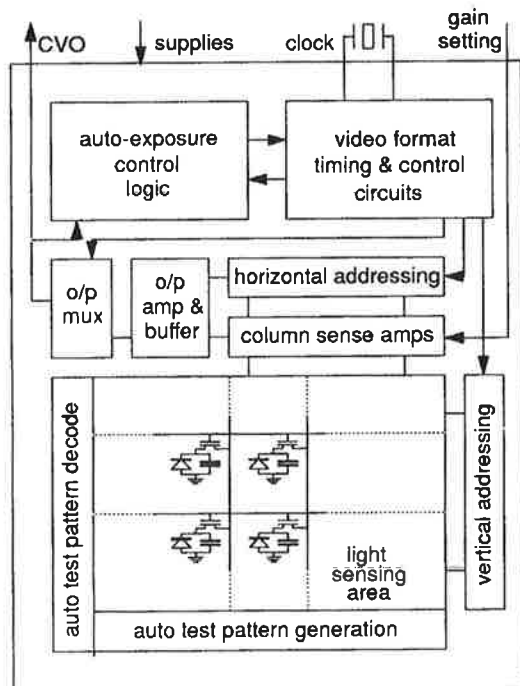

* CVO -- composite video output

Figure 2. Architecture of the image sensor

The photodiodes are accessed on the basis of sequential selection of each row through a verti-

cal shift register. At the top of each column is a sense amplifier. The sensed information is read out sequentially along the x-direction under control of a horizontal shift register. At the end of the path there is an output amplifier [1,2].

The sense amplifier is a single-ended differential charge integrator. Its performance demands an accurate capacitor, formed by metal1/metal2 and metal1/poly. However, commodity ASIC CMOS technology sometimes can not guarantee the resulting capacitance values. We designed a gain-controllable integrator, shown in Figure. 3, which allows wide range of programmable variation of the capacitance value.

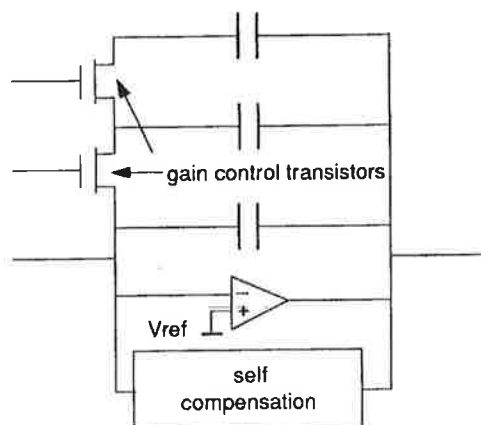


Figure 3. Integrator with programmable gain and self compensation

The main concern in the output stage design is the read-out speed required to achieve high resolution. A 6 MHz clock was chosen for this design; this gives a horizontal resolution of 312 pixels. The resultant picture quality is assured by a two stage output buffer with sample and hold function.

3. Automatic Exposure Control

The device automatically controls its exposure over a range of 40,000:1. Control is achieved by varying the integration time prior to reading each row of pixels. The integration time can be as long as one field, or as short as three cycles of the pixel clock (about 500ns).

The exposure is set by monitoring the video stream and estimating the fractions of each picture which are very white and very black. On the basis of this information, the device decides whether the picture contrast is acceptable, or too white, or too dark. If necessary, the exposure time is then changed, in the appropriate direction.

4. Generation of the Video Format Signal

Figure 4 shows a block diagram for the generation of the video formatted signal. The γ corrected image data is multiplexed with the sync-level and blanking-level, controlled by timing control signals, which are provided from the video timing block. A bipolar transistor (emitter follower) is needed to provide a low impedance output.

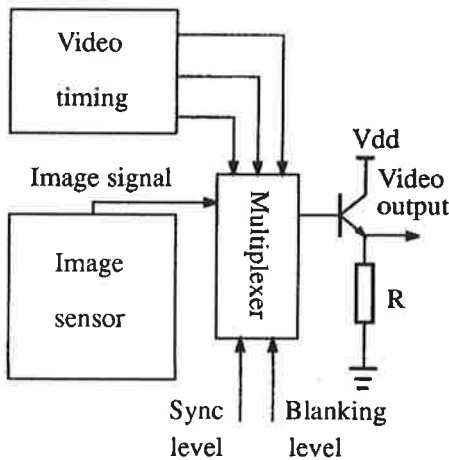


Figure 4. Generation of the video output

5. Simple Solution for γ Correction

The analogue image data needs to be γ corrected, to compensate for the nonlinearity of monitor tubes [3]. This is usually implemented using discrete components e.g. a ladder-network of diodes, resistors and reference voltages. Unfortunately, this is not suitable for integration. In this design γ correction is achieved by a simple solution which uses the nonlinear I_D - V_{GS} characteristic of an MOS FET, as shown

in Figure 5.

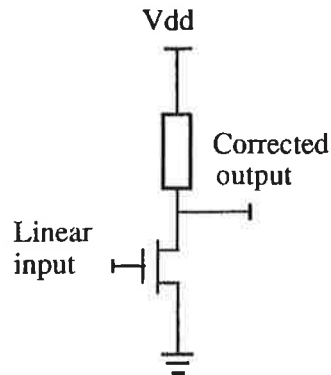


Figure 5. Gamma corrector

SPICE simulation was carried out and a simulation result is shown in Figure 6. A theoretical curve of ideal γ correction ($\gamma = 0.45$) is also shown in Figure 6.

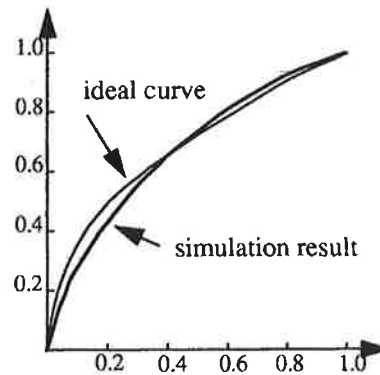


Figure 6. Gamma correction curves

6. Simple Solution for Test

Special consideration has been given to make it possible to carry out digital wafer test which is as complete as possible. The analogue parts are also tested by making them produce digital outputs, so avoiding a requirement for full analogue test. The test includes bit-line tests and word-line tests. Only a 0.78% increase in chip area was required to implement the on chip

hardware necessary for this form of testing (Figure 2). The individual photo pixels may be tested if a sufficiently long vector set is allowable.

The chip can also self-generate a checkerboard pattern which may be displayed on a monitor screen, or captured by a frame grabber. This pattern can be used not only to find defective pixels, but also to check analogue performance parameters, such as read out speed and uniformity.

7. Eliminating Noise

Complete guard rings are put around all analogue parts to minimize interference from the digital parts. Routing is arranged with priority to analogue output and analogue power supplies. Analogue power supplies and digital supplies are separated, and supplies to different analogue parts are divided where necessary.

There are two sources of fixed pattern noise: threshold variation in the MOS pixel access transistors causing speckles, and mismatches between the column sense amplifiers causing vertical stripes. The solution to the pixel threshold variation is to reduce the pixel reset voltage below ($V_{dd}-V_t$) so that the reset voltage is insensitive to the variation of the threshold V_t .

Column fixed pattern noise arises mostly from offset mismatches in the column sense amplifiers. We have successfully eliminated this problem by automatically compensating each amplifier to give zero offset during each line synchronization interval.

8. Characterization

An optical test measurement set-up was used to characterize the camera. The following table summarizes the measured results of the performance characterization experiments. The parameters of typical monochrome CCD cameras are also given for comparison.

parameter	CMOS	CCD
operating voltage for camera	5v	12v
power dissipation for chip	50mW	
power dissipation for camera	200mW	1W
s.n.r.	51dB	52dB
exposure range	40,000:1	300:1
saturation level	20lux	20lux
antiblooming factor	100x	100x
dark current*	0.0004	0.005

* as fraction of saturation at room temperature, 20msec integration time

9. Conclusions

We have developed several design techniques to achieve a single chip camera, in unmodified CMOS technology, which matches the performance of CCD cameras. The design has proven that three technical barriers which most greatly influence new product development; cost, power consumption and size, are all dramatically reduced over today's solid-state camera technologies.

10. Acknowledgements

We acknowledge support received from the Science and Engineering Research Council (Grant GR/F 36538 IED2/1/1159).

11. References

- [1] D. Renshaw, et. al., "ASIC Vision", Proc. IEEE Custom Integrated Circuits Conference, 1990, pp 3038-3041.
- [2] D. Renshaw, et. al., "ASIC Image Sensors", Proc. IEEE International Symposium on Circuits and Systems, 1990, pp 7.3.1-7.3.4.
- [3] Eugene Trundle, Television and Video Engineers Pocket Book, Heinemann, 1987.

DECLARATION OF GERARD P. GRENIER

I, Gerard P. Grenier, do hereby state that:


1. I am currently Senior Director of Publishing Technologies for the Institute of Electrical and Electronics Engineers (IEEE), 445 Hoes Lane, Piscataway, New Jersey.
2. I have been asked to confirm certain dates regarding the following article (the "Article"):

G. Wang, et al., "CMOS Video Cameras," Euro ASIC '91, Paris, France, May 27-31, 1991.
3. A true and correct copy of the Article accompany this declaration as Exhibit A.
4. IEEE is a neutral third party to the dispute in this IPR.
5. Neither I nor IEEE itself is being compensated for this declaration.
6. The Article was published by IEEE. Copies of the conference proceedings were made available to attendees of the conference. The Article is currently available for public download from the IEEE digital library, IEEE Xplore (www.ieeexplore.ieee.org).
7. IEEE maintains records of the dates on which articles were first made available for public download. These records are maintained as part of the ordinary course of business of the IEEE, are updated regularly as articles are published. I have personal knowledge of the records.
8. I have reviewed the IEEE records relating to the Article.
9. IEEE's records confirm the following:
 - a) "CMOS" Video Cameras" was presented as part of Euro SIC '91 which occurred May 27-31, 1991.
 - b) IEEE has registered this conference with U.S. Copyright Office.

I declare under penalty of perjury that the foregoing statements are true and correct.

Executed on:

June 30, 2011



Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.