



A CRT Display System for a Concept Vehicle

Technical Paper

Paper #: **890283**

Published: 1989-02-01

DOI: 10.4271/890283

Citation: Brandt, D. and Jamieson, R., "A CRT Display System for a Concept Vehicle," SAE Technical Paper 890283, 1989, doi:10.4271/890283.

Author(s): Douglas J. Brandt Ronn E. Jamieson

Affiliated: Delco Electronics Corp., General Motors Corp. Chevrolet

Abstract: The use of advanced instrumentation in automobiles has increased dramatically over the last several years. The design, development, and build of an advanced concept vehicle recently allowed both vehicle and instrumentation engineers the opportunity to further explore the use of advanced instrumentation for the vehicle display functions. For this vehicle, cathode ray tube (CRT) displays were used for primary information display, secondary information display and functional control, in-vehicle navigation display, and rear vision. Each of these applications of a CRT had unique requirements. This paper will discuss the application and implementation of CRTs for this concept vehicle's display functions.

Sector: Automotive

Topic: Electrical, Electronics and Avionics Displays Systems engineering

Buy	Select	List Price
Add	Download	\$24.00
Add	Mail	\$24.00

Members save up to 37% off list price.

Members: [login](#) to see discount.[Ordering Info](#)

SAE Technical Paper Series

890283

A CRT Display System for a Concept Vehicle

Douglas J. Brandt

Advanced Instrumentation Engineering
Delco Electronics Corp.
General Motors Corp.

Ronn E. Jamieson

Advanced Vehicle Engineering
Chevrolet • Pontiac • Canada Group
General Motors Corp.

Reprinted from SP-770—Automotive Information
Systems and Electronic Displays:
Recent Developments

International Congress and Exposition
Detroit, Michigan
February 27 — March 3, 1989



*The papers included in this volume
are abstracted and indexed in the
SAE Global Mobility Database*

No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.

ISSN 0148-7191
Copyright 1989 Society of Automotive Engineers, Inc.

Positions and opinions advanced in this paper are those of the author(s) and not necessarily those of SAE. The author is solely responsible for the content of the paper. A process is available by which discussions will be printed with the paper if it is published in SAE Transactions. For permission to

Persons wishing to submit papers to be considered for presentation or publication through SAE should send the manuscript or a 300 word abstract of a proposed manuscript to: Secretary, Engineering Activity Board, SAE.

890283

A CRT Display System for a Concept Vehicle

Douglas J. Brandt
Advanced Instrumentation Engineering
Delco Electronics Corp.
General Motors Corp.

Ronn E. Jamieson
Advanced Vehicle Engineering
Chevrolet • Pontiac • Canada Group
General Motors Corp.

ABSTRACT

The use of advanced instrumentation in automobiles has increased dramatically over the last several years. The design, development, and build of an advanced concept vehicle recently allowed both vehicle and instrumentation engineers the opportunity to further explore the use of advanced instrumentation for the vehicle display functions. For this vehicle, cathode ray tube (CRT) displays were used for primary information display, secondary information display and functional control, in-vehicle navigation display, and rear vision. Each of these applications of a CRT had unique requirements. This paper will discuss the application and implementation of CRTs for this concept vehicle's display functions.

BACKGROUND

Concept vehicles typically allow engineers the luxury of developing and implementing more advanced and state-of-the-art technology than production intent vehicles. To complement the advanced powertrain, chassis, and aerodynamic features of a recently developed concept vehicle, advanced instrumentation comprised completely of CRTs was developed. CRTs were chosen as the displays for the following reasons:

- * CRTs could simultaneously satisfy the brightness, color and reconfigurability requirements
- * To further develop previous automotive CRT technology
- * Availability of the hardware

The complete system includes six CRTs: a primary display CRT, a secondary display CRT, a dedicated CRT for in-vehicle navigation and three independent CRTs for rear vision (i.e., left side view, rear view, and right side

view). The location of each CRT in the vehicle is shown in Figure 1. Because each of these display applications has unique requirements, several different CRT types were developed, evaluated, and implemented.

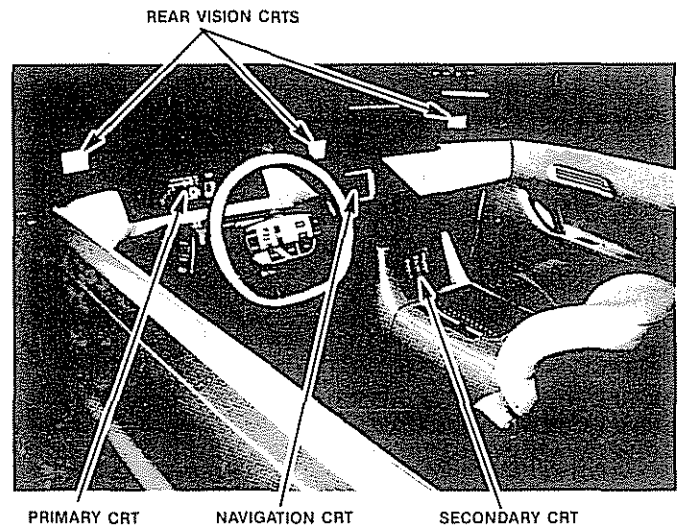


Figure 1. CRT Locations

PRIMARY DISPLAY

The primary display is located directly in front of the driver to display necessary vehicle operational information. The criteria established for the primary display were:

- * High brightness
- * High resolution (512 x 240 pixels)
- * Multi-color
- * Single page (required driving information only)
- * Direct view (i.e., not head-up or reflective)

- * High reliability
- * Automotive environment

A high brightness, high resolution, single gun CRT with fixed color phosphor zones was selected. This CRT gives the appearance of a color CRT with the control simplicity of a monochrome CRT. The different color phosphor zones are shown in Figure 2.

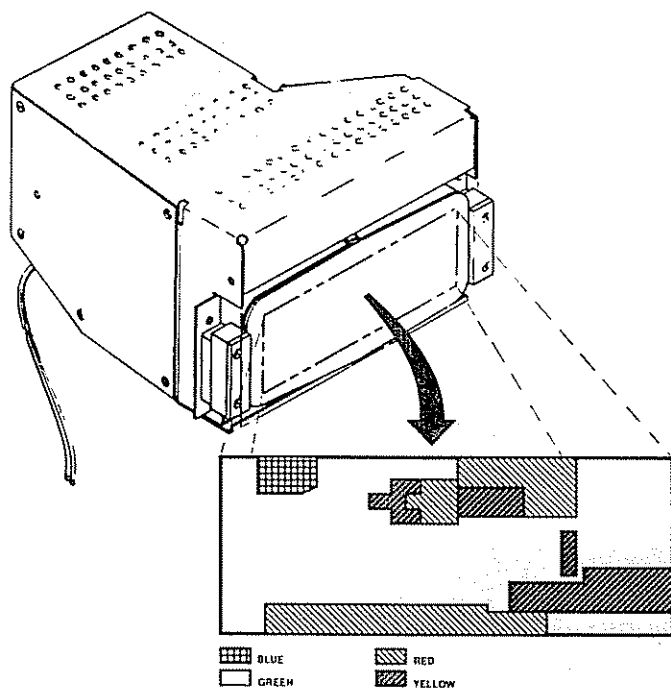


Figure 2. Primary Display Color Phosphor Zones

To achieve the brightness needed in direct sunlight, special burn resistant phosphor was used. Some typical brightness measurements are shown in Figure 3*.

Color	Brightness (fL)
Green	402
Yellow	214
Red	165
Blue	55

Figure 3. Primary Display CRT Brightness Measurements

The primary display electronic controller is the Monochrome Graphics Controller (MGC). The MGC is a microprocessor based video generator that is capable of driving several

types of pixel based displays. It has the capability of interfacing with another computer via a serial data link and can also receive information directly from vehicle sensors. The MGC uses a 6802 microprocessor as the central processing unit (CPU). The MGC also contains hardware that provides a total of sixteen analog inputs, sixteen digital input/output lines, a serial communications link, two programmable timer counters, and a 6845 CRT controller.

The graphic information and color specifications defined for the primary display are shown in Figure 4.

Information	Color
Vehicle speed	Green
Engine speed	Green, yellow, and red zones
Odometer	Red
Fuel level	Green and yellow zones
Turn indicators	Green
High beam	Blue
Message center	Red
PRNDL (gear select)	Green
Oil pressure telltale	Red
Coolant temperature telltale	Red
Charging system telltale	Red
Seat belt telltale	Red
Brake telltale	Yellow

Figure 4. Primary Display Graphics Definition

The primary display graphics were developed using a specific dotmap program. This program allowed the designer to view the animated display and quickly make changes. These graphics were then compressed to approximately a 3:1 ratio to reduce memory storage requirements. This graphic information was then translated and programmed into programmable read only memory (PROM) and inserted into the MGC. A decompression algorithm for the graphics is contained in the 6802 microprocessor.

SECONDARY DISPLAY

The secondary display provided a conveniently located, reconfigurable

* All measurements taken with a Pritchard Model 713 East Sea Spectroradiometer

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.