

Ex. GOOG 1033

## Computers and Home Electronics

# The Canon Still Video System Is One of a Kind

*Imagine a camera that takes color photos but uses a floppy disk instead of film so that no film development is necessary. Then imagine sending these photos 8,000 kilometers in three minutes. You've just imagined Canon's SVS.*

Canon U.S.A., Inc. has commercialized a still video system (SVS) that was field-tested at the 1984 Summer Olympics in Los Angeles. Fujio Mitarai, president, announced the product by saying, "The system was designed and is being built exclusively by Canon. The Canon SVS's components are intended for industrial users at this time. Newspapers, magazines and news photo agencies are the most likely immediate users." But this unique system can be used in any business where managing graphic information is required.

The components that Mitarai referred to are the RC-701 high-resolution camera (\$2,595) that records up to 50 color pictures on a still video floppy disk, the RT-971 transceiver (\$19,900) for transmitting color or monochrome images over telephone lines in three minutes, the RP-601 printer (\$6,950) and the RR-551 recorder (\$2,695) for instant picture playback on a TV set or monitor. Also available are the BP-7N Ni-Cd battery pack, the Video Visualizer RE-550, the CCD Color Video Camera Module and the RL-303 Laminator. In the following paragraphs, the main components of the system will be examined in further detail.

### The Camera

The still video camera resembles a

conventional 35 mm SLR camera in appearance, size and—to a large degree—operation. But the RC-701 is the first electronic imaging color camera on the market. It is equipped with a 2/3-inch CCD image sensor. Recording on a two-inch floppy disk at 780 pixels per horizontal line, the camera uses an RGB stripe filter to distinguish colors.

Its shutter speed varies from 1/18 second to 1/2,000 second in nine steps. Four shooting speeds are possible: a single image, two images per second, five images per second or even 10 pictures per second. The head moves automatically from one track to another and it does so soundlessly even at the fastest shooting speed.


Automatic white balance is provided but the color temperature may also be manually adjusted with a nine-position control. Exposure metering is also automatic or manual. For automatic metering, an SV lens is used; for manual, an FD lens. The normal CCD sensitivity is equal to a film speed of ISO 200 but in low-light conditions, sensitivity is automatically raised to EV1.5, the equivalent to ISO 600.

For viewing and focusing an image, a roof prism with laser mat and split-image rangefinder is conveniently equipped. Viewfinder LEDs indicate shooting mode, aperture value, over or under exposure warning, ex-

posure correction, flash charge ready, battery level, manual mode set and floppy disk status. More information is provided by an LCD on the top of the camera, including shutter speed, color temperature, shooting speed, track number and warnings for improper disk loading or full disk. An added feature not found in conventional cameras is the RC-701's built-in data encoding system that can superimpose on the bottom of the image year, month, day, hour, minute, second, shutter speed, aperture and four-digit identification. When data is entered, it is monitored with the LCD.

The user does not have to worry about accidental exposure or double exposure with a floppy disk. The disk, VF-50, is easily snapped into the camera, tracks of the disk are automatically advanced. Even if several pictures have been taken, the disk may be removed and re-inserted. The next picture is then recorded on the next empty track with no need for the user to perform any adjustment. Furthermore, the disk may be erased and used over again indefinitely if reasonable care is taken to avoid damage. Its capacity is 50 images in field or 25 images in frame mode.

With an adapter, the camera can use nearly 60 Canon FD lenses. In addition to these, the company has introduced models designed especially for use with the RC-701, compensating for the CCD's high sensitivity to long-wavelength light. Two lenses are currently available, the SV11-66 mm f/1.2 zoom and the SV 50-150 mm

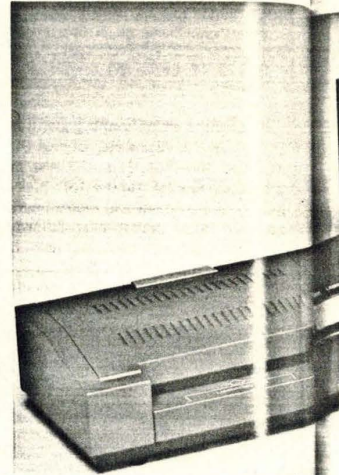

Canon still video system:


f/2.8 zoom. The SV 6 mm f/1.8 wide angle lens will be available later. Because the camera's imaging area is only one-fourth that of a 35 mm camera, the effective focal lengths of the two zoom lenses are 44-264 mm and 200-600 mm, respectively. These models have electronic mounts. Special ICs provide the interface with the camera and 8-bit microcomputers adjust aperture.

Only 50 ms is required for the SV 11-66 to go from maximum f/1.2 to minimum f/22 aperture. The two lenses do not have aperture setting rings, however, because they operate in either shutter priority or programmed modes. Both zooms have macro capability. The SV 11-66 is priced at \$695 and the SV 50-150 costs \$795.


### The Transceiver

The RT-971 sends and receives video images worldwide via public telephone lines or leased lines. It may even be used with cellular telephone, a feature that enhances flexibility and versatility. Transmission time for a color picture is three minutes in the fast mode (field) and six minutes in the slow mode (frame). For monochrome, transmission is twice as fast. Two telephone transmission modes are available, AM for low-noise lines and FM for high-noise lines.

To send a picture, the user inserts the floppy disk. The transceiver reads the disk and stores the digital information in its 256KB memory. The unit then reads the data from its memory and transmits it. Users at either end can view the images on their transceivers built in 2.7 inch

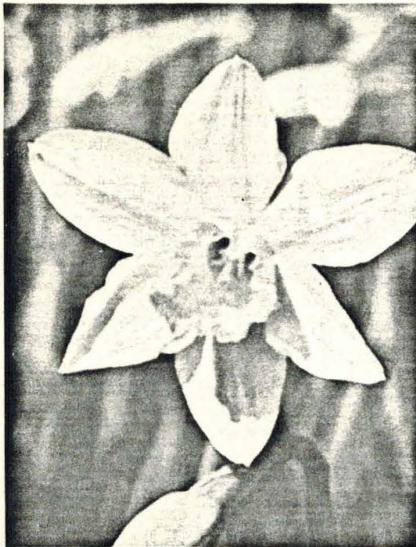



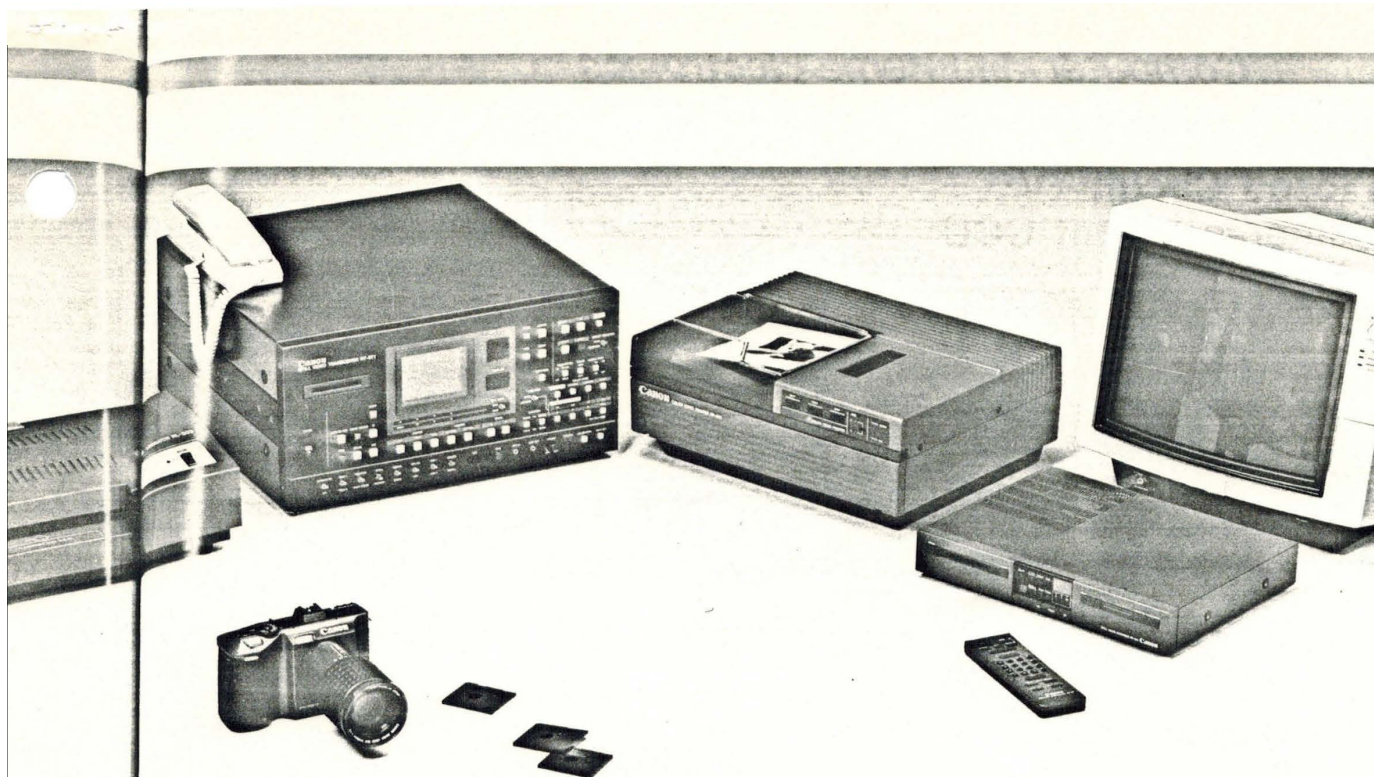

(Left to right) RL-303 laminator, RC-701 still video camera, RT-971 still video transceiver, RP-601 color video printer, RR-551 still video recorder

f/1.8 wide  
e later. Be-  
ing area is  
a n  
len, of  
4-264 mm  
ely. These  
units. Spe-  
ce with the  
puters ad-

for the SV  
n f/1.2 to  
The two  
re setting  
y operate  
rity or  
h zooms  
SV 11-66  
V 50-150

receives  
ublic tel-  
. It may  
lephone,  
ility and  
ne for a  
s in the  
nutes in  
r mono  
as fast.  
modes  
ise lines

inserts  
er reads  
l infor-  
y.  
or  
ser. ..  
ges on  
.7-inch  
al mo-

nitor of any size. Two-way voice communication is possible because each transceiver is equipped with speaker and mic.

For color images, red, green and blue signals are transmitted sequentially and they are reassembled at the other end. Black is transmitted separately. The receiving RT-971 copies the digital information onto another floppy disk. Transmission and reception require very little from the users and this ease of use has the additional advantage of providing higher reliability.

Moreover, the transceiver can record/playback freeze-frame images from other sources such as a VCR or videodisk player. Compatibility, in fact, is one of its primary benefits. The RT-971 may be used with a personal computer and computer as well as with the Canon RP-601 video printer. Thus the transceiver can handle captions and text from a personal computer (64KB of the RT-971's memory is for text). It also interfaces with conventional wirephoto machines.

Two final functions of the transceiver should also be mentioned. A positive-negative reversal switch is included as a standard feature, and the unit may be powered by a car battery by connection with a converter.

#### The Printer

The RP-601 is a full-color ink-jet printer with yellow, cyan, magenta and black ink. It produces prints in either of two sizes: 3 5/8 x 4 13/16 inches or 2 11/16 x 3 9/16 inches. For the larger size, printing time is 4.5 minutes and for the smaller it is three minutes. Printing is automatic but

may be adjusted manually. The printer converts analog video signals into digital signals and this data is entered into the unit's memory. At this point, the data is analyzed and the printer's on-board computer selects hues, brightness and saturation. As mentioned, these characteristics may be manually adjusted.

Originals may be made from the Canon still video camera and visualizer or from freeze-frames of TV, VCR and videodisk. To assure care-free operation, the RP-601 includes an automatic capping mechanism to cover nozzles during non-use. It also has a pump that removes bubbles from the ink supply.

#### The Recorder

An integral part of the still video system is the RR-551 video recorder. This unit allows the pictures from the camera's floppy disk as well as freeze-frames of other video sources to be displayed on a TV set or monitor. It has a disk drive for the floppy disk and permits forward or reverse search at one, two, five or 10 frames per second.

It displays an image on the screen for one to 99 seconds.

The recorder can both erase tracks and re-record erased tracks of the floppy disk. It is also the unit that freeze-frames video images from a TV, VCR or videodisk player. The RR-551 further records dates, parameters and other identification on the bottom of a video image produced by the still image camera.


Finally, all the recorders's functions may be remotely controlled (up to 23 feet away) by an infrared control unit.

#### The Visualizer

The RE-550 is an electronic overhead projector. It is equipped with a color video camera, Ci-10, that can feed signals to one or more TV monitors or to a large-screen projection video system for mass audiences. Its Ci-10 CCD camera provides 780 horizontal and 490 vertical pixels. Unlike conventional overhead projectors, this model can accommodate three-dimensional objects as well as transparencies. It can connect with the Canon transceiver or printer and

it produces images ranging in size from 91 x 121.6 mm to 314.6 x 233.3 mm. The unit's lens is an 8.3-16 mm f/1.7-2.2 zoom with macro and it can focus an object as close as 1.29 inches. The RE-550 also produces flicker-free images with its high-frequency lighting system and it has a built-in microphone. An external mic may also be used.

This outline of the SVS indicates the range of capabilities of Canon's most recent innovation.

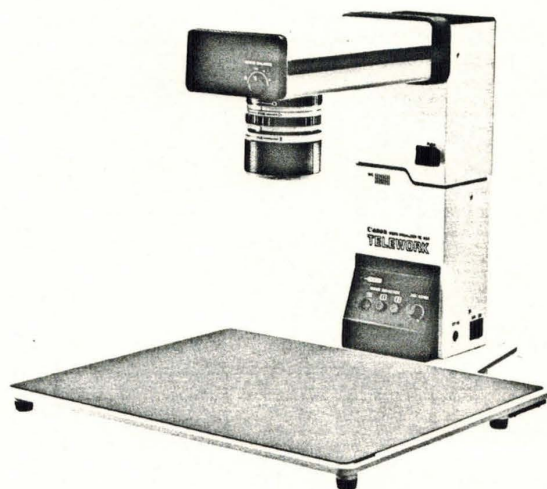

Telework RE-550 video visualizer