

# YMU757

## MA-1

### Outline

The YMU757 is a high quality melody LSI for cellular phone handsets, supporting the data format for various applications including ringing and holding melody sounds. The built-in Yamaha's original FM synthesizer can create various timbres, and its built-in sequencer can produce up to 4 different sounds with 4 different timbres simultaneously without placing a load to the controller.

The serial port controller interface enables real time reproduction of the melody data via FIFO, without the limitation of the data capacity.

With a built-in amplifier to drive the dynamic type speaker, it is possible to connect the speaker directly.

This LSI also has an analog-output terminal for the phone jack. In the stand-by mode, the power consumption can be reduced to 1  $\mu$ A or less while waiting.

A portable terminal machine.

### Features

- YAMAHA's original FM sound generator function
- Built-in sequencer
- Capable of producing up to 4 different sounds simultaneously (4 independent timbres available)
- Built-in output 400mW speaker amplifier
- Built-in circuit for sound quality correcting equalizer
- Built-in serial interface
- 2.688, 8.4, 12.6, 14.4, 19.2, 19.68, 19.8 and 27.82 MHz serial clock inputs support
- Analog output for earphone.
- Power down mode (Typ 1 $\mu$ A or less)
- Power supply voltage (Digital and Analog) : 3.0V  $\pm$ 10 %
- 20-pin TSSOP

YAMAHA CORPORATION


YMU757 CATALOG

CATALOG No. 1-LSI-AMU757A2

- General description of Y M U 757... .. 3
- Block description... .. 4
- Pin configuration... .. 5
- Pin description... .. 6
- Block diagram... .. 7
- Register map... .. 8
- Explanation of registers... .. 9-19
  - M usical score data... .. 9-13
  - T im bre data... .. 14-17
  - O ther control data... .. 17-19
- Power-down control division diagram... .. 20
- Explanation of each bit... .. 20-22
- Resetting... .. 23
- Settings & procedure required to generate melody... .. 23
- Interrupt sequence... .. 23-24
- State transition description... .. 25-26
- Operation in FIFO empty state... .. 27
- Reproduction method assuming occurrence of empty state... .. 27
- Exam ple of system connection... .. 28
- One sound and volume level adjustment in 4 sound pronunciation... .. 29-30
- Sound quality correction circuit... .. 31-32
- Serial interface specifications... .. 33
- Electrical characteristics... .. 34-39
- General description of FM sound generator... .. 40
- External dimensions... .. 41

The YM U 757 is controlled by way of the serial interface.

Shown below is its internal configuration.

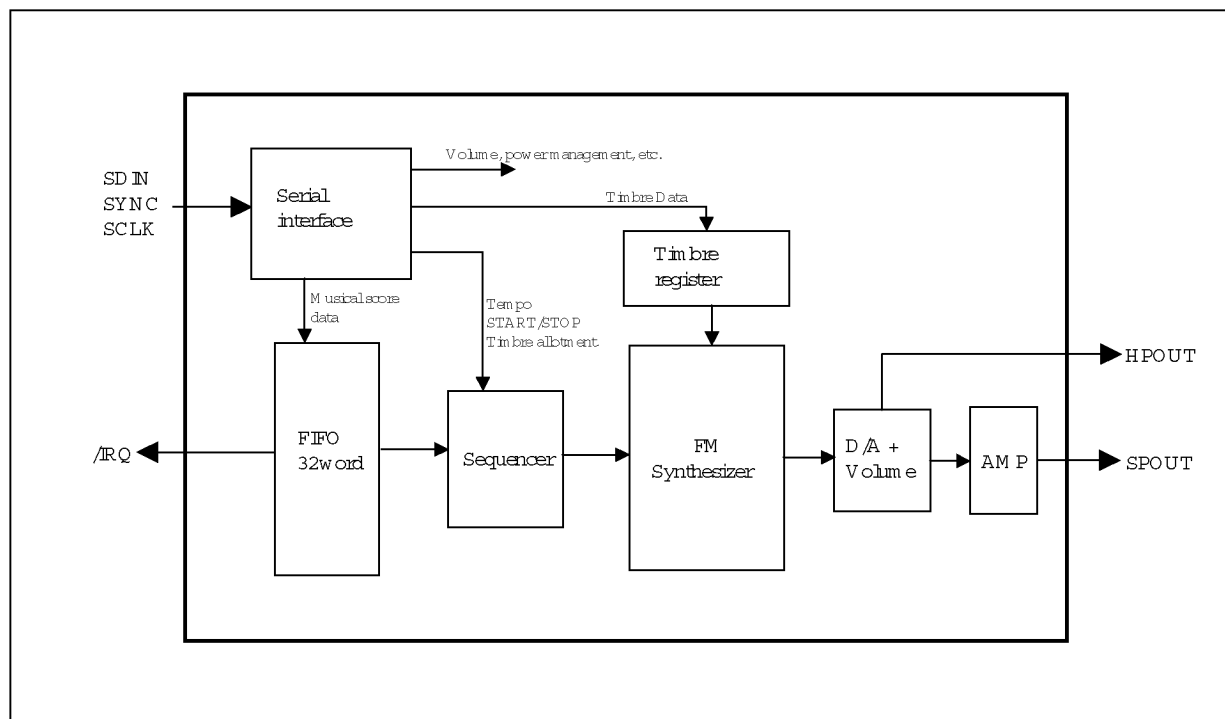

When the data is inputted into the serial interface, it is converted into the parallel data and transmitted to each function block according to the index address.

The musical score data is stored in the 32-word FIFO first and then transmitted to the sequencer where it is interpreted and signals to control sound generation of the FM synthesizer is output.

The timbre register is where up to 8 timbre data can be stored.

Also, as the sequencer controlling parameters, the start/stop and tempo signals are provided.

In order to have sound generated, the following processes must be performed for this LSI.

- 1) Initial status setting (cancellation of power-down function, clock selection, etc.)
- 2) Timbre data setting
- 3) Writing the musical score data in FIFO before starting the sequence
- 4) Writing the next musical score data before FIFO becomes empty upon receipt of the interrupt signal from FIFO during reproduction.

(For the details, refer to "Settings & procedure required to generate melody".)

## Block description

### 1) Serial interface

When the serial interface receives the serial data, it identifies the index data and transmits the control data to each function block.

### 2) FIFO

The musical score data are stored temporarily in FIFO which can contain up to 32 musical score data. The musical score data are processed in the sequencer when they are generated as sounds and those that have been processed are deleted one after another. When the remaining data amount in FIFO reaches the register setting (IRQ point) or less, it outputs an interrupt signal to ask for the continuing musical score data to be fed.

### 3) Sequencer

When the sequencer receives the START command, it starts to read the musical score data which have been stored in FIFO. The processed musical score data are deleted.

### 4) Timbre register


The timbre data are stored in this register which can contain up to 8 timbres. Settings for this register must be made before sound generation. It is initialized when the hardware or the software is reset but the values are retained while in the power-down mode and also after it is cancelled.

### 5) FM synthesizer

The timbres are synthesized and generated according to settings. Four sounds can be generated at the same time.

### 6) D/A, volume and amplifier

The outputs from the synthesizer are D/A converted and volume processed. After that, they are output from the speaker or the earphone output terminal.

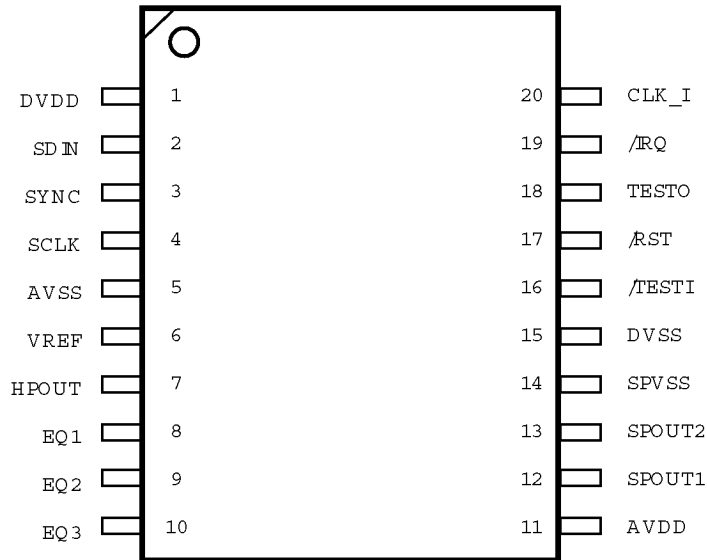

20 Pin TSSOP Top View

# Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

## Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

## Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

## Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

## API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

## LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

## FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

## E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.