

GEOPHYSICAL MONOGRAPH SERIES

David V. Fitterman, Series Editor

William H. Dragoset Jr., Volume Editor

NUMBER 7

**A HANDBOOK FOR SEISMIC DATA
ACQUISITION IN EXPLORATION**

By Brian J. Evans

SOCIETY OF EXPLORATION GEOPHYSICISTS

included several technical innovations that furthered the development of seismic data acquisition equipment and the interpretation of seismic data.

Beginning in the early 1930s seismic exploration activity in the United States surged for 20 years as related technology was being developed and refined (Figure 2). For the next 20 years, seismic activity, as measured by the U.S. crew count, declined. During this period, however, the so-called digital revolution ushered in what some historians now are calling the Information Age. This had a tremendous impact on the seismic exploration industry. The ability to record digitized seismic data on magnetic tape, then process that data in a computer, not only greatly improved the productivity of seismic crews but also greatly improved the fidelity with which the processed data imaged earth structure. Modern seismic data acquisition as we know it could not have evolved without the digital computer.

During the past 20 years, the degree of seismic exploration activity has become related to the price of a barrel of oil, both in the United States (Figure 3) and worldwide. In 1990, US\$2.195 billion was spent worldwide in geophysical exploration activity (Goodfellow, 1991). More than 96% of this (US\$2.110 billion) was spent on petroleum exploration.

Despite the recent decline in the seismic crew count, innovation has continued. The late 1970s saw the development of the 3-D seismic survey, in which the data imaged not just a vertical cross-section of earth but an entire volume of earth. The technology improved during the 1980s, leading to more

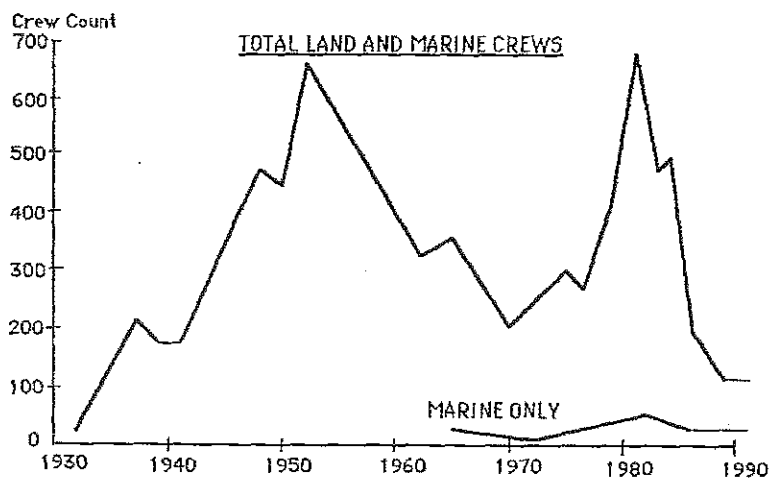


Fig. 2. U.S. seismic crew count (Goodfellow, 1991).

cally monitored by radio navigation so that shots (or "pops") can be fired at the desired locations.

Just as with land records, marine shot records also are recorded and displayed in time (Figure 7). Instead of traces showing stations versus time, they are referred to as *channels* versus time. The shot records in Figure 7 have the ship and energy-source position to the left of the streamer. Seismic events such as A arrive first at channels on the left which are nearest to the source, then spread to the right in a curved manner. Event B is the direct arrival. The area of a marine shot record of greatest interest to the geophysicist is windowed on the right-hand record. A comparison of the land shot record (Figure 5) with the marine records shows that the marine events appear more continuous across the record. Although some reflection events are visible on the land record, most of that record is obscured by surface-generated noise. The marine record—being relatively noise free—is said to have a high signal-to-noise ratio, while the land record has a low signal-to-noise ratio. Reasons for this are discussed in greater detail in Chapter 3.

Consider again the land and marine acquisition schemes (Figures 4 and 6). After each land shot, the line of receivers may be moved along to another appropriate location and the shot fired again. This is the so-called *roll-along method* of seismic recording, the parameters of the roll-along being governed by both the geology and how the data are to be processed. Alternatively, the geophones may be left in place while the shot position is moved several times. To record an extensive number of lines on land is clearly time consuming because of the need to reposition the geophones manually. In marine

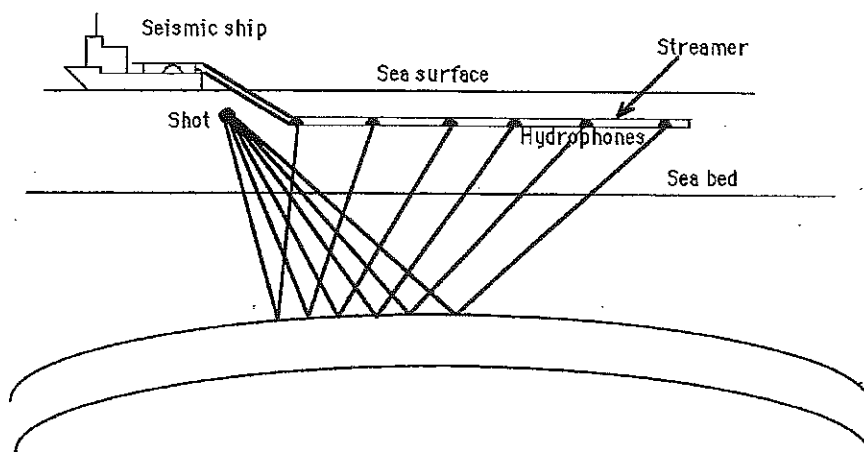


Fig. 6. Marine recording technique.

grams are generally only used in special circumstances (such as in transition zone or erratic coverage areas).

1.5 Survey Design and Planning

If we take a vertical cut through a geologic section, the direction where the geologic units are horizontal is known as the *strike direction*. A geologic section perpendicular to this direction is cut in the *dip direction* (see Figure 31).

The geology of beds is easier to understand if a 2-D profile through them is made in the dip direction rather than in the strike direction. Also, data tend to be of better quality in the dip direction. Hence, dip lines are more important than strike lines in 2-D recording. In 3-D surveying, the situation is somewhat different (see Chapter 7). In 2-D recording, lines shot in any direction other than the dip direction can be confusing to interpret. Consequently, a general idea of basin shape, orientation, or structure initially must be appreciated in order to position lines correctly. In addition, advanced 2-D migration processing is more effective with dip lines and thus a knowledge of the steepest dip direction is of extreme importance in line layout. In a new area to be mapped, seismic lines ideally should be recorded in both the dip and strike directions. The strike lines, in conjunction with the dip lines, help the interpreter form a coherent picture of an area's geology.

Line spacing is determined by the type of survey and the nature of the structure under examination. For reconnaissance work, large line spacing (50 km+) may give a regional picture, and in-fill lines with small spacing (500 m+) may be added later. If an interpreter cannot follow the geologic horizons from one line to the next during his interpretation of the data, the lines are too far apart. In 3-D surveying, the line spacing is required to be as little as 25 m in many cases to provide as detailed a geologic image as possible. Apart from geologic considerations, survey planning cannot proceed until the logis-

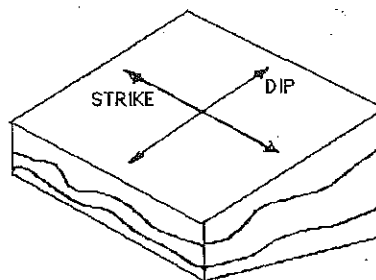


Fig. 31. Dip and strike directions.

the advent of the IBM personal computer (PC). The PC reduced the cost of processing but was frequently too slow or had inadequate software to perform much more than the simplest of input/output functions. UNIX-based workstations were then developed to be more powerful than the PCs. Today, many field crews have data processing workstations to provide quick-look and general data processing support during field acquisition.

Interactive field computers are considered necessary during land crew startup when test lines and source tests need to be evaluated. Processing costs and time at the computer center can be saved using a field computer system that can demultiplex field records. Three-dimensional data acquisition, both land and marine, would be almost impossible today without some form of field computing—even if it were only to locate the position of common mid-points during the recording operations—to ensure that the fold of coverage is adequate and within specified tolerances.

Field computers have blossomed on marine vessels during the upsurge in 3-D data recording. When four streamers are collecting data from four source arrays, the amount of positioning information for recording increases substantially. Networked workstations are becoming the norm for recording and processing the navigation sensor data in near real time. For example, a streamer's depth, feathering angle, and x,y location can be updated every second using ship-monitoring computers. The collected data also can be inspected to ensure that the quality of recording is acceptable.

Many recording systems have computers able to perform on-line phone tests and analyses as well as cable tests prior to each shot. This is useful in checking receiver integrity before recording commences. A number of instruments are able to perform limited signal processing as a *quick-look* data processing package. The advantage of having a system that can do some form of field processing is that interpretation of field stacks may identify interesting formations that could be further delineated by a modified program. One quick-look approach in marine 3-D recording is to bin short offset traces in a low fold 3-D volume, which may be rapidly processed and provide an early indication of data quality as well as profiles and time slices through the 3-D volume.

Exercise 4.1

- 1) If two seismic lines (which tie at their respective centers) were recorded by different source, receivers, and instruments, what tests would be needed on the field-acquisition system to ensure that the data phase ties in data processing would be made correctly?

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.