

Exterior Research & Design, L.L.C.

Building Science and Envelope Consultants

ERD Laboratory



Lab Code: 200563-0

ERD LABORATORY REPORT #01460.06.03 Comparative Pull-Over Testing of Fast Felt™ vs. Standard Nail with Tin-Cap

Prepared for:
LFF Systems, Inc.
Attention: David Collins
Date of Issuance: June 26, 2003 - DRAFT

Client Information: LFF Systems, Inc
11302 Memorial Drive
Houston, TX 77024

Client Reference: Comparative Rupture Testing

ERD Reference: Project #01460.03LAB

Samples: Fast Felt™, manufactured and supplied for testing by LFF Systems, Inc., consists of an ASTM D 226, type II organic felt (30# felt) to which 1-5/8" diameter, 0.009" thick plastic discs are laminated in a predetermined pattern. The integral plates are imprinted on the top side with a target symbol indicating where the nail is to be placed.

'Tin-caps' are 1-5/8" diameter, 32 ga., sheet metal discs, as defined in Section 1517.5.2 of the Florida Building Code.

'Nails' are minimum 12 ga. annular ring shank, hot dip galvanized nails with minimum 3/8" diameter heads, as defined in Section 1517.5.1 of the Florida Building Code.

'30# Felt' is ASTM D 226, type II asphalt impregnated organic roofing felt.

Sample Delivery: Fast Felt™ materials were supplied by the named client. 'Tin-caps' were obtained from a roofing distribution house in Miami, FL. Nails were obtained from Home Depot, Seattle, WA.

Main Office: 2412 7th Ave W • Suite 101 • Seattle, WA 98119 • Voice (206) 467-0054 • Fax (206) 467-5840

Laboratory: 600 W. Nickerson St • Seattle, WA 98119 • Voice (206) 298-3620 • Fax (206) 298-3130

FAST FELT 2002, pg. 1
Owens Corning v. Fast Felt
IPR2015-00650

Test Date(s): June 2003

ERD Technicians: Charles Phillips, Nelson Morez

**Miami-Dade
Notification No.:** TE103002

Properties: Base Sheet Rupture (Pull-Over) Performance

Standards: Miami-Dade TAS 117(B), *Test Procedure for Dynamic Pull-Through Performance of Roofing Membranes Over Fastener Heads or Fasteners with Metal Bearing Plates*, © Miami-Dade Building Code Compliance Office.

Specimens: **Base Sheet Rupture, TAS 117(B)**

Rupture specimens are prepared in accordance with TAS 117(B).

- One set of specimens consists of Fast Felt™ material cut to 18" x 18" squares with an integral disc positioned in the center. A nail is installed through the center of the disc and the specimen is positioned in the test apparatus. See Photo 1, below.
- A second set of specimens consists of a 30# felt cut to 18" x 18" squares. A 'tin-cap' is positioned in the center, a nail is installed through the center of the 'tin-cap' and the specimen is positioned in the test apparatus. See Photo 2, below.



Main Office: 2412 7th Ave W • Suite 101 • Seattle, WA 98119 • Voice (206) 467-0054 • Fax (206) 467-5840

Laboratory: 600 W Nickerson Street • Seattle, WA 98119 • Voice (206) 298-3620 • Fax (206) 298-3130



Photo 1: View of Fast Felt™ Specimen



Photo 2: View of Nail & Tin-Cap Specimen



Main Office: 2412 7th Ave W • Suite 101 • Seattle, WA 98119 • Voice (206) 467-0054 • Fax (206) 467-5840

Laboratory: 600 W Nickerson Street • Seattle, WA 98119 • Voice (206) 298-3620 • Fax (206) 298-3130

Test Apparatus: Rupture (Pull-Over) Resistance, TAS I 17(B)

Tests were conducted on the Com-Ten Model PSB0040 Universal Testing Machine to evaluate the base sheet ability to resist fastener-plate rupture (pull-through). See Photo 3, below.



Photo 3: View of Test Apparatus

Test Procedure: Rupture (Pull-Over) Resistance, TAS I 17 (B)

The fastener is installed through the center of an 18 x 18 inch specimen of the selected base sheet. For the purposes of this program, no cap sheet is installed ovetop the base sheet. The specimen is inverted and clamped into place at the base of the tensile tester. A load application grip is placed on the fastener shank. The opposite end of the load application grip is connected to the load cell, which is connected to the tensile testing machine. Load is applied to the fastener shank through pulling at a rate of 2 inches per minute until failure, as defined in TAS I 17(B), occurs. The load attained at the failure point is recorded. Fourteen tests are conducted for each base sheet, eliminating the 'high' and 'low' values from the final data set.



Main Office: 2412 7th Ave W • Suite 101 • Seattle, WA 98119 • Voice (206) 467-0054 • Fax (206) 467-5840


Laboratory: 600 W Nickerson Street • Seattle, WA 98119 • Voice (206) 298-3620 • Fax (206) 298-3130

FAST FELT 2002, pg. 4
Owens Corning v. Fast Felt
IPR2015-00650

Results: Rupture (Pull-Through) Resistance, Base Sheets, TAS 117(B)

- Notes: 1.) The mode of failure observed for all sheets was rupture of the felt around the disc.
 2.) C of V represents the coefficient of variation for the data set.

Sample	Peak Force	
	Nail & Tin-Cap	Fast Felt™
1	44.0	50.8
2	41.5	54.1
3	45.2	50.0
4	41.8	50.0
5	41.6	51.5
6	40.2	52.6
7	43.0	54.7
8	40.7	55.2
9	40.2	50.6
10	49.2	51.2
11	44.6	51.3
12	43.5	49.5
Average:	43.0	51.8
Std. Dev.:	2.6	1.9
C of V:	6.0%	3.7%

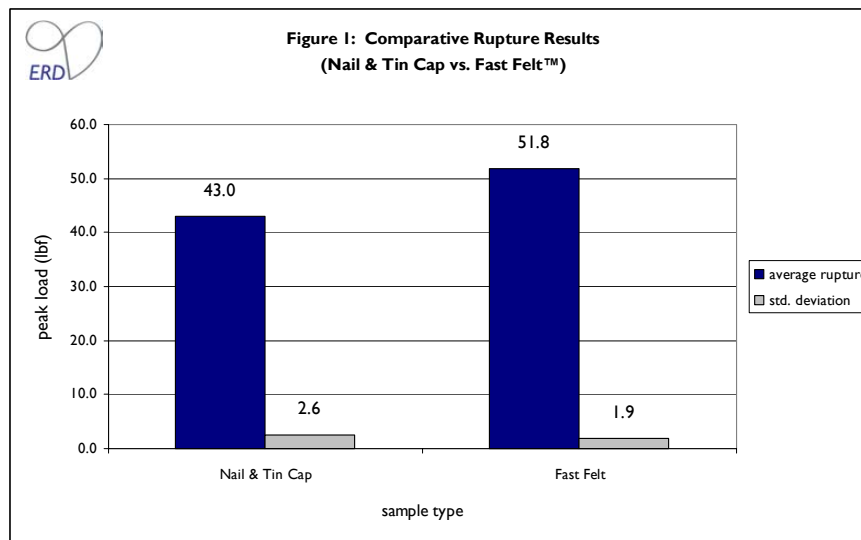

Main Office: 2412 7th Ave W • Suite 101 • Seattle, WA 98119 • Voice (206) 467-0054 • Fax (206) 467-5840

Laboratory: 600 W Nickerson Street • Seattle, WA 98119 • Voice (206) 298-3620 • Fax (206) 298-3130

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.