

PERFORMANCE OF A 576x576 OPTICAL CROSS CONNECT

Herzel Laor
Astarte Fiber Networks, Inc.
2555 55th St. Boulder, CO 80301
Tel: 303-641-0514
herzel.laor@starswitch.com

Edward Fontenot
Astarte Fiber Networks, Inc.
2555 55th St. Boulder, CO 80301
Tel: 303-443-8778
ed.fontenot@starswitch.com

Alan Richards
Astarte Fiber Networks, Inc.
2555 55th St. Boulder, CO 80301
Tel: 303-443-8778
alan.richards@starswitch.com

Jack D'Entremont
Texas Instruments, Inc.
34 Forest Street
Attleboro, MA 02703
Tel: 508-236-1971
jdentremont@ti.com

Marshall Hudson
Texas Instruments, Inc.
34 Forest Street
Attleboro, MA 02703
Tel: 508-236-3317
mhudson@ti.com

David Krozier
Texas Instruments, Inc.
34 Forest Street
Attleboro, MA 02703
Tel: 508-236-2117
dkrozier@ti.com

Abstract

Fiber has been used in the transport of information for over two decades. Over this period the performance of optical transport equipment has skyrocketed while its cost has spiraled down. This has led to the proliferation of fiber in long haul, local, and private networks, and even the appearance of fiber connections to the home or desktop. The recent rise of Dense Wave Division Multiplexing (DWDM) technology added multiplexing and demultiplexing functions to the use of photonics in communications. The next challenge for photonics as we move toward all optical networks is optical switching.

Evolution towards all optical networks necessitates switching equipment that can operate on any rate and format of optical transmission without hardware changes. Such protocol transparency simplifies the network management task. Switching large numbers of fiber optic signals at the photonic level eliminates expensive conversion and switching electronics. This ability to create end-to-end optical channels fuels wavelength routing applications. Until recently, optical switching technology with this capability and capacity was unavailable. Texas Instruments and Astarte Fiber Networks have developed high port count, transparent optical switching technology that is now in evaluation. This paper describes the architecture, components, and operation of this optical switching technology and provides initial test results.

Introduction

The typical central office has thousands of fibers to manage with each fiber capable of carrying millions of dollars worth of traffic each hour. SONET is the most prevalent optical protocol in use today, but other protocols such as optical IP are growing in popularity. Switching equipment used to manage these fibers must have the flexibility to effectively handle any traffic protocol in order to minimize the burden on network management systems. In addition, as transmission speeds increase optical switching

equipment should continue to operate without the need to ‘forklift upgrade’ the switching equipment. Only transparent optical switching equipment has the ability to continue to function normally as rates and formats change or as DWDM migrates into a network.

Network reconfiguration and service provisioning are two areas where a large transparent optical switching system can provide immense benefits in optical networks. For network reconfiguration applications a large optical cross connect (OXC) is located at each hub. Each cross connect is controlled by a management system in a coordinated fashion to create fiber or wavelength connections throughout the network. Since the network can carry multiple rates and formats of optical signals the cross connects must be able to switch any type of optical signal that may traverse the network.

Service provisioning places the OXC in a central office to manage the fiber connections to the outside world. The OXC switches fiber connections to circuit switches, electronic cross connects, ATM switches, or even optical IP switches. In this situation the OXC is likely to see frequent configuration changes as customer services churn. Protocol transparency in this application provides the ability to carry various rates and formats as customer needs require.

System configuration

The OXC developed by TI and Astarte is a free space, single stage, strictly non-blocking, transparent, matrix optical switch capable of supporting 1152 fibers. Figure 1 illustrates the general architecture of this OXC. For illustration purposes Figure 1 is simplified to show only sixteen fibers. The illustration shows fibers (on the left) coming into an array of switch actuating modules. Each of these modules represents an electro-optical assembly that is capable of focusing, and accurately controlling the deflection of a light beam coming out of a fiber. All modules face a mirror which turns all optical beams back toward the array of modules. By varying in two axes the deflection angle of a beam coming out of any switch-actuating module, the beam can be aimed at any other module. If the second module is also aimed correctly an optical connection is created between the two modules.

The figure shows three optical connections. Since the beams are projected through free space, a beam can freely cross any other without effect. New connections can be created without any impact on existing connections. Every connection involves only two switch actuating modules. This single stage switch architecture means signal attenuation is low and consistent. Once a connection is established between two modules, any optical signal on one fiber is carried through the switch to the other fiber, bidirectionally, without regard to the rate, format, or protocol of the signal. DWDM signals can be switched very cost effectively as a group or demultiplexed outside the switch and switched individually. With 1152 fibers, 576 connections can coexist on the OXC.

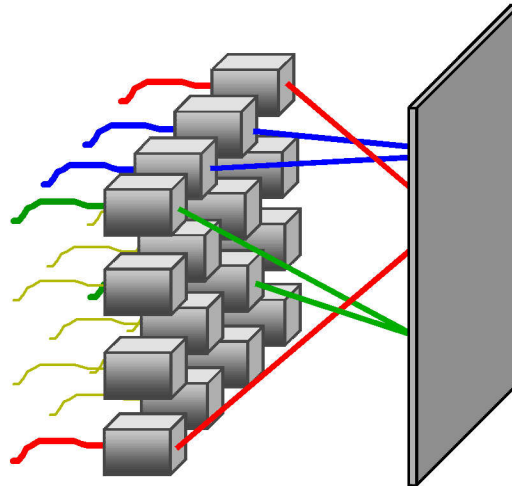


Figure 1 – The OXC architecture showing three simultaneous free-space optical connections

A unique characteristic of this OXC architecture is its modularity. This modularity allows craft to perform board-level replacement of any failed module in-service, as well as the ability to partially equip an OXC and add additional modules as needed.

Also unique to this OXC architecture is the redundancy built into the system. Redundant main processors handle all communications within the OXC, and to the network management system. Two redundant power supply units power the OXC. The processors and power supplies are hot-swappable. Connection commands are generated by the OXC main processors, and downloaded to a Digital Signal Processor (DSP) within each module over redundant communications channels. Each module is then autonomous in performing and maintaining the commanded connection. Rearranging any number of connections does not influence existing connections in the OXC.

The Optical Path

The optical path, representing a connection through two modules, is shown in Figure 2. Light from a fiber passes through a focusing lens. The light is reflected off a fixed mirror which folds the beam to keep device packaging small. It is then reflected off a movable mirror which precisely directs the beam in two axes.

To make an optical connection between modules the moveable mirror directs the beam directly at the moveable mirror of a targeted second unit. At the same time the second unit controls its moveable mirror to deflect the beam toward its fixed mirror, into its lens, and then into its fiber completing the connection. It is the coordinated control of deflection angles by the two moveable mirrors that creates the optical connection between two fibers.

Clearly, if the second mirror is not positioned to deflect the incoming beam to the precise angle where the beam will enter the fiber then no connection will be made. For this reason, a free space beam moving within the switch cavity, which traverses other units, will not induce a crosstalk signal with any other connections.

It should also be noted that the optical path is the same from right to left and left to right. Therefore the optical path through any two modules in a connection is bidirectional. The optical path is the same for

every possible connection in the OXC resulting in minimal and consistent optical attenuation in this single stage architecture.

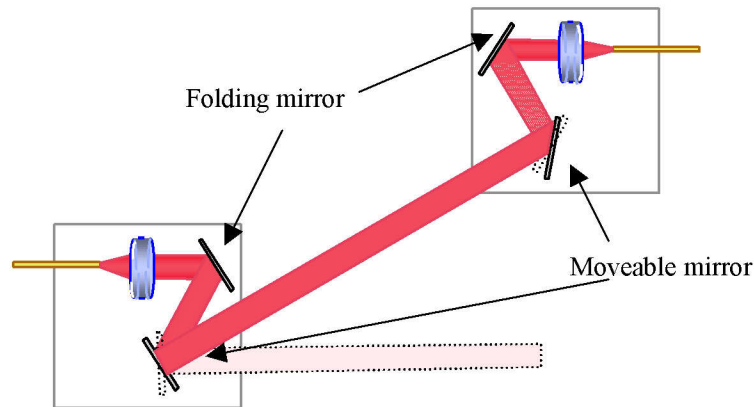


Figure 2 – The optical path through two modules in the OXC

To precisely control the position of the beam with the moveable micromirror, a closed-loop servo control system is employed. This servo control system enables each module to locate and identify an opposing module for targeting. With this control system the moveable micromirror can precisely position the beam on the fiber core and hold it there. This active positioning system provides high optical coupling efficiency into the fiber and protects the optical signal against vibration and drift.

Optical Module

In its physical implementation each optical module supports two fibers, as illustrated in Figure 3. This allows a transmit/receive connection to be configured within the same module simplifying fiber management. A DSP on each module handles communication with the main processor and manages servo control operation for both micromirrors. Once the main processor has communicated connection commands to a module, that module is autonomous in control of the beam position and maintenance of an optical connection. Redundant power supplies and communication paths are provided to the module, and the module is designed to be hot-swappable.

The switch module contains electronics to operate the two actuators that handle the optical signal. One of these actuators is illustrated in Figure 4. This optical switch actuator assembly contains all the optical components: the single mode fiber, a lens, folding mirror, moveable MEMS mirror and several detectors and emitters for the servo system.

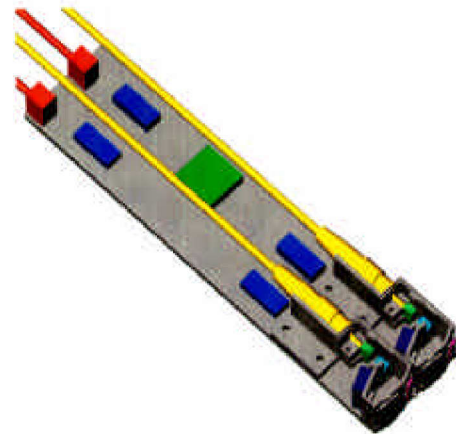


Figure 3 – Illustration of an optical module showing two fibers and redundant communications cables

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.