

**AUTOMOTIVE  
HANDBOOK**

18th German Edition  
1st English Edition

**BOSCH**



**FORD 1359**

## Imprint

© 1978 Robert Bosch GmbH  
Postfach 30, D-7000 Stuttgart 1  
Automotive equipment division  
Department for technical publications  
(KH/YDT)

Reproduction, duplication and translation of this publication, even in abridged form, is only to ensue with our previous written consent and with particulars of source.

Illustrations, descriptions, diagrams and other particulars only serve for elucidation and presentation of the text. They are not binding as regards details of construction, installation or delivery of particular vehicles or equipment.

We undertake no liability for conformity of the text with national or local regulations.

Printed in the Federal Republic of Germany.  
Imprimé en République Fédérale d'Allemagne.

### Editors

Ing. (grad.) U. Adler, Dipl.-Ing. W. Bazlen

### Translation 1978

Ingenieurbüro für technische und wissenschaftliche Übersetzungen Dr. W.-D. Haehl, Stuttgart

Eurolingua Professional Language Service Limited, London  
Peter Girling, Robert Bosch GmbH, Stuttgart

### Graphics, layout

R. Böhrkircher, H. J. Sommer, D. Westermann

### Distribution Rights

Exclusive distribution rights for the European Continent:

VDI-Verlag GmbH, Graf-Recke-Str. 84,  
D-4000 Düsseldorf 1  
ISBN 3-18-418004-2

Exclusive distribution rights for the United States of America, Canada, United Kingdom of Great Britain and Northern Ireland, Australia and the rest of the world, excepted European Continent:

SAE Society of Automotive Engineers, Inc.,  
400 Commonwealth Drive, Warrendale, PA,  
15096, USA  
ISBN 0-89863-510-0

## Special Consultants\*)

### Fundamentals

Dipl.-Ing. W. Bazlen

### Engineering statistics

Dipl.-Math. R. Lang

### Vibration and oscillation

Ing. (grad.) R. Lemanczyk

### Acoustics

Dr. rer. nat. W. Grotheer

### Heat

Dipl.-Ing. E. Ungerer

### Strength calculation, hardness

Dipl.-Ing. J. Huhnen

### Spring calculation

Dipl.-Ing. O. Krickau

### Gears calculation

Ing. (grad.) W. Silberhorn

### Light

Dipl.-Phys. K. Kerner

### Magnetic fields

Dr. rer. nat. H.-U. Gruber

### High-frequency electromagnetic oscillations

Dr.-Ing. W. Busse, Blaupunkt-Werke GmbH, Hildesheim

### Semiconductors

Dipl.-Phys. W. Offenhäuser

### Atom physics

Dr. rer. nat. H. Leiböle, Ing. (grad.) F. Meeh,

Dr.-Ing. E. Zehender

### Industrial materials

Dr. rer. nat. F. Esper, Ing. (grad.) R. Finze,

Dr.-Ing. W. Gohl, Dr. rer. nat. H.-U. Gruber,

Dipl.-Ing. R. Jonck, Ing. (grad.) K. Lohse,

W. Reiner, F. Steffen

### Heat treatment

Dipl.-Ing. D. Liedtke

### Corrosion

Dipl.-Chem. G. Ochotta

### Lubricants, fuels

Chem.-Ing. Irmgard Thiel

### Automotive mechanics

Dipl.-Ing. H. Dobler, Daimler-Benz AG, Stuttgart;

Dipl.-Ing. W. v. Kamp, Daimler-Benz AG, Stuttgart;

Dr.-Ing. G. Prigge, Daimler-Benz AG, Stuttgart;

Dipl.-Ing. E. Slegert, Daimler-Benz AG, Stuttgart

\*) Unless otherwise stated, the special consultants are employees of Robert Bosch GmbH

### Internal-combustion engines

Dr. rer. nat. J. Brettschneider, Ing. (grad.) E.

Jäger, Ing. (grad.) E.-U. Joachim, Ing. (grad.)

H. Laufer, Ing. (grad.) W. Wessel; Dipl.-Ing.

H. Dobler, Daimler-Benz AG, Stuttgart; Dipl.-

Ing. H.-J. Strauber, Daimler-Benz AG, Stuttgart

### Exhaust gases

Dr. rer. nat. B. Blaich, H. Kraemer,

Ing. (grad.) G. Thiele

### Carburetors

Dr. v. Watzdorf, Deutsche Vergaser GmbH,

Neuss

### Gasoline injection

Dipl.-Ing. G. Felger

### Diesel fuel-injection pumps

Ing. (grad.) K. Konrath, Ing. (grad.) H. Trattning

### Filters

Dr. Parr, Filterwerk Mann u. Hummel GmbH,

Ludwigsburg

### Engine cooling

H. Isselhorst, Südd. Kühlerfabrik Julius Fr.

Behr, Stuttgart

### Clutches, transmissions, steering

Prof. Dr. H.-J. Förster, Daimler-Benz AG,

Stuttgart

### Oil hydraulics

Ing. (grad.) W. Weigert

### Wheel suspension

Ing. (grad.) O. Engler

Dr.-Ing. G. Prigge, Daimler-Benz AG, Stuttgart

### Tires and wheels

H. Mädje, Continental Gummi-Werke AG,

Hannover; Mitarbeiter der Dunlop AG, Hanau

### Braking equipment

Ing. (grad.) H. Böhmler

### Graphical symbols, circuit diagrams, terminal designations

W. Schneider

### Cable calculation

Ing. (grad.) E. Heller

### Generators, alternators

Dipl.-Ing. E. Kuhn, R. Leunig

### Storage batteries

Ing. (grad.) A. Heffner

### Starting motors

Ing. (grad.) E. Bürkle

### Battery ignition

Dipl.-Phys. W. Offenhäuser, Dr. rer. nat. H.

Schwarz

### Magneto ignition

Dipl.-Ing. J. Wesemeyer

### Spark plugs

Ing. (grad.) L. Steinke

### Headlamps

Dipl.-Ing. R. Müller

### Optical signaling systems

Ing. (grad.) E. Schemitzek

### Acoustic signaling systems

Dipl.-Ing. H. Regensburger

### Heating and air-conditioning of passenger-cars

H. Isselhorst, Südd. Kühlerfabrik Julius Fr.

Behr, Stuttgart

### Car radio receivers

Dipl.-Ing. H. Pröls, Blaupunkt-Werke GmbH

Hildesheim

### Interference suppression

Ing. (grad.) H. Herde

### Racing categories, classes and formulas

F. Jüttner

### Records

H. Chr. Graf Seherr-Thoss, München


## 308 Clutches

The following relationships exist between torque  $T_p$  or power  $P_p$ , angular velocity  $\omega_p$  of the pump, diameter  $D$  of the Foettinger coupling and density  $\rho$  of the operating fluid:

$$T_p = \rho \lambda \omega_p^2 D^5$$

$$P_p = \rho \lambda \omega_p^3 D^5$$

The coefficient of performance  $\lambda$  (dimensionless) is particularly dependent on the speed ratio between the turbine and pump  $n_2/n_1$ , as well as on the design (see graph).




Coefficient of performance  $\lambda$  of Foettinger coupling  
a with inner torus  
b with baffle plate

## Automatic clutches

Operating the clutch and gearshifting are the most tiring part of motoring. Efforts have thus been made to simplify operation by means of automatic clutches. (Gearshifting is still required but clutch operation and a clutch pedal are dispensed with).

Automatic clutches have separate or combined starting and shifting clutches. The following are employed as the starting clutch: centrifugal clutch, Foettinger coupling (today mainly the Foettinger torque converter), hydraulically actuated servo-clutch. Features common to all starting clutches: at engine idling there is no or only negligible torque transmission; clutch torque increases with increasing engine speed. Shifting clutches are operated pneumatically, hydraulically or electrically, clutch control being mostly electrical (via valves) from the gear shift lever.

Example of an automatic clutch (see diagram): crankshaft  $W$  is connected with Foettinger torque converter  $F$ . Stall-torque with turbine stationary (vehicle stationary) 2...2.4. (In this way first gear can usually be dispensed with). The torque converter oil circuit is fed by a special, engine-driven oil pump  $Z$  (possibly via heat exchanger). Gearshifting performed manually. Touching the gearshift lever closes contact  $a$ , which opens valve  $c$  via solenoid  $b$ . Vacuum from intake manifold  $d$  opens clutch  $K$  via servo-motor  $f$ . After releasing the gearshift lever the solenoid is de-energized and the clutch is engaged quickly or gently (via valves  $m$  and  $n$ ), depending on the pressure in the carburetor throat.

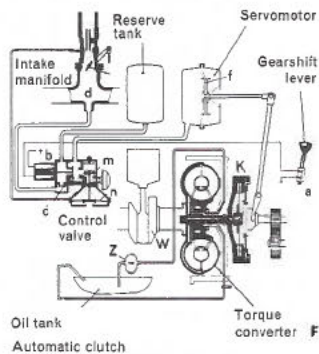

## Transmission

The internal combustion engine delivers a basically constant torque over the entire speed range, and hence increasing power as the rotational speed increases. A directly driven vehicle would provide only little acceleration and exhibit unsatisfactory climbing ability (see graph, direct drive). For this reason a transmission with variable ratio is provided between the engine and vehicle. The function of the transmission is to provide the maximum engine power which is present at only one engine speed, at any driving speed.


The ideal tractive force hyperbola (line of constant power in the performance map, see diagram) can be attained only approximately in practice: in the case of infinitely variable transmissions because of the lower efficiency, and in the case of step-by-step gearboxes (in spite of better efficiency) because of the steps. How good such adaptation is in the case of the latter transmissions depends on the engine torque characteristics and the number of gears. The torque of spark-ignition engines decreases in the upper speed range (favorable, "buffalo-back characteristics"), hence it adapts better to the tractive force hyperbola with fewer transmission steps. In the case of diesel engines the torque is usually virtually constant, and the maximum power is available at one engine speed only. Having a high number of transmission steps still does not completely rule out these discontinuities. The number of steps is a compromise between optimum utilization and simplification of operation.

Transmissions are mostly designed with varying steps: closely spaced upper driving gears, widely spaced lower acceleration gears. The ratio of the first gear is determined either by the adhesive force of the driving wheels or the maximum gradient taken as a basis (mostly greater than 35%).

## Step-by-step gearbox

In such transmissions a number of ratios are formed between the input (drive) and output shafts by means of gears, which can be incorporated in the power train either manually or by servo assistance.

## Transmissions 309

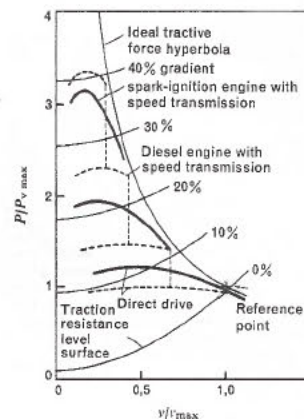

Performance map

## Manual shifted transmissions

These are mostly layshaft transmissions. The power flow passes from the clutch driven plate via the drive shaft and constant-mesh driving gears to the layshaft and on to the output shaft via the engaged gear pair. In reverse gear the normal direction of rotation is reversed via a third intermediate shaft. Transmissions for passenger cars have 3...5 gears (mainly 4) and for commercial vehicles 4...12 gears (mostly 5...6). Transmissions with more than 6 gears are mostly of the range-change (auxiliary-range) type, where the gear pairs are used several times. Advantage: fewer gears, disadvantage: sometimes two gear pairs have to be engaged simultaneously.

"Shifting", i.e. establishing the power flow via a gear pair, is performed manually by means of sliding gears or a dog clutch.

## Sliding gears

Least expensive, straight-toothed, no axial thrust, but noisy and difficult to operate. In the case of passenger cars used only for reverse and occasionally first gear; only found in lower gears of trucks (use decreasing).