

(12) EX PARTE REEXAMINATION CERTIFICATE (8207th)

United States Patent

Mattaway et al.

(10) Number: US 6,009,469 C1

(45) Certificate Issued: May 10, 2011

(54) GRAPHIC USER INTERFACE FOR INTERNET TELEPHONY APPLICATION

- (75) Inventors: Shane D. Mattaway, Boca Raton, FL
 (US); Glenn W. Hutton, Miami, FL
 (US); Craig B. Strickland, Tamarac, FL
 (US)
- (73) Assignee: Net2Phone, Inc., Newark, NJ (US)

Reexamination Request:

No. 90/010,422, Feb. 26, 2009

Reexamination Certificate for:

Patent No.:	6,009,469
Issued:	Dec. 28, 1999
Appl. No.:	08/721,316
Filed:	Sep. 25, 1996

Related U.S. Application Data

- (63) Continuation-in-part of application No. 08/533,115, filed on Sep. 25, 1995, now Pat. No. 6,108,704.
- (60) Provisional application No. 60/025,415, filed on Sep. 4, 1996, and provisional application No. 60/024,251, filed on Aug. 21, 1996.

(51) Int. Cl.

H04M 1/72	(2006.01)
H04M 1/65	(2006.01)
H04M 1/66	(2006.01)

- (58) **Field of Classification Search** None See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,313,035 A	1/1982	Jordan et al.
4,332,982 A	6/1982	Thomas
4,410,765 A	10/1983	Hestad et al.
4,423,414 A	12/1983	Bryant et al.
4,446,519 A	5/1984	Thomas
4,450,554 A	5/1984	Steensma et al.

4,468,529 A	8/1984	Samuel et al.	
4 491 693 4	1/1085	Sano et al	

4,491,693	Α	1/1985	Sano et al.
4,528,659	Α	7/1985	Jones, Jr.
4,589,107	А	5/1986	Middleton et al.

(Continued)

FOREIGN PATENT DOCUMENTS

AU	200059377 A1	11/2000
AU	200059378 A1	11/2000
AU	200059379 A1	11/2000
EP	0455402 A2	11/1991
EP	0497022 A1	5/1992

(Continued)

OTHER PUBLICATIONS

The Open Group, Technical Standard, *Protocols for X/Open PC Interworking: SMB, Version 2*, 1992, pp. ii–xvi and pp. 1–516.

Zellweger, Polle T., et al., *Etherphone: Collected Papers* 1987–1988, Xerox Corporation, May 1989.

Vin, Herrick M., et al, Multimedia Conferencing in the Etherphone Environment, Oct. 1991, pp. 69-79.

Droms, R., Dynamic Host Configuration Protocol, RFC 1531, Bucknell University, Oct. 1993, pp. 1-39.


U.S. Patent No. 5533110 issued to Pinard, et al. ("the Pinard patent").

(Continued)

Primary Examiner-Alexander J Kosowski

(57) ABSTRACT

A communication utility for establishing real-time, point-topoint communications between processes over a computer network includes apparatus for querying a server as to the network protocol address of another client process, and apparatus for directly establishing a communication link with the client process upon receipt of the network protocol address from the server. In one embodiment, the utility includes a sophisticated user interface having features similar to typical telephony hardware but implementing greater flexibility with software.

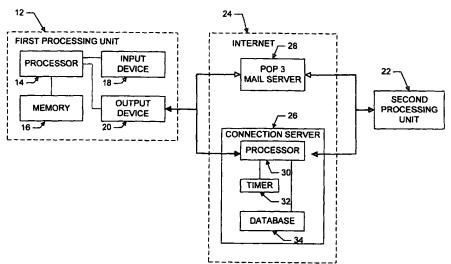

US 6,009,469 C1 Page 2

• • • •

•

OTHER PUBLICATIONS

•

01	HER PU	BLICATIONS
4,594,477 A	6/1986	Noirot
4,598,397 A	7/1986	Nelson et al.
4,602,132 A	7/1986	Nagatomi et al.
4,630,262 A	12/1986	Callens et al.
4,652,703 A	3/1987	Lu et al.
4,653,090 A	3/1987	Hayden
4,654,483 A 4,658,093 A	3/1987	Imai et al.
4,694,492 A	4/1987 9/1987	Hellman Wirstrom et al.
4,706,274 A	11/1987	Baker et al.
4,740,963 A	4/1988	Eckley
4,754,479 A	6/1988	Bicknell et al.
4,755,985 A	7/1988	Jayapalan et al.
4,756,020 A	7/1988	Fodale
4,759,056 A	7/1988	Akiyama
4,782,485 A 4,799,153 A	11/1988 1/1989	Gollub Hann et al.
4,800,488 A	1/1989	Agrawal et al.
4,809,271 A	2/1989	Kondo et al.
4,813,040 A	3/1989	Futato
4,819,228 A	4/1989	Baran et al.
4,821,263 A	4/1989	Lundh
4,823,374 A	4/1989	Verlohr
4,827,411 A 4,829,554 A	5/1989	Arrowood
4,829,554 A 4,837,797 A	5/1989 6/1989	Barnes et al.
4,866,704 A	9/1989	Freeny, Jr. Bergman
4,866,732 A	9/1989	Carey et al.
4,873,715 A	10/1989	Shibata
4,887,265 A	12/1989	Felix
4,890,282 A	12/1989	Lambert et al.
4,899,333 A	2/1990	Roediger
4,899,373 A 4,912,705 A	2/1990	Lee et al.
4,912,705 A 4,914,571 A	3/1990 4/1990	Paneth et al. Baratz et al.
4,928,306 A	5/1990	Biswas et al.
4,932,022 A	6/1990	Keeney et al.
4,953,159 A	8/1990	Hayden
4,962,449 A	10/1990	Schlesinger
4,981,371 A	1/1991	Gurak et al.
4,989,230 A 4,995,074 A	1/1991 2/1991	Gillig et al. Goldman et al.
5,031,089 A	7/1991	Liu et al.
5,036,513 A	7/1991	Greenblatt
5,040,141 A	8/1991	Yazima et al.
5,056,140 A	10/1991	Kimbell
5,065,425 A	11/1991	Lecomte et al.
5,107,443 A	4/1992	Smith et al.
5,109,403 A 5,113,499 A	4/1992 5/1992	Sutphin Anknow at al
5,121,385 A	6/1992	Ankney et al. Tominaga et al.
5,127,001 A	6/1992	Steagall et al.
5,127,003 A	6/1992	Doll, Jr. et al.
5,130,985 A	7/1992	Kondo et al.
5,134,648 A	7/1992	Hochfield et al.
5,136,716 A	8/1992	Harvey et al.
5,150,410 A 5,153,908 A	9/1992	Bertrand
5,153,908 A 5,155,726 A	10/1992 10/1992	Kakizawa et al. Spinney et al.
5,157,592 A	10/1992	Walters
5,159,592 A	10/1992	Perkins
5,164,988 A	11/1992	Matyas et al.
5,185,860 A	2/1993	Wu
5,187,591 A	2/1993	Guy et al.
5,195,086 A	3/1993	Baumgartner et al.
5,212,789 A 5,214,650 A	5/1993 5/1993	Rago Repper et al
5,220,599 A	5/1993 6/1993	Renner et al. Sasano et al.
5,241,594 A	8/1993	Kung
5,241,625 A	8/1993	Epard et al.
		-

5,247,620	Α	9/1993	Fukuzawa et al.
5,249,290	Α	9/1993	Heizer
5,274,635	Α	12/1993	Rahman et al.
5,282,197	Α	1/1994	Kreitzer
5,283,819	А	2/1994	Glick et al.
5,287,103	Α	2/1994	Kasprzyk et al.
5,301,324	Α	4/1994	Dewey et al.
5,305,312		4/1994	Fornek et al.
5,315,705	A	5/1994	Iwami et al.
5,319,705	Α	6/1994	Halter et al.
5,325,524	A	6/1994	Black et al.
5,327,486	Α	7/1994	Wolff et al.
5,329,619		7/1994	Page et al.
5,335,276		8/1994	Thompson et al.
5,341,374		8/1994	Lewen et al.
5,347,632		9/1994	Filepp et al.
5,377,260		12/1994	Long
5,388,213		2/1995	Oppenheimer et al.
5,396,485 5,402,477		3/1995 3/1995	Ohno et al. McMahan et al.
5,402,528		3/1995	Christopher et al.
5,408,526		4/1995	McFarland et al.
5,408,619		4/1995	Oran
5,410,754		4/1995	Favreau et al.
5,425,028		6/1995	Britton et al.
5,428,608		6/1995	Freeman et al.
5,434,913		7/1995	Tung et al.
5,440,547	Α	8/1995	Easki et al.
5,440,632	А	8/1995	Bacon et al.
5,446,891	Α	8/1995	Kaplan et al.
5,446,919		8/1995	Wilkins
5,452,289		9/1995	Sharma et al.
5,459,864		10/1995	Brent et al.
5,461,611		10/1995	Drake, Jr. et al.
5,461,668		10/1995	Zdenek et al.
5,467,388 5,469,500		11/1995 11/1995	Redd et al. Satter et al.
5,473,531		12/1995	Flora-Holmquist et al.
5,474,741		12/1995	Mikeska et al.
5,474,819		12/1995	Chambers et al.
5,475,819		12/1995	Miller et al.
5,481,720	Α	1/1996	Loucks et al.
5,483,524	A	1/1996	Lev et al.
5,487,100		1/1996	Kane
5,491,800		2/1996	Goldsmith et al.
5,499,295		3/1996	Cooper
5,500,890		3/1996	Rogge et al.
5,502,727		3/1996	Catanzaro et al.
5,515,508 5,517,432	A	5/1996	Pettus et al. Chandra et al.
5,528,671	A	5/1996 6/1996	Ryu et al.
5,533,102	A	7/1996	Robinson et al.
5,533,110		7/1996	Pinard et al.
5,544,164		8/1996	Baran
5,544,322		8/1996	Cheng et al.
5,546,448	Α	8/1996	Caswell et al.
5,546,452		8/1996	Andrews et al.
5,548,636		8/1996	Bannister et al.
5,548,694		8/1996	Frisken Gibson
5,555,290		9/1996	McLeod et al.
5,563,882 5,572,643		10/1996 11/1996	Bruno et al.
5,574,774		11/1996	Judson Ahlberg et al.
5,574,934		11/1996	Mirashrafi et al.
5,581,522		12/1996	Sibuya et al.
5,581,702		12/1996	McArdle et al.
5,586,257		12/1996	Perlman
5,586,260	Α	12/1996	Hu
5,604,737		2/1997	Iwami et al.
5,606,669		2/1997	Bertin et al.
5,608,786	A	^{3/199} Ci	iscodonExhibit 1003 - Page 2
			5

5,614,940 A	3/1997	Cobbley et al.
5,615,257 A	3/1997	Pezzullo et al.
5,619,557 A	4/1997	Van Berkum
5,621,789 A	4/1997	McCalmont et al.
5,623,483 A	4/1997	Agrawal et al.
5,623,490 A	4/1997	Richter et al.
5,623,605 A	4/1997	Keshav et al.
5,625,407 A	4/1997	Biggs et al.
5,627,978 A	5/1997	Altom et al.
5,636,282 A	6/1997	Holmquist et al.
	6/1997	_ •
		Saxe
5,642,156 A	6/1997	Saiki
5,644,629 A	7/1997	Chow
5,649,194 A	7/1997	Miller et al.
5,651,006 A	7/1997	Fujino et al.
5,652,759 A	7/1997	Stringfellow, Jr.
5,655,120 A	8/1997	Witte et al.
5,659,542 A		Bell et al.
	8/1997	
5,659,596 A	8/1997	Dunn
5,668,862 A	9/1997	Bannister et al.
5,671,412 A	9/1997	Christiano
5,671,428 A	9/1997	Muranaga et al.
5,675,507 A	10/1997	Bobo
5,680,392 A	10/1997	Semaan
5,684,800 A	11/1997	Dobbins et al.
5,684,951 A	11/1997	Goldman et al.
5,689,553 A	11/1997	
		Ahuja et al.
, ,	11/1997	Ludwig et al.
5,692,180 A	11/1997	Lee
5,692,192 A	11/1997	Sudo
5,694,594 A	12/1997	Chang
5,701,463 A	12/1997	Malcolm
5,708,422 A	1/1998	Blonder et al.
5,708,655 A	1/1998	Toth et al.
5,710,884 A	1/1998	Dedrick
5,717,923 A	2/1998	Dedrick
5,719,786 A	2/1998	Nelson et al.
	2/1998	Logan et al.
5,724,092 A	3/1998	Davidsohn et al.
5,724,412 A	3/1998	Srinivasan
5,724,506 A	3/1998	Cleron et al.
5,724,648 A	3/1998	Shaughnessy et al.
5,726,984 A	3/1998	Kubler et al.
5,729,748 A	3/1998	Robbins et al.
5,732,078 A	3/1998	Arango
5,734,828 A	3/1998	Pendse et al.
5,736,968 A	4/1998	Tsakiris
5,742,668 A	4/1998	
5,742,675 A		Pepe et al.
	4/1998	Kilander et al.
5,742,762 A	4/1998	Scholl et al.
5,742,905 A	4/1998	Pepe et al.
5,745.642 A	4/1998	Ahn
5,745,702 A	4/1998	Morozumi
5,745,711 A	4/1998	Kitahara et al.
5,751,712 A	5/1998	Farwell et al.
5,751,961 A	5/1998	Smyk
5,754,636 A	5/1998	Bayless et al.
5,754,939 A	5/1998	Herz et al.
5,758,110 A	5/1998	Boss et al.
5,758,257 A	5/1998	Herz et al.
5,761,606 A	6/1998	Wolzien
5,764,736 A	6/1998	Shachar et al.
5,764,741 A	6/1998	Barak
5,764,756 A	6/1998	Onweller
5,767,897 A	6/1998	Howell
5,768,527 A	6/1998	Zhu et al.
5,771,355 A	6/1998	Kuzma
5,774,656 A	6/1998	Hattori et al.
5,774,660 A		
	6/1998	Brendel et al.
5,774,666 A		
5 770 101 4	6/1998	Portuesi
5,778,181 A	6/1998 7/1998	Hidary et al.

· ·

5,778,187	Α	7/1998	Monteiro et al.
5,784,564	А	7/1998	Camaisa et al.
5,784,619	A	7/1998	Evans et al.
5,787,253	A	7/1998	McCreery et al.
5,790,548		8/1998	Sistanizadeh et al.
5,790,792		8/1998	Dudgeon et al.
5,790,793		8/1998	Higley
5,790,803		8/1998	Kinoshita et al.
5,793,365		8/1998	Tang et al.
5,794,018		8/1998	Vrvilo et al.
5,794,257		8/1998	Liu et al.
5,796,394		8/1998	Wicks et al.
5,799,063		8/1998	Krane
5,799,072		8/1998	Vulcan et al.
5,799,150 5,805,587		8/1998 9/1998	Hamilton et al. Norris et al.
5,805,810		9/1998	Maxwell
5,805,822		9/1998	Long et al.
5,809,233		: 9/1998	Shur
5,812,819		9/1998	Rodwin et al.
5,815,665		9/1998	Teper et al.
5,816,919	Α	10/1998	Scagnelli et al.
5,818,510	A	10/1998	Cobbley et al.
5,818,836		10/1998	DuVal
5,819,084		10/1998	Shapiro et al.
5,822,524		10/1998	Chen et al.
5,825,865 5,828,837		10/1998	Oberlander et al. Fikaland
5,828,843		· 10/1998 10/1998	Eikeland Grimm et al.
5,828,846		10/1998	Kirby et al.
5,832,119		11/1998	Rhoads
5,832,240		11/1998	Larsen et al.
5,835,720		11/1998	Nelson et al.
5,835,723	Α	11/1998	Andrews et al.
5,835,725	А	11/1998	Chiang et al.
5,838,683		11/1998	Corley et al.
5,838,970		11/1998	Thomas
5,841,769		11/1998	Okanoue et al.
5,842,216		11/1998	Anderson et al.
5,844,978 5,848,143		12/1998 12/1998	Reuss et al. Andrews et al.
5,848,396		12/1998	Gerace
5,854,901		12/1998	Cole et al.
5,857,072		1/1999	Crowle
5,864,684		1/1999	Nielsen
5,867,156	Α	2/1999	Beard et al.
5,867,654	А	2/1999	Ludwig et al.
5,867,665		2/1999	Butman et al.
5,872,850		2/1999	Klein et al.
5,872,922		2/1999	Hogan et al.
5,872,972	A	2/1999	Boland et al.
5,883,956 5,884,032	A	3/1999	Le et al. Bateman et al.
5,884,032		3/1999 3/1999	Butman et al.
5,884,077	A	3/1999	Suzuki
5,890,162	A	3/1999	Huckins
5,892,825	Α	4/1999	Mages et al.
5.892,903	Α	4/1999	Klaus
5,892,924	Α	4/1999	Lyon et al.
5,903,721		5/1999	Sixtus
5,903,723		5/1999	Beck et al.
5,903,727		5/1999	Niclsen
5,905,719		5/1999	Arnold et al.
5,905,736 5,905,865		5/1999 5/1999	Ronen et al. Palmer et al.
5,905,805		5/1999 5/1999	DeSimone et al.
5,915,001	Â	6/1999	Uppaluru
5,923,736		7/1999	Shachar
5,924,093		7/1999	Potter et al.
5.925,103		7/1999	Magallanes et al.
5,928,327	Α	7/1999	isco ^{-et} exhibit 1003 - Page 3
		C	

5 0 20 0 40 1	-	
5,929,849 A	7/1999	Kikinis
5,937,162 A	8/1999	Funk et al.
5,946,386 A	8/1999	Rogers et al.
5,946,629 A	8/1999	Sawyer et al.
5,950,123 A	9/1999	Schwelb et al.
5,950,172 A	9/1999	Klingman
5,953,350 A	9/1999	Higgins
5,956,482 A	9/1999	Agraharam et al.
5,956,485 A	9/1999	Perlman
5,961,584 A	10/1999	Wolf
5,964,872 A	10/1999	Turpin
5,969,967 A	10/1999	Aahlad et al.
5,982,774 A	11/1999	Foladare et al.
	11/1999	
5,983,005 A 5,999,965 A	12/1999	Monteiro et al.
		Kelly
	12/1999	Leung
	12/1999	Slezak
	12/1999	Mattaway et al.
6,014,379 A	1/2000	White et al.
6,014,710 A	1/2000	Talluri et al.
6,016,393 A	1/2000	White et al.
6,018,768 A	1/2000	Ullman et al.
6,018,771 A	1/2000	Hayden
6,021,126 A	2/2000	White et al.
6,026,086 A	2/2000	Lancelot et al.
6,026,425 A	2/2000	Suguri et al.
6,029,175 A	2/2000	Chow et al.
6,031,836 A	2/2000	Haserodt
6,032,192 A	2/2000	Wegner et al.
6,041,345 A 6,047,054 A	3/2000	Levi et al.
.,	4/2000	Bayless et al.
6,047,292 A 6,055,594 A	4/2000	Kelly et al.
6,061,716 A	4/2000 5/2000	Lo et al. Moncreiff
6,064,975 A	5/2000	Moon et al.
6,065,048 A	5/2000	Higley
6,067,350 A	5/2000	Gordon
6,069,890 A	5/2000	White et al.
6,085,217 A	7/2000	Ault et al.
6,101,182 A	8/2000	Sistanizadeh et al.
6,105,053 A	8/2000	Kimmel et al.
6,108,704 A	8/2000	Hutton et al.
6,122,255 A	9/2000	Bartholomew et al.
6,125,113 A	9/2000	Farris et al.
6,131,121 A	10/2000	Mattaway et al.
6,137,877 A	10/2000	Robin et al.
6,141,341 A	10/2000	Jones et al.
6,151,643 A	11/2000	Cheng et al.
6,154,445 A	11/2000	Farris et al.
6,163,316 A	12/2000	Killian
6,173,044 B1	1/2001	Hortensius et al.
6,178,453 B1	1/2001	Mattaway et al.
6,181,689 B1	1/2001	Choung et al.
6,185,184 B1	2/2001	Mattaway et al.
6,188,677 B1	2/2001	Oyama et al.
6,195,357 B1	2/2001	Polcyn
6,198,303 B1	3/2001	Rangasayee
6,205,135 B1	3/2001	Chinni et al.
6,212,625 B1	4/2001	Russell
6,226,678 B1	5/2001	Mattaway et al.
6,226,690 B1	5/2001	Banda et al.
6,240,444 B1	5/2001	Fin et al.
6,243,373 B1	6/2001	Turock
6,266,539 B1	7/2001	Pardo
6,275,490 B1	8/2001	Mattaway et al.
6,282,272 B1	8/2001	Noonen et al.
6,289,369 B1	9/2001	Sundaresan
6,300,863 B1 6,338,078 B1	10/2001	Cotichini et al.
	1/2002	Chang et al.
	1/2002	Foladare et al.
6,343,220 BI	1/2002	Van Der Salm

6,347,085	B2	2/2002	Kelly
6,347,342	B1	2/2002	Marcos et al.
6,360,266	B 1	3/2002	Pettus
6,377,568	B1	4/2002	Kelly
6,385,583	B1	5/2002	Ladd et al.
6,393,455	B1	5/2002	Eilert et al.
6,427,064	B1	7/2002	Henderson
6,434,552	B1	8/2002	Leong
6,463,565	B1	10/2002	Kelly
6,477,586	B1	11/2002	Achenson et al.
6,513,066	B1	1/2003	Hutton et al.
6,594,254	B1	7/2003	Kelly
6,687,738	B1	2/2004	Hutton
6,701,365	B1	3/2004	Hutton
6,704,802	B1	3/2004	Finch et al.
6,728,784		4/2004	Mattaway
6,772,335		8/2004	Curtis et al.
6,829,645	B1	12/2004	Hutton
6,888,836		5/2005	Cherkasova
6,909,708	B1	6/2005	Krishnaswamy et al.
2003/0050075	A1	3/2003	Rangarajan et al.
	A1	10/2004	Deeds
2005/0032435	A1	2/2005	Tischer et al.
2005/0130611	A1	6/2005	Lu et al.

FOREIGN PATENT DOCUMENTS

EP	0518596	12/1992
EP	0556012 A2	8/1993
EP	0559047	9/1993
EP	0581722	2/1994
ĒΡ	0597691	5/1994
EP	0632672	1/1995
EP	0648038	4/1995
EP	1379039 A2	1/2004
EP	1379050 A2	1/2004
GB	2283645	5/1995
JP	5944140	3/1984
JP	63-131637	3/1988
JP	6-62020	3/1994
wo	WO-9003074	3/1990
WO	WO-9219054	10/1992
WO	WO-9422087	9/1994
wo	WO-9714234	4/1997
wo	WO-9811704	3/1998

OTHER PUBLICATIONS

VocalChat User's Guide Version 2.0, Vocaltec, 1994, pp. 1-77.

README, VocalChat Version 2.02 & VocalChat WAN Version 2.02, Vocaltec, Jun. 1994, pp. 1–3.

VocalChat 1.01 Network Information, Vocaltec, 1994, pp. 1-10.

VocalChat Information, Vocaltec, 1994, pp. 1-31.

VocalChat Troubleshooting, Vocaltec, 1994, pp. 1-101.

VocalChat GTI Information file, believed to be included with VocalChat GTI version 2.12 dated Sep. 1994.

VocalChat GTI README.TXT for Version 2.12 Beta, dated Sep. 1994.

VocalChat GTI Troubleshooting.Inf, believed to be included with VocalChat GTI version 2.12 dated Sep. 1994.

Translation of Japanese Kokai H07-129488 (published May 19, 1995).

David Strom, "Talking Telephony", Windows Sources, Ziff-Davis Publishing Company, Sep. 1996, vol. 4, No. 9, pp. 6, 7, 10, 150–152, 157, 158, 163, 167, 169, 171, 174, 181, 184, 186, 195, 203, 208. Cisco - Exhibit 1003 - Page 4 Emad Farag et al., "Structure and network control of a hierarchical mobile network architecture", IEEE Fourteenth Annual International Phoenix Conference on Computers and Communications, Mar. 1995, ISBN: 0–7803–2492–7, pp. 671–677.

English translation of JP-06-62020 (dated Mar. 4, 1994).

Huanxu Pan et al., "Analysis of a CCSS#7 Network supporting database services", IEEE International Conference on Information Engineering, Sep. 1993, ISBN: 0–7803– 1445–X, pp. 193–197, vol. 1.

John E. Goodwin, Project Gutenberg Alpha Edition of Email 101, http://metalab.unc.edu/pub/docs/books/gutenberg/ etext93/email025.txt, Jul. 1993.

Junichi Kimura, et al. "Voice/Data Multiplexing Transmission Methods", Kokai Japanese Patent, Kokai Sho 59–44140, pp. 205–215, with English Abstract, English Translation, pp. 1–24.

Mark R. Brown et al. "Special Edition: Using Netscape 2", Que Publishing, 1995, ISBN 0-7897-0612-1, pp. 7-35, 37-56, 78, 83, 176, 301-320, 393, 395-467, 469-506.

Preston Gralla, "How the Internet Works", Ziff–Davis Press, Emeryville, CA, c1997, pp. 34–37, 202–205, 214–215 and 272–275, ISBN 1–56276–552–3.

After Downsizing: Overcoming Client-Server Chaos (May 21, 1994).

Barrow Street Research report on New Paradigm Software Corp. (dated Sep. 20, 1995).

Camelot Corps Shining Internet Dream /Draws Skeptics (Aug. 95).

DigiPhone and Camelot Documents.

DigiPhone Documents (including Q and A) (prior to Sep. 1995).

DigiPhone Documents (prior to Sep. 1995).

DigiPhone for Mac (1996).

Electric Magic Beta Tester Agreement dated Jul. 21, 1995 (SKYPE-N2P01609523).

Electric Magic Company Releases NetPhone 1.2 and Net-Pub Server (dated Jun. 8, 1995).

Electric Magic Information (May 1995).

Electric Magic Notebooks (prior to Sep. 1995).

Electric Magic Notes (including references to Apr. 18, 1995) and patent pending.

Electric Magic Notes (including references to DigiPhone) (prior to Sep. 1995).

Electric Magic Press Release (dated Mar. 13, 1995).

Google Groups comp.dcom.videoconf posting (dated Jul. 5, 1995).

intern.tex (dated Aug. 30, 1994).

Jabra—Corporate and Product Backgrounder (Apr. 19, 1995).

Jabra Ear Phone Common Questions and Answers.

Jabra Ear phone PC, 1995.

Jabra Streamline Ear Phone, 1993.

List of source modules in NetPhone (dated Oct. 10, 1995).

MagicPhone Distribution Agreement (Aug. 1995).

Maven README (including 1994 copyright notice).

Net as Phone (Internet World Jul. 1995).

Net phone ad (with Jabra fax line) (May 1995).

NetPhone 1.1 User Manual (including date Jan. 9, 1995). NetPhone Advertisement (Aug. 1995).

NetPhone Digital User Manual (dated Feb. 26, 1995).

NetPhone gives your Mac voice over the Internet (Inside the Internet—Jun. 1995).

NetPhone Tasks and Plans (dated Jan.-Feb. 1995).

Open Systems Today, Feb. 20, 1995.

Order for NetPhone version 1.2 labels (dated Jun. 6, 1995). Phoneless Phoning Apr. 2, 1995.

PowWow Chunked Protocol Specification, Last edited Mar. 12, 1999.

PowWow Native Protocols, last updated Dec. 8, 1998.

Roadmap for the Internet (Mar. 1995).

SlipMagic Ad for MacZone (dated Sep. 28, 1995) for selling product.

The Mac Zone (Catalog) dated 1995.

Two-way voice calls over the Internet (Nov. 21, 1994).

Ubique documents relating to Virtual Places Products (dated 1995 and Mar. 1995).

Ubique Ships Virtual Places Client and Server (dated Mar. 20, 1995).

Ubique, Ltd. Fact Sheet (referencing NetPhone codecs and Vocaltec) (date unknown).

Welcome to NetPhone Demo (includes copyright date 1994).

"Circuit Switching", Ericsson, last published Jul. 5, 2001, found at http://www.ericsson.com/multiservicenetworks/circuitswitching/axe/ printed on Aug. 1, 2001, 2 pages.

"Data Communication Over the Telephone Network", International Telecommunication Union, CCITT The International Telegraph and Telephone Consultative Committee, Blue Book, vol. VIII—Fascicle VIII.1, IXth Plenary Assembly, Melbourne, Nov. 14–25, 1988, pp. 296–370.

"Full Duplex Speakerphone", IBM Technical Disclosure Bulletin, vol. 29, No. 12, May 1987, pp. 5599–5602.

"ICL OPD—One Per Desk", Issue Aug. 1, 1990, A Comprehensive Technical Information Document (24 pages).

"Information Processing Techniques Program. vol. II. Wideband Integrated Voice/Data Technology" Semiannual Technical Summary Report, Massachusetts Institute of Technology Lexington, MA, Oct. 1, 1977–Mar. 31, 1978, Issued Aug. 31, 1978, pp. 1–25 and 27–31, ADA067014.

"Integrated Voice/Data PABX Communications", IBM Technical Disclosure Bulletin, Sep. 1986, http://patents.ibm.com.

"Level 1–5 of 65 Stories" 1990 Network World, Inc., Apr. 16, 1990, pp. 114–115.

"Multi–Service Networks", Ericsson, last published Jun. 27, 2001, found at http://www.ericsson.com/multiservicenet-works/circuitswitching/ printed on Aug. 1, 2001, 2 pages.

"The History of TPC.INT", Jan. 15, 1999, 2 pages, found at http://www.tpc.int/faq/history.html printed on Aug. 8, 2002.

A. A. Kapauan, et al. "Wideband Packet Access for Workstations: Integrated Voice/Data/Image Services on the UNIX+

PC", IEEE Global Telecommunications Conference, Houston, Texas, Dec. 1–4, 1986, Conference Record vol. 3, pp. 1439–1441.

Ahrens, Richard L., "Frequently-Asked Questions about Internet VoiceChat 1.1 FAQ Version: 1.0", 1994, 6 pages.

Andy Hopper "Pandora—An Experimental System for Multimedia Applications", Operating Systems Review, Jan. 12, 1990, pp. 1–16.

Bennett, Geoff, "Designing TCP/IP Internetworks", Chapter 11, pp. 290, 291 and 323, Van Nostrand Reinhold, 1995.

Bernard Gold "Digital Speech Networks", Proceedings of the IEEE, vol. 65, No. 12, Dec. 1977, pp. 1636–1658.

Bill Newman "An ISDN Data and Voice Terminal Based on a Personal Computer", Globecom'85, IEEE Global Telecommunications Conference, Conference Record vol. 3,

New Orleans, Louisiana, Deci325 1985hppit10031057age 5

Borland, John, "Technology uses one number to find you on any device", May 17, 2001, 3 pages, found at http://news. cnet.com/news/0–1004–201–5939191–0.html.

C. Malamud et al., "Principles of Operation for the TPC.INT Subdomain: General Principles and Policy", RFC 1530, Oct. 1993, pp. 1–7.

C. Malamud et al., "Principles of Operation for the TPC.INT Subdomain: Remote Printing—Administrative Policies", RFC 1529, Oct. 1993, pp. 1–5.

C. Malamud et al., "Principles of Operation for the TPC.INT Subdomain: Remote Printing—Technical Procedures", RFC 1528, Oct. 1993, pp. 1–12.

C. Topolcic "Experimental Internet Stream Protocol, Version 2 (ST-II)", Request for Comments 1190, Oct. 1990, pp. 1–148.

C. Yang, "INETPhone: Telephone Services and Servers on Internet", Request for Comments 1789, pp. 1–6, Apr. 1995. Carl A. Sunshine, et al. "Broad–Band Personal Computer LAN's", IEEE Journal on Selected Areas in Communications, vol. SAC–3, No. 3, May 1985, pp. 408–415.

Cindy Mueller et al., "ATD Data Services", http://www.iita.ucar.edu/ws/datawkshop/Abstract-ATD.html, Jan. 5, 1995, 2 pages.

Clifford J. Weinstein, et al. "Experience with Speech Communication in Packet Networks" IEEE Journal on Selected Areas in Communications, vol. SAC-1, No. 6, (ISSN 0733-8716), Dec. 1983, pp. 963–980.

D. Adolphs, et al. "Adapters for the Public ISDN", pp. 72-80.

D. Perkins "The Point-to-Point Protocol for the Transmission of Multi-Protocol Datagrams Over Point-to-Point Links", Request for Comments 1171, ftp://ftp.isi.edu/in-notes/rfc1171.txt, Jul. 1990, pp. 1–48.

D.C. Swinehart et al., "Adding Voice to an Office Computer Network", IEEE Global Telecommunications Conference, Nov. 28–Dec. 1, 1983, Conference Record vol. 1 of 3, pp. 392–398.

Dale Gulick et al., "Interface the ISDN to Your PC With a Voice/Data Board", Design Applications, 2328 Electronic Design, 35 (1987) Dec. 10, No. 29, Hashbrouck Heights, NJ, USA, pp. 85–88, XP 000004313.

Daniel C. Swinehart "Telephone Management in the Etherphone System", IEEE/IEICE Global Telecommunications Conference '87, Conference Record vol. 2 of 3, Nov. 15–18, 1987, pp. 1176–1180.

Danny Cohen "A Network Voice Protocol NVP-II", Apr. 1, 1981, pp. 1–68.

Danny Cohen "Packet Communication of Online Speech", AFIPS Conference Proceedings, 1981 National Computer Conference, May 4–7, 1981, Chicago, Illinois, pp. 169–176. Danny Cohen "Specifications for the Network Voice Protocol (NVP)", Request for Comments 741, Jan. 29, 1976, pp. 1–30.

Don H. Johnson, et al. "A Local Access Network for Packetized Digital Voice Communication", IEEE Transactions on Communications, vol. Com. 29, No. 5, May 1981, pp. 679–688.

Douglas B. Terry and Daniel C. Swinehart, "Managing Stored Voice in the Etherphone System", 1987 ACM 089791-242-X/87/0011/0103, pp. 103-104.

Douglas B. Terry And Daniel C. Swinehart, "Managing Stored Voice in the Etherphone System" ACM Transactions on Computer Systems, vol. 6, No. 1, Feb. 1988, pp. 3–27.

Eve M. Schooler, et al. "A Packet–Switched Multimedia Conferencing System", SIGOIS Bulletin, pp. 12–22.

Gary C. Kessler "ISDN Concepts, Facilities, and Services", McGraw-Hill, Inc., c1990, pp. 224–231, ISBN 0-07-034242-3.

Giulio Barberis, et al. "Coded Speech in Packet-Switched Networks: Models and Experiments" IEEE Journal on Selected Areas in Communications, vol. SAC-1, No. 6, Dec. 1983, pp. 1028–1038.

H. Jonathan Chao, et al. "A Packet Video System Using the Dynamic Time Division Multiplexing Technique", IEEE Global Telecommunications Conference, Houston, Texas, Dec. 1–4, 1988, Conference Record, vol. 3, pp. 0767–0772. H. Opderbeck "Throughput Degredations for Single Packet Messages", Request for Comments 632, ftp://ftp.isi.edu/innotes/rfc632.txt, May 20, 1974, pp. 1–6.

Henning Schulzrinne "Voice Communication Across the Internet: A Network Voice Terminal", Jul. 29, 1992, pp. 1–34.

Hiroshi Kobayashi and Hideaki Haruyama, "Voice, Data and Video Integrated Broadband Metropolitan Area Network", Electronics and Communications in Japan, Part 1, vol. 73, No. 11, 1990, pp. 34–42.

Hiroyuki Ichikawa et al. "High–Speed Packet Switching Systems for Multimedia Communications", IEEE Journal on Selected Areas in Communications, Oct. 1987, vol. SAC–5, No. 8 (ISSN 0733–8716), pp. 1336–1345.

Ian H. Merritt "Providing Telephone Line Access to a Packet Voice Network", University of Southern California, Marina Del Rey. Information Sciences Inst., Feb. 1983, ADA126270.

Implementation of Next–Generation Agent–Dedicated Communications, by Agatsuma et al., Tech Report of IEICE 94–216 (Mar. 1995).

Israel Gitman, et al. "Economic Analysis of Integrated Voice and Data Networks: A Case Study" Proceedings of the IEEE, vol. 66, No. 11, Nov. 1978, pp. 1549–1570.

J. Huelamo, et al. "End User Premises Equipment and Terminals for Broadband Applications", Electrical Communication, vol. 64, No. 2/3, 1990.

J. K. Reynolds et al., Voice File Interchange Protocol (VFIP), Request for Comments 978, ftp://ftp.isi.edu/innotes/ rfc978.txt, Feb. 1986, pp. 1–5.

J. Romkey "A Nonstandard For Transmission of IP Datagrams Over Serial Lines: Slip", Request for Comments 1055, ftp://ftp.isi.edu/in-notes/std/std47.txt, Jun. 1988, pp. 1-6.

James D. Mills, et al. "A data and voice system for the general service telephone network", Proceedings IECON '87, 1987 International Conference on IND. Electronics, Control, and Instrumentation, Cambridge, Massachusetts, Nov. 3–6, 1987.

James W. Forgie "Speech Transmission in Packet–Switched Store–and–Forward Networks", AFIPS Conference Proceedings,1975 National Computer Conference, May 19–22, 1975, Anaheim, California, pp. 137–142.

James W. Forgie "Voice Conferencing in Packet Networks", ICC '80, Conference Record, International Conference on Communications, Seattle, WA, Jun. 8–12, 1980, vol. 1, 80CH1505–6 CSCB, pp. 21.3.1–21.3.4.

Jane's Military Communications 1979–80, pp. 452 and 453. Jane's Military Communications 1985, pp. 585, 546, and 545. Cisco - Exhibit 1003 - Page 6 Jane's Military Communications 1989, Tenth Edition, Edited by John Williamson, ISBN 0710608772, pp. 443, 507, and 512.

Jane's Military Communications 1990–91, Eleventh Edition, Edited by John Williamson, ISBN 0710609000, pp. [30], 264, 357, 398, 406, 450, 454, 456, 560, 572, 573, 814, 815, and 816.

Jane's Military Communications 1992–93, Thirteenth Edition, Edited by John Williamson, ISBN 0710609809, pp. 375, 376, 384, and 704.

Jim Stevens, "Much More Idle Chatter About Reference Models", http://www-mice.cs.ucl.ac.uk/multimedia/misc/ tcp_ip/8709.mm.www/0041.html, Dec. 18, 1987, pp. 1–9.

John Bellamy, "Digital Telephony", c1982 John Wiley & Sons, Inc., pp. 392-397 and 410-412.

K. Sohraby, et al. "ISDN Primary Rate Interface Impact on Performance of Integrated Voice and Data on CSMA/CD Networks—A Measurement and Simulation Study", Globecom '90 IEEE Global Telecommunication Conference & Exhibition, San Diego, California, Dec. 2–5, 1990, vol. 2, pp. 0912–0919.

Ken Sherman "Data Communications—A User's Guide", 3rd Edition, c1981 Prentice–Hall, Inc., pp. 296–307 and 404–407.

Kevin Jeffay, et al. "Kernel Support for Live Digital Audio and Video", pp. 10–21, University of North Carolina at Chapel Hill, Department of Computer Science.

Kyuta Saito, et al. "Voice Packet Communication System for Private Networks", Globecom '89, IEEE Global Telecommunications Conference & Exhibition, Dallas, Texas, Nov. 27–30, 1989, vol. 3, pp. 1874–1878.

Lawrence G. Roberts "The Evolution of Packet Switching", Proceedings of the IEEE, vol. 66, No. 11, Nov. 1978, pp. 1307–1313.

Lin, Hwa-Chun and C.S. Raghavendra, "A Dynamic Load-Balancing Policy With a Central Job Dispatcher (LBC)," IEEE Transactions on Software Engineering, vol. 18, No. 2, Feb. 1992, pp. 148–158.

M. E. Ulug, et al. "Statistical Multiplexing of Data and Encoded Voice in a Transparent Intelligent Network", Fifth Data Communications Symposium, Sep. 27–29, 1977, Snowbird, Utah, pp. 6–14–6–20.

M. Gopalakrishnan, et al. "Integrating Voice and Data SALAN: An Experimtental Local Area Network", Computer Communications, vol. 9, No. 4, Aug. 1986, pp. 186–194 and p. 169.

M.J. Ross "Alternatives for Integrating Voice and Data", 1981 International Switching Symposium, ISS' 81 CIC Montreal, Sep. 21–25, 1981.

Natesa Janakiraman "An Overview of Recent Developments in the Designs and Applications of Customer Premises Switches", IEEE Communications Magazine, Oct. 1985, vol. 23, No. 10, pp. 32–45.

P. Borgnis-Desbordes, et al. "Variable-Speed Data Transmission", IBM Technical Disclosure Bulletin, vol. 27, No. 4A, Sep. 1984, pp. 2269–2270.

P. Venkat Rangan and Daniel C. Swinehart, "Software Architecture for Integration of Video Services in the Etherphone System", IEEE Journal on Selected Areas in Communication, vol. 9, No. 9, Dec. 1991, pp. 1395–1404.

Paul Francis, "Comparison of Geographical and Providerrooted Internet Addressing," Computer Networks and ISDN Systems 27(3)437–448, 1994 (selected paper from INET 94/JENC 5). Paul Gilster, "Internet Navigator", Maruzen Kabushiki-Kaisha (1st Ed.), pp. 473–476, Feb. 28, 1995 (with translation and SOR).

Paul Tsuchiya, Tony Eng, "Extending the IP Internet Through Address Reuse," ACM SIGCOMM Computer Communications Review, 23(1):16–33, Jan. 1993.

Philip H. Reagan, "Is it the PBX or is it the LAN?", Datamation, The Telecom Manager Emerges, Mar. 1984, vol. 30 No. 3, pp. 3–4, 147, 148, 150.

Polle T. Zellweger et al., "An Overview of the Etherphone System and its Applications", 2nd IEEE Conference on Computer Workstations, Mar. 7–10, 1988, pp. 160–168.

R. Braudes et al., "Requirements for Multicast Protocols", Request for Comments 1458, Network Working Group, May 1993, pp. 1–19.

R. W. Meba, et al. "Experiments in Wideband Packet Technology", Digital Communications—New Directions in Switching and Networks, Proceedings of the International Seminar, Zurich, Switzerland, Mar. 11–13, 1986, pp. 135–139.

R.P. McNamara, "Some Considerations of the Voice–Data Capabilities of Broadband Cable Networks", IEEE Digest of Papers Spring CompCon 82, Feb. 22–25, 1982, pp. 312–314. Randy Cole "Packet Voice: When It Makes Sense", Speech Technology, Sep./Oct. 1982, pp. 52–61.

Scott Flinn, "Coordinating Heterogeneous Time-Based Media Between Independent Applications" ACM Multimedia 95—Electronic Proceedings Nov. 5-9, 1995, pp. 1–16.

Shimmi Hattori et al., "Integrated Digital Switching System with Queueing Storage Facility", IEEE Transactions on Communications, vol. Com–30, No. 8, Aug. 1982, pp. 1900–1905, (ISSN 0090–6778).

Steve Oltmanns, et al. "A Voice and Communications System for the IBM PC", Speech Technology, Mar./Apr. 1986, pp. 94–99.

Stuart Cheshire et al., "Internet Mobility 4×4", www.acm.org, 1996, pp. 1–12.

Susan Angebranndt et al., "Integrating Audio and Telephony in a Distributed Workstation Environment", Proceedings of the Summer 1991 USENIX Conference, Jun. 10–14, 1991, Nashville, Tennessee, pp. 419–435.

T. Kamae "Visual Terminals and User Interfaces", FGCS North-Holland, pp. 257-278.

T. Kamae "Voice/Data Integration in the INS Model System and Local Area Networks" IEEE Communications Magazine, Dec. 1986, vol. 24, No. 12, pp. 7–15.

T7540 Digital Telephone Codec, AT&T Microelectronics, Jan. 1991, pp. 1–62 and Data Sheet Addendum, Jul. 1991, 4 pages.

Takashi Yamada, et al. "New Technologies—Multimedia High-throughput X.25 Packet Switching System", NTT Review, vol. 1, No. 2, Jul. 1989, pp. 82–88.

Tamohiro Kawai, Nikkei Communications, No. 202, pp. 29–30, Nikkei BP, Jul. 17, 1995 ("Communication software appears on the Internet") (w/ SOR).

Theodore Bially, et al. "Voice Communication in Integrated Digital Voice and Data Networks", IEEE Transactions on Communications, vol. Com-28, No. 9, Sep. 1980, pp. 1478-1490.

Toru Tsuda, et al. "An Approach to Multi-Service Subscriber Loop System Using Packetized Voice/Data Terminals" ISSLS '78, The International Symposium on Subscriber Loops and Services, Mar. 20–24, 1978, Atlanta, Georgia Conference Records pp. 161–165, was as a service of the service of

Georgia, Conference Record pp. 161 EXhibit 1003 - Page 7

V. Jacobson, et al. "TCP Extension for High-Speed Paths", Request for Comments 1185, ftp://ftp.isi.edu/in-notes/ rfc1185.txt, Oct. 1990, pp. 1-21.

V. Jacobson, et al. "TCP Extensions for High Performance", Request for Comments 1323, ftp://ftp.isi.edu/in-notes/ rfc1323.txt, May 1992, pp. 1-37.

Vinton G. Cerf, "Packet Satellite Technology Reference Sources", Request for Comments 829, Nov. 1982, http:// www.cis.ohio-state.edu/htbin/rfc/rfc829.html, pp. 1-5.

VocalTech Internet Phone (TM) Version 2.5 Readme, VocalTec Ltd., Feb. 1995, 5 pages.

"A Low Cost Solution for: Using your WAN as a Voice Communication Tool" VocalTec White Paper (dated Jun. 3, 1994).

"CyberPhone Announcement" Internet Posting in Newsgroups comp.speech, Jun. 8, 1995.

"CyberPhone!" Internet Posting in Newsgroups comp.speech, Apr. 14, 1995.

"Electric Magic Company Provides Internet Alternative to Long-Distance Calls", Electric Magic Company Press Release (Mar. 13, 1995).

"Electric Magic Company Releases NetPhone 1.2 and Netpub Serve", Electric Magic Company Press Release (Jun. 1995).

"Frequently-Asked Questions about Tribal Voices Pow-Wow" Version 0.34, Mar. 4, 1996.

"Frequently-Asked Questions about Tribal Voices Pow-Wow" Version 0.43, May 1, 1996.

"Frequently-Asked Questions about Tribal Voices Pow-Wow" Version 0.45, May 31, 1996.

"Frequently-Asked Questions about Tribal Voices Pow-Wow" Version 0.47, Jun. 12, 1996.

"Frequently-Asked Questions about Tribal Voices Pow-Wow" Version 0.48, Jun. 25, 1996.

"Frequently-Asked Questions about Tribal Voices Pow-Wow" Version 0.59, Oct. 30, 1996.

"NetPhone Gets Internet Users Talking at Local Rates" MacUser UK, Mar. 3, 1995, p. 27.

"NetPhone Gives Your Mac Voice Over the Internet" Inside the Internet Rocket Science for the Rest of Us. vol. 2 No. 3, Jun. 1995.

"NetPhone" MacWorld, Jul. 1995.

"NetPhone" West Coast Online, Ver. 3.02 (#26), Apr. 1995. "PowWow 1.3b Now Available!" Google Newsgroup comp. os.ms-windows.misc Discussion Posting (dated Apr. 22, 1995).

1996-1997 Buyer's Guide, CTI for Management.

Abbe Cohen, Inessential Zephyr (Aug. 23, 1993).

Adam Gaffin, VocalTec Ware Lets Users Make Voice Calls over 'Net, Network World (Feb. 13, 1995).

Alexander Schill, ed., DCE—The OSF Distributed Computer Environment: Client/Server Model and Beyond, Lecture Notes in Computer Science 731, Karlsruhe University (1993).

Analysis of DCE Security Draft (Sep. 18, 1996).

Andrew D. Birrell, et al., Grapevine: An Exercise in Distributed Computing, Communications of the ACM (Apr. 1982). Andrew D. Birrell, et al., Grapevine: An Exercise in Distributed Computing, Communications of the ACM, vol. 25, No. 4, Apr. 1982.

Andrew D. Birrell, et al., Implementing Remote Procedure Calls, ACM Transactions on Computer Systems (Feb. 1984). Andrew S. Tanenbaum, Computer Networks, 2d ed. (Prentice-Hall, 1988). Andy Patrizio, Telecom, Digital Limits Begin to Blur with 'Phone Calls' Across Internet, PC Week, vol. 12, No. 6 (Feb. 13, 1995).

Antonio Ruiz, Voice and Telephony Applications for the Office Workstation, IEEE 1st International Conference on Computer Workstations, San Jose, California (Nov. 11–14, 1985).

AVC-650: Technical Issues Concerning Real-Time Protocol in H.32Z Systems in ATM and Other Packet-Switched Computer Networks, Jul. 9, 1994.

AVC-655: Communication Procedure for H.222.1, Jul. 1, 1994.

AVC-666: H.32X Communication Modes, Terminal Types and Interworking Scenarios, Jul. 1994.

AVC-683: Update Draft H.32Z Following Grimstad Meeting, Nov. 1994.

AVC-696: An Example of Call Setup Procedure in a H.32Z Terminal, Nov. 1994.

AVC-702: Terminal to Terminal Signaling in H.32X, Oct. 24, 1994.

AVC-707R: Report of the Seventeenth Experts Group Meeting in Singapore (Jul. 1–11, 1994)—Part 1 and Part II, Nov. 11, 1994.

AVC-716: Draft Recommendation H.32X, Jan. 1995.

AVC-718: Draft H.32X, Jan. 1995.

AVC-743R: Report of the Eighteenth Experts Group Meeting in Kamifukuoka (Jan. 24–27, 1995), Jan. 27, 1995.

AVC-748: Update of Draft Recommendation H.322, May 1995.

AVC-750: Report of the Study Group 15 Meeting Held During Feb. 6-17, 1995, Feb. 24, 1995.

AVC-752: Open Issues Issues Towards the Stockholm Meeting, Mar. 17, 1995.

AVC-758: Draft Recommendation H.323 Visual Telephone Systems and Terminal Equipment for Local Area Networks Which Provide A Non-Guaranteed Quality of Service, Rev. May 12, 1995.

AVC-767: Logical Channel Set-up Procedure, Apr. 28, 1995.

AVC-799: Comments on Draft H.323 and H.22Z, May 11, 1995.

AVC-800R: Report of the Nineteenth Experts Group Meeting in Haninge (May 15-18, 1995), May 18, 1995).

AVC-813: Signaling Recommendation Within the Scope of H.323, Sep. 10, 1995.

AVC-819: LAN Addressing Plan in H.323, Sep. 10, 1995.

AVC-830: Connection Management Procedures for H.323, Oct. 24–27, 1995.

AVC-842: Gateway, Gatekeeper and Terminal Procedures in H.323, Oct. 17, 1995.

Avnish Aggarwal, et al., RFC 1002: Protocol Standard for a NetBIOS Service on a TCP/UDP Tansport: Detailed Specifications (Mar. 1987).

Barbara Darrow, Internet Phone Chat Software Prompts Spat; IRC Operators Rebuffed Use of Their Systems, Computer Reseller News (Mar. 20, 1995).

Barry Michael Arons, The Audio–Graphical Interface to a Personal Integrated Telecommunications System, Masters Thesis, Massachusetts Institute of Technology (Jun. 1984).

Barry Phillips, Casting the Net for New Media, OEM Magazine, No. 320 (1995).

Belville, Sharon, "Zephyr on Athena", Athena Documentation, Sep. 10, 1991, Version Gisco - Exhibit 1003 - Page 8 Ben Mesander, et al., The Client-To-Client Protocol (Aug. 12, 1994).

Bill Welsh, H.245 Implementors' Guide (undated but references Apr. 1996).

Bob Blakley's Email to sig-dce-security, DCE Delegation Proposal Review, Jul. 7, 1992.

Brad Curtis Johnson, A Distributed Computing Environment Framework: An OSF Perspective (1991).

Brent Nordin, et al., Remote Operation Across a Network of Small Computers (Association of Computing Machinery, 1986).

Brian Fox, et al., GNU Finger program documentation, Free Software Foundation (1992).

Bruce Brown, BugNet Bug/Fix List, Newsbytes (Dec. 13, 1995).

Bruce Brown, BugNet Bug/Fix List, Newsbytes (Dec. 13, 1996).

Butler W. Lampson, et al., A Distributed Systems Architecture for the 1990's (Dec. 17, 1989).

Buy Memory Configured Expressly for Your Computer, San Jose Mercury News (Jul. 16, 1995).

C. Anthony DellaFera, et al., Section E.4.1: Zephyr Notification Service, Athena Technical Plan (Jul. 29, 1988).

C. Anthony DellaFera, et al., Section E.4.1: Zephyr Notification Service, Project Athena Technical Plan (Jun. 5, 1989).

C. Anthony DellaFera, et al., The Athena Notification Service: Zephyr (1987).

C. Anthony DellaFera, et al., The Athena Notification Service: Zephyr (Dec. 31, 1987).

C. Anthony DellaFera, et al., The Zephyr Notification Service (undated).

C. Anthony DellaFera, et al., The Zephyr Notification Service, Usenix Winter Conference, Feb. 9–12, 1988.

C. Anthony DellaFera, The Zephyr Notification Service, MIT Project Athena, Winter Usenix Conference (Feb. 12, 1988).

C. Malamud, et al., RFC 1528: Principles of Operation for the TPC.INT Subdomain: Technical Procedures (Oct. 1993).
C. Malamud, et al., RFC1530: Principles of Operation for the TPC.INT Subdomain: General Principles and Policy (Oct. 1993).

C. Sunshine, et al., IEN 135: Addressing Mobile Hosts in the ARPA Internet Environment (Oct. 1985).

C. Yang, RFC 1789: INETPhone: Telephone Services and Servers on Internet (Apr. 1995).

Calls Waiting on the Internet Although Telephone Software Makes 'Free' Long Distance Possible, it's a Long Way from Practical, Kansas City Star (Jul. 14, 1996).

Carl Sunshine, IEN 178: Addressing Problems in Multi-Network Systems (Apr. 1981).

Charles E. Perkins, et al., A Mobile Networking System Based on Internet Protocol, IEEE Personal Communications (First Quarter 1994).

Charlie Kaufman's Email to dmackey re DCE 1.1 Delegation Proposal for Review, Jun. 22, 1992.

Chii-Ren Tsai, et al., Distributed Audit with Secure Remote Procedure Calls (1991).

Christopher Schmandt, et al., An Audio and Telephone Server for Multi-Media Workstations, IEEE (1988).

Christopher Schmandt, et al., Phone Slave: A Graphical Telecommunications Interface, Society for Information Display, 1984 International Symposium Digest of Technical Papers (Jun. 1984). Chuck Kane, List of IRC servers as of Feb. 1, 1995, available at http://ftp.funet.fi/pub/unix/irc/does/servers.950201.

Clinton Wilder, Pulling in the Net—InfoSeek, VocalTec Offer Search and Voice Options to Internet Users Online, Informationweek, No. 516 (1995).

Common Desktop Environment 1.0—Advanced User's and System Administrator's Guide, Addison–Wesley Publishing Co. (1995).

Common Desktop Environment 1.0—User's Guide, Addison-Wesley Publishing Co. (1995).

Communications Connectivity Networking, Microsoft Systems Journal, vol. 10, No. 1 (Jan. 1995).

Comp.Speech FAQ Archive; Comp.Speech FAQ Web Page, Comp.Speech Newsgroup. Jul. 17, 1995.

Comp.Speech FAQ Weekly Reminder, Comp.Speech Newsgroup (Jun. 21, 1995).

Contents, Preface, and Index to Open Software Foundation, X/Open Preliminary Specification—X/Open DCE: Authentication and Security Services (Mar. 1996).

Conversation Excerpt from ftp://svr-ftp.eng.camac.uk/pub/ comp.speech/archive/subject5xxx.txt accessed on Nov. 28, 2007.

Craig Crossman, Free Calls on Internet are CB-Style No Longer, Miami Herald (Jun. 26, 1995).

Craig Crossman, Make Long Distance Calls Via the Internet, Record (Jul. 3, 1995).

D. O'Mahoney, 1st Generation Internet Phones (1998).

D. Reed, RFC 1324: A Discussion on Computer Network Conferencing (May 1992).

D. Zimmerman, RFC 1288: The Finger User Information Protocol (Dec. 1991).

Dale Skran, Draft ITU–T Recommendation H.225.0—Line Transmission of Non–Telephone Signals, Media Stream Packetization and Synchronization on Non–Guaranteed Quality of Service LANs (May 28, 1996).

Dale Skran, ed. ASN.1 for H.225.0 (Jun. 18, 1996).

Dan Cohen, IEN 31: On Name, Addresses and Routings (II) (Apr. 28, 1978).

Dan Keating, Ring! It's Computer Calling Phone by Internet Has Gotten Better, Miami Herald (May 22, 1996).

Daniel C. Swinehart, Telephone Management in the Etherphone System, IEEE (1987).

Daniel H. Craft, Resource Management in a Decentralized System, Operating Systems Review, vol. 17, No. 5 (Association for Computing Machinery, Oct. 1983).

Danny Cohen, IEN 23: On Name, Addresses and Routings (Jan. 23, 1978).

Dave Lindbergh, H.323 Encryption, Document: CNC-96-22 (Apr. 15, 1996).

David D. Clark, RFC 814: Name, Addresses, Ports, and Routes (Jul. 1982).

David Gertler, Hardware and Software Tidbits CEBIT, Sey-Bold Report on Desktop Publishing, vol. 9, No. 8 (Apr. 3, 1995).

David Hafke, New on the Net—Talk It Up, Windows Magazine, No. 711 (1996).

David Harvey, All the News That's Fit to Speak, Netguide, No. 301 (1996).

David R. Cheriton, et al., A Decentralized Naming Facility (Stanford University, Feb. 1, 1986).

David R. Cheriton, The V Distributed System, Communications of the ACM, vol. 31, No.3 (Apr Lass) to 1003 - Page 9 David Rapp, I've Got to Get a Message to You, Instant Messaging Started as an MIT Computer–Science Department Project, Technology Review (2002).

DCE 1.0 Security Technology, architectural overview documents, Walter Tuvell, Feb. 1997.

DCE 1.1 Security Technology, architectural overview documents May 1994. cer as Ir

DCE RPC Internals and Data Structures (Aug. 1993).

Dean Adams, ed., Security Survival: An indispensable guide to securing your business, X/Open Co. (1996).

Decided H.225.0 (Jun. 19, 1996).

Derek C. Oppen, et al., The Clearinghouse: A Decentralized Agent for Locating Named Objects in a Distributed Environment (Association for Computing Machinery, 1983). Description of New Zephyr Protocol (undated).

Digiphone Specifications, from Q1.11 of Section 1 of the comp.speech FAQ Home Page (dated Jan. 6, 1997).

Douglas B. Terry, et al., The Berkeley Internet Name Domain Server, Usenix Association Software Tools Users Group, Summer Conference, Salt Lake City, Utah (Jun. 12–15, 1984).

Douglas B. Terry, Structure freeName Management for Evolving Distributed Environments, IEEE 6th International Conference on Distributed Computing Systems, Cambridge, Massachusetts (May 19–23, 1986).

Douglas Brian Terry, Distributed Name Servers: Naming and Caching in Large Distributed Computing Environments, Ph.D Thesis, University of California, Berkeley (Feb. 21, 1985).

Douglas E. Corner, Internetworking with TCP/IP: vol. 1: Principles, Protocols, and Architecture, 1st ed. (Prentice-Hall, 1988).

Douglas E. Comer, Internetworking with TCP/IP: vol. 1: Principles, Protocols, and Architecture, 3d ed. (Prentice-Hall, 1995).

Douglas E. Comer, Internetworking with TCP/IP: vol. 1: Principles, Protocols, and Architectures, 2d ed. (Prentice-Hall, 1991).

Douglas W. Johnson, Internet–Connected Phone Calls Dial in to Lower Prices, Computerworld (Feb. 19, 1996).

Draft ITU–T Recommendation G.723—Dual Rate Speech Coder for Multimedia Communications Transmitting at 5.3 & 6.3 KBIT/S (Oct. 17, 1995).

Draft ITU–T Recommendation H.323 Line Transmission of Non–Telephone Signals: Visual Telephone Systems and Equipment for Local Area Networks Which Provide a Non– Guaranteed Quality of Service, (May 28, 1996).

Draft Recommendation H.323 Visual Telephone Systems and Terminal Equipment for Local Area Networks Which Provide A Non–Guaranteed Quality of Service, Sep. 8, 1995.

Draft Recommendation H.323—Visual Telephone Systems and Equipment for Local Area Networks Which Provide A Non–Guaranteed Quality of Service (May 28, 1996).

E.D. Sykas, et al., Overview of the CCITT X500 Recommendations Series (Butterworth–Heinemann, 1991).

Electric Magic Company Sales Invoices, Feb. 23, 1995 thru Dec. 3, 1995.

Electric Magic Company, Beta Test License Agreement (dated May 30, 1995).

Elizabeth Feinler, et al., RFC 810: DoD Internet Host Table Specification (Mar. 1, 1982).

Ellen Massmer, PictureTel Brings Video to the Lan Network World (Sep. 4, 1995).

E-mail from Dale Skran to jtoga@ibeam.jf. intel.com, phone numbers for email list (Jan. 6, 1997).

E-mail from Dale Skran to jtoga@ibeam.jf.intel.com, mailing list to enter (Jan. 6, 1997).

E-mail from Ofer Shapiro to Bob Bell, et al., RE: Destination side gateway problem (Jul. 29, 1996).

E-mail from Sakae Okubo to Experts of ITU-T SG16 Q.12/ 16, Q.13/16 and Q.14/16, Notice of the Q.12-14/16 Sunriver meeting (Jul. 17, 1997).

Email from Sakae Okubo to yves.robinchampigneu10issy.cnet.fr, et al., Working tools of SG16 experts groups (May 8, 1997).

E-mail from Vineet Kumar to h323implementors@ mailbag.jf.intel.com Receiver associating a logical channel with a RTP stream (Aug. 5, 1996).

Erdos, Marlena and Pato, Joseph, "Extending the OSF DCE Authorization System to Support Practical Delegation," Feb. 11, 1993.

Eric C. Rosen, IEN 183: Logical Addressing (May 1981).

Eric C. Rosen, IEN 188: Issues in Internetting Part 3: Addressing (Jun. 1981).

Etherphone: Collected Papers 1987–1988, Xerox PARC, CSL-89-2 (May 1989).

Eve M. Schooler, Case Study: Multimedia Conference Control in a Packet–Switched Teleconferencing System, Journal of Internetworking: Research and Experience, vol. 4, No. 2 (Jun. 1993).

Eve M. Schooler, et al., An Architecture for Multimedia Connection Management, Proceedings IEEE 4th Comsoc International Workshop on Multimedia Communications, MM '92, Monterey, California (Apr. 1992).

Eve M. Schooler, The Connection Control Protocol: Architecture Overview (Jan. 28, 1992).

Eve M. Schooler, The Connection Control Protocol: Specification, Version 1.1 (Jan. 29, 1992).

Eve M. Schooler, The Impact of Scaling on Multimedia Connection Architecture, Multimedia Systems, vol. 1 (Association for Computing Machinery, 1993).

Exportability of DCE Multi-Crypto Feature by Walter Tuvell, Mar. 5, 1996.

F. Anklesaria, et al., RFC 1436: The Internet Gopher Protocol (A Distributed Document Search and Retrieval Protocol) (Mar. 1993).

FAQ: How Can I Use the Internet as a Telephone, Ver. 0.2 (Apr. 27, 1995).

FAQ: How Can I Use the Internet as a Telephone, Ver. 0.4 (Feb. 23, 1996).

Fax from Ryan Holmquist to Dale Skran (May 30, 1996).

FLEXIm v3.0 Programmer's Guide, Globetrotter Software, Inc. (Aug. 1994).

Full Duplex Internet Voice Comms Available, Newsbytes (Feb. 14, 1995).

Gary A. Thom, H.323: The Multimedia Communications Standard for Local Area Networks, IEEE Communications Magazine (Dec. 2006).

Gilbert Held, The ABCs of IP Addressing, CRC Press LLC (2002).

Gligor, et al. "On Inter-realm Authentication in Large Distributed Systems" May 2, 1992.

Google Groups "CyberPhone" Search Results, search conducted on Nov. 28, 2007.

Goretsky, Aryeh "PowWow Quick Installation Guide", 1996. Cisco - Exhibit 1003 - Page 10 Green, Andrew, NetPhone Tasks and Plans, Email, 2 pages (printed Feb. 2, 1995).

Greg Wood. Computer VAR Takes His First Computer Telephony Plunge, Computer Telephony (Sep. 1996).

Gursharan S. Sidu, et al., Inside AppleTalk, 2d ed. (Addison-Wesley Publishing Co., 1990).

H. Schulzrinne, et al., RFC 1889: RTP: A Transport Protocol for Real-Time Applications (Jan. 1996).

Handwritten Notes, Electric Magic Company (dated Jul. 22, 1994 thru Aug. 30, 1995).

Harrick M. Vin., et al., Multimedia Conferencing in the Etherphone Environment (IEEE, Oct. 1991).

How Can I use the Internet as a telephone? from Q1.11 of Section 1 of the comp.speech FAQ Home Page (dated Mar. 19, 1996).

Hussein M. Abdel-Wahab, XTV: A Framework for Sharing X Window Clients in Remote Synchronous Collaboration, IEEE Conference on Communications Software: Communi-

cations for Distributed Applications & Systems (Apr. 1991). I C. Weider, et al., RFC 1727: A Vision of an Integrated Information Service (Dec. 1994).

Inder Gopal, et al., Directories for Networks with Casually Connected Users (IEEE, 1988).

Information Technology—Database Language SQL (Proposed revised text of DIS 9075), Digital Equipment Corp. (Jul. 1992).

InterFACE from Hijinx Specifications, from Q1.11 of Section 1 of the comp.speech FAQ Home Page (dated Mar. 19, 1996).

Internet Phone from VocalTec Specifications, from Q1.11 of Section 1 of the comp.speech FAQ Home Page (dated Mar. 19, 1996).

Internet Phone Release 4, Users Manual, VocalTech 1996.

Internet Telephone Companies Racing to Market, Voice Technology & Service News, vol. 14 No. 20 (Oct. 3, 1995). Introduction to OSF DCE (Prentice–Hall, Inc., 1992).

ITU-T Recommendation X.500—Information technology—Open Systems Interconnection—The Directory: Overview of concepts, models and services (Aug. 1997).

ITU-T Recommendation X.501—Information technology—Open Systems Interconnection—The Directory: Models (Aug. 1997).

J. Oikarinan, et al., RFC 1459: Internet Relay Chat Protocol (May 1993).

J. Pato, Hierarchical Trust Relationships for Inter-Cell Authentication, Slides, (Jul. 7, 1992).

J. Pato, RFC 7.0: Hierarchical Trust Relationships for Inter-Cell Authentication (Jul. 1992).

J. Postel, et al., RFC 959: File Transfer Protocol (FTP) (Oct. 1985).

J. Postel, RFC 765: File Transfer Protocol (Jun. 1980).

J. Postel, RFC 925: Multi-LAN Address Resolution (Oct. 1984).

J. Saltzer, RFC 1498: On the Naming and Binding of Network Destinations (Aug. 1993).

Jack Rickard, Voice Over Internet—the Internet Phone, Boardwatch Magazine, vol. 9, No. 4 (Apr. 1995).

James M. Bloom, et al., Experiences Implementing BIND, A Distributed Name Server for the DARPA Internet (Jun. 9-13, 1986.

James Martin, et al., TCP/IP Networking: Architecture, Administration, and Programming (Prentice Hall, 1994).

James Staten, NetPhone 1.2 Calls the Web, MacWeek, vol. 9 No. 27 (Jul. 10, 1995).

Jennifer G. Steiner, et al., Kerberos: An Authentication Service for Open Network Systems, Usenix Winter Conference, Dallas, Texas (Feb. 9–12, 1988).

Joe Maloney, DCE: Focus on Security, the Internet and the Future (printed Apr. 25, 2002, date unknown).

Joe Pato, et al., Distributed Computing Environment (DCE) Design of the Security Services and Facilities (Aug. 10, 1992).

Joe Pato, Extending the DCE Authorization Model to Support Practical Delegation—Extended Summary (Jul. 7, 1992).

Joe Pato, RFC 3.0: Extending the DCE Authorization Model to Support Practical Delegation—Extended Summary (Jun. 1992).

Joe Pato, RFC 6.0: A Generic Interface for Extended Registry Attributes (Jun. 1992).

John A. Pershing, Jr., et al., IEN 162: Transport, Addressing, and Routing in the Wideband Net (Oct. 1980).

John F. Shoch, IEN 19: Inter-Network Naming, Addressing, and Routing (Jan. 1978).

John Ioannidis, et. al., IP-based Protocols for Mobile Internetworking, Columbia Univ., Dept. of Computer Science (1991).

John R. Pickens, et al., RFC 756: The NIC Name Server—A Datagram Based Information Utility (Jul. 1979).

John T. Kohl, The Zephyr Notification Service, First International Athena Technical Conference (Apr. 11, 1991).

John Veizades, et al., Service Location Protocol, Internet Draft (May 2, 1995).

Jon Hill, et al., Pow Wow, PC Magazine, vol. 15 No. 17 (Oct. 8, 1996).

Jon Hill, TeleVox, PC Magazine, vol. 15 No. 17 (Oct. 8, 1996).

Jon Livesey, Inter-process Communication and Naming in the Mininet System, Eighteenth Annual IEEE Computer Society International Conference, San Francisco, California (1979).

Jon Postel, RFC 921: Domain Name System Implementation Schedule—Revised (Oct. 1984).

José M. Bernabeu–Auban, et al., Optimizing a Generalized Polling Protocol for Resource Finding over a Multiple Access Channel, Computer Networks and ISDN Systems 27 (1995).

Josina M. Arfman, et al., Project Athena: Supporting Distributed Computing at MIT, IBM Systems Journal (1992).

K. Harrenstien, et al., RFC 811: Hostname Server (Oct. 1985).

K. Harrenstien, et al., RFC 952: DoD Internet Host Table Specification (Oct. 1985).

K. Harrenstien, RFC 742: Name/Finger (Dec. 30, 1977).

Kahane, Opher et al., "Call Management Agent System Specification" Volp Forum Technical Committee Contribution (dated Aug. 15, 1996).

Karl Auerbach, et al., RFC 1001: Protocol Standard for a NetBIOS Service on a TCP/UDP Transport: Concepts and Methods (Mar. 1987).

Keith A. Lantz, et al., Towards a Universal Directory Service, 4th PODC Conference Proceedings (Association for Computing Machinery, 1985).

Ken Harrenstien, et al., RFC 811: Hostnames Server (Mar. 1, 1982).

Ken Harrenstien, RFC 811: Hostnames Server (Mar. 1, 1982).

Ken Harrenstien, RFC 812 CNicham 2X11 Bis (Nor31- 1983) 11

Kenneth Hart, Startups, industry mainstays add to Internet phone menu, Communicationsweek Int'l (Nov. 27, 1995). Klaus Zeuge, et al., The Client-to-Client Protocol (CTCP) (published no later than Aug. 12, 1994).

Kohl, John T., "Zephyr Installation and Operation Guide", Draft—Nov. 20, 1989.

Koster, Steven "The Phone Companies Worst Nightmare" Hotwired, Apr. 1995.

L. Landweber, et al., Architecture of the CSNET Name Server (Association for Computing Machinery, 1983).

L. Peter Deutsch, RFC 606: Host Names On-Line (Dec. 1973).

Larry L. Peterson, A Yellow–Pages Service for a Local–Area Network (Association for Computing Machinery, 1988).

Larry L. Peterson, The Profile Naming Service, ACM Transactions on Computer Systems, vol. 6, No. 4, (Nov. 1988).

Lisa Zahn, et al., Network Computing Architecture, Prentice Hall (1990).

List of Names from a DCE Meeting; attendees from DISA, OSF, DEC, Mitre, HP, Open Market and others (undated).

Listsery postings by Jon Postel, Dynamic Updated Proposal, dated Sep. 1 and 9, 1993.

Listsery postings by Susan Thomson, DNS Dynamic Updates, dated Jul. 14, 1994.

Lon Wagner, New Software Lets Users Talk for Cheap, Virginian–Pilot (Mar. 26, 1995).

M. Bever, et al., Distributed Systems, OSF DCE, and Beyond (1993).

M.D. Kudlick, RFC 608: Host Names On-Line (Jan. 10, 1974).

Making the Most of IP Telephony, VocalTec Annual Report 1997.

Mark Crispin, RFC 752: A Universal Host Table (Jan. 2, 1979).

Mark Reid, Ptell Call Control Procedure in H.323 (Jun. 16, 1995).

Markus Sohlenkamp & Greg Chwelos, Integrating Communication, Cooperation, and Awarness: The DIVA Virtual Office Environment (1994).

Mic Bowman, et al., Univers: An Attribute-based Name Server, Software Practice and Experience, vol. 20(4) (Apr. 1990).

Michael D. Schroeder, et al., Experience with Grapevine: The Growth of a Distributed System, ACM Transactions on Computer Systems (Feb. 1984).

Michael D. Schroeder, et al., Experience with Grapevine: The Growth of a Distributed System, ACM Transactions on Computer Systems, vol. 2, No. 1 (Feb. 1984).

Michael F. Schwartz, et al., A Comparison of Internet Resource Discovery Approaches, Computing Systems (Aug. 1992).

Michael F. Schwartz, et al., A Name Service for Evolving, Heterogeneous Systems, ACM (1987).

Michael J. Bibeau, A Formative Evaluation of CU–SeeMe, Masters Thesis, Virginia Polytechnic Institute and State University (Feb. 20, 1995) (including CU–SeeMe Users Manual by same author published Jan. 1995).

Michelle Slatalla, Hold the Phone! You Can Call Long Distance on a Computer For Pennies, But it has its Drawbacks, Newsday (Mar. 14, 1995).

Mike Kong, et al., Network Computing System Reference Manual, Prentice Hall (1990).

Mike Kudlick, et al., RFC 627: ASCII Text File of Hostnames (Mar. 25, 1974). Mitch Wagner, Phone Home Cheaply Over the I-Way, Open Systems Today (Feb. 20, 1995).

Mitre Fort Meade Site DCE Meeting Sign In Sheet Jan. 16, 1995.

Mostafa H. Ammar, et al., Using Hint Tables to Locate Resources in Distributed Systems (IEEE, 1988).

Motorola Micro TAC International 5000 Series Manual (undated).

Motorola Micro TAC International 7000 Series (dated May 1994).

Motorola Micro TAC International 7500 Series (undated).

Motorola Micro TAC International 8000 Series (undated).

Nate Zelnick, Chat on the Web: An Overview, Interactive Content, vol. 2, No. 17 (Sep. 1995).

Nautilius: Secure Computer Telephony, from Q1.11 of Section 1 of the comp.speech FAQ Home Page (dated Aug. 7, 1996).

NetPhone 1.0 User Manual, Electric Magic Company (document includes date Dec. 31, 1994).

NetPhone 1.1 User Manual, Electric Magic Company (document includes date Feb. 16, 1995).

NetPhone Demo Instructions, Electric Magic Company, 1994.

NetPhone Development Plan (undated).

NetPhone Development Plan v0.1 (undated).

NetPhone Digital User Manual, Electric Magic Company, Feb. 26, 1995.

NetPhone Digital User Manual, Electric Magic Company, Mar. 12, 1995.

Netphone Information Manual, Electric Magic Company, May 30, 1995.

NetPhone Testing Notes, Sep. 28, 1994.

Netphone, Change Notes, Dec. 6.

Nigel Hinds, et al., Name Space Models for Locating Services, IBM Canada Laboratory Technical Report 74.074 (1991).

Norbert Leser, Towards a Worldwide Distributed File System: The OSF DCE File System as an example (Sep. 27, 1990).

Open Group, Cambridge Information (Jun. 23, 1997).

Open Software Foundation Security Sig (Mar. 19, 1996).

Open Software Foundation, AES/Distributed Computing RPC Volume, PTR Prentice Hall (1994).

Open Software Foundation, DCE Internals Course, Instructor Guide vol. 1 (1992).

Open Software Foundation, DCE Internals Course, Instructor Guide vol. 2 (1992).

Open Software Foundation, Industry Analysis of DCE (May 15, 1990).

Open Software Foundation, Introduction to OSF DCE, Prentice Hall (1992).

Open Software Foundation, Open Line Magazine (May/Jun. 1990).

Open Software Foundation, OSF DCE Administration Guide Core Components, PTR Prentice Hall (1993).

Open Software Foundation, OSF DCE Administration Guide—Extended Services, PTR Prentice Hall (1993).

Open Software Foundation, OSF DCE Administration Guide—Introduction, PTR Prentice Hall (1993).

Open Software Foundation, OSF DCE Administration Reference, PTR Prentice Hall (1993).

Open Software Foundation, OSF DCE Application Development Guide, PTR Prentice Heb (1923) hibit 1003 - Page 12 Open Software Foundation, OSF DCE Application Development Reference, PTR Prentice Hall (1993).

Open Software Foundation, OSF DCE User's Guide and Reference, PTR Prentice Hall (1993).

OSF DCE User's Guide and Reference (Prentice-Hall, Inc., 1993).

P. Deutsch, et al., RFC 1835: Architecture of the Whois++ Service (Aug. 1995).

P. Faltstrom, et al., RFC 1914: How to Interact with a Whois++ Mesh (Feb. 1996).

P. Mockapetris, RFC 882: Domain Names—Concepts and Facilities (Nov. 1983).

P. Mockapetris, RFC 883: Domain Names—Implementation and Specification (Nov. 1983).

P. Venkat Rangan, et al., Software Architecture for Integration of Video Services in the Etherphone System, IEEE Journal on Selected Areas in Communications, vol. 9, No. 9 (Dec. 1991).

P.M. Gopal, et al., Consistent Resource Registration, IBM Technical Disclosure Bulletin, vol. 37, No. 9 (Sep. 1994).

Part 1 of Open Software Foundation, X/Open Preliminary Specification—X/Open DCE: Authentication and Security Services (Mar. 1996).

Part 2 chapter 2 thru 5 of Open Software Foundation, X/Open Preliminary Specification—X/Open DCE: Authentication and Security Services (Mar. 1996).

Part 2 chapter 6 thru 13 of Open Software Foundation, X/Open Preliminary Specification—X/Open DCE: Authentication and Security Services (Mar. 1996).

Part 3 and Part 4 of Open Software Foundation, X/Open Preliminary Specification—X/Open DCE: Authentication and Security Services (Mar. 1996).

Pato, Joseph N., A Generic Interface for Extended Registry Attributes, Jul. 7, 1992.

Paul Albitz, et al., DNS and Bind in a Nutshell (O'Reilly & Associaties, 1992).

Paul Mockapetris, RFC 1034: Domain Name—Concepts and Facilities (Nov. 1987).

Paul Mockapetris, RFC 1035: Domain Name—Implementation and Specification (Nov. 1987).

Paul V. Mockapetris, et al., Development of the Domain Name Server, Computer Communication Review, vol. 18, No. 4 (Aug. 1988).

Paul V. Mockapetris, et al., Development of the Domain Name System, Computer Communication Review (Aug. 1988).

Phoning By Web, San Francisco Chronicle (Mar. 12, 1996). PictureTel Corp., 10–K405/A (filed Jan. 13, 1998).

PictureTel LiveLan (printed Dec. 3, 2007).

Ping Lin's Email to mackey, Comments on DCE 1.1 Delegation RFC, Jul. 2, 1992.

Polle T. Zellweger, et al., An Overview of the Etherphone System and its Applications (IEEE, 1988).

Postel, RFC 791: Internet Protocol: Darpa Internet Program Protocol Specification (Sep. 1981).

Postel, RFC 793: Transmission Control Protocol: Darpa Internet Program Protocol Specification (Sep. 1981).

PowWow For Microsoft Windows User's Guide, Version 1.4B, Documentation by Token White Man (dated 1995).

PowWow For Microsoft Windows User's Guide, Version 1.5, Documentation by Aryeh Goretsky (dated 1995).

PowWow For Microsoft Windows User's Guide, Version 1.6 beta 2, Documentation by Aryeh Goretsky (dated 1995).

PowWow For Microsoft Windows User's Guide, Version 1.6 beta, Documentation by Aryeh Goretsky (dated 1995).

PowWow For Microsoft Windows User's Guide, Version 1.7 beta 1, Documentation by Aryeh Goretsky (dated 1995).

PowWow For Microsoft Windows User's Guide, Version 1.7 beta 2, Documentation by Aryeh Goretsky (dated 1995).

PowWow For Microsoft Windows User's Guide, Version 1.7 beta 3, Documentation by Aryeh Goretsky (dated 1995).

PowWow For Microsoft Windows User's Guide, Version 1.7 beta 4, Documentation by Aryeh Goretsky (dated 1995).

PowWow For Microsoft Windows User's Guide, Version 2.0 beta 1, Documentation by Aryeh Goretsky (dated 1995, 1996).

PowWow For Microsoft Windows User's Guide, Version 2.1, Documentation by Aryeh Goretsky (dated 1995, 1996). PowWow For Microsoft Windows User's Guide, Version 2.2 beta 1, Documentation by Aryeh Goretsky (dated 1995, 1996).

PowWow For Microsoft Windows User's Guide, Version 2.2 beta 2, Documentation by Aryeh Goretsky (dated 1995, 1996).

PowWow For Microsoft Windows User's Guide, Version 2.3, Documentation by Aryeh Goretsky (dated 1995, 1996). PowWow For Microsoft Windows User's Guide, Version 2.31, Documentation by Aryeh Goretsky (dated 1995, 1996). PowWow For Microsoft Windows User's Guide, Version 2.32, Documentation by Aryeh Goretsky (dated 1995, 1996). PowWow For Microsoft Windows User's Guide, Version 3.0 beta 3, Documentation by Aryeh Goretsky (dated 1995, 1996).

PowWow User Local Server Version 1.0 beta 2 Release Notes (Dated Jun. 18, 1996).

PowWow User Location Server for Microsoft Windows NT and 95 Version 1.0 beta 2 Installation Guide. by Gorestsky, Aryeh (dated 1996).

PowWow Version Release Notes (covering versions 1.4b to 2.32) (dated Jun. 26, 1996).

PowWow32 Release Notes (PowWow Versions 3.0 beta 3 and 3.0 beta 2) (dated Nov. 21, 1996).

Prospectus for VocalTech Ordinary Shares, Feb. 6, 1996.

Questions and Comments: DCE RFC 6.0 "A Generic Interface for Extended Registry Attributes" Commentary by Bob Blakley, Jul. 6, 1992.

R. Braden, RFC 1644 T/TCP—TCP Extensions for Transactions Functional Specifications (Jul. 1994).

R. Droms, RFC 1531: Dynamic Host Configuration Protocol (Oct. 1993).

R. Droms, RFC 1541: Dynamic Host Configuration Protocol (Oct. 1993).

R.C. Summers, Local-Area Distributed Systems, IBM Systems Journal, vol. 28, No. 2 (1989).

Raj Pandya, Emerging Mobile and Personal Communication Systems, IEEE Communications Magazine (Jun. 1995).

RFC 1001: Protocol Standard for a NetBIOS Service on a TCP/UDP Transport: Concepts and Methods, Mar. 1987.

RFC 1057: RPC Remote Procedure Call Protocol Specification Version 2, Jun. 1988.

Richard Karpinski, Internet Phones Battle for the Market, Interactive Age, No. 212 (1995).

Richard Karpinski, Upgrading Internet Phone—VocalTec Offers Full-Duplex Version, Eliminating Voice Delays, Interactive Age, No. 216 (1995).

Richard T. Snodgrass, Developing Time-Oriented Database Applications in SQL, Mongan Kaufman Publishers (200).13 Rivka Tadjer, Internet Communications Solutions: How Well Do They Work?, Computer Shopper, vol. 15, No. 6 (Jun. 1995).

Rivka Tadjer, Internet Phones to Upstage Videoconferencing Products? Talk is Cheaper with Local Worldwide Dialing, Computer Shopper, vol. 15, No. 5 (May 1995).

Rob Walters, Computer Telephone Integration (Artech House, 1993).

Robert E. Kahn, et al., Advances in Packet Radio Technology, Proceedings Of The IEEE (Nov. 1978).

Robert Gurwitz, et al., IEN 212: IP—Local Area Network Addressing Issues (Sep. 1982).

Robert J. Williams, User Location Service (Feb. 1996).

Robert Joseph Fowler, Decentralized Object Finding Using Forwarding Addresses, Ph.D. Thesis, University of Washington (Dec. 1985).

Robert Richardson, Internet Phone, LAN Magazine, vol. 10, No. 7 (Jul. 1995).

Robert Richardson, Pow Wow, Anyone? A Web Chat That Works, LAN Magazine, vol. 10 No. 9 (Sep. 1995).

Robert S. French, et al., The Zephyr Programmer's Manual, Rev. 2.1 (May 5, 1989).

Rosen, Nick "Internet Opens Line on Cheap Global Phone Calls" The Guardian, Feb. 10, 1995, A1.

S. Waldbusser, et al., RFC 1742: AppleTalk Management Information Base II (Jan. 1995).

S.R. Ahuja, et al., The Rapport Multimedia Conferencing System, ACM (1988).

Sakae Okubo, et al., Draft ITU-T Recommendation H.245—Line Transmission of Non-Telephone Signals: Control Protocol for Multimedia Communications (Nov. 14, 1995).

Sakae Okubo, et al., ITU–T Recommendation H.245—Line Transmission of Non–Telephone Signals: Control Protocol for Multimedia Communication (May 20, 1996).

Sakae Okubo, et al., Line Transmission of Non-Telephone Signals: Control Protocol for Multimedia Communication, Recommendation H245 (May 20, 1996).

Sakae Okubo, et, al., ITU-T Standardization of Audiovisual Communication Systems in ATM and LAN Environments (Apr. 17, 1996).

Sape J. Mullender, et al., Distributed Match-Making for Processes in Computer Networks (Association for Computing Machinery, 1985).

Sape Mullender, ed., Distributed Systems, ACM Press (1992).

Sapwater, E. "Webbed", 2 pages (undated).

Saruchi Mohan, Internet Phone Accepting Calls, Computerworld (Feb. 27, 1995).

Savetz, Kevin "Net as Phone" Internet World, Jul. 1995.

Schill, et al., ed., IFIP/IEEE International Conference on Distributed Platforms—Client/Server and Beyond: DCE, Corba, ODP & Advanced Distribution Applications, Technical University Bergakademie Freiburg (1996).

Schulzrinne, Service Conference Invitation Protocol, Internet Draft (Feb. 22, 1996).

Scott Kahn, Leave Your Message on My PC After the Beep, PC Week (Oct. 3, 1994).

Sharon Fisher, Fruits of Athena—Academic Projects Like Athen Have Given the World Its First Inkling of What Computer Interoperability is All About, Communications Week (1992).

Snell, Jason "Foiling Ma Bell" MacUser, Jul. 1995.

Speak Freely, from Q1.11 of Section 1 of the comp.speech FAQ Home Page (dated Mar. 19, 1996).

Staff Phone List (Jul. 1, 1997).

Steinberg, Bob "Will Politics Interfere With The Global Internet?" Mashpee Enterprise, Apr. 28, 1995.

Stephen A. Uhler, PhoneStation, Moving the Telephone onto the Virtual Desktop, 1993 Winter Usenix, San Diego, California (Jan. 25–29, 1993).

Steve Hamm, The Merry Pranksters, PC Week, vol. 12 No. 34 (Aug. 28, 1995).

Stuart Harris, The IRC Survival Guide: Talk to the World With Internet Relay Chat (Addison–Wesley, Feb. 1995).

Sun Microsystems, Inc., RFC 1050: RPC: Remote Procedure Call Protocol Specification Version 2 (Jun. 1988).

Surfers Can Drop Phones, Electronics Times (Feb. 16, 1995).

Susan Thomson, et al., DNS Dynamic Updates, IETF DNSIND Working Group (Jul. 1994).

T. Berners-Lee, et al., RFC 1738: Uniform Resource Locators (URL) (Dec. 1994).

Tamila Baron, Hearing Voices on the Net, Communication Week (Feb. 20, 1995).

Tamila Baron, VocalTec, Motorola Team Up for Internet Phone and Modem Bundle, Communications Week, No. 549 (1995).

Ted Anderson's Email to dmackey re DCE 1.1 Delegation Proposal for Review, Jun. 23, 1992.

Ted Anderson's Email to pato, Re: RFC 7.0 (really glp92), Jul. 21, 1992.

The 4.4BSD-Lite distribution announcement, Computer Systems Research Group (Mar. 1, 1994), and related news-group postings, dated Apr. 21-22, 1994.

The Electric Magic Company, Business Plan, Version 0.1 draft, Apr. 17, 1995.

The Open Group Organization Chart (Oct. 1997).

The Open Group Organization Chart Oct. 1996 (Confedential).

The OSF Distributed Computing Environment: Building on International Standards, OSF White Paper (Apr. 1992).

The VocalChat User's Guide, Sep. 28, 1993.

Thomas Maresca, The Internet Phone Company?, Consumer Information Appliance, No. 55 (Feb. 1995).

TIMOP: DCE Time Operations Sample Application. (undated).

Timothy J. O'Malley, Analysis of the Zephyr Communication Paradigm, Bachelor of Science in Computer Science and Engineering, Thesis, Massachusetts Institute of Technology (May 1993).

Todd Copilevitz, Heard on the Internet, The Star-Ledger (Mar. 7, 1995).

Tom Lyons, Network Computing System Tutorial, Prentice Hall (1991).

Tony Pompili, VocalTec: The Internet Phone Number?, PC Magazine (May 16, 1995).

Translation of Japanese Patent Application No. Sho 63[1988]–131637 (Original dated Jun. 3, 1988).

Transparencies: Walter Tuvell, DCE 1.0 Security Technology—Detailed Architectural Overview (Feb. 1997).

V. Jacobson, et al. RFC 1185: TCP Extension for High-Speed Paths (Oct. 1990).

VocalChat 1.01 Network Information (undated).

VocalChat Early Beta Release 1.02B Information (undated).

VocalChat GTI 2.12 Beta Retrival Instructions and Informa-

tion (undated). Cisco - Exhibit 1003 - Page 14

VocalChat Version 1.0, README.TXT, Nov. 1993.

VocalChat Version 1.01, README.TXT, Mar. 1994. VocalChat Version 2.01 and Wan 2.01, README.TXT. May 1994.

VocalTec Annual Report, 1996.

VocalTec Cross-Reference Sheet, Pursuant to Item 501 of Reg. S-K (dated Jan. 1996).

VocalTec Internet Phone Information Sheet, 2 pages. (dated Jun. 1995).

VocalTec Internet Phone Version 3.0 Build 17, READ-ME.TXT. Aug. 11, 1995.

VocalTec Internet Phone Version 3.2 Build 21, READ-ME.TXT, Mar. 25, 1996.

VocalTec SEC 20–F Filing, 1996.

VocalTec SEC F-1 Filing, Dec. 22, 1995.

VocalTec SEC F-1 Filing, Jan. 5, 1996.

Voice Over the Internet, Boardwatch Magazine, vol. IX, No. 1 (Jan. 1995).

W. David Albrecht, CPA Firms on the World Wide Web. Ohio CPA Journal (Jun. 1996).

W. Simpson, RFC 1661: The Point-to-Point Protocol (PPP) (Jul. 1994).

W. Yeong, et al., RFC 1777. Lightweight Directory Access Protocol (Mar. 1995).

Walt and mactcp's ip addresses and code (undated).

Walter Tuvell, DCE 1.0 Security Technology–Detailed Architectural Overview (Feb. 1997).

Walter Turvell, DCE 1.0, Security Technology Detailed Architectural Overview, Draft (Feb. 1997).

Walter Tuvell, DCE 1.0 Security Technology: Detailed Architectural Overview (Feb. 1997).

Walter Tuvell, DCE 1.0 Security Technology: Detailed Architectural Overview (May 1994).

Walter Tuvell, DCE Multi-Crypto Support-Proposal to NSA for Funding and Exportability of Multiple Cryptographic Mechanisms in OSF's Distributed Computing Environment (Sep. 12, 1995).

Walter Tuvell, Distribution & The Infobahn (1996).

Walter Tuvell, Exportability of DCE Multi-Crypto Feature (Mar. 5, 1996).

Walter Tuvell, RFC 98.0: Challenges Concerning Public-Key in DCE (Dec. 1996).

Walter Tuvell, System V/ONC Comparison to AIX/NCS (Oct. 3, 1988).

Walter Tuvell, The DCE Dance: Application Development in 29 Easy Steps (Sep. 1991).

Walter Tuvell, The OSF Distributed Computing Environment (DE). (undated).

Web Phone, from Q1.11 of Section 1 of the comp.speech FAQ Home Page (dated Mar. 19, 1996).

WebSTAR Technical Reference (formerly MacHTTP), Star-Nine Technologies, 1995).

Wei Hu, DCE Security Programming, O'Reilly & Associates (Jul. 1995).

Welch, Nathalie "Vendors Ring in New Telephony Options" MacWeek, Apr. 10, 1995, p. 18.

Wendy Woods, Newsbytes Daily Summary, Newsbytes (Jun. 10, 1994).

William M. Bulkeley, On-line: Hello, world. Audible Chats on the Internet, Wall Street Journal (Feb. 10, 1995).

Winther, Mark. "The World Wide Web Phones Home: Internet Telephony Market Assessment, 1996–1999", International Data Corporation White Paper (dated 1996).

Xerox System Integration Standard Clearinghouse Protocol (Apr. 1984).

Yakov Rekhter, et al., Dynamic Updates in the Domain Name System (DNS):Architecture and Mechanism, Internet-Draft, DNSIND Working Group (Jul. 15, 1994). 5

15

EX PARTE REEXAMINATION CERTIFICATE ISSUED UNDER 35 U.S.C. 307

THE PATENT IS HEREBY AMENDED AS INDICATED BELOW.

Matter enclosed in heavy brackets [] appeared in the patent, but has been deleted and is no longer a part of the patent; matter printed in italics indicates additions made 10 to the patent.

AS A RESULT OF REEXAMINATION, IT HAS BEEN DETERMINED THAT:

The patentability of claims 5 and 6 is confirmed.

Claim 8 is cancelled.

Claims 1, 9, 14, 16 and 17 are determined to be patentable $_{20}$ as amended.

Claims 2, 3, 15 and 18, dependent on an amended claim, are determined to be patentable.

Claims 4, 7 and 10-13 were not reexamined.

1. A computer program product for use with a computer system having a display, the computer system capable of executing a first process and connecting to other processes and a server process over a computer network, the computer ³⁰ program product comprising a computer usable medium having computer readable code means embodied in the medium comprising:

- a. program code for generating a user-interface enabling control *of* a first process executing on the computer system;
- b. program code for determining the currently assigned network protocol address of the first process upon connection to the computer network;
- c. program code responsive to the currently assigned network,
 40
 c. program code responsive to the currently assigned network protocol address of the first process, for establishing a communication connection with the server process and for forwarding the assigned network protocol address of the first process and a unique identifier of the first process to the server process upon establishing a communication connection with the server process; and
- d. program code, responsive to user input commands, for establishing a point-to-point communications with another process over the computer network.

9. [The] In a computer system having a display and capable of executing a process, a method for establishing a point-to-point communication from a caller process to a callee process over a computer network, the caller process capable of generating a user interface and being operatively 55 connected to the callee process and a server process over the computer network, the method [of claim 8] comprising the steps of:

- A. generating a user-interface element representing a first communication line;
- B. generating a user interface element representing a first callee process;

- C. querying the server process to determine if the first callee process is accessible; and
- D. establishing a point-to-point communication link from the caller process to the first callee process, in response to a user associating the element representing the first callee process with the element representing the first communication line, wherein step C further comprises the steps of:
- C.1 querying the server process as to the on-line status of the first callee process; and
- C.2 receiving a network protocol address of the first callee process over the computer network from the server process.
- 14. The method of claim [8] 9, further comprising the steps of:
- E. generating a user interface element representing a communication line having a temporarily disabled status; and
- F. temporarily disabling the point-to-point communication between the caller process and the first callee process, in response to the user associating the element representing the first callee process with the element representing the communication line having a temporarily disabled status.

16. [The] In a computer system having a display and capable of executing a process, a method for establishing a point-to-point communication from a caller process to a callee process over a computer network, the caller process capable of generating a user interface and being operatively connected to the callee process and a server process over the computer network, the method [of claim 15] comprising the steps of:

- A. generating a user-interface element representing a first communication line;
- B. generating a user interface element representing a first callee process;
- C. querying the server process to determine if the first callee process is accessible;
- D. establishing a point-to-point communication link from the caller process to the first callee process, in response to a user associating the element representing the first callee process with the element representing the first communication line;
- E. generating a user interface element representing a communication line having a temporarily disabled status; and
- F. temporarily disabling the point-to-point communication between the caller process and the first callee process, in response to the user associating the element representing the first callee process with the element representing the communication line having a temporarily disabled status, wherein the element generated in step E represents a communication line on hold status, and wherein the element generated in step E represents a communication line on mute status.

17. The method of claim [8] 9 wherein the display further 60 comprises a visual display.

* * * * *

Cisco - Exhibit 1003 - Page 16

25

	ed States Paten	t and Trademark Office	UNITED STATES DEPAR United States Patent and Address: COMMISSIONER F P.O. Box 1450 Alexandria, Virginia 22: www.uspto.gov	
APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
90/010,422	02/26/2009	6,009,469	2655-0185	6565
42624 75	590 12/03/2010		EXAM	INER
	BERQUIST JACKSO BLVD., 7TH FLOOR	ON & GOWDEY LLP		
ARLINGTON,			ART UNIT	PAPER NUMBER
:			DATE MAILED: 12/03/201	0
:				

Please find below and/or attached an Office communication concerning this application or proceeding.

į

.



Commissioner for Patents United States Patents and Trademark Office P.O.Box 1450 Alexandria, VA 22313-1450 www.uspto.gov

THIRD PARTY REQUESTER'S CORRESPONDENCE ADDRESS EWIN H. TAYLOR BLAKELY,SOKOLOFF,TAYLOR & ZAFMAN, LLP 1279 OAKMEAD PARKWAY SUNNYVALE, CA 94085-4040 Date:

MAILED

DEC U3 2010

CENTRAL REEXAMINATION UNIT

EX PARTE REEXAMINATION COMMUNICATION TRANSMITTAL FORM

REEXAMINATION CONTROL NO. : 90010422 PATENT NO. : 6009469 ART UNIT : 3992

Enclosed is a copy of the latest communication from the United States Patent and Trademark Office in the above identified ex parte reexamination proceeding (37 CFR 1.550(f)).

Where this copy is supplied after the reply by requester, 37 CFR 1.535, or the time for filing a reply has passed, no submission on behalf of the ex parte reexamination requester will be acknowledged or considered (37 CFR 1.550(g)).

	Control No.	Patent Under Reexamination						
	90/010,422	6,009,469						
Notice of Intent to Issue Ex Parte Reexamination Certificate	Examiner	Art Unit						
	ALEXANDER J. KOSOWSKI	3992						
The MAILING DATE of this communication appears o		prrespondence address						
 issued in view of (a) Patent owner's communication(s) filed: <u>10 No</u> (b) Patent owner's late response filed: (c) Patent owner's failure to file an appropriate re (d) Patent owner's failure to timely file an Appeal (e) Other: Status of <i>Ex Parte</i> Reexamination: 	 subject to reopening at the initiative of the Office or upon petition. <i>Cf.</i> 37 CFR 1.313(a). A Certificate will be issued in view of (a) Patent owner's communication(s) filed: <u>10 November 2010</u>. (b) Patent owner's late response filed:							
 (f) Change in the Specification: □ Yes ⊠ No (g) Change in the Drawing(s): □ Yes ⊠ No (h) Status of the Claim(s): 								
 (1) Patent claim(s) confirmed: <u>2,3,5,6,15 and 18</u>. (2) Patent claim(s) amended (including dependent on amended claim(s)): <u>1,9,14,16 and 17</u> (3) Patent claim(s) canceled: <u>8</u>. (4) Newly presented claim(s) patentable:								
(6) Patent claim(s) 🔲 previously 🔲 currently	disclaimed:							
(7) Patent claim(s) not subject to reexamination	n: <u>4,7 and 10-13</u> .							
2. Note the attached statement of reasons for patentabil necessary by patent owner regarding reasons for pate to avoid processing delays. Such submission(s) shou Patentability and/or Confirmation."	entability and/or confirmatio	n must be submitted promptly						
3. Note attached NOTICE OF REFERENCES CITED (P	TO-892).							
4. 🖾 Note attached LIST OF REFERENCES CITED (PTO/	SB/08 or PTO/SB/08 sub	stitute).						
5. The drawing correction request filed on is:	approved 🗌 disapprove	ed.						
 6. Acknowledgment is made of the priority claim under 35 U.S.C. § 119(a)-(d) or (f). a) All b) Some* c) None of the certified copies have been received. not been received. been filed in Application No. been filed in reexamination Control No. been received by the International Bureau in PCT Application No. 								
* Certified copies not received:								
7. 🔲 Note attached Examiner's Amendment.								
8. 🗍 Note attached Interview Summary (PTO-474).								
9. 🗍 Other:								
cc: Requester (if third party requester) U.S. Patent and Trademark Office								

a 16,

Page 2

DETAILED ACTION

1) This Office action addresses claims 1-3, 5-6, 9, 14-18 of United States Patent Number 6,009,469 (Mattaway et al), for which it has been determined in the Order Granting Ex Parte Reexamination (hereafter the "Order") mailed 3/13/09 that a substantial new question of patentability was raised in the Request for *Ex Parte* reexamination filed on 2/26/09 (hereafter the "Request"). Claims 4, 7, 10-13 are not subject to reexamination. This is a response to the second after final amendment filed 11/10/10. Claims 1-3, 5-6, 9 and 14-18 are allowable and/or confirmed below. Claim 8 has been canceled.

Examiner notes that the after final amendment filed 11/10/10 has re-written claim 9 in independent form, thereby incorporating the limitation from claim 9 into canceled claim 8. The limitation of claim 9 was confirmed in related reexamination 90/010416 in view of the same proposed prior art. In addition, previously confirmed claim 16 has been rewritten into independent form. Therefore, claims 9 and 16 are now allowable as amended.

STATEMENT OF REASONS FOR PATENTABILITY AND/OR CONFIRMATION

2) Claims 1-3, 5-6, 9 and 14-18 are allowable and/or confirmed.

The following is an examiner's statement of reasons for patentability and/or confirmation of the claims found patentable in this reexamination proceeding:

Referring to claim 1, the claim is allowable over the prior art that was explained in the request and determined to raise a substantial new question of patentability in the order granting reexamination and over the prior art that was applied and discussed by the examiner in the present reexamination proceeding because that prior art does not explicitly teach a computer

۹.

program product for use with a computer system comprising program code for determining the currently assigned network protocol address of the first process upon connection to the computer network, in combination with the remaining elements or features of the claimed invention.

Referring to claim 5, the claim is allowable over the prior art that was explained in the request and determined to raise a substantial new question of patentability in the order granting reexamination and over the prior art that was applied and discussed by the examiner in the present reexamination proceeding because that prior art does not explicitly teach a method for establishing point-to-point communications with other processes comprising determining the currently assigned network protocol address of the first process upon connection to the computer network, in combination with the remaining elements or features of the claimed invention.

Referring to claim 9, the claim is allowable over the prior art that was explained in the request and determined to raise a substantial new question of patentability in the order granting reexamination and over the prior art that was applied and discussed by the examiner in the present reexamination proceeding because that prior art does not explicitly teach a method for establishing a point-to-point communication including querying the server process as to the on-line status of the first callee process and receiving a network protocol address of the first callee process over the computer network from the server process, in combination with the remaining elements or features of the claimed invention.

Referring to claim 16, the claim is allowable over the prior art that was explained in the request and determined to raise a substantial new question of patentability in the order granting reexamination and over the prior art that was applied and discussed by the examiner in the present reexamination proceeding because that prior art does not explicitly teach a method for

establishing a point-to-point communication including wherein a generated element represents a communication line on mute status, in combination with the remaining elements or features of the claimed invention.

Claims 2-3, 6, 14-15, 17-18 depend on allowable claims, and are therefore also allowable.

Any comments considered necessary by PATENT OWNER regarding the above statement must be submitted promptly to avoid processing delays. Such submission by the patent owner should be labeled: "Comments on Statement of Reasons for Patentability and/or Confirmation" and will be placed in the reexamination file.

Conclusion

All correspondence relating to this ex parte reexamination proceeding should be directed as follows:

By U.S. Postal Service Mail to:

Mail Stop Ex Parte Reexam ATTN: Central Reexamination Unit Commissioner for Patents P.O. Box 1450 Alexandria, VA 22313-1450

By FAX to:

(571) 273-9900 Central Reexamination Unit

By hand to:

Customer Service Window Randolph Building 401 Dulany St. Alexandria, VA 22314

By EFS-Web:

Registered users of EFS-Web may alternatively submit such correspondence via the electronic filing system EFS-Web, at

https://sportal.uspto.gov/authenticate/authenticateuserlocalepf.html

EFS-Web offers the benefit of quick submission to the particular area of the Office that needs to act on the correspondence. Also, EFS-Web submissions are "soft scanned" (i.e., electronically uploaded) directly into the official file for the reexamination proceeding, which offers parties the opportunity to review the content of their submissions after the "soft scanning" process is complete.

Any inquiry concerning this communication or earlier communications from the

Reexamination Legal Advisor or Examiner, or as to the status of this proceeding, should be

directed to the Central Reexamination Unit at telephone number (571) 272-7705.

/Alexander J Kosowski/

Primary Examiner, Art Unit 3992

JESSICA HARRISON SUPERVISORY PATENT EXAMINER

	Application/Control No.	Applicant(s)/Patent Under Reexamination
ssue Classification	90010422	6,009,469
	Examiner	Art Unit
	ALEXANDER J KOSOWSKI	3992

ORIGINAL						INTERNATIONAL CLASSIFICATION								ION
	CLASS			SUBCLASS	S		CLAIMED				<u> </u>		NON	-CLAIMED
709			227			н	0	4	м	1 / 72 (2006.01.01)				
	CR	OSS REFI		5)		н	0	4	м	1 / 65 (2006.01.01)				
· · · · · · · · · · · · · · · · · · ·			н	0	4	м	1 / 66 (2006.01.01)				· · ·			
CLASS SUBCLASS (ONE SUBCLASS PER BLOCK)														
														· · · · · · · · · · · · · · · · · · ·
				·····										
		· · · · · · · · · · · · · · · · · · ·												
										· · · · · · · · · · · · · · · · · · ·				

3	Claims re	numbere	ed in the sa	ame orde	r as prese	ented by	applicant		CP.	A [] T.D.	[] R.1.4	47	
Final	Original	Final	Original	Final	Original	Final	Original	Final	Original	Final	Original	Final	Original	Final	Origin
										· · · · · · · · · · · · · · · · · · ·					
															ļ
															ļ
															ļ
												·····			ļ
															ļ
•······															
															ļ
															ļ
				-i											<u> </u>
						·		-			····				
]				

NONE		Total Claims Allowed:			
(Assistant Examiner)	(Date)	1	1		
/ALEXANDER J KOSOWSKI/ Primary Examiner.Art Unit 3992		O.G. Print Claim(s)	O.G. Print Figure		
(Primary Examiner)	(Date)	1	1		

.

U.S. Patent and Trademark Office

.

Part of Paper No. 20101118

Vic To entres

IN THE CLAIMS

Please amend the claims in this re-examination as follows:

8. (Canceled)

9. (Amended) In a computer system having a display and capable of executing a process, a method for establishing a point-to-point communication from a caller process to a callee process over a computer network, the caller process capable of generating a user interface and being operatively connected to the callee process and a server process over the computer network, the [The] method [of claim 8] comprising the steps of:

A. generating a user-interface element representing a first communication line;

B. generating a user interface element representing a first callee process;

C. querying the server process to determine if the first callee process is accessible; and

<u>D. establishing a point-to-point communication link from the caller process to the first</u> callee process, in response to a user associating the element representing the first callee process with the element representing the first communication line, wherein step C further comprises the steps of:

C.1 querying the server process as to the on-line status of the first callee process; and

C.2 receiving a network protocol address of the first callee process over the computer network from the server process.

14. (Amended) The method of claim [8] 9, further comprising the steps of:

E. generating a user interface element representing a communication line having a temporarily disabled status; and

F. temporarily disabling the point-to-point communication between the caller process and the first callee process, in response to the user associating the element representing the first callee process with the element representing the communication line having a temporarily disabled status.

2

	Application/Control No.	Applicant(s)/Patent Under Reexamination
Search Notes	90010422	6,009,469
	Examiner	Art Unit
	ALEXANDER J KOSOWSKI	3992

SEARCHED	

SEARCH NOTES							
Search Notes	Date	Examiner					
Reviewed proposed prior art and prosecution history	5/6/10	AJK					
Reviewed proposed prior art	11/19/10	AJK					

	INTERFERENCE SEA	RCH	
Class	Subclass	Date	Examine

<u> </u>			
U.S. Patent and	Trademark	Office	

.



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office Address: COMMISSIONER FOR PATENTS P.O. Box 1450 Alexandria, Virginia 22313-1450 www.uspto.gov

BIB DATA SHEET

CONFIRMATION NO. 6565

SERIAL NUMBE			CLASS	GROUP AR	T UNIT	ΑΤΤΟ	DRNEY DOCKET
90/010,422	DAT 02/26/2	-	709	3992	2		NO . 2655-0185
	RUL	E					
APPLICANTS 6,009,469, Residence Not Provided; NET2PHONE, INC. (OWNER), NEWARK, NJ; BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN LLP (3RD.PTY.REQ.), SUNNYVALE, CA; EWIN H. TAYLOR, SUNNYVALE, CA; ** CONTINUING DATA **********************************							
Foreign Priority claimed 35 USC 119(a-d) condition Verified and	Yes X No	Met aft Allowa	STATE OR	SHEETS DRAWINGS	TOT, CLAII	MS	
ADDRESS DAVIDSON BERQUIST JACKSON & GOWDEY LLP 4300 WILSON BLVD., 7TH FLOOR ARLINGTON, VA 22203 UNITED STATES							¥
TITLE			· · · · · · · · · · · · · · · · · · ·		-		
Graphic User Interface For Internet Telephony Application							
All Fee			Fees (Fil Fees (Pr Fees (Iss r	ocess	ing Ext. of time)		

Reexamination	Application/Control No.	Applicant(s)/Patent Under Reexamination
	90010422	6,009,469
	Certificate Date	Certificate Number

Requester Correspondence Address:	Patent Owner	\boxtimes	Third Party
BLAKELY SOKOLOFF TAYLOR & ZAFMAN LLP 1279 OAKMEAD PARKWAY SUNNYVALE, CA 94085-4040			

	AJK (examiner initials)	11/19/2010 (date)
* Ca	se Name	Director Initials
OPEN: 2:06cv2469 Net2phone v. Eb	Anton Ry	

COPENDING OFFICE PROCEEDINGS			
TYPE OF PROCEEDING	NUMBER		
1. no copending proceedings			
· · ·			

	INFORMATION DISCLOSURE STATEMENT BY APPLICANT			Reexam number	90/010,422		
				First Named Inventor	Mattaway et al.		
				· Patent Under Re-Exam	6009469		
	1		1449 (modified)	Issue Date	1999/12/28		
				Group Art Unit	3992		
				Examiner Name	KOSOWSKI, ALEXANDER J		
				Attorney Docket No.	2655-0185		
		Sheet	1 of 1	Confirmation No.	6565		
		·	. N	ON-PATENT REFERENCES			
	Examiner Initials*	Cite No.	Non-patent Reference	bibliographic information, where	e available	Notes	
		1-1	Second Supplemental	Expert Report of Bruce M. Mag	gs dated October 8, 2008, 6	-	
			pgs.				
•		1-2	Supplement to Respor	nsive Expert Expert Report of K 2008 9 pas	evin Jeffay, Ph.D. on Invalidity	:	
		1-3	Supplement to Respor October 8, 2008, 9 pag	nsive Expert Report of Kevin Je	ffay on Invalidity Issues, dated		
		1-4	Translation of Jananas	a Kakai UO7 120488 (aubliaha			
	/AK/	1-4	Translation of Japanes	e Kokai H07-129488 (published	1 May 19, 1995)		
		1-5					
		1-6					
		1-7				+	

Examiner Signature	/Alexander Kosowski/	Date Considered	11/18/2010

*Examiner: Initial if reference was considered, whether or not citation is in conformance with MPEP 609. Draw a line through citation if not in conformance and not considered. Include a copy of this form with next communication to applicant. Notes: If identified, the following is provided: EA = English Abstract, T = Translation, PT = Partial Translation, SOR = Statement of Relevancy, PF = Patent Family.

.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re PATENT APPLICATION OF: Net2Phone, Inc. (Patent No. 6,009,469) Control No.: 90/010,422 Issue Date: December 28, 1999

Title:**GRAPHIC USER INTERFACE FOR**
INTERNET TELEPHONY APPLICATION

Attorney Docket:2655-0185Group Art Unit:3992Examiner:KOSOWSKI, AlexanderConfirmation No.:6565Date:November 10, 2010

SUPPLEMENTAL AMENDMENT AFTER FINAL UNDER 37 C.F.R. 1.116

Hon. Commissioner of Patents P.O. Box 1450 Alexandria, VA 22313-1450

Sir:

In response to the Office Action dated May 10, 2010, and as a supplement to the Response filed on Monday, July 12, 2010, the Patent Owner hereby files a supplemental Amendment prior to the filing of its Appeal Brief, in which:

A listing of the amended claims in the re-examination are provided starting on page 2; and

Remarks/Arguments are provided starting at page 4.

IN THE CLAIMS

Please amend the claims in this re-examination as follows:

8. (Canceled)

9. (Amended) In a computer system having a display and capable of executing a process, a method for establishing a point-to-point communication from a caller process to a callee process over a computer network, the caller process capable of generating a user interface and being operatively connected to the callee process and a server process over the computer network, the [The] method [of claim 8] comprising the steps of:

A. generating a user-interface element representing a first communication line;

B. generating a user interface element representing a first callee process;

C. querying the server process to determine if the first callee process is accessible; and

D. establishing a point-to-point communication link from the caller process to the first callee process, in response to a user associating the element representing the first callee process with the element representing the first communication line, wherein step C further comprises the steps of:

C.1 querying the server process as to the on-line status of the first callee process; and

C.2 receiving a network protocol address of the first callee process over the computer network from the server process.

14. (Amended) The method of claim [8] 9, further comprising the steps of:

E. generating a user interface element representing a communication line having a temporarily disabled status; and

F. temporarily disabling the point-to-point communication between the caller process and the first callee process, in response to the user associating the element representing the first callee process with the element representing the communication line having a temporarily disabled status.

16. (Amended) In a computer system having a display and capable of executing a process, a method for establishing a point-to-point communication from a caller process to a callee process over a computer network, the caller process capable of generating a user interface and being operatively connected to the callee process and a server process over the computer network, the [The] method [of claim 15] comprising the steps of:

A. generating a user-interface element representing a first communication line;

B. generating a user interface element representing a first callee process;

C. querying the server process to determine if the first callee process is accessible;

D. establishing a point-to-point communication link from the caller process to the first callee process, in response to a user associating the element representing the first callee process with the element representing the first communication line;

E. generating a user interface element representing a communication line having a temporarily disabled status; and

<u>F. temporarily disabling the point-to-point communication between the caller process and</u> the first callee process, in response to the user associating the element representing the first callee process with the element representing the communication line having a temporarily disabled status, wherein the element generated in step E represents a communication line on hold status, and wherein the element generated in step E represents a communication line on mute status.

17. (Amended) The method of claim [8] $\underline{9}$ wherein the display further comprises a visual display.

3

ARGUMENTS

The Rejection of Claims 9, 14, 15, 17 and 18 Over the Combination of the Etherphone Papers in view of Pinard

Status of the Claims and Support for the Changes

A statement of the status of all the claims in the proceeding is as follows: Rejected: Claims 9 and 14, 15, 17 and 18; allowed or confirmed: Claims 1-3, 5, 6 and 16; withdrawn: none; objected to: none; canceled: 8; and not subject to re-examination: Claims 4, 7 and 10-13.

The changes are supported by the originally filed specification and do not introduce any new matter. Claim 9 has been amended to include the limitations of claim 8. Claims 14 and 17 have been amended to update their dependencies in light of the cancellation of claim 8. Claim 16 has been rewritten in independent form in light of the confirmation of its patentability. Thus, the changes for each of the amended claims can be found, at least, in the claims which are being rewritten and the claims from which they depend.

These amendments should be entered as they are in compliance with 37 C.F.R. 41.33 which allows entry of Amendments filed after a notice of appeal but prior to the filing of an appeal brief if the amendments are in compliance with 37 C.F.R. 1.116. These amendments are in compliance with 37 C.F.R. 1.116 as they "present[] rejected claims in better form for consideration on appeal" by placing the case in condition for allowance/confirmation, as discussed in more detail below.

4

Summary of the Remaining Ground for Rejection

The remaining ground for rejection is a rejection of claims 9, 14, 15, 17 and 18 under 35 U.S.C. 103(a) based on the combination of the Etherphone papers in view of Pinard.¹

Response to Remaining Ground for Rejection

In an effort to accelerate prosecution, claim 8 has been canceled herewith (without prejudice to the validity of the claims which depend from claim 8 but which are not the subject of the re-examination), and claim 9 has been rewritten in independent form to have a claim structure similar to confirmed claim 11 of re-examined U.S. Patent No. 6,108,704 (Control No. 90/010,416) (hereinafter "the '416 re-examination"). As shown in the table below, amended claim 9 of this re-examination has the additional limitation of "querying the server process to determine if the first callee process is accessible" as compared to confirmed claim 11 of the '416 re-examination.

Amended Claim 9 of this Re-examination	Amended Claim 11 of Re-examination Control
(without bracketing)	No. 90/010,416 (without bracketing)
9. In a computer system having a	11. In a computer system, a method for
display and capable of executing a process, a	establishing a point-to-point communication
method for establishing a point-to-point	link from a caller process to a callee process
communication from a caller process to a	over a computer network, the caller process
callee process over a computer network, the	having a user interface and being operatively
caller process capable of generating a user	connectable to the callee process and a server
interface and being operatively connected to	over the computer network, the method
the callee process and a server process over the	comprising the steps of:
computer network, the method comprising the	

¹ The rejection under 35 U.S.C. 103(a) over NetBIOS and Pinard was withdrawn in the Advisory Action dated 7/20/2010, as was the rejection of claim 16 on all grounds.

-	
steps of:	
A. generating a user-interface element	A. providing a user interface element
representing a first communication line;	representing a first communication line;
B. generating a user interface element	B. providing a user interface element
representing a first callee process;	representing a first callee process; and
C. querying the server process to	
determine if the first callee process is	
accessible;	
D. establishing a point-to-point	C. establishing a point-to-point
communication link from the caller process to	communication link from the caller process to
the first callee process, in response to a user	the first callee process, in response to a user
associating the element representing the first	associating the element representing the first
callee process with the element representing	callee process with the element representing
the first communication line,	the first communication line,
wherein step C further comprises the	wherein step C further comprises the
steps of:	steps of:
C.1 querying the server process as to	c.1 querying the server as to the on-line status
the on-line status of the first callee process; and	of the first callee process; and
C.2 receiving a network protocol	c.2 receiving a network protocol
address of the first callee process over the	address of the first callee process over the
computer network from the server process.	computer network from the server.

In the Statement of Reasons for Patentability and/or Confirmation in the '416 reexamination, the paragraph crossing pages 2 and 3 explains that amended claim 11 in the '416 re-examination was found to be patentable "because the prior art does not explicitly teach ... receiving a network protocol address of the first callee process over the computer network from the server." It is respectfully submitted that the same rationale holds true for amended claim 9

since the applied references do not teach the same claimed dynamic addressing limitation of amended claim 9 that they did not teach with respect to amended claim 11 of the '416 reexamination. In addition, the applied references also do not teach the claimed generating steps as set forth in the first response to the outstanding Office Action. Those arguments are incorporated herein by reference.

Consequently, in light of the above discussions, the outstanding grounds for rejection are believed to have been overcome and the patentability of the claims subject to re-examination should be indicated as confirmed. An early and favorable action to that effect is respectfully requested.

CHARGE STATEMENT: Deposit Account No. 501860, order no. 2655-0185.

The Commissioner is hereby authorized to charge any fee specifically authorized hereafter, or any missing or insufficient fee(s) filed, or asserted to be filed, or which should have been filed herewith or concerning any paper filed hereafter, and which may be required under Rules 16-18 (missing or insufficiencies only) now or hereafter relative to this application and the resulting Official Document under Rule 20, or credit any overpayment, to our Accounting/ Order Nos. shown above, for which purpose a <u>duplicate</u> copy of this sheet is attached.

This CHARGE STATEMENT <u>does not authorize</u> charge of the <u>issue fee</u> until/unless an issue fee transmittal sheet is filed.

	Respectfully submitted,	
CUSTOMER NUMBER 42624	By: / Michael R. Casey /	
	Michael R. Casey, Ph.D. Registration No.: 40,294	
Davidson Berquist Jackson & Gowdey LLP 4300 Wilson Blvd., 7th Floor, Arlington, Virginia 22203 Main: (703) 894-6400 • FAX: (703) 894-6430		

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re PATENT APPLICATION OF:

Net2Phone, Inc.

Control No.: 90/010,422

Issue Date: December 28, 1999 Title: GRAPHIC USER INTERFACE FOR INTERNET TELEPHONY APPLICATION

Attorney Docket: 2655-0185 Group Art Unit: 3992 Examiner: KOSOWSKI, Alexander J. Date: November 10, 2010 Confirmation No.: 6565

INFORMATION DISCLOSURE STATEMENT

Hon. Commissioner of Patents P.O. Box 1450 Alexandria, VA 22313-1450

Sir:

Pursuant to 37 C.F.R. § 1.56, the attention of the Patent and Trademark Office is hereby directed to the reference(s) listed on the attached PTO-1449. One copy of each non-U.S. Patent reference is attached. It is respectfully requested that the information be expressly considered during the prosecution of this application, and that the reference(s) be made of record therein and appear among the "References Cited" on any patent to issue therefrom.

The submission of any document herewith, which is not a statutory bar, is not intended that any such document constitutes prior art against any of the claims of the present application or is considered to be material to patentability as defined in 37 C.F.R. § 1.56(b). Applicants do not waive any rights to take any action which would be appropriate to antedate or otherwise remove as a competent reference against the claims of the present application.

In re Application of: Net2Phone, Inc. Control No.: 90/010,422 Page 2 of 2

It has come to the attention of the undersigned that Exhibit D referenced on page 495 of the redacted Expert Report of Professor Bruce M. Maggs (as Supplemented September 8, 2008) was not included in the copy of the report filed in that IDS. That reference, however, was submitted as "Translation of Japanese Kokai H07-129488 (published May 19, 1995)" which was noted as considered by the Examiner.

CHARGE STATEMENT: Deposit Account No. 501860, order no. 2655-0185.

The Commissioner is hereby authorized to charge any fee specifically authorized hereafter, or any missing or insufficient fee(s) filed, or asserted to be filed, or which should have been filed herewith or concerning any paper filed hereafter, and which may be required under Rules 16-18 (missing or insufficiencies only) now or hereafter relative to this application and the resulting Official Document under Rule 20, or credit any overpayment, to our Accounting/Order Nos. shown above, for which purpose a duplicate copy of this sheet is attached

This CHARGE STATEMENT does not authorize charge of the issue fee until/unless an issue fee transmittal sheet is filed.

CUSTOMER NUMBER	Respectfully submitted,
42624	
Davidson Berquist Jackson & Gowdey LLP 4300 Wilson Blvd., 7th Floor,	By: / Michael R. Casey /
Arlington Virginia 22203 Main: (703) 894-6400 • FAX: (703) 894-6430	Michael R. Casey, Ph.D.

Registration No.: 40,294

			Reexam number	90/010,422		
INFORMATION DISCLOSURE STATEMENT BY APPLICANT			First Named Inventor Mattaway et al.			
			Patent Under Re-Exam 6009469			
			Issue Date	1999/12/28		
FUN	FORM PTO-1449 (modified)		Group Art Unit	3992		
			Examiner Name	KOSOWSKI, ALEXANDER J		
			Attorney Docket No.	2655-0185		
9	Sheet ⁻	1 of 1	Confirmation No.	6565		
		NI				
			DN-PATENT REFERENCES		1	
Examiner Initials*	Cite No.	Non-patent Reference	bibliographic information, wher	e available	Notes	
	1-1	Second Supplemental l pgs.	Second Supplemental Expert Report of Bruce M. Maggs dated October 8, 2008, 6 pgs.			
	1-2	Supplement to Responsive Expert Expert Report of Kevin Jeffay, Ph.D. on Invalidity Issues, dated Sept. 8, 2008, 9 pgs.				
	1-3	Supplement to Responsive Expert Report of Kevin Jeffay on Invalidity Issues, dated October 8, 2008, 9 pages.				
	1-4	Translation of Japanese Kokai H07-129488 (published May 19, 1995)				
	1-5					
	1-6					
	1-7					

Examiner	Date
Signature	Considered

*Examiner: Initial if reference was considered, whether or not citation is in conformance with MPEP 609. Draw a line through citation if not in conformance and not considered. Include a copy of this form with next communication to applicant. Notes: If identified, the following is provided: EA = English Abstract, T = Translation, PT = Partial Translation, SOR = Statement of Relevancy, PF = Patent Family.

CERTIFICATE OF SERVICE

The undersigned hereby certifies that, on November 10, 2010, the SUPPLEMENTAL AMENDMENT AFTER FINAL UNDER 37 C.F.R. 1.116 filed in Re-examination Control No. 90/010,422, and its corresponding Information Disclosure Statement (with 4 non-patent references) were served by U.S. First Class Mail, postage pre-paid, on Requestor as follows:

Blakely, Sokoloff, Taylor & Zafman LLP 1279 Oakmead Parkway Sunnyvale, CA 94085-4040

/ Michael R. Casey /

Michael R. Casey, Ph.D.

Electronic Acknowledgement Receipt			
EFS ID:	8808697		
Application Number:	90010422		
International Application Number:			
Confirmation Number:	6565		
Title of Invention:	Graphic User Interface For Internet Telephony Application		
First Named Inventor/Applicant Name:	6,009,469		
Customer Number:	42624		
Filer:	Michael R. Casey		
Filer Authorized By:			
Attorney Docket Number:	2655-0185		
Receipt Date:	10-NOV-2010		
Filing Date:	26-FEB-2009		
Time Stamp:	14:31:16		
Application Type:	Reexam (Third Party)		

Payment information:

Submitted with I	Payment		no			
File Listing:						
Document Number	Document Description		File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1		101110_supplemental_after _final_01_cover.pdf	74214 no	1		
Supplemental Amendment			e100ffbbeee3e8ce992c59093e51111d5972 5f0e			
Warnings:						
Information: Cisco - Exhibit 1003 - Page 41			41			

1					
2	Claims	20101110_supplemental_after _final_02_claims.pdf	61543 11b0fdc8d98abee56e552feedd5dedddcbe f66a6	no	2
Warnings:			1040		
Information:					
3	Applicant Arguments/Remarks Made in an Amendment		139533	no	4
	an Amendment	_final_03_remarks.pdf	fdba4c550cc91fc7231f1ea403372f0e45418 d7e		
Warnings:					
Information:					
4	Transmittal Letter	20101110_IDS_transmittal.pdf	134763	no	2
			62d80c799a257b5f9e00fd98f740c64a65bc 4254		
Warnings:					
Information:					
5	Information Disclosure Statement (IDS)	20101110_1449.pdf	51874	no	1
-	Filed (SB/08)		d6ceaf78376c9f5fc8994de68ece036f31118 b0e		
Warnings:					
Information:					
This is not an U	SPTO supplied IDS fillable form				
6	NPL Documents	NP0000.pdf	460448	no	6
0	6 NPL Documents		94816ae2b186fc3cfb6ec6b11f3c96a1ed5d 1190		
Warnings:					
Information:					
7	NPL Documents	NP0001.pdf	169154	no	9
,		i i ocor.pai	54f51f4f9fba5a0895016138eaa383458051 bc01	110	
Warnings:					
Information:					
8	NPL Documents	NP0002.pdf	1105522	no	9
		Wie Documents Wie 0002.put	8bbf8a738631f4a9a78c1ff994df5cdbc9578 926		
Warnings:					
Information:					
9	NPL Documents	NP0003.pdf	1380439	no	7
9 NPL Documents	in coosipui	93da8abe7003f0a96bc5f683c173ddd234e 7f94a		, 	
Warnings:	·				
Information:					
10	Reexam Certificate of Service	20101110_supplemental_after	58363	no	1
	_final_04_COS.pdf	453e96876dc5c3edf6834ea068cc139093b 0b4c0			
	I		Cisco - Exhibit 1	003 - Page	42

Warnings:

Information:

Total Files Size (in bytes):

3635853

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re PATENT APPLICATION OF: Net2Phone, Inc. (Patent No. 6,009,469) Control No.: 90/010,422 Issue Date: December 28, 1999 Title: GRAPHIC USER INTERFACE FOR INTERNET TELEPHONY APPLICATION Attorney Docket:2655-0185Group Art Unit:3992Examiner:KOSOWSKI, AlexanderConfirmation No.:6565Date:November 10, 2010

APPEAL BRIEF

Hon. Commissioner of Patents P.O. Box 1450 Alexandria, VA 22313-1450

Sir:

In response to the Office Action dated May 10, 2010, in support of its appeal, the Patentee respectfully submits this Appeal Brief in compliance with 37 C.F.R. 41.37 including sections set forth in the order specified in 37 C.F.R. 41.37(c)(1).

(i) Real Party in Interest

As evidenced by the assignment recorded at reel 017105/frame 0240, the real party in interest for this appeal is Net2Phone, Inc., having a principal place of business in Newark, NJ. Net2Phone, Inc. is a wholly-owned subsidiary of International Discount Telecommunications Corporation (IDT Corporation), a Delaware Corporation having a principal place of business at 520 Broad Street, Newark, New Jersey 07102. IDT Corporation is a publicly-traded corporation.

(ii) Related Appeals and Interferences

No prior and pending appeals, interferences or judicial proceedings are known to appellant, the appellant's legal representative, or assignee which may be related to, directly affect or be directly affected by or have a bearing on the Board's decision in the pending appeal. The

patent under re-examination was the subject of a previous litigation (Net2Phone, Inc. v. eBay et al., U.S. District Court of New Jersey, Civil Action No. 06-2469 (KSH)), which has now settled.

(iii) Status of claims

If the Amendment filed on even-date herewith is entered, the status of the claims will be: Rejected: Claims 9 and 14, 15, 17 and 18; allowed or confirmed: Claims 1-3, 5, 6 and 16; withdrawn: none; objected to: none; canceled: Claim 8; and not subject to re-examination: Claims 4, 7 and 10-13.

Of those claims, claims 9 and 14, 15, 17 and 18 are being appealed.

If the Amendment filed on even-date herewith is not entered, the status of the claims will

be:

Rejected: Claims 8, 9 and 14, 15, 17 and 18; allowed or confirmed: Claims 1-3, 5, 6 and 16; withdrawn: none; objected to: none; canceled: none; and not subject to re-examination: Claims 4, 7 and 10-13.

Of those claims, claims 8, 9 and 14, 15, 17 and 18 are being appealed.

(iv) Status of amendments

The amendment filed on even-date herewith, but before the filing of the appeal brief, cancels claim 8 and contains amendments to claims 9, 14, 16 and 17. That amendment has not been entered as of the filing date of this appeal brief, but is believed to place the case in

condition for allowance as it incorporates the limitation of claim 8 into claim 9 and causes amended claim 9 to include limitations substantially similar to those of claim 11 of another, nowterminated reexamination (90/010,416) and contains an additional limitation as well.

(v) Summary of claimed subject matter

Claim 8

Claim 8 "relates ... to a method and apparatus for facilitating audio communications over computer networks." U.S. Patent No. 6,009,469 (hereinafter "the '469 patent"), col. 1, lines 54-57. As described in the Background of the Invention "Permanent IP addresses of users and devices accessing the Internet readily support point-to-point communications of voice and video signals over the Internet. For example, real-time video teleconferencing has been implemented using dedicated IP addresses and mechanisms known as reflectors." Col. 2, lines 31-36. However, many users are not associated with permanent IP addresses, as was often the case with dial-up users that connected to modems in modem "pools" where which modem a user connected with depended on which modem was not already in use at the time of the call. As described in the specification:

Devices such as a host computer or server of a company may include multiple modems for connection of users to the Internet, with a temporary IP address allocated to each user. For example, the host computer may have a general IP address "XXX.XXX.XXX," and each user may be allocated a successive IP address of XXX.XXX.10, XXX.XXX.11, XXX.XXX.12, etc. Such temporary IP addresses may be reassigned or recycled to the users, for example, as each user is successively connected to an outside party. For example, a host computer of a company may support a maximum of 254 IP addresses which are pooled and shared between devices connected to the host computer.

3

Col. 2, lines 18-30. This leads to the problem that "Due to the dynamic nature of temporary IP addresses of some devices accessing the Internet, point-to-point communications in real-time of voice and video have been generally difficult to attain." Col. 2, lines 36-39. Likewise, "The ability to locate users having temporary or dynamically assigned Internet Protocol address has been difficult without the user manually initiating the communication. Accordingly, spontaneous, real-time communications with such users over computer networks have been impractical." Col. 2, lines 40-44.

As a result, a "need exists for a way to obtain the dynamically assigned Internet Protocol address of a user having on-line status with respect to a computer network, particularly the Internet." Col. 2, lines 56-59. Also a "need exists for a method and apparatus by which to establish real-time, point-to-point communications over a computer network using a communication utility having an interface which combines the familiar aspects of current hardware communication utilities but which allows for the flexibility associated with graphic user interfaces." Col. 2, lines 60-65.

In one embodiment, "The record entries of On-line table 1516B are used by connection server 1512 and information server 1514, as explained hereinafter, to provide a directory of those WebPhone client processes currently having on-line status with respect to the computer network." Col. 20, lines 49-54. "Each WebPhone application, also referred to as a WebPhone client process, connects to global server 1500 upon start up to inform global server 1500 that the WebPhone client process is on-line and available to make and/or receive calls." Col. 21, lines 57-61. Later, "Prior to transmission of the <ONLINE ACK> packet, connection server 1514 updates database 1516, specifically On-line table 1516B to indicate that WebPhone 1536 is on-line with respect to the computer network." Col. 23, lines 28-32.

The preamble of claim 8 recites "a method for establishing a point-to-point communication from a caller process to a callee process over a computer network, the

4

caller process capable of generating a user interface and being operatively connected to the callee process and a server process over the computer network." The method of claim 8 "provide[s] computer users with a powerful protocol in which to directly establish real-time, point-to-point communications over computer networks directly without server required linking. The … directory server assists in furnishing the current dynamically assigned internet protocol address of other similarly equipped computer users or information about such users." Col. 26, lines 31-38.

Claim 8 further recites "A. generating a user-interface element representing a first communication line." "Referring again to FIG. 14, the WebPhone GUI 1400 consists of a main window which has the look of a modern cellular flip phone and a set of dialog boxes launched from window. Operation of the WebPhone is controlled by selecting objects, i.e., buttons, text and images, and dragging objects, i.e., lines, parties, messages, etc., as explained hereinafter." Col. 26, lines 43-46. "WebPhone GUI 1400 comprises a plurality of visual objects, including ... line pad 1404" (col. 26, lines 47-49) which represents communication lines. "The line pad 1404 comprises four toggle buttons L1-L4, each of which has a letter, a number and an LED indicating the status of the line. When one or more parties are associated, i.e., dragged and dropped, with a line, the letter designating the appropriate line turns from an L to C indicating a conference call." Paragraph crossing cols. 27 and 28.

Claim 8 further recites "B. generating a user interface element representing a first callee process." "Operation of the WebPhone is controlled by selecting objects, i.e., buttons, text and images, and dragging objects, i.e., lines, parties, messages, etc., as explained hereinafter." Col. 26, lines 43-46. The specification describes that "the user of WebPhone 1536 requests assistance from global server 1500 to obtain the current dynamically assigned Internet Protocol address of the prospective callee WebPhone." Col. 23, lines 53-56. "The line pad 1404 comprises four toggle buttons L1-L4, each of which has a letter, a number and an LED indicating the status of the line. When one or

more parties are associated, i.e., dragged and dropped, with a line, the letter designating the appropriate line turns from an L to C indicating a conference call." Paragraph crossing cols. 27 and 28.

Claim 8 further recites querying "the server process to determine if the first callee process is accessible." The specification states "Connection server 1512 of global server 1500 utilizes the value of the E-mail address specified in the <CONNECT REQ> packet to perform a one-to-one mapping in the on-line table 1516B to determine the current Internet Protocol address of the indicated callee, as illustrated by the flowchart of FIG. 15A. Once this mapping is performed, the server 1500 transmits to WebPhone 1536 a <CONNECT ACK> packet, as indicated by message 7A of FIG. 17A. The <CONNECT ACK> packet has the format and content as illustrated in Table 6 and includes the IP address of the callee as well as information such as an error code to indicate that no WebPhone application is associated with that callee. Alternatively, if the selected callee is off line, global server 1500 transmits to WebPhone 1536 an <OFF LINE> packet to indicate that the desired party is not on-line, as illustrated by message 7B of FIG. 17A." Paragraph crossing cols. 23 and 24.

Claim 8 further recites "D. establishing a point-to-point communication link from the caller process to the first callee process, in response to a user associating the element representing the first callee process with the element representing the first communication line." "Operation of the WebPhone is controlled by selecting objects, i.e., buttons, text and images, and dragging objects, i.e., lines, parties, messages, etc., as explained hereinafter." Col. 26, lines 43-46. "The line pad 1404 comprises four toggle buttons L1-L4, each of which has a letter, a number and an LED indicating the status of the line. When one or more parties are associated, i.e., dragged and dropped, with a line, the letter designating the appropriate line turns from an L to C indicating a conference call." Paragraph crossing cols. 27 and 28. "WebPhone 1536 transmits to WebPhone 1538 a <CALL> packet as illustrated by message 8 of FIG. 16A. The <CALL> packet

has the format illustrated in Table 6 and may, optionally, include information identifying the compression/decompression (codec) used by the caller WebPhone." Col. 24, lines 27-32. "Following transmission of <CALL ACK> packet by callee WebPhone 1538, the callee WebPhone further transmits an <ANSWER> packet to caller WebPhone 1536, as illustrated by message 10 of FIG. 17A. … In addition, caller WebPhone 1536 opens a second socket to callee WebPhone 1538 over which the respective WebPhones may exchange <AUDIO> packets, as illustrated by messages 11A-B of FIG. 17A. … The WebPhone application enables the parties to converse in real-time, telephone quality, encrypted audio communication over the Internet and other TCP/IP based networks." Col. 25, lines 20-41.

<u>Claim 9</u>

Claim 9 further adds the limitation of "wherein step C further comprises the steps of: C.1 querying the server process as to the on-line status of the first callee process; and C.2 receiving a network protocol address of the first callee process over the computer network from the server process." As described above with respect to claim 8, a "need exists for a way to obtain the dynamically assigned Internet Protocol address of a user having on-line status with respect to a computer network, particularly the Internet." Col. 2, lines 56-59. In one embodiment, "The record entries of On-line table 1516B are used by connection server 1512 and information server 1514... to provide a directory of those WebPhone client processes currently having on-line status with respect to the computer network." Col. 20, lines 49-54. "Each WebPhone application, also referred to as a WebPhone client process, connects to global server 1500 upon start up to inform global server 1500 that the WebPhone client process is on-line and available to make and/or receive calls." Col. 21, lines 57-61. The system further "provide[s] computer users with a powerful protocol in which to directly establish real-time, point-to-point communications over computer networks directly without server required linking. The ...

directory server assists in furnishing the current dynamically assigned internet protocol address of other similarly equipped computer users or information about such users." Col. 26, lines 31-38. Thus, the system can provide dynamically assigned addresses to clients wishing to perform point-to-point communication.

(vi) Grounds of rejection to be reviewed on appeal

The grounds for rejection to be reviewed on appeal are whether claims 8, 9, 14, 15, 17 and 18 are rendered obvious over the combination of the Etherphone papers in view of Pinard.¹ The patentability of claims 8 and 9 are argued separately herein.

(vii) Argument

The Rejection of Claims 8, 9, 14, 15, 17 and 18 Over the Combination of the Etherphone Papers in view of Pinard

<u>Claim 8</u>

Querying the Server Process

Claim 8 recites "a method for establishing a point-to-point communication from a caller process to a callee process over a computer network, the caller process capable of generating a user interface and being operatively connected to the callee process and a server process over the computer network." Step C. of the method provides querying "the server process to determine if the first callee process is accessible." The Office Action alleges that this limitation is taught by the Etherphone papers and cites "Swinehart, pg. 2, 4, Zellweger, pg. 5, whereby a query is transmitted to determine a location of a second Etherphone by contacting a server." The Office Action does not identify any particular passages of those pages to guide an analysis, so those pages are discussed generally herein.²

¹ The rejection under 35 U.S.C. 103(a) over NetBIOS and Pinard was withdrawn in the Advisory Action dated 7/20/2010, as was the rejection of claim 16 on all grounds.

 $^{^{2}}$ Should an Examiner's Answer be issued in response to this brief, it is respectfully requested that the portions relied upon by the Office Action be cited with greater specificity, e.g., by using paragraph numbers or section numbers.

The first paragraph of the left-hand column of page 2 of Swinehart states "Lee turns to his workstation and registers Karmen as a *visitor* (Figure 1). Immediately, Lee's own telephone repeat's the ring-duet. ... During Karmen's meeting with Lee, two additional calls find her in a similar way, and Lee also answers one that rings with his own motif. An additional call to Karmen after she has returned to her office reminds lee to terminate the visiting arrangement." Section 2.3 of Swinehart further states "Logging in tells the telephone system where Karmen is."

Neither of those sections describes how the information is distributed among workstations, let alone querying the server process to determine if the first callee process is accessible. Instead, the workstations themselves could broadcast information about workstation associations and Etherphones such that the Etherphones initiating communication would have to receive the broadcast information in order to keep track of the associations. Alternatively, the workstations themselves could transmit information about workstation associations and Etherphones on a workstation-by-workstation basis such that the Etherphones initiating communication would have to receive a message from each workstation in order to keep track of its associations. Thus, page 2 of Swinehart does not inherently disclose the claimed querying limitation.

Page 4 of Swinehart also does not teach the claimed querying step. Section 3.1 of Swinehart states that the "telephone control server manages voice switching by sending to each Etherphone or service the network addresses of the other participants." Section 3.2 of Swinehart also states that "The *telephone control server* ... uses dynamic information linking users to workstations in order to provide calls to individuals rather than fixed locations, and the registration of *visitors* in the offices of their colleagues." However, both of those sections do not explicitly or inherently disclose querying the server process as claimed. As described above, the telephone control server could instead utilize broadcast messages (or messages to individual workstations) to inform the workstations and/or Etherphones about information that they may need in the future. In such a configuration, the caller process would not need to query the server

9

process for information that it already had. Thus, the Office Action has not shown that page 4 of Swinehart teaches the querying limitation either.

Page 5 of Zellweger is similarly deficient. The first full paragraph of the left-hand column of page 5 states:

If an Etherphone user logs in at a workstation, his calls can be automatically forwarded to the adjacent Etherphone. An additional feature, called visiting, allows him to register his presence with a second workstation or Etherphone, such as during a meeting. Each visit request cancels any earlier requests. The common problem of forgetting to cancel call forwarding is eased by ringing both Etherphones during visiting.

Like with Swinehart, Zellweger does not disclose the implementation details of how the call forwarding/visiting occurs. As it is not inherently implemented as claimed, Zellweger does not teach the claimed querying step.

Swinehart and Zellweger also disclose workstations that are separate from the Etherphones in the system. There is no disclosure in those references how the workstations know if the callee process that will engage in the point-to-point communication is accessible. The references do not disclose, for example, that the workstations periodically determine if the adjacent Etherphones are accessible. Instead, the Etherphones could be unplugged from power or the Ethernet (as they have their own Ethernet connections) such that they are not actually accessible. Thus, logging into a workstation will not actually enable one to know if the adjacent Etherphone is accessible. For this reason also, Swinehart and Zellweger do not disclose the querying limitation.

Since the querying step is not alleged to be taught by Pinard, the combination of references fails to teach the same limitation not taught by the references individually.

Establishing A Point-To-Point Communication Link


Claim 8 further includes the step of "establishing a point-to-point communication link from the caller process to the first callee process." The Office Action asserts that Swinehart (page 2) and Zellweger (Figure 4) teach such a limitation in light of the disclosure that "voice datagrams are transmitted directly among participants." As the Patentee argued in response to the first Office Action, it appears that the Office Action means that the Etherphones are the "participants." If this is the case, there is no indication that the combination meets the limitation of "the caller process capable of generating a user interface" as the Office Action has not alleged that the Etherphone has such a capability. Declaration of Ketan Mayer-Patel Under 37 C.F.R. 1.132, dated November 25, 2009 (hereinafter the "First Mayer-Patel Declaration"), paragraph 43. Said differently, the Etherphones and workstations run on hardware in separate housings; thus, the process that is generating the user interface of the workstation (alleged by the Office Action to be the "caller process") is not the process that engages in the point-to-point communication with the callee process.

In the second Office Action, in the section entitled Response to Arguments, the Office Action responded to such a point by stating:

Examiner notes that PO appears to be arguing that the Etherphones themselves are not capable of generating user interfaces by themselves. If this is the case, examiner points to Zellweger, page 2. Zellweger teaches that workstations work in combination with the Etherphones and provided the enhanced user interface functionality. The Etherphones are only used to separately split up voice voice-processing functionality due to hardware processing requirements. Therefore, the caller process is a function of the workstation in combination with the Etherphone.

Second Office Action, page 13.

In that argument, the Office Action admits that multiple hardware platforms are used to achieve the functionality alleged to be in the Etherphone papers. As shown below in Figures 1 and 11 of Zellweger and Swinehart, respectively, the workstations and Etherphones operate independently, are separate devices and, in fact, each have their own Ethernet connections.

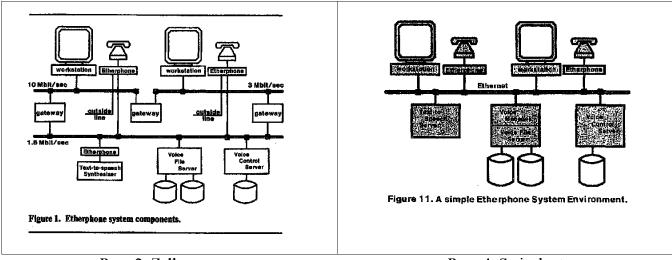

Page 2, Zellweger

Page 4, Swinehart

Thus, there is no process as claimed that runs on a workstation or the Etherphone that both generates a user interface and participates in a point-to-point communication with a callee process. If the Office Action is proposing a modification to the teachings of the Etherphone papers in order to create a system where the user interface and point-to-point communication are implemented by the same process, then it is incumbent on the Office Action to show that one of ordinary skill in the art would have been motivated to make the proposed change.

The Office Action has also not alleged that the other references overcome this deficiency of the Etherphone references. Thus, claim 8 and its dependent claims are patentable over the applied combination of references for those reasons as well.

No Motivation To Combine The Applied References

With respect to the motivation to combine the references, the Office Action alleges that: it would have been obvious to one skilled in the art at the time the invention was made to utiliz[e] the user-interface elements and interactions taught by Pinard in the invention taught by EtherPhone since Pinard teaches that the invention can be used in any system in which a personal computer in conjunction with a server operates..., and since examiner notes that both EtherPhone and Pinard relate to communications between at least two users implemented in a computerized environment.

The Office Action, however, provides no evidence to support this allegation. For example, the Office Action does not point to a problem identified in the art which was known to exist in one reference and for which the second references was the solution. Moreover, just because two references could be combined does not mean that one of ordinary skill in the art would have been motivated to do so absent the teachings in the patentee's specification.

Furthermore, the Etherphone papers and Pinard utilize different technologies for routing calls. Pinard places calls between conventional telephone equipment using a telephony server 5 connected to telephone interface circuits 8. Thus, Pinard does not disclose generating a user interface element representing a first callee process that is going to communicate with a caller process that generates a user interface because the phone application process in Pinard does not have another process with which to engage in point-to-point communications.

Accordingly, the patentability of claim 8 and its dependent claims should be confirmed.

Claim 9

Claim 9, in either its dependent or independent form, has an implicit or explicit claim structure similar to confirmed claim 11 of re-examined U.S. Patent No. 6,108,704 (Control No. 90/010,416) (hereinafter "the '416 re-examination"). As shown in the table below, amended claim 9 of this re-examination has the additional limitation of "querying the server process to determine if the first callee process is accessible" as compared to confirmed claim 11 of the '416 re-examination.

Amended Claim 9 of this Re-examination	Amended Claim 11 of Re-examination Control
(without bracketing)	No. 90/010,416 (without bracketing)
9. In a computer system having a	11. In a computer system, a method for
display and capable of executing a process, a	establishing a point-to-point communication
method for establishing a point-to-point	link from a caller process to a callee process
communication from a caller process to a	over a computer network, the caller process
callee process over a computer network, the	having a user interface and being operatively
caller process capable of generating a user	connectable to the callee process and a server
interface and being operatively connected to	over the computer network, the method
the callee process and a server process over the	comprising the steps of:
computer network, the method comprising the	
steps of:	
A. generating a user-interface element	A. providing a user interface element
representing a first communication line;	representing a first communication line;
B. generating a user interface element	B. providing a user interface element
representing a first callee process;	representing a first callee process; and
C. querying the server process to	
determine if the first callee process is	

Amended Claim 9 of this Re-examination	Amended Claim 11 of Re-examination Control
(without bracketing)	No. 90/010,416 (without bracketing)
accessible;	
D. establishing a point-to-point	C. establishing a point-to-point
communication link from the caller process to	communication link from the caller process to
the first callee process, in response to a user	the first callee process, in response to a user
associating the element representing the first	associating the element representing the first
callee process with the element representing	callee process with the element representing
the first communication line,	the first communication line,
wherein step C further comprises the	wherein step C further comprises the
steps of:	steps of:
C.1 querying the server process as to	c.1 querying the server as to the on-line status
the on-line status of the first callee process; and	of the first callee process; and
C.2 receiving a network protocol	c.2 receiving a network protocol
address of the first callee process over the	address of the first callee process over the
computer network from the server process.	computer network from the server.

In the Statement of Reasons for Patentability and/or Confirmation in the '416 reexamination, the paragraph crossing pages 2 and 3 explains that amended claim 11 in the '416 re-examination was found to be patentable "because the prior art does not explicitly teach ... receiving a network protocol address of the first callee process over the computer network from the server." It is respectfully submitted that the same rationale holds true for amended claim 9 since the applied references do not teach the same claimed dynamic addressing limitation of amended claim 9 that they did not teach with respect to amended claim 11 of the '416 reexamination.

Accordingly, the patentability of claim 9 and its dependent claims should be confirmed.

CUSTOMER NUMBER 42624

Davidson Berquist Jackson & Gowdey LLP 4300 Wilson Blvd., 7th Floor, Arlington Virginia 22203 Main: (703) 894-6400 • FAX: (703) 894-6430 Respectfully submitted,

By: / Michael R. Casey /

Michael R. Casey, Ph.D. Registration No.: 40,294

CHARGE STATEMENT: Deposit Account No. 501860, order no. 2655-0185.

The Commissioner is hereby authorized to charge any fee specifically authorized hereafter, or any missing or insufficient fee(s) filed, or asserted to be filed, or which should have been filed herewith or concerning any paper filed hereafter, and which may be required under Rules 16-18 (missing or insufficiencies only) now or hereafter relative to this application and the resulting Official Document under Rule 20, or credit any overpayment, to our Accounting/Order Nos. shown above.

This CHARGE STATEMENT <u>does not authorize</u> charge of the <u>issue fee</u> until/unless an issue fee transmittal sheet is filed.

(viii). CLAIMS APPENDIX

The unamended claims as pending prior to the filing of the amendment on even date are shown below:

1. (Confirmed) A computer program product for use with a computer system having a display and an audio transducer, the computer system capable of executing a first process and connecting to other processes and a server process over a computer network, the computer program product comprising a computer usable medium having computer readable code means embodied in the medium comprising:

a. program code for generating a user-interface enabling control of a first process executing on the computer system;

b. program code for determining the currently assigned network protocol address of the first process upon connection to the computer network;

c. program code responsive to the currently assigned network protocol address of the first process, for establishing a communication connection with the server process and for forwarding the assigned network protocol address of the first process and a unique identifier of the first process to the server process upon establishing a communication connection with the server process; and

d. program code means, responsive to user input commands, for establishing a point-topoint communications with another process over the computer network.

2. (Confirmed) The computer program product of claim 1 wherein the program code for establishing a point-to-point communication link further comprises:

d.1 program code, responsive to the network protocol address of a second process, for establishing a point-to-point communication link between the first process and the second process over the computer network.

3. (Confirmed) The computer program product of claim 2 wherein the program code for establishing a point-to-point communication link further comprise:

d.2 program code for transmitting, from the first process to the server process, a query as to whether the second process is connected to the computer network; and

d.3 program code means for receiving a network protocol address of the second process from the server process, when the second process is connected to the computer network.

4. (Not subject to re-examination) The computer program product of claim 2 wherein the program code for establishing a point-to-point communication link further comprises:

d.2 program code means for transmitting an E-mail message containing a network protocol address from the first process to the server process over the computer network;

d.3 program code means for receiving a second network protocol address from the second process over the computer network.

5. (Confirmed) In a computer system having a display and an audio transducer, the computer system capable of executing a first process and communicating with other processes and a server process over a computer network, a method for establishing point-to-point communications with other processes comprising:

A. determining the currently assigned network protocol address of the first process upon connection to the computer network;

B. establishing a communication connection with the server process once the assigned network protocol of the first process is known;

C. forwarding the assigned network protocol address of the first process to the server process upon establishing a communication connection with the server process; and

D. establishing a point-to-point communication with another process over the computer network.

6. (Confirmed) The method of claim 5 wherein the program step D comprises:

D.1 transmitting, from the first process to the server process, a query as to whether a second process is connected to the computer network; and

D.2 receiving a network protocol address of the second process from the server process, when the second process is connected to the computer network.

7. (Not subject to re-examination) The method of claim 5 wherein the program step D comprises:

D.1 transmitting an E-mail message containing a network protocol address from the first process to the server process over the computer network;

19

D.2 receiving a second network protocol address from a second process over the computer network.

8. (Appealed) In a computer system having a display and capable of executing a process, a method for establishing a point-to-point communication from a caller process to a callee process over a computer network, the caller process capable of generating a user interface and being operatively connected to the callee process and a server process over the computer network, the method comprising the steps of:

A. generating a user-interface element representing a first communication line;

B. generating a user interface element representing a first callee process;

C. guerving the server process to determine if the first callee process is accessible; and

D. establishing a point-to-point communication link from the caller process to the first callee process, in response to a user associating the element representing the first callee process with the element representing the first communication line.

9. (Appealed) The method of claim 8 wherein step C further comprises the steps of:

C.1 querying the server process as to the on-line status of the first callee process; and

C.2 receiving a network protocol address of the first callee process over the computer network from the server process.

10. (Not subject to re-examination) The method of claim 8 further comprising the step of:

E. generating a user-interface element representing a second communication line.

11. (Not subject to re-examination) The method of claim 8 further comprising the step of:

F. terminating the point-to-point communication from the caller process to the first callee process, in response to the user disassociating the element representing the first callee process from the element representing the first communication line; and

G. establishing a different point-to-point communication from the caller process to the first callee process, in response to the user associating the element representing the first callee process with the element representing the second communication line.

12. (Not subject to re-examination) The method of claim 8 further comprising the steps of:

E. generating a user interface element representing a second callee process; and

F. establishing a conference point-to-point communication between the caller process and the first and second callee processes, in response to the user associating the element representing the second callee process with the element representing the first communication line.

13. (Not subject to re-examination) The method of claim 8 further comprising the step of:

G. removing the second callee process from the conference point-to-point communication in response to the user disassociating the element representing the second callee process from the element representing the first communication line.

14. (Appealed) The method of claim 8 further comprising the steps of:

E. generating a user interface element representing a communication line having a temporarily disabled status; and

F. temporarily disabling the point-to-point communication between the caller process and the first callee process, in response to the user associating the element representing the first callee process with the element representing the communication line having a temporarily disabled status.

15. (Appealed) The method of claim 14 wherein the element generated in step E represents a communication line on hold status.

16. (Confirmed) The method of claim 15 wherein the element generated in step E represents a communication line on mute status.

17. (Appealed) The method of claim 8 wherein the display further comprises a visual display.

18. (Appealed) The method of claim 17 wherein the user interface is a graphic user interface and the user-interface elements generated in steps A and B are graphic elements.

The claims as they would be after entry of the amendment filed on even date are as follows:

1. (Confirmed) A computer program product for use with a computer system having a display and an audio transducer, the computer system capable of executing a first process and connecting to other processes and a server process over a computer network, the computer program product comprising a computer usable medium having computer readable code means embodied in the medium comprising:

a. program code for generating a user-interface enabling control of a first process executing on the computer system;

b. program code for determining the currently assigned network protocol address of the first process upon connection to the computer network;

c. program code responsive to the currently assigned network protocol address of the first process, for establishing a communication connection with the server process and for forwarding the assigned network protocol address of the first process and a unique identifier of the first process to the server process upon establishing a communication connection with the server process; and

d. program code means, responsive to user input commands, for establishing a point-topoint communications with another process over the computer network.

2. (Confirmed) The computer program product of claim 1 wherein the program code for establishing a point-to-point communication link further comprises:

23

d.1 program code, responsive to the network protocol address of a second process, for establishing a point-to-point communication link between the first process and the second process over the computer network.

3. (Confirmed) The computer program product of claim 2 wherein the program code for establishing a point-to-point communication link further comprise:

d.2 program code for transmitting, from the first process to the server process, a query as to whether the second process is connected to the computer network; and

d.3 program code means for receiving a network protocol address of the second process from the server process, when the second process is connected to the computer network.

4. (Not subject to re-examination) The computer program product of claim 2 wherein the program code for establishing a point-to-point communication link further comprises:

d.2 program code means for transmitting an E-mail message containing a network protocol address from the first process to the server process over the computer network;

d.3 program code means for receiving a second network protocol address from the second process over the computer network.

5. (Confirmed) In a computer system having a display and an audio transducer, the computer system capable of executing a first process and communicating with other processes and a server process over a computer network, a method for establishing point-to-point communications with other processes comprising:

A. determining the currently assigned network protocol address of the first process upon connection to the computer network;

B. establishing a communication connection with the server process once the assigned network protocol of the first process is known;

C. forwarding the assigned network protocol address of the first process to the server process upon establishing a communication connection with the server process; and

D. establishing a point-to-point communication with another process over the computer network.

6. (Confirmed) The method of claim 5 wherein the program step D comprises:

D.1 transmitting, from the first process to the server process, a query as to whether a second process is connected to the computer network; and

D.2 receiving a network protocol address of the second process from the server process, when the second process is connected to the computer network.

7. (Not subject to re-examination) The method of claim 5 wherein the program step D comprises:

D.1 transmitting an E-mail message containing a network protocol address from the first process to the server process over the computer network;

25

D.2 receiving a second network protocol address from a second process over the computer network.

8. (Canceled)

9. (Appealed) In a computer system having a display and capable of executing a process, a method for establishing a point-to-point communication from a caller process to a callee process over a computer network, the caller process capable of generating a user interface and being operatively connected to the callee process and a server process over the computer network, the [The] method [of claim 8] comprising the steps of:

A. generating a user-interface element representing a first communication line;

B. generating a user interface element representing a first callee process;

C. querying the server process to determine if the first callee process is accessible; and

D. establishing a point-to-point communication link from the caller process to the first callee process, in response to a user associating the element representing the first callee process with the element representing the first communication line, wherein step C further comprises the steps of:

C.1 querying the server process as to the on-line status of the first callee process; and

C.2 receiving a network protocol address of the first callee process over the computer network from the server process.

10. (Not subject to re-examination) The method of claim 8 further comprising the step of:E. generating a user-interface element representing a second communication line.

11. (Not subject to re-examination) The method of claim 8 further comprising the step of:

F. terminating the point-to-point communication from the caller process to the first callee process, in response to the user disassociating the element representing the first callee process from the element representing the first communication line; and

G. establishing a different point-to-point communication from the caller process to the first callee process, in response to the user associating the element representing the first callee process with the element representing the second communication line.

12. (Not subject to re-examination) The method of claim 8 further comprising the steps of:

E. generating a user interface element representing a second callee process; and

F. establishing a conference point-to-point communication between the caller process and the first and second callee processes, in response to the user associating the element representing the second callee process with the element representing the first communication line.

13. (Not subject to re-examination) The method of claim 8 further comprising the step of:

G. removing the second callee process from the conference point-to-point communication in response to the user disassociating the element representing the second callee process from the element representing the first communication line.

14. (Appealed) The method of claim [8] 9 further comprising the steps of:

E. generating a user interface element representing a communication line having a temporarily disabled status; and

F. temporarily disabling the point-to-point communication between the caller process and the first callee process, in response to the user associating the element representing the first callee process with the element representing the communication line having a temporarily disabled status.

15. (Appealed) The method of claim 14 wherein the element generated in step E represents a communication line on hold status.

16. (Confirmed) In a computer system having a display and capable of executing a process, a method for establishing a point-to-point communication from a caller process to a callee process over a computer network, the caller process capable of generating a user interface and being operatively connected to the callee process and a server process over the computer network, the [The] method [of claim 15] comprising the steps of:

A. generating a user-interface element representing a first communication line;

B. generating a user interface element representing a first callee process;

C. querying the server process to determine if the first callee process is accessible;

D. establishing a point-to-point communication link from the caller process to the first callee process, in response to a user associating the element representing the first callee process with the element representing the first communication line;

E. generating a user interface element representing a communication line having a temporarily disabled status; and

<u>F. temporarily disabling the point-to-point communication between the caller process and</u> the first callee process, in response to the user associating the element representing the first callee process with the element representing the communication line having a temporarily disabled status, wherein the element generated in step E represents a communication line on hold status, and wherein the element generated in step E represents a communication line on mute status.

17. (Appealed) The method of claim [8] $\underline{9}$ wherein the display further comprises a visual display.

18. (Appealed) The method of claim 17 wherein the user interface is a graphic user interface and the user-interface elements generated in steps A and B are graphic elements.

Control No. 90/010,422 Re-examination of U.S. Patent No. 6,009,469

(ix). EVIDENCE APPENDIX

The first and second Declarations of Dr. Ketan Mayer-Patel under 37 CFR 1.132 are being relied upon in this appeal and are attached hereto.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re PATENT APPLICATION OF: Net2Phone, Inc. (Patent No. 6,009,469) Control No.: 90/010,422 Issue Date: December 28, 1999 Title: GRAPHIC USER INTERFACE FOR INTERNET TELEPHONY APPLICATION Attorney Docket: 2655-0185 Group Art Unit: 3992 Examiner: KOSOWSKI, Alexander Confirmation No.: 6565

SECOND DECLARATION OF KETAN MAYER-PATEL UNDER 37 C.F.R. 1.132

Hon. Commissioner of Patents P.O. Box 1450 Alexandria, VA 22313-1450

I. INTRODUCTION

1. I am the same Ketan Mayer-Patel that filed a Declaration in response to the first Office Action in the re-examination of U.S. Patent No. 6,009,469 (hereinafter "the '469 patent").

2. I have reviewed the outstanding Office Action dated May 10, 2010.

3. I understand that claims 8, 9, and 14-18 were alleged to be obvious over the combination of NetBIOS and Pinard (U.S. Patent No. 5,533,110), either alone or in combination with the VocalChat User's Guide, and claims 8, 9, and 14-18 were alleged to be obvious over the combination of the Etherphone papers in view of Pinard, either alone or in combination with the VocalChat User's Guide.

4. I understand that in response to evidence presented in my first Declaration the Office Action now alleges "under a broadest reasonable interpretation, this [accessible] limitation could simply mean that a user is registered with the system." As this argument was not presented in the first Office Action, I was not able to know that such a position needed to be addressed.

5. I do not believe that one of ordinary skill in the art at the time the invention was made would have believed that the definitions proposed by the Office Action are proper -- even under a "broadest reasonable interpretation" standard.

6. The dictionary definitions of "accessible" and "registered" show that they are not synonymous with each other. See Exhibit 1 attached hereto. According to the definitions, a system such as NetBIOS would indicate whether a name is "registered" (e.g., recorded or listed), but it would not indicate that a callee process is accessible (e.g., easy to reach or use or easily approached or entered).

7. Accordingly, I do not agree that "under a broadest reasonable interpretation, this [accessible] limitation could simply mean that a user is registered with the system."


8. In fact, NetBIOS explicitly provides for permanent registration of names. As described in Section 15.1.3.2 of RFC 1001, "Names held by an NBNS are given a lifetime during name registration." The same section further states "The lifetime period is established through a simple negotiation mechanism during name registration: In the name registration request, the end-node proposes a lifetime value or *requests an infinite lifetime*. The NBNS places an actual lifetime value into the name registration response. The NBNS is always allowed to respond with an infinite actual period." (Emphasis added.) Thus, in any number of cases, the NBNS may demand an infinite lifetime for names registered by nodes, with the effect that the NBNS would deliberately preserve the name and address information registered by a node permanently on the NBNS even weeks, months or years after the node had stopped using the name or had gone offline altogether. Therefore, the correspondence between a name and an IP address is not indicative that a first callee process is accessible.

9. Moreover, the node requesting information on whether a name is registered does not receive an indication from the NBNS that the registered name corresponds to a name that has been given an infinite lifetime and could therefore be completely out-of-date. Section 4.2.13 of RFC 1002 describes the Positive Name Query Response (reproduced below) that is returned when a name has been registered, and there is no indication that the returned address is for a name associated with an identified lifetime, let alone an infinite lifetime.

> 4.2.13. POSITIVE NAME QUERY RESPONSE
> NAME TRN ID
> 1
> 0x0
> 1
> 1
> 0x0
> 0x0000 0x0001 ł ĥ **⋴**⋼⋳⋇⋼⋇∊⋇∊⋇∊⋇∊⋇⋼⋇⋼⋇⋼⋇∊⋇∊⋇∊⋇∊⋇∊⋇∊⋇∊⋇∊⋇∊⋇∊⋇⋼⋇⋼⋇⋼⋧∊⋇∊⋇⋼⋇ 0x0600 0x0000 ÷. ł, RR NAME NB (0x0020) TTL. ROLENGTH -ADDR_BRTRY ARRAY The ADDR_ENTRY ARRAY a sequence of zero or more ADDR_HWTRY records records. Each ADDR ENTRY record represents an owner of a name. For group names there may be multiple entries. However, the list may be incomplete due to packet size limitations. Bit 22, "T", will be set to indicate truncated data. Each ADDR_ENTRY has the following format: ------NB_FLAGS _FLAGS | NB_ADDRESS | NB_ADDRESS (continued) والأربية والمرورية والمراجع فالمراجع والمراجع والمراجع والمراجع والمراجع

10. In addition, there is no indication in the Positive Name Query Response disclosed by NetBIOS that the returned address necessarily corresponds with a computer or process that was ever accessible as asserted by the pending office action. For example, a first user could manually enter a dummy address in the NB_Address field associated with a claimed name that he wanted to register and still be compliant with the NetBIOS protocol standard since queries by other users for that name are "not necessarily a prelude to NetBIOS session establishment or NetBIOS datagram transmission." Section 15.3.1.

11. Furthermore, RFC 1002 further shows that a name registration is not an indication of whether a first callee process is accessible since a NBNS can refuse to release registered names for policy reasons. As described in Section 4.2.9, a node may request that a name be released using a Name Release Request (reproduced below).

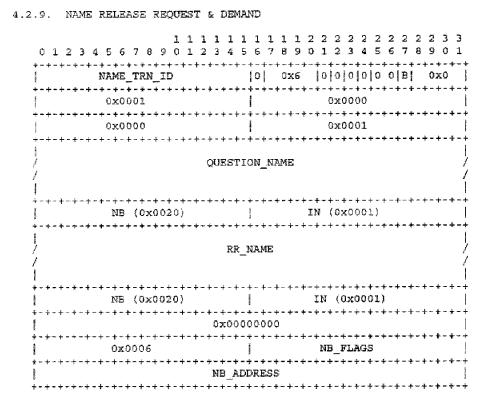

12. In response, as shown in Section 4.2.11, a server can generate a Negative Name Release Response, as shown below.

4.2.11. NEGATIVE NAME RELEASE RESPONSE

1 1 1 1 1 1 1 1 1 2 2 2 2 2 2 2 2 2 2 3 3 01234567890123456789012345678901 NAME_TRN_ID |1| 0x6 |1|0|0|0|0|0|0 RCODE | 0x0000 0x0001 1 +---*-+-*-* 0x0000 0x0000 **╾┽╾╅┶┽┶┽┙┽┙╅╶╉╶╫┙┼┙┽╶┼╴┽╸┽╸┽╸┽╸┽╸┽╸┽╸┽╸┼╸┼╸┼╴┼╴╂╸╂╸╋╸╋╸╋╸╇╸┼╸┼╸**┽ RR NAME ╶╶╶╶┽┈┼┈╽╶┼**╴╅╶╉╸╬╸┽╸┽╸╅╸┽╸┼╸┼╶┼╶┼╶┼╴┽╸┽╸╅╸┽╸╊╸┼┙┾╸┿╴┼╴┼╸┼**╴╪╶┼ NB (0x0020) IN (0x0001) TTL、 ┽╴┽╴╪┈┼┈┼┈┼┈┼**┈┼**╾╬**╾╬**╍╬**╾┼**┉┽**╾**┿**╾┿**╾┿**╾**┿╼┿┈┽┈┼┈┼╴┼╌╬╍╋**╸┿╸┿╸**┿╸┿╸ 0x0006 NB_FLAGS ╅╾╅╾╋╾┿╾┿╌┽╌┽┈╬┈╬╾╬╾┿**╍╈╺┽**╍╈╍┿╾┿╴┿╴┿╴┿╴┿╸╋╸╋╸╇╸ NB ADDRESS

The RCODE field indicates the response from the server. One such response is RFS_ERR which is described as follows:

RFS_ERR 0x5 Refused error. For policy reasons server will not release this name from this host.

13. Thus, the registration of a name does not indicate that NetBIOS discloses that a "first callee process is accessible."

14. I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Dated: July 12, 2010

Kanlat

Ketan Mayer-Patel, Ph.D.

EXHIBIT 1

,

ac·ces·si·ble [ak-ses-uh-buh1]

-adjective

1. easy to approach, reach, enter, speak with, or use.

2. that can be used, entered, reached, etc.: an accessible road; accessible ruins.

3. obtainable; attainable: accessible evidence.

4. open to the influence of (usually fol. by to): accessible to bribery.

Dictionary.com Unabridged

Based on the Random House Dictionary, © Random House, Inc. 2010.

 $ac \cdot ces \cdot si \cdot ble$ ($\bar{a}k - ses' \cdot bal$) adj.

- Easily approached or entered. 1.
- 2. Easily obtained: accessible money.
- Easy to talk to or get along with: an accessible manager. 3.
- 4. Easily swayed or influenced: accessible to flattery.

ac ces'si bil'i ty, ac ces'si ble ness n., ac ces'si bly adv. The American Heritage® Dictionary of the English Language, Fourth Edition Copyright © 2009 by Houghton Mifflin Company.

Published by Houghton Mifflin Company. All rights reserved.

reg is tered [rej-uh-sterd]

-adjective

1. recorded, as in a register or book; enrolled.

2. Commerce . officially listing the owner's name with the issuing corporation and suitably inscribing the certificate, as with bonds to evidence title. Abbreviation: r

3. officially or legally certified by a government officer or board: a registered patent.

4. denoting cattle, horses, dogs, etc., having pedigrees verified and filed by authorized associations of breeders.

dictionary.com

reg·is·tered (rěj'ĭ-stərd) adj.

1. Having the owner's name listed in a register: registered bonds.

2. Having the pedigree recorded and verified by an authorized association of breeders: a registered golden retriever.

3. Officially qualified or certified: a registered pharmacist.

The American Heritage® Dictionary of the English Language, Fourth Edition Copyright © 2009 by Houghton Mifflin Company. Published by Houghton Mifflin Company. All rights reserved.

Main Entry: registered Part of Speech: adjective Definition: recorded Synonyms: cataloged, certified, enrolled

Main Entry:registeredPart of Speech:adjectiveDefinition:pedigreedSynonyms:blooded, full-blooded, pure-blooded, purebred, thoroughbred

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re PATENT APPLICATION OF: Net2Phone, Inc. (Patent No. 6,009,469) Control No.: 90/010,422 Issue Date: December 28, 1999 Title: GRAPHIC USER INTERFACE FOR INTERNET TELEPHONY APPLICATION Attorney Docket:2655-0185Group Art Unit:3992Examiner:KOSOWSKI, AlexanderConfirmation No.:6565

DECLARATION OF KETAN MAYER-PATEL UNDER 37 C.F.R. 1.132

Hon. Commissioner of Patents P.O. Box 1450 Alexandria, VA 22313-1450

I. INTRODUCTION

1. I have been retained as an independent expert witness by Net2Phone, Inc., the assignee of the patent presently undergoing re-examination (i.e., U.S. Patent No. 6,009,469 (hereinafter "the '469 patent")).

2. I am an expert in the field of networking protocols including networking protocols supporting multimedia streams including digital audio data. See Curriculum Vitae attached as Exhibit 1.

3. I received Bachelors of Arts degrees in Computer Science and Economics in 1992, a Masters of Science in 1997 from the Department of Electrical Engineering and Computer Science and a Ph.D. in 1999 from the Department of Electrical Engineering and Computer Science, all from the University of California, Berkeley.

4. I received the National Science Foundation CAREER Award in 2003 while an Assistant Professor at the University of North Carolina, Chapel Hill.

5. I have had extensive experience in both industry and academia as it relates to the technical fields relevant here. For example, I have been a programmer, a visiting researcher, and an Assistant and Associate professor.

6. I am a co-author of numerous articles that have appeared in a number of refereed publications and proceedings.

7. Governmental agencies, such as the National Science Foundation and the Office of Naval Research, have provided funding for my research.

II. RETENTION AND COMPENSATION

8. I have been retained to offer an expert opinion on the prior art relevant to the '469 patent (and other patents currently under re-examination) and the validity of the claims undergoing re-examination.

9. My work on this case is being billed at a rate of \$400 per hour, with reimbursement for actual expenses. My compensation is not contingent upon the outcome of the case.

III. BASIS OF MY OPINION AND MATERIALS CONSIDERED

10. In preparation for this report, I have considered and relied on data or other documents identified in this report. For example, I have reviewed the Office Action dated August 25, 2009 as well as the Request for Re-examination that was filed for the '469 patent including the Exhibits to the Request for Re-examination. I have also reviewed the file history of the '469 patent.

11. I have familiarized myself with the state of the art at the time the '469 patent was filed by reviewing both patent and non-patent references from prior to the filing date of the application that became the '469 patent.

12. My opinions are also based upon my education, training, research, knowledge, and experience in this technical field.

IV. SUMMARY OF MY OPINIONS

13. Based on my prior experience in the field of computer systems and networking, including network communication protocols, and based on my review of the documents relating to the

pending re-examination proceeding, I have developed an understanding of the '469 patent and the claimed inventions.

14. I have been asked to compare the claims of the '469 patent to the references applied in the outstanding Office Action. The results of my comparison are provided below.

15. In general, it is my opinion that all of the claims undergoing re-examination (i.e., claims
1-3, 5, 6, 8, 9 and 14-18) are patentable over the applied references for at least the reasons set forth below.

The rejection of claims 1-3, 5, 6, 8, 9, and 14-18 over NetBIOS, RFC 1531, Pinard and the VocalChat User's Guide

16. Claims 1-3, 5, 6, 8, 9, and 14-18 were rejected under 35 U.S.C. § 103(a) as being obvious in light of Protocols for X/Open PC Interworking SMB, Version 2, The Open Group (1992) (hereinafter "NetBIOS"), in view of RFC 1531, Pinard and the VocalChat User's Guide.
17. I understand that a rejection under 35 U.S.C. § 103(a) means that an examiner believes that although no single reference includes all of the claimed limitations, nonetheless the combination of references made by the examiner would have been obvious to one of ordinary skill in the art at the time the invention was made.

Claims 1-3

18. Claim 1 recites "a. program code for generating a user-interface enabling control of a first process executing on the computer system." With respect to the limitation of "program code for generating a user-interface enabling control of a first process executing on the computer system," the Office Action alleges that "computers executing NetBIOS *may contain* DOS operating systems or may operate on other operating systems, which examiner notes inherently contain at least text-based user interfaces." By stating that NetBIOS "may contain" DOS operating systems I believe the Examiner is indicating that NetBIOS need not actually contain or be running on a

DOS operating system. Since that is true, NetBIOS (or the computer running NetBIOS) does not inherently include text-based user interfaces.

19. Furthermore, the recitation of "other operating systems" also does not inherently mean that "text-based user interfaces" are provided. For example, embedded systems need not have a display or a text interface even though they may have operating systems. The Office Action also has not asserted that this limitation is taught by RFC 1531. Thus, I do not believe that limitation (a) has been shown to be taught by either applied reference.

20. Claim 1 also recites "b. program code for determining the currently assigned network protocol address of the first process upon connection to the computer network." The Office Action admits that NetBIOS does not teach this limitation. The Office Action alleges that such a limitation is taught by RFC 1531 because "RFC 1531 teaches dynamically assigning IP address on a TCP/IP network by an Internet access server." By looking at limitations (a) and (b) together, however, it can be seen that the Office Action has not shown that the currently assigned network protocol address is that of the first process which the Office Action alleged was the "text-based user interface." The Office Action also has not explained why the text-based interface would have to have its currently assigned network protocol address determined. Thus, I do not believe that limitation (b) is taught by either applied reference.

21. Claim 1 recites "c. program code responsive ... for forwarding the assigned network protocol address of the first process and a unique identifier of the first process to the server process upon establishing a communication connection with the server process." The Office Action has not shown that the assigned network protocol address of the first process is determined, so the Office Action also has not shown that the assigned network protocol address of the first process would be forwarded to the server upon establishing a communication connection with the server process. Similarly, the Office Action has not shown that the textbased user interfaces would have a unique identifier to be forwarded to the server. The Office Action further has not shown that such a limitation is taught by RFC 1531. Accordingly, I do not believe that limitation (c) is taught by either applied reference.

22. Claim 1 also recites "d. program code, responsive to user input commands, for establishing a point-to-point communications with another process over the computer network." The Office Action cites NetBIOS, pgs. 397-400, as teaching that "point-to-point communication is established upon initiation between nodes once target names and addresses have been found." However, the Office Action has not shown that the code is "responsive to user input commands" as no user input commands have been identified. Even assuming that text-based user interfaces were taught by NetBIOS, the Office Action still would not have shown that point-to-point communications are inherently established "responsive to user input commands." The text-based user interfaces could have been used for non-communicating functions or even functions that use non-point-to-point communications. The Office Action further has not shown that such a limitation is taught by RFC 1531. Accordingly, I do not believe that limitation (d) is taught by either applied reference.

23. Since none of the limitations of claim 1 have been shown to be taught by the applied combination of references, I do not believe that claim 1 and dependent claims 2 and 3 are obvious in light of the proposed combination.

24. The Office Action states that "it would have been obvious ... to determine the currently assigned network address of the first process upon connection to the computer network in the invention taught by NetBIOS above since this allows for automatic reuse of an address ... and since examiner notes the use of dynamic IP address assignment ... are old and well known ... and are useful to eliminate the burdensome task of manually assigning IP addresses for all networked computers." However, the Office Action does not acknowledge the problems that could arise in doing so or how those problems would be resolved by those of ordinary skill at the time the patent was filed.

25. In the context of point-to-point communication, widespread use of dynamically assigned addresses can create additional problems for a NetBIOS environment. For example, Section 15.1.7 of the NetBIOS reference (entitled "Consistency of the NBNS Data Base") recognizes that the association between a node, a registered name and an IP address is tenuous, even in an

environment that uses static IP addresses. "Even in a properly running NetBIOS scope the NBNS and its community of end-nodes may occasionally lose synchronization with respect to the true state of name registrations." To minimize the impact of this problem, the reference states, "Various approaches have been incorporated into the NetBIOS-over-TCP protocols" which it then proceeds to describe.

26. However, by incorporating DHCP and adopting of dynamic address allocation (e.g., as used by Internet access providers), the synchronization problem would become more disruptive, not less. Dynamic addressing introduced a new uncertainty to the relationships among the NBNS and its community of end-nodes and a new set of obstacles to NetBIOS synchronization that *are not addressed by the NetBIOS reference*. Consider the case of a node that is turned-off and then subsequently turned back on, or the case of a node that has simply lost its Internet connection for some technical reason or whose DHCP lease has expired which then re-establishes a connection. In such a dynamic addressing environment, such a node would most likely obtain a new IP address when it was turned back on that was different than the one it had when it registered its name. This change could lead to any number of node-name-IP address synchronization problems for the disclosed NetBIOS protocols.

27. For example, because the NBNS does not know the node's new address, the NBNS would be unable to send to the node a Name Release Request or a Name Conflict Demand or request that the node send it a Name Status Request. Because communication from the node would be originating at a new address that was not recognized by the NBNS, a node's response to a Name Query Request (assuming it somehow knew that its name had been challenged, perhaps from before it lost network connectivity) would not be recognized. A node would also be unable to confirm its association with registered names by sending Name Refresh Request packets to the NBNS. If a session between two NetBIOS applications were cut-off, reestablishing the communication would be especially difficult where the ability of a called entity to obtain both its associated name and its associated IP address were in doubt. As a result, the Office Action has not demonstrated that a solution to the problems created by exposure of

NetBIOS to DHCP and dynamic addressing has been addressed by any of the applied references.¹

28. The Office Action also has not identified anything in the cited art that suggests how a person of ordinary skill is to go about the redesign of NetBIOS and the solving of obstacles to NetBIOS operation that are created by Internet access; problems that were recognized and left as warnings unresolved in the NetBIOS reference.²

29. Thus, I believe claims 1-3 are patentable over the combination of NetBIOS and RFC 1531.

Claims 5 and 6

30. Claim 5 recites "determining the currently assigned network protocol address of the first process upon connection to the computer network." The Office Action acknowledges that this limitation is not taught by NetBIOS but alleges that "RFC 1531 teaches dynamically assigning IP addresses on a TCP/IP network by an Internet access server." The Office Action further alleges that "it would have been obvious ... to determine the currently assigned network address of the first process upon connection to the computer network in the invention taught by NetBIOS above since this allows for automatic reuse of an address ... and since examiner notes the use of dynamic IP address assignment ... are old and well known ... and are useful to eliminate the burdensome task of manually assigning IP addresses for all networked computers." However, as described above with respect to claims 1-3, I do not believe that the Office Action has shown that in light of the problems that worsen by combining NetBIOS and RFC 1531, that a person of

¹ Besides dynamic addressing, Internet access would pose other challenges to a NetBIOS system. For example, because NetBIOS was designed for use on local area networks with small numbers of computers, trust among the network participants is assumed. That assumption cannot be transferred to a global Internet made up of unknown, and sometimes malevolent, entities. An implementation of NetBIOS on the public Internet would necessitate non-trivial adaptations to ensure that its services perform correctly and return accurate information. See Exhibit 2, from http://www.w3schools.com/Site/site_security.asp which instructs Microsoft Windows users whose computers access the Internet to disable NetBIOS over TCP/IP in order to solve their security problems.

² See Section 4.6 ("The proposed standard recognizes the need for NetBIOS operation across a set of networks interconnected by network (IP) level relays (gateways.) However, the standard assumes that this form of operation will be less frequent than on the local MAC bridged-LAN.")

ordinary skill in the art would have combined the two references as proposed. Thus, I believe that claims 5 and 6 are patentable over the applied NetBIOS and RFC 1531 references.

Claims 8, 9 and 14-18

31. Claim 8 recites "querying the server process to determine if the first callee process is accessible." The Office Action asserts that this limitation is taught by NetBIOS and cites pages 377, 388, 389 and 446 as supporting the proposition that "a query is sent to the NBNS to determine if another node is logged in and discover[s] the node[']s IP address." However, the Office Action has not shown how knowing that a name has been registered equates to "determin[ing] if the first callee process is accessible." While NetBIOS uses name entries with "active" statuses as part of its name management process, an analysis of how that "active" status is used shows that "an active name" is not synonymous with determining if the first callee process is accessible. An active name simply refers to a name that has been registered and that has not yet been de-registered, independent of whether the associated computer is or is not accessible. As shown on page 447 (and reproduced below), the Node_Name entries stored with respect to a NetBIOS Name Server contain a series of fields including the "ACT" field.

The NAME FLAGS field:

		<u>1 1 1 1 1</u>
0 1	2 3 4	5 6 7 8 9 0 1 2 3 4 5
**-		๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛
x F	8 4	IP ACT PRM RESERVED
~~~~~~*		๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛
		19 8
The RAME I	fleks Ilei	d is defined as:
Symbol	Bit (s)	Description:
·····		£
RESERVED	7-15	Reserved for future use. Must be zero (0).
PRM	6	Permanent Name Flag. If one (1) then entry
		is for the permanent node name. Plag is zero
		(0) for all other names.
ACT	5	Active Name Flag. All entries have this flag
		set to one (1).
CMF .	4	Conflict Flag. If one (1) then name on this node is in conflict.
TRACE	3	Deregister Flag. If one (1) then this name
7768.72		is in the process of being deleted.
CRIT	1.2	Owner Node Type:
· · · ·		OC = B node
		01 = P node
		10 = M node
		11 - Reserved for future use
G	0	Group Name Flag.
		If one (1) then the name is a GROUP NetBIOS
		name.
		If zero (0) then it is a UNIQUE NotBIOS name.

32. The ACT field is a single bit field (in bit 5) that signifies an "Active Name Flag. *All* entries have this flag set to one (1)." (Emphasis added.) If all name entries have this flag set to one (1), then the NetBIOS name server cannot be using the Active Name Flag as a means of separately tracking whether the entity that owns the name is "active," let alone what its "on-line" status might be.

33. The NetBIOS reference also does not teach that the active status of a name in the NetBIOS server is an indication of the active status of the owner of that name. To the contrary, when information about whether the owner of a name is "active" may be relevant, for example when a new entity seeks to register a name that has already been registered in the NetBIOS name server, the NetBIOS reference describes an elaborate set of interactions used to test whether the

existing owner of the registered name is active or inactive. It does not rely on the fact that the name is active in the NetBIOS name server (See Section 15.2.2.2 and 15.2.2.3 entitled "Existing Name and Owner is Inactive").

34. The NetBIOS reference also does not teach that an acquired IP address can be reasonably relied upon by a requesting end-node to confirm that an end-node associated with a sought name is, in fact, "accessible." The NetBIOS reference describes at least two different scenarios where a second end-node sends a rejection response to the first end-node notwithstanding the fact that an end-node is connected to the computer network and active with respect to the sought name. See Section 16.1.1 ("There exists a NetBIOS LISTEN compatible with the incoming call, but there are inadequate resources to permit establishment of a session...The called name does, in fact, exist on the called node, but there is no pending NetBIOS LISTEN compatible with the incoming call."). No distinction is made in the reference between the rejection response in these cases and the rejection response in cases where the called name does not exist on the called end-node. Section 16.1.1 also states "In all but the first case, a rejection response is sent back over the TCP connection to the caller."

35. The Office Action also has not alleged that any of the remaining references teach this limitation missing from the NetBIOS reference. As such, claim 8 and its dependent claims (claims 9 and 14-18) are not rendered obvious by the cited combination of references.

The rejection of claims 1-3, 5, 6, 8, 9, and 14-18 over the combination of the Etherphone papers in view of Vin and further in view of RFC 1531, Pinard and the VocalChar User's Guide 36. Claims 1-3 were rejected under 35 U.S.C. § 103(a) as obvious over Etherphone: Collected Papers 1987-1988 (May 1989) (hereinafter "Etherphone") in view of Harrick M. Vin, et al. *Multimedia Conferencing in the Etherphone* Environment, IEEE Computer Society (October 1991) (hereinafter "Vin") and further in view of RFC 1531, Pinard and VocalChat User's Guide. The Etherphone Collected Papers include *An Overview of the Etherphone System and its Applications* (hereinafter "Zellweger"), *Telephone Management in the Etherphone*

System (hereinafter "Swinehart"), and Managing Stored Voice in the Etherphone System (hereinafter "Terry").

Claim 1, as amended, recites "a. program code for generating a user-interface enabling 37. control of a first process executing on the computer system" and "d. program code means, responsive to user input commands, for establishing a point-to-point communications with another process over the computer network." When read together, it can be seen that the Office Action has not shown that these limitations are taught by the applied combination of references. 38. With respect to the limitation "a, program code for generating a user-interface enabling control of a first process executing on the computer system," the Office Action cites Swinehart and Zellweger as teaching that "workstations include GUI's." Later, with respect to the limitation "d. program code means, responsive to user input commands, for establishing a pointto-point communications with another process over the computer network," the Office Action asserts that "after acquiring the network address of a callee, voice datagrams are transmitted directly amont [sic; among] the participants, bypassing the control server." However, by "participants" it appears that the Office Action is referring to Etherphones participating in a telephone call. As such, the Office Action has not shown that the datagrams are transmitted as part of a point-to-point communication from the workstation (which was alleged as having the first process) to one of the Etherphones. In fact, with respect to limitation (c), the Office Action confirms that its interpretation is that the "workstation address [is] transmitted to the Voice Control Server when connected" -- not the Etherphone's network address.

39. Similarly, looking at it from the opposite perspective, if the voice datagrams are actually going from one Etherphone to another, then the Office Action has not shown how the "currently assigned network protocol address of the first process" is the address of the Etherphone and how the Etherphone has a display or "a user-interface enabling control a first process" on that Etherphone. The Office Action also has not alleged that RFC 1531 teaches this limitation missing from the Etherphone references. Thus, claims 1-3 are not rendered obvious by the proposed combination.

Claims 5 and 6

40. Claim 5 recites "A. determining the currently assigned network protocol address of the first process upon connection to the computer network" and "D. establishing a point-to-point communication with another process over the computer network." As described above with respect to claim 1, when these two limitations are examined together, it can be seen that the Office Action has not shown that these limitations are met.

41. With respect to the limitation "A. determining the currently assigned network protocol address of the first process upon connection to the computer network," the Office Action again cites the GUI's of the workstation as meeting this limitation. Then, with respect to the limitation "D. establishing a point-to-point communication with another process over the computer network," the Office Action again states "voice datagrams are transmitted directly amont [sic; among] the participants, bypassing the control server." Thus, as discussed above with respect to claim 1, the Office Action appears to have overlooked that the Etherphone, not the workstation with the GUI, is receiving the voice datagrams, so the Etherphone reference does not teach limitations (A) and (D). The Office Action also has not alleged that RFC 1531 teaches this limitation missing from the Etherphone references. Thus, claims 5 and 6 are not rendered obvious by the proposed combination.

Claims 8, 9 and 14-18

42. Claim 8 recites "a method for establishing a point-to-point communication from a caller process to a callee process over a computer network, the caller process capable of generating a user interface and being operatively connected to the callee process and a server process over the computer network." That method includes "querying the server process to determine if the first callee process is accessible" and "establishing a point-to-point communication link from the caller process to the first callee process."

43. With respect to the limitation of "establishing a point-to-point communication link from the caller process to the first callee process," the Office Action asserts that Swinehart and Zellweger teach "voice datagrams are transmitted directly among participants." However, it appears that the Office Action means that the Etherphone are the "participants." If this is the case, there is no indication that the combination meets the limitation of "the caller process capable of generating a user interface" as the Office Action has not alleged that the Etherphone has such a capability. The Office Action has also not alleged that the other references overcome this deficiency of the Etherphone references. Thus, claim 8 and its dependent claims are patentable over the applied combination of references.

The rejection of claims 1-3, 5, 6, 8, 9, and 14-18 over the combination of the VocalChat references in view of RFC 1531 and Pinard

44. Claims 1-3, 5, 6, 8, 9 and 14-18 were rejected under 35 U.S.C. § 103(a) as obvious over VocalChat User's Guide in view of VocalChat Readme, VocalChat Networking, VocalChat Help File and VocalChat Troubleshooting Help file (collectively the "VocalChat References") and further in view of RFC 1531 and Pinard.

Claims 1-3

45. Claim 1 recites "program code responsive to the currently assigned network protocol address of the first process, for establishing a communication connection with the server process and for forwarding the assigned network protocol address of the first process and a unique identifier of the first process to the server process upon establishing a communication connection with the server process." The Office Action admits that this limitation is not disclosed by the VocalChat references. However, the Office Action attempts to overcome this deficiency by combining the VocalChat references with RFC 1531.

46. However, the Office Action does not acknowledge the problems that could arise in doing so or how those problems would be resolved by those of ordinary skill at the time the patent was

filed. Thus, I do not believe that the Office Action has proven that one of ordinary skill at the time the patent was filed would have made the proposed combination.

47. Claim 1 also recites "forwarding the assigned network protocol address of the first process and a unique identifier of the first process to the server process upon establishing a communication connection with the server process." The VocalChat Generic implementation does not disclose such a limitation. In the VocalChat Generic implementation, a local process reads a "USERS" file or a Connections file in its entirety and writes it back in its entirety rather than "forwarding the assigned network protocol address of the first process and a unique identifier of the first process to the server process upon establishing a communication connection with the server process upon establishing a communication connection with the server process." This causes the VocalChat system to have to send an increasing amount of information as the number of users increases. Sending the whole file such that the new file replaces the old file also creates problems with consistency such that one user's changes could overwrite the changes of another user -- especially as networks got larger which would have increased the problem of inconsistent files being written.

48. The Office Action also has not shown that one of ordinary skill in the art would have made the proposed combination. The Office Action proposes a modification to the VocalChat References by incorporating the teachings of RFC 1531 because it allegedly "would have been obvious to utilize dynamically assigned IP addresses from Internet access servers in the invention taught by VocalChat ... since this allows for automatic reuse of an address that is no longer needed by the host to which it is assigned." Such an allegation ignores the development history of the VocalChat products themselves.

49. The Request cites a Generic version of the VocalChat client which, according to Mr. Cohen, was used on local area networks. See Cohen Declaration, paragraph 3. There apparently was a subsequent version of VocalChat that was also released by VocalTec to the public in 1994, at least in beta. This version, called VocalChat Gateway To Interent (or "VocalChat GTI") was designed for use on the Internet, and I have been informed that Net2Phone believes that VocalChat GTI used static local address files into which static callee addresses were manually

input. I have also been informed that Net2Phone believes that VocalChat GTI did not utilize a server at all.

50. Based on the above, I believe the use of manual inputting of static addresses and the absence of a server suggests that the VocalTec designers—presumably software developers of at least ordinary skill in the art—did not consider the alleged combination of their own VocalChat references with RFC 1531, or it suggests that they did consider it but were unable to overcome the non-trivial obstacles to doing so.

51. I have also been informed that Net2Phone believes that soon after the release of the VocalChat GTI version, VocalTec released another VocalChat version that used Internet Relay Chat (IRC) to help VocalChat clients with dynamically assigned IP addresses find one another. This change from VocalChat GTI to VocalChat IRC appears to be further objective evidence that even the VocalChat designers recognized that the "improvement" to the Generic VocalChat implementation was still deficient. If the designers of the VocalChat Generic implementation did not see fit to combine dynamic addressing with the Generic implementation disclosed in the VocalChat references, then I do not believe that one of ordinary skill in the art would not have done so either.

52. Accordingly, I do not believe that the Office Action has shown that claim 1 is rendered obvious by the combination of the VocalChat references and RFC 1531. Since claim 1 is not rendered obvious by the proposed combination, claims 2-3 are not rendered obvious as well. 53. With respect to claim 3, claim 3 further recites "program code for transmitting, from the first process to the server process, a query as to whether the second process is connected to the computer network." As is discussed in greater detail below with respect to claim 8, the VocalChat references do not disclose querying whether processes are connected to the computer network. Thus, claim 3 is also separately patentable from claim 1.

Claims 5 and 6

54. Claim 5 recites "A. determining the currently assigned network protocol address of the first process upon connection to the computer network" and "C. forwarding the assigned network protocol address of the first process to the server process upon establishing a communication connection with the server process." As was discussed above with respect to claim 1, the combination of the VocalChat references and RFC 1531 does not disclose either of those elements. Thus, I believe claim 5 and its dependent claim 6 are not rendered obvious by the combination of the VocalChat references and RFC 1531.

Claims 8, 9 and 14-18

55. Claim 8 recites "C. querying the server process to determine if the first callee process is accessible." The Office Action cites the Help file, pgs. 2 and 26, and Network information, page 10, and asserts that "a server can receive[] queries to determine status and information of users." However, the Office Action has not identified what portion of those references teach the claimed "querying." At best, the references teach that a local process reads a "USERS" file or a Connections file. As can be seen from page 4 of the VocalChat Network Information (reproduced below), when the VocalChat system uses the Generic mode, a USERS file is used.

2.5. Network parameters in the VocalChat INI files

These are the network parameters in the VocalChat VOCLCHAT.INI and VCSETUP.INI files (under the NetWork section):

[NetWork]	
NetWork-	/ description of the selected network
NetWorkUsers=	/userservices: NetWare/WinWorkgroups/Generic*
NetWorkProtocol=	/ network protocol: IPX / NetBIOS
NetWorkType=	/ name of the selected network, for future use
UsersFile=	/ path name of users file (when Generic is set)
MyUserName=	/ the name of the user (when Generic is set)**

* When Generic is set, a USERS file is used.

** This line appears only in the VOCALCHAT.INI file of each user.

The VOCLCHAT.INI files are in the windows directory of each user. The VCSETUP.INI file is in the VOCLCHAT directory, where VocalChat was installed, and is used only to supply default values for the different installations.

The USERS file configuration parameter includes a "UsersFile" entry that specifies the "path name of users file (when Generic is set)." However, it is also stated that "The VOCLCHAT.INI files are in the windows directory of each user." Thus, this "UsersFile" entry is a local configuration parameter such that the local VocalChat client reads and writes the USERS file on its own -- without performing the claimed query.

56. Similarly, page 8 of the VocalChat Help file states "If your network type is not NetWare or Windows for Workgroups, the Setup program creates a Connection List file which is used to identify and access users." The Connection List file and the USERS file apparently have the same function. Thus, the identification and access enabled by the Connection List is performed by the local client reading and writing the file itself -- without performing the claimed query. Accordingly, I do not believe that claims 8, 9 and 14-18 are obvious over the applied combination of references.

57. I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Dated: November 25, 2009

Impar?

Ketan Mayer-Patel, Ph.D.

EXHIBIT 1 TO MAYER-PATEL DECLARATION

Ketan Mayer-Patel

154 Fred Brooks Building Department of Computer Science, CB #3175 University of North Carolina, Chapel Hill kmp@cs.unc.edu http://www.cs.unc.edu/~kmp

Education

Ph.I	0. University of California, Berkeley, 1999		
	Parallel Software-only Video Effects Processing		
M.S	M.S. University of California, Berkeley, 1997		
	Design and Performance of the Berkeley Continuous Media Toolkit		
B.A			
	Majors: Computer Science and Economics		
Professi	onal Experience		
	ociate Professor		
I	Jniversity of North Carolina, Chapel Hill, NC (August 2005 – present)		
	stant Professor		
1	Iniversity of North Carolina, Chapel Hill, NC. (January 2000 – August 2005)		
	ing Researcher		
]	Microsoft Bay Area Research Center (BARC), San Francisco, CA. (June 2003 –		
	December 2003)		
Gтас	luate Student Researcher		
Į	Jniversity of California, Berkeley, CA. (June 1993 – November 1999)		
	luate Student Instructor		
	Jniversity of California, Berkeley, CA. (August 1997 – December 1997)		
	rammer		
	Jniversity of California, Berkeley, CA. (June 1992 – June 1993)		
	rammer		
	Jnited States Department of Agriculture, Albany, CA. (May 1991 – June 1992)		

Honors and Notables

- National Science Foundation CAREER Award, 2003
- Computer Science Student Association Teaching Award, 2003
- Invited to three major meetings (one domestic and two international) of top multimedia researchers to discuss future directions for the field.
- In the sixteen-year history of the ACM SIGMultimedia Conference, considered to be the premier conference in the field of multimedia, I have published twelve papers in ten different years.

Publications

Refereed Journals

K. Mayer-Patel and D. Gotz, "Scalable, Adaptive Streaming for Nonlinear Media," *IEEE Multimedia*, vol. 14, no. 3 (15 pages).

- D. Ott and K. Mayer-Patel, "An open architecture for transport-level protocol coordination for distributed multimedia applications," *ACM Transactions on Multimedia Computing, Communications, and Applications*, vol. 3, no. 3 (22 pages).
- D. Gotz and K. Mayer-Patel, "GAL: A middleware library for multidimensional adaptation," under review for ACM Transactions on Multimedia Computing, Communications, and Applications (21 pages).
- K. Mayer-Patel, B. Smith, and L.A. Rowe, "The Berkeley software MPEG-1 video decoder," to appear in *ACM Transactions on Multimedia Computing, Communications, and Applications*, vol. 1, no. 1 (23 pages).
- K. Mayer-Patel and S.-U. Kum, "Real-time multi depth stream compression," ACM Transactions on Multimedia Computing, Communications, and Applications, vol. 1, no. 2 (26 pages).
- D. Gotz and K. Mayer-Patel, "A Framework for Scalable Delivery of Digitized Spaces," International Journal on Digital Libraries, vol. 5, no. 3 (14 pages).
- J. Considine, K. Mayer-Patel, and J. Byers, "A case for testbed embedding services," *Computer Communication Review*, vol. 34, no. 1, January 2004, pp. 137-142.

Refereed Conferences and Workshops

- K. Mayer-Patel, "Systems challenges of media collectives: Supporting media collectives with adaptive MDC," *Proceedings of the 15th International ACM Conference on Multimedia*, Augsberg, Germany, 2007, pp. 625-630.
- S. Krishnan and K. Mayer-Patel, "A utility-driven framework for loss and encoding aware video adaptation," *Proceedings of the 15th International ACM Conference on Multimedia*, Augsberg, Germany, 2007, pp. 1026-1035.
- D. Gotz and K. Mayer-Patel, "A general framework for multidimensional adaptation," *Proceedings of the 12th International ACM Conference on Multimedia*, New York, 2004, pp 612-619.
- D. Ott and K. Mayer-Patel, "Coordinated multi-streaming for 3D tele-immersion," *Proceedings of the 12th International ACM Conference on Multimedia*, New York, NY, 2004, pp. 596-603.
- D. Ott and K. Mayer-Patel, "Aggregate congestion control for distributed multimedia applications," *Proceedings of IEEE Infocom '04*, Hong Kong, 7-11 March 2004, vol. 1, pp. 13-23.

- K. Mayer-Patel and W. Miaw, "Evaluating the effectiveness of automatic PVR management," *Proceedings of the SPIE Conference on Storage and Retrieval Methods and Applications for Multimedia*, San Jose, CA, January 2004, vol. 5307, pp. 360-365.
- S.-U. Kum, K. Mayer-Patel and H. Fuchs, "Real-time compression for dynamic 3D environments," *Proceedings of the 11th International ACM Conference on Multimedia*, Berkeley, CA, 2003, pp. 185-194.
- N. Kelshikar, X. Zabulis, J. Mulligan, K. Daniilidis, V. Sawant, S. Sinha, T. Sparks, S. Larsen, H. Towles, K. Mayer-Patel, H. Fuchs, J. Urbanic, K. Benninger, R. Reddy and G. Huntoon, "Real-time terascale implementation of tele-immersion," *Proceedings of the International Conference on Computation Science*, Melbourne, Australia, 2003, Springer-Verlag Lecture Notes in Computer Science vol. 2660, pp. 33-42.
- K. Mayer-Patel, L. Le and G. Carle, "An MPEG performance model and its application to adaptive forward error correction," *Proceedings of the 10th International ACM Conference on Multimedia*, Juan-les-Prins, France, 2002, pp. 1-10.
- D. Gotz and K. Mayer-Patel, "IRW: an incremental representation for image-based walkthroughs," *Proceedings of the 10th International ACM Conference on Multimedia*, Juan-les-Prins, France, 2002, pp. 67-76.
- D. Ott and K. Mayer-Patel, "A mechanism for TCP-friendly transport-level protocol coordination," *Proceedings of the USENIX Technical Conference*, Monterrey, CA, 2002 (14 pages).
- A. Wilson, K. Mayer-Patel and D. Manocha, "Spatially-encoded far-field representations for interactive walkthroughs," *Proceedings of the 9th International ACM Conference on Multimedia*, Ottawa, Canada, 2001, pp. 348-357.
- D. Ott and K. Mayer-Patel, "Transport-level protocol coordination in cluster-to-cluster applications," Proceedings of the 8th International Workshop on Interactive Distributed Multimedia Systems (Lecture Notes in Computer Science), vol. 2158, Springer, 2001, pp. 10-22.
- D. Yu, D. Wu, K. Mayer-Patel and L.A. Rowe, "dc: a live webcast control system," Proceedings of the SPIE Conference on Multimedia Computing and Networking, vol. 4312, San Jose, CA, 2001, pp. 111-122.
- K. Mayer-Patel, "Incorporating application-level knowledge into the MPEG-2 coding model," *Proceedings of the Workshop on Network and Operating System Support for Digital Audio and Video (NOSSDAV)*, Chapel Hill, CA, 2000, (6 pages).
- K. Mayer-Patel and L.A. Rowe, "Exploiting spatial parallelism for software-only video effects processing," *Proceedings of the SPIE Conference on Multimedia Computing and Networking*, vol. 3654, San Jose, CA, 1999, pp. 252-263.

- K. Mayer-Patel and L.A. Rowe, "A multicast control scheme for parallel software-only video effects processing," *Proceedings of the 7th International ACM Conference on Multimedia*, Orlando, FL, 1999, pp. 409-418.
- K. Mayer-Patel and L.A. Rowe, "Exploiting temporal parallelism for software-only video effects processing," *Proceedings of the 6th International ACM Conference on Multimedia*, Bristol, England, 1998, pp. 161-169.
- T.H. Wong, K. Mayer-Patel and L.A. Rowe, "A software-only video production switcher for the Internet MBone," *Proceedings of the SPIE conference on Multimedia Computing and Networking*, vol. 3310, San Jose, CA, 1998, pp. 28-41.
- K. Mayer-Patel and L.A. Rowe, "Design and performance of the Berkeley Continuous Media Toolkit," *Proceedings of the SPIE conference on Multimedia Computing and Networking*, vol. 3020, San Jose, CA, 1997, pp. 194-206.
- K. Mayer-Patel, D. Simpson, D. Wu, and L.A. Rowe, "Synchronized continuous media playback through the World Wide Web," *Proceedings of the 4th International ACM Conference on Multimedia*, Boston, MA, 1997, pp. 435-436.
- L.A. Rowe, K. Patel, and B. Smith, "MPEG video in software: representation, transmission, and playback," *Proceedings of the SPIE conference on High-Speed Networking and Multimedia Computing*, vol. 2188, San Jose, CA, 1994, pp. 134-144.
- K. Patel, B. Smith, and L.A. Rowe, "Performance of a software MPEG video decoder," *Proceedings of the 1st International ACM Conference on Multimedia*, Los Angeles, CA, 1993, pp. 75-82.

Software Artifacts

mpeg_play

The first publicly available MPEG-1 video decoder originally released in 1993. Over 1,000,000 copies of this program have been downloaded. It has been used as a code base for innumerable research and open source systems. Mayer-Patel was the architect of the original code that was later refactored and maintained by a number of other individuals.

The Berkeley Continuous Media Toolkit

The Berkeley CMT provided a framework within which to develop experimental multimedia tools and applications. Although primarily used by researchers at UC Berkeley, it was employed by a number of different research groups world-wide. Development of CMT ended in approximately 1998.

MPEG2Event

This recently released C# library allows researchers to rapidly develop MPEG-2 analysis tools that are interested in the details of bit-level coding elements. Although currently in use

by only a small number of researchers, it is freely available at http://www.cs.unc.edu/~kmp/mpeg2event. Further development of the library is on-going.

Teaching

COMP 416: Introduction to Web Programming

My goal with this course is to pique student interest for more detailed upper-division courses in operating systems, networking, databases, security, etc. while satisfying their practical interest in developing web programming skills.

COMP 426: Advanced Web Programming

A follow-on course to COMP 416, this course expands on client-server programming concepts and concentrates more attention to the design and use of databases and XML-related technologies.

COMP 249: Multimedia Computing and Networking

This course is an advanced graduate-level course that covers the fundamental concepts in multimedia computing and networking. Students are expected to complete an extensive final project, some of which have led to publications in refereed conferences and workshops.

COMP 249-080: Topics in Multimedia Systems

This seminar course provides students with an opportunity to read and present the most research literature in multimedia systems.

Research Areas

Coordinated Multistreaming

In this project, we are developing mechanisms to address the needs of distributed multimedia applications that employ many (i.e., 10's or 100's) of different media flows with complex inter-stream semantics and adaptation requirements. This project addresses fundamental problems in protocol coordination and aggregate congestion control.

Multidimensional Adaptation

We are developing a framework for compactly expressing and evaluating adaptation policies that must negotiate tradeoffs in real-time within very large multiresolutional datasets with high dimensionality.

StrandCast

StrandCast is an application-layer multicast protocol intended for latency-insensitive multimedia applications such as receiver-driven layered multicast and pyramid broadcasting. The design and implementation of StrandCast exploits the lax latency requirements of these applications to optimize for link stress, rapid joins and leaves, and robustness in the face of node failure.

Encoding and Transmission of 3D Scenes from Multiple Cameras

The project explores ways to efficiently transmit video data from a set of cameras viewing the same scene. This problem is at the heart of most tele-immersion applications. Our hypothesis is that it is possible to exploit depth information (even if imperfect) derived from stereo correlation between cameras to more efficiently encode the original color information.

Recoverable Video Adaptation

Existing video adaptation techniques generally lead to irreversibly loss of video quality. In this project, we are exploring adaptation techniques that can be used to recover high (or at least higher) quality video from a set of independently constructed lower quality representations.

Funding

CAREER: Enabling Futuristic Distributed Applications with Integrative Multistream Networking

PI's: K. Mayer-Patel Agency: National Science Foundation (ANI-0238260) Amount: \$404,387 Duration: 8/15/2003 – 8/14/2008

ITR: Protocol Coordination for Multi-Stream Applications

PI's: K. Mayer-Patel Agency: National Science Foundation (ANI-0219780) Amount: \$368, 047 Duration: 10/1/2002 – 9/30/2005

RI: Tera-Pixels - Using High-Resolution Pervasive Displays to Transform Collaboration and Teaching

PI's: K. Jeffay, A. Lastra, F.D. Smith, K. Mayer-Patel and L. McMillan
Agency: National Science Foundation (EIA-0303590)
Amount: \$590,986
Duration: 8/15/2003 - 8/14/2008

3D Telepresence for Medical Consultation: Extending Medical Expertise Throughout, Between, and Beyond Hospitals

PI's: H. Fuchs, B. Cairns, K. Mayer-Patel, D. Sonnenwald, G. Welch

Agency: National Library of Medicine

Amount: \$2,549,980

Duration: 09/30/2003-09/29/2006

Video-Based Representation and Rendering of Large Real and Synthetic Environments

PI's: D. Manocha and K. Mayer-Patel Agency: Office of Naval Research

Amount: \$112,384

Duration: 01/01/2001-12/31/2003

Video Quality Metric Oracle

PI's: K. Mayer-Patel Agency: North Carolina Networking Initiative Fellowship Program Amount: \$20,000 Duration: 08/15/2001 – 5/15/2002

SCOUT: An On-Line Network Path Measurement and Characterization Tool

PI's: K. Mayer-Patel Agency: North Carolina Networking Initiative Fellowship Program Amount: \$20,000 Duration: 08/15/2000 - 5/15/2001

Professional Activities

Editorships

- Associate Editor, ACM Transactions on Multimedia Communications, Computing, and Applications (TOMCCAP)
- Associate Editor, IEEE Multimedia Magazine

Executive Committees

• Co-Chair, International Workshop on Network and Operating System Support for Digital Audio and Video (NOSSDAV)

Organizing Committees

- Program Chair, ACM Multimedia Systems 2010
- General Co-Chair, Multimedia Networking and Computing 2009
- Program Co-Chair, Multimedia Modeling (MMM) 2009
- General Co-Chair, NOSSDAV 2005
- Program Co-Chair, ACM Multimedia, 2006
- Open Source Software Competition Chair, ACM Multimedia (2004, 2005)
- Tutorial Program Chair, ACM Multimedia (2003)
- Doctoral Symposium Chair, ACM Multimedia (2000, 2001)

Program Committees

- ACM Multimedia
- NOSSDAV
- Multimedia Computing and Networking (MMCN)
- Multimedia Interactive Protocols and Systems Workshop
- IFIP Networking Conference
- Multimedia Information Systems Conference
- International World Wide Web Conference
- SPIE Conference on Multimedia Computing and Networking
- IEEE International Conference on Distributed Computing Systems
- Interactive Distributed Multimedia Systems Workshop
- Global Internet Symposium

Other Professional Service

- Guest Editor, Special Issue of Multimedia Systems Journal featuring expanded papers from the SPIE Conference on Multimedia Computing and Networking, 2003.
- In 2004, participated in a by invitation-only meeting of leaders within ACM SIGMultimedia. A report of the meeting outlining important directions for multimedia research will appear in Transactions on Multimedia Computing, Communications, and Applications.
- Invited to an international meeting of leading multimedia researchers being organized for Spring 2005 in Dagstuhl, Germany to discuss the future of multimedia research.

Past Ph.D. Students

- David Gotz, Supporting adaptive scalable access to multiresolutional multidimensional data, May 2005.
- David Ott, Coordination mechanisms for distributed multistream applications, November 2005.
- Sang-Uok Kum, Encoding and transmission of 3D depth streams, November 2008.

University Service

University Committees

• Tar Heel Bus Tour Advisory Committee (Fall 2001).


Department Service

- Chair of Undergraduate Curriculum Committee (Fall 2009 present).
- Chair of Graduate Admissions Committee (Spring 2005 Fall 2009).
- Member of Graduate Admissions Committee (Spring 2001 Spring 2005).

Other Service

- Project UPLIFT participant (recruitment of minority high school students)
- Co-coach of the UNC ACM Programming Competition team (Fall 2000 present).

EXHIBIT 2 TO MAYER-PATEL DECLARATION

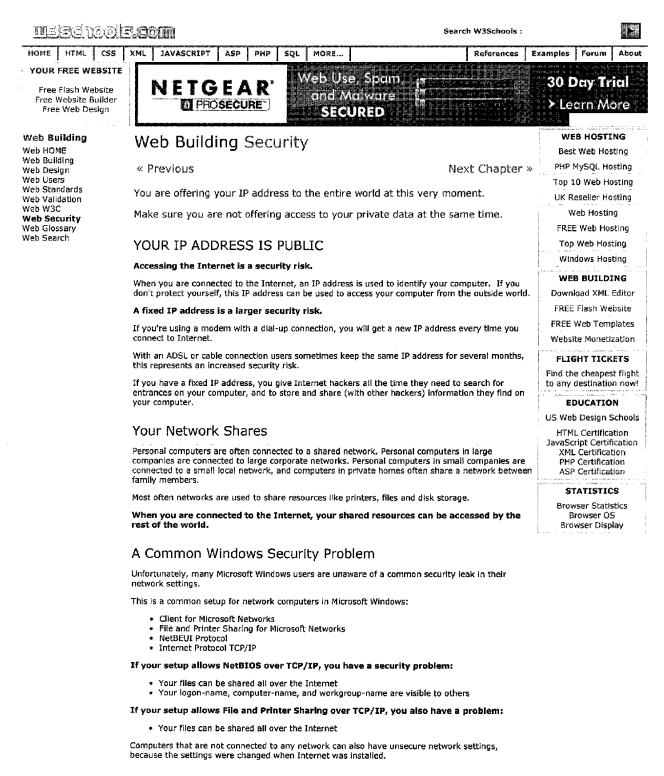

Solving the Problem

For Windows 2000 users:

You can solve your security problem by disabling NetBIOS over TCP/IP:

- Open Windows Explorer
- · Right-click on My Network Places
- Select: Properties
- · Right-click on Local Area Network
- Select: Properties

- Select: Internet Protocol TCP/IP
- Click on Properties
- Click on Advanced
 Select the WINS tab
- Select Disable NetBIOS over TCP/IP
- Click OK

If you get the message: "This connection has an empty......", Ignore the message and click on YES to continue, and click OK to close the other setup windows.

You should restart your computer after the changes.

For Windows 95, 98, or ME users:

You can solve your security problem by disabling NetBIOS over TCP/IP:

- Open Windows Explorer
- Right-click on My Network Places
- Select: Properties
- Select: Internet Protocol TCP/IP
- Click on Properties · Select the NetBIOS tab
- Uncheck: Enable NetBIOS over TCP/IP
- Click OK

You must also disable the TCP/IP Bindings to Client for Microsoft Networks and File and Printer Sharing:

- Open Windows Explorer
 Right-click on My Network Places
- Select: Properties
- Select: Internet Protocol TCP/IP
- Click on Properties
- Select the Bindings tab ٠
- Uncheck: Client for Microsoft Networks Uncheck: File and Printer Sharing
- Click OK

If you get a message with something like: "You must select a driver.......", ignore the message and click on YES to continue, and click OK to close the other setup windows.

If you still want to share your Files and Printer over the network, you must use the NetBEUI protocol instead of the TCP/IP protocol. Make sure you have enabled it for your local network:

- **Open Windows Explore**
- Right-click on My Network Places
- Select: Properties
 Select: NetBEUI
- **Click on Properties**
- Select the Bindings tab
- Check: Client for Microsoft Networks
- Check: File and Printer Sharing
- Click OK

You should restart your computer after the changes.

Protect Your Server

IISPROTECT provides a complete range of password protection, authentication and user management solutions:

iisPROTECTasp: Protect areas of your web site and require username and password. Grant/deny any users/groups on a per resource basis. Extensive Web Interface for user/group admin, use any DB backend, store custom data, set user start/end dates, email users, audit logins.

iisPROTECT: Protect all web site files including images, databases, html, ASP etc. Protect entire directories, users / groups independent from Windows accounts, complete web administration, does not require cookies or any programming. Complete turn key solution.

iisPROTECTquota: All of the features of iisPROTECT plus: prevent concurrent logins and password cracking attempts, set quotas on hits, logins, kb per user.

Read more about iisPROTECT

« Previous

Next Chapter »


Product Spotlight

Web 2.0 Code Generation is Herel Generate data entry and reporting .NET Web apps in minutes. Quickly create visually stunning, feature-rich apps that are easy to customize and ready to deploy. Download Now!

1,050,724 Sites built with Wix. Make your own!

Click here to design a Stunning Flash Website for Free

Wix is a revolutionary web design tool that provides anyone with the possibility to create professional and beautiful websites for free.

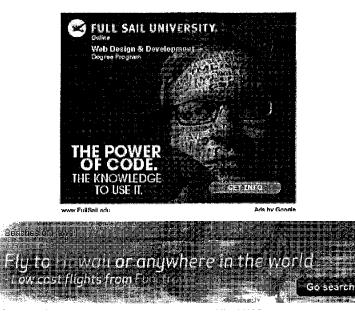

With e-commerce features, search engine visibility and many more professional tools, Wix is the ultimate solution for creating a spectacular site while saving tons of money.

Rechools com

HOME | TOP | PRINT | FORUM | ABOUT

W3Schools is for training only. We do not warrant the correctness of its content. The risk from using it lies entirely with the user. While using this site, you agree to have read and accepted our terms of use and privacy policy. Copyright 1999-2009 by Refsnes Data. All Rights Reserved. Control No. 90/010,422 Re-examination of U.S. Patent No. 6,009,469

(x). RELATED PROCEEDINGS APPENDIX

No related proceedings.

Electronic Patent A	\pp	olication Fee	e Transmi	ttal		
Application Number:	90	010422				
Filing Date:	26	-Feb-2009				
Title of Invention:	Gra	aphic User Interface	For Internet Te	lephony Applicatic	on	
First Named Inventor/Applicant Name:	6,0	6,009,469				
Filer:	Mi	chael R. Casey				
Attorney Docket Number:	26	55-0185				
Filed as Large Entity						
ex parte reexam Filing Fees						
Description		Fee Code	Quantity	Amount	Sub-Total in USD(\$)	
Basic Filing:						
Pages:						
Claims:						
Miscellaneous-Filing:						
Petition:						
Patent-Appeals-and-Interference:						
Filing a brief in support of an appeal		1402	1	540	540	
Post-Allowance-and-Post-Issuance:						
Extension-of-Time:			Cisco	- Exhibit 1003 -	Page 115	

Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Miscellaneous:				
	Tot	al in USD	(\$)	540

Electronic Ac	knowledgement Receipt
EFS ID:	8809507
Application Number:	90010422
International Application Number:	
Confirmation Number:	6565
Title of Invention:	Graphic User Interface For Internet Telephony Application
First Named Inventor/Applicant Name:	6,009,469
Customer Number:	42624
Filer:	Michael R. Casey
Filer Authorized By:	
Attorney Docket Number:	2655-0185
Receipt Date:	10-NOV-2010
Filing Date:	26-FEB-2009
Time Stamp:	15:07:14
Application Type:	Reexam (Third Party)

Payment information:

Submitted with Payment	yes
Payment Type	Deposit Account
Payment was successfully received in RAM	\$540
RAM confirmation Number	1409
Deposit Account	501860
Authorized User	
The Director of the USPTO is hereby authorized to charg	e indicated fees and credit any overpayment as follows:
Charge any Additional Fees required under 37 C.F.R. Se	ection 1.16 (National application filing, search, and examination fees)
Charge any Additional Fees required under 37 C.F.R. Se	ction 1.17 (Patent application an ருக்கும் மாதர் இரைகள் இது பிர

Charge any Additional Fees required under 37 C.F.R. Section 1.19 (Document supply fe	es)
--	-----

Charge any Additional Fees required under 37 C.F.R. Section 1.20 (Post Issuance fees)

Charge any Additional Fees required under 37 C.F.R. Section 1.21 (Miscellaneous fees and charges)

File Listin	g:				
Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Reexam Certificate of Service	20101110_appeal_brief_COS.	57211	no	1
		pdf	7a5e80b833ca96bcd745d4b67cd54e64540 d1e25		
Warnings:					
Information					
2	Appeal Brief Filed	20101110_appeal_brief.pdf	2180801	no	71
			1dc1cd6a6cfecec42e073ce8f75bf9779d73 6f09		
Warnings:					
Information					
3	Fee Worksheet (PTO-875)	fee-info.pdf	29450	no	2
			a7aabb2cf9843744f39aa3766c5c93db007b 482d		
Warnings:					
Information					
		Total Files Size (in bytes)	: 220	67462	
characterize	ledgement Receipt evidences receip d by the applicant, and including pa described in MPEP 503.				
lf a new appl 1.53(b)-(d) a	<u>tions Under 35 U.S.C. 111</u> ication is being filed and the applica nd MPEP 506), a Filing Receipt (37 CF ement Receipt will establish the filin	FR 1.54) will be issued in due			
lf a timely su U.S.C. 371 ar	ge of an International Application un bmission to enter the national stage nd other applicable requirements a F ge submission under 35 U.S.C. 371 w	of an international applicati form PCT/DO/EO/903 indicati	ing acceptance of the	application	
If a new inter an internation and of the In	tional Application Filed with the USF mational application is being filed a onal filing date (see PCT Article 11 an ternational Filing Date (Form PCT/R urity, and the date shown on this Act on.	nd the international applicat nd MPEP 1810), a Notification O/105) will be issued in due c	of the International <i>l</i> ourse, subject to pres	Application criptions co	Number oncerning

CERTIFICATE OF SERVICE

The undersigned hereby certifies that, on November 10, 2010, the APPEAL BRIEF filed in Re-examination Control No. 90/010,422 was served by U.S. First Class Mail, postage prepaid, on Requestor as follows:

> Blakely, Sokoloff, Taylor & Zafman LLP 1279 Oakmead Parkway Sunnyvale, CA 94085-4040

> > / Michael R. Casey /

Michael R. Casey, Ph.D.

PTO/SB/31 (07-09) Approved for use through 07/31/2012. OMB 0651-0031 U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

	Under the Paperwork Reduction Act of 1995, no persons are required to respon			it displays a valid OMB control number.
			Docket Number ((Optional)
	NOTICE OF APPEAL FROM THE EXAMINER TO THE BOARD OF PATENT APPEALS AND INTERFERE		2655-0185	
to the	by certify that this correspondence is being facsimile transmitted USPTO or deposited with the United States Postal Service with ient postage as first class mail in an envelope addressed to	In re Applicat U.S. Pater	ion of nt No. 6,009,46	9
"Com 1450'	missioner for Patents, P.O. Box 1450, Alexandria, VA 22313- " [37 CFR 1.8(a)]	Application N 90/010,42		Filed 02-26-2009
	turo	For		
Signa	ature	Art Unit		Examiner
Type name	d or printed	3992		KOSOWSKI, ALEXANDER
Appli	cant hereby appeals to the Board of Patent Appeals and Interferences	s from the last o	decision of the exa	
The f	ee for this Notice of Appeal is (37 CFR 41.20(b)(1))			\$ <u></u>
	Applicant claims small entity status. See 37 CFR 1.27. Therefore, the by half, and the resulting fee is:	e fee shown ab	ove is reduced	\$
	A check in the amount of the fee is enclosed.			
	Payment by credit card. Form PTO-2038 is attached.			
	The Director has already been authorized to charge fees in this appli	ication to a Dep	oosit Account.	
2	The Director is hereby authorized to charge any fees which may be to Deposit Account No. 501860	required, or cre	dit any overpayme	nt
	A petition for an extension of time under 37 CFR 1.136(a) (PTO/SB/2	22) is enclosed		
	WARNING: Information on this form may become public. Credit be included on this form. Provide credit card information and a			
lam	the			
	applicant/inventor.	/ Mich	ael R. Casey /	Olemature
	assignee of record of the entire interest. See 37 CFR 3.71. Statement under 37 CFR 3.73(b) is enclosed.	Micha	ael R. Casey	Signature
	(Form PTO/SB/96)		Typed	or printed name
4	attorney or agent of record. 40,294 Registration number	703-8	394-6406 Telev	phone number
			reie	
	attorney or agent acting under 37 CFR 1.34. Registration number if acting under 37 CFR 1.34.	09/09	9/2010	Dete
				Date
	TE: Signatures of all the inventors or assignees of record of the entire omit multiple forms if more than one signature is required, see below*.	interest or thei	r representative(s)	are required.
	*Total of forms are submitted.			

This collection of information is required by 37 CFR 41.31. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11, 1.14 and 41.6. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

Privacy Act Statement

The **Privacy Act of 1974 (P.L. 93-579)** requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

- 1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether disclosure of these records is required by the Freedom of Information Act.
- 2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
- 3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
- 4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
- 5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
- 6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
- 7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (*i.e.*, GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
- 8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspection or an issued patent.
- 9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

CERTIFICATE OF SERVICE

The undersigned hereby certifies that, on September 10, 2010, the Notice of Appeal filed in Re-examination Control No. 90/010,422 was served by U.S. First Class Mail, postage prepaid, on Requestor as follows:

> Blakely, Sokoloff, Taylor & Zafman LLP 1279 Oakmead Parkway Sunnyvale, CA 94085-4040

> > / Michael R. Casey /

Michael R. Casey, Ph.D.

Electronic Patent A	4pp	lication Fee	e Transmit	ttal		
Application Number:	900	010422				
Filing Date:	26-	Feb-2009				
Title of Invention:	Gra	aphic User Interface	For Internet Tel	ephony Applicatic	n	
First Named Inventor/Applicant Name:	6,0	6,009,469				
Filer:	Mie	chael R. Casey				
Attorney Docket Number:	26	55-0185				
Filed as Large Entity						
ex parte reexam Filing Fees						
Description		Fee Code	Quantity	Amount	Sub-Total in USD(\$)	
Basic Filing:						
Pages:						
Claims:						
Miscellaneous-Filing:						
Petition:						
Patent-Appeals-and-Interference:						
Notice of appeal		1401	1	540	540	
Post-Allowance-and-Post-Issuance:						
Extension-of-Time:			Cisco	- Exhibit 1003 -	Page 123	

Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Miscellaneous:				
	Tot	al in USD	(\$)	540

Electronic Ac	knowledgement Receipt
EFS ID:	8390486
Application Number:	90010422
International Application Number:	
Confirmation Number:	6565
Title of Invention:	Graphic User Interface For Internet Telephony Application
First Named Inventor/Applicant Name:	6,009,469
Customer Number:	42624
Filer:	Michael R. Casey
Filer Authorized By:	
Attorney Docket Number:	2655-0185
Receipt Date:	10-SEP-2010
Filing Date:	26-FEB-2009
Time Stamp:	11:01:03
Application Type:	Reexam (Third Party)

Payment information:

Submitted with Payment	yes
Payment Type	Deposit Account
Payment was successfully received in RAM	\$540
RAM confirmation Number	9694
Deposit Account	501860
Authorized User	
The Director of the USPTO is hereby authorized to charge	e indicated fees and credit any overpayment as follows:
Charge any Additional Fees required under 37 C.F.R. Se	ction 1.16 (National application filing, search, and examination fees)
Charge any Additional Fees required under 37 C.F.R. Se	ction 1.17 (Patent application an முல னு நல்கு மற்று குறைக்குகு) 125

	g:				
Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.
1	Notice of Appeal Filed	NOA_90010422.pdf	243752	no	2
			11da765238c9aa4c3959c99a5e41177dca2 49191		
Narnings:					
nformation					
2	Reexam Certificate of Service	20100909_COS.pdf	56691	no	1
2	Reckam certificate of service	20100303_003.pdf	98d048c1b967512ad0ebb3c393d8a2d68e 99bed9	110	·
Narnings:					
nformation		1			
3	Fee Worksheet (PTO-875)	fee-info.pdf	29442	no	2
L.		ree-into.pui	ce067f002c78af4fa1b84a75939b6d1f1fae1 c11	no	2
Varnings:			·		
nformation					
·his Aslensu	ledgement Receipt evidences receip	Total Files Size (in byte		29885	

			UNITED STATES DEPAR United States Patent and Address: COMMISSIONER F P.O. Box 1450 Alexandria, Virginia 223 www.uspto.gov	Trademark Office OR PATENTS
APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
90/010,422	02/26/2009	6,009,469	2655-0185	6565
42624 75	590 07/20/2010		EXAM	INER
	BERQUIST JACKSON	& GOWDEY LLP		
	BLVD., 7TH FLOOR VA 22203		ART UNIT	PAPER NUMBER

Please find below and/or attached an Office communication concerning this application or proceeding.

۰.

TOT ADD

UNITED STATES PATENT AND TRADEMARK OFFICE



Commissioner for Patents United States Patents and Trademark Office P.O.Box 1450 Alexandria, VA 22313-1450 www.uspto.gov



THIRD PARTY REQUESTER'S CORRESPONDENCE ADDRESS EWIN H. TAYLOR BLAKELY,SOKOLOFF,TAYLOR & ZAFMAN, LLP 1279 OAKMEAD PARKWAY SUNNYVALE, CA 94085-4040

CENTRAL REEXAMINATION UNIT

JUL 2 0 2010

EX PARTE REEXAMINATION COMMUNICATION TRANSMITTAL FORM

REEXAMINATION CONTROL NO. : 90010422 PATENT NO. : 6009469 ART UNIT : 3992

Enclosed is a copy of the latest communication from the United States Patent and Trademark Office in the above identified ex parte reexamination proceeding (37 CFR 1.550(f)).

Where this copy is supplied after the reply by requester, 37 CFR 1.535, or the time for filing a reply has passed, no submission on behalf of the ex parte reexamination requester will be acknowledged or considered (37 CFR 1.550(g)).

	Control No.	Patent Under Reexamination	
Ex Parte Reexamination	90/010,422	6,009,469	
Advisory Action	Examiner	Art Unit	
Before the Filing of an Appeal Brief	ALEXANDER J. KOSOWSKI	3992	
The MAILING DATE of this communication app	ears on the cover sheet with the c	orrespondence address	
THE PROPOSED RESPONSE FILED <u>12 July 2010</u> F FINAL REJECTION MAILED 10 May 2010		·	
 Unless a timely appeal is filed, or other appropriate action by the patent owner is taken to overcome all of the outstanding rejection(s), this prosecution of the present <i>ex parte</i> reexamination proceeding WILL BE TERMINATED and a Notice of Intent to Issue <i>Ex Parte</i> Reexamination Certificate will be mailed in due course. Any finally rejected claims, or claims objected to, will be CANCELLED. THE PERIOD FOR RESPONSE IS EXTENDED TO RUN 4 MONTHS FROM THE MAILING DATE OF THE FINAL REJECTION. Extensions of time are governed by 37 CFR 1.550(c). 			
NOTICE OF APPEAL			
2. An Appeal Brief is due two months from the date of the Notice of Appeal filed on <u>to</u> a void dismissal of the appeal. See 37 CFR 41.37(a). Extensions of time are governed by 37 CFR 1.550(c). See 37 CFR 41.37(e).			
AMENDMENTS			
 3. The proposed amendment(s) filed after a final action, but prior to the date of filing a brief, will <u>not</u> be entered because: (a) They raise new issues that would require further consideration and/or search (see NOTE below); (b) They raise the issue of new matter (see NOTE below); (c) They are not deemed to place the proceeding in better form for appeal by materially reducing or simplifying the issues for appeal; and/or 			
(d) They present additional claims without canceling a corresponding number of finally rejected claims. NOTE: (See 37 CFR 1.116 and 41.33(a)).			
4. Patent owner's proposed response filed <u>has over the second second</u> .			
5. The proposed new or amended claim(s) <u>would be</u> allowable if submitted in a separate, timely filed amendment canceling the non-allowable claim(s).			
 6. For purposes of appeal, the proposed amendment explanation of how the new or amended claim(s) w The status of the claim(s) is (or will be) as follows: Claim(s) patentable and/or confirmed: Claim(s) objected to: Claim(s) rejected: Claim(s) not subject to reexamination: 			
AFFIDAVIT OR OTHER EVIDENCE			
7. The affidavit or other evidence filed after a final acti entered because patent owner failed to provide a s evidence is necessary and was not earlier presented	howing of good and sufficient rea		
8. The affidavit or other evidence filed after the date on not be entered because the affidavit or other evider failed to provide a showing of good and sufficient renot earlier presented. See 37 CFR 41.33(d)(1).	nce fails to overcome all rejection	ns under appeal and/or appellant	
9. \boxtimes The affidavit or other evidence is entered. An expla	nation of the status of the claims	after entry is below or attached.	
REQUEST FOR RECONSIDERATION/OTHER		insting in population for -University	
 M The request for reconsideration has been conside because: See Continuation Sheet. 	red but does NOT place the appl		
11. Note the attached Information Disclosure Stateme	nt(s), PTO/SB/08, Paper No(s) _		
12. Other:			
/Alexander J Kosowski/			
Primary Examiner, Art Unit 3992			
cc: Requester (if third party requester)			
U.S. Patent and Trademark Office PTOL-467 (Rev. 08-06) <i>Ex Parte</i> Reexamination Advisory	Action Before the Filing of an Appeal	Brief Part of Paper No. 20100719	

Continuation of 10.

The request for reconsideration has been considered but does NOT place the application in condition for allowance because:

Examiner begins by noting the amendment and declaration filed 7/12/10 have been entered and considered.

1) Examiner notes that claim 16 was improperly rejected in the final office action. The rejection relied upon VocalChat as a secondary reference, however this reference has been removed from consideration. Therefore, examiner notes claim 16 is hereby confirmed.

2) Examiner notes that the amendment and declaration filed 7/12/10 are found persuasive with regard to the rejection of claims 8-9 and 14-18 under NetBIOS and Pinard. The NetBIOS name registration system does not mean that a "first callee process is accessible" as name registration is often permanent and the correspondence between name and IP address would not always be indicative of accessibility. Therefore, the rejection of claims 8-9 and 14-18 under the combination of NetBIOS and Pinard is hereby withdrawn.

3) The rejection of claims 8-9, 14-15 and 17-18 under the combination of the Etherphone Papers and Pinard is maintained. The rejection of claim 16 has been withdrawn due to utilization of the withdrawn VocalChat reference as noted above.

With regard to the rejection of claim 8 utilizing Etherphone and Pinard:

Patent Owner (PO) argues that Pinard does not "state that any of the icons are representative of a "callee process", and that the icon represents "a callee from a directory which does not inherently have a corresponding process". PO argues that Pinard is directed to using a conventional telephone number and not a process.

In Response, examiner notes that the callee process itself has been taught by Etherphone, and the graphical icon representing this is taught by Pinard. Pinard shows that a callee (for instance, an employee in a directory) can be graphically represented and manipulated visually though a graphical user interface on a computer associated with a telephony server. A user manipulating this callee icon to place a call can therefore, when considered in combination with Etherphone, be considered to be manipulating the callee process as this manipulation leads to placing the call. In addition, examiner notes that the term "callee process" does not appear to be defined anywhere in PO's specification. Therefore, no strict definition can be given to this term, and a graphical icon representing a callee which enables placement of a call utilizing a callee process taught by Etherphone can be considered a "user interface element representing a first callee process".

PO also argues that there is no motivation to combine the references, since Pinard does not have a general discussion of personal computers and since Pinard utilizes a conventional telephone.

In response, examiner notes that Pinard teaches the use of a telephony server in combination with a personal computer. The computer is utilized for its graphical user interface to control the calling process of the telephony server. Etherphone utilizes a personal computer and graphical user interface to place telephone calls over a network. Therefore, both pieces of prior art relate to communications between users in a computerized environment, and are therefore combinable.

Conclusion: Claims 8-9, 14-15 and 17-18 remain rejected under Etherphone and Pinard. Claim 16 is confirmed.

Reexamination	Application/Control No.	Applicant(s)/Patent Under Reexamination	
	90010422 Certificate Date	6,009,469 Certificate Number	

Requester Correspondence Address:
Patent Owner
Third Party

BLAKELY SOKOLOFF TAYLOR & ZAFMAN LLP 1279 OAKMEAD PARKWAY SUNNYVALE, CA 94085-4040

	AJK (examiner initials)	07/19/2010 (date)	
Ca	se Name	Director Initials	
OPEN: 2:06cv2469 Net2phone v. Et	bay		
		· · ·	

COPENDING OFFICE PROCEEDINGS		
TYPE OF PROCEEDING	NUMBER	
1. no copending proceedings		
	· · · · · · · · · · · · · · · · · · ·	

_		· · · · · · · · · · · · · · · · · · ·

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In rc PATENT APPLICATION OF: Net2Phone, Inc. (Patent No. 6,009,469) Control No.: 90/010,422 Issue Date: December 28, 1999 Title: GRAPHIC USER INTERFACE FOR INTERNET TELEPHONY APPLICATION Attorney Docket:2655-0185Group Art Unit:3992Examiner:KOSOWSKI, AlexanderDate:July 12, 2010Confirmation No.:6565

RESPONSE TO FINAL REJECTION IN A RE-EXAMINATION

Hon. Commissioner of Patents P.O. Box 1450 Alexandria, VA 22313-1450 OK to Kater Aze

Sir:

In response to the Office Action dated May 10, 2010, the Assignee hereby requests the automatic one-month extension of time proscribed in MPEP 2265 for "a first timely response to an Office Action" after a final rejection in a re-examination and submits:

Remarks/Arguments beginning on page 2 of this paper.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re PATENT APPLICATION OF: Net2Phone, Inc. (Patent No. 6,009,469) Control No.: 90/010,422 Issue Date: December 28, 1999 Title: GRAPHIC USER INTERFACE FOR INTERNET TELEPHONY APPLICATION Attorney Docket:2655-0185Group Art Unit:3992Examiner:KOSOWSKI, AlexanderDate:July 12, 2010Confirmation No.:6565

RESPONSE TO FINAL REJECTION IN A RE-EXAMINATION

Hon. Commissioner of Patents P.O. Box 1450 Alexandria, VA 22313-1450

Sir:

In response to the Office Action dated May 10, 2010, the Assignee hereby requests the automatic one-month extension of time proscribed in MPEP 2265 for "a first timely response to an Office Action" after a final rejection in a re-examination and submits:

Remarks/Arguments beginning on page 2 of this paper.

REMARKS/ARGUMENTS

Favorable reconsideration, in light of the following discussion, is respectfully requested. In the outstanding Office Action, a number of previous grounds for rejection were withdrawn, the patentability of claims 1-3, 5 and 6 was confirmed, and claims 8, 9 and 14-18 were again rejected under 35 U.S.C 103(a) as follows:

1. Claims 8, 9, and 14-18 were alleged to be obvious over the combination of NetBIOS and Pinard (U.S. Patent No. 5,533,110), either alone or in combination with the VocalChat User's Guide; and

2. Claims 8, 9, and 14-18 were alleged to be obvious over the combination of the Etherphone papers in view of Pinard, either alone or in combination with the VocalChat User's Guide.

Each of those rejections is respectfully traversed for the reasons set forth below. Reference is made throughout this response to the Second Declaration Of Ketan Mayer-Patel Under 37 C.F.R. 1.132 (hereinafter the "Second Mayer-Patel Declaration") attached hereto as Exhibit 1. The Second Mayer-Patel Declaration is submitted herewith in response to the new argument in the final Office Action that "under a broadest reasonable interpretation, this [accessible] limitation could simply mean that a user is registered with the system." As this argument was not presented in the first Office Action, the Assignee was not able to know that such a position needed to be addressed. Accordingly, as the corresponding evidence could not have been presented earlier, it is respectfully requested that the Second Mayer-Patel Declaration be admitted into the record.

The Rejection of Claim 16 Over the Combination of the VocalChat User's Guide and Either (1) the Combination of NetBIOS and Pinard or (2) the Combination of the EtherPhone Papers and Pinard

With respect to claim 16 and the combination of NetBIOS, Pinard and the VocalChat User's Guide, the Office Action alleges, in section 5, that the "VocalChat User's Guide teaches

the use of a MUTE option on a phone so that a user can talk without being heard by the other user's system." Similarly, with respect to claim 16 and the combination of EtherPhone, Pinard and the VocalChat User's Guide, the Office Action alleges, in section 8, that the "VocalChat User's Guide teaches the use of a MUTE option on a phone so that a user can talk without being heard by the other user's system." However, as noted in section 9a of the Office Action, the use of this reference was withdrawn in light of the defect(s) in the Alon Cohen declaration. Specifically, the Office Action states "Examiner therefore withdraws all rejections utilizing the VocalChat references." Thus, the rejections of claim 16 are believed to be defective, and the rejections of claim 16 should be withdrawn.

The Rejection of Claims 8, 9, 14, 15, 17 and 18 Over the Combination of NetBIOS and Pinard Claim 8

In addition to the reasons set forth in the previous response (which are incorporated herein by reference), the Assignee further submits the additional arguments set forth below for the patentability of claim 8 and its dependent claims.

With respect to the limitation of "determin[ing] if the first callee process is accessible," the Assignee previously argued that the Office Action had not shown that such a limitation was taught by NetBIOS. In section 9e, the Office Action now alleges that "under a broadest reasonable interpretation, this [accessible] limitation could simply mean that a user is registered with the system." However, users are not registered with a NetBIOS system, names are. Moreover, the registration of a name does not mean that a "first callee process is accessible."

As a preliminary matter, even the dictionary definitions of "accessible" and "registered" show that they are not synonymous with each other. See Exhibit 1 to the Second Mayer-Patel Declaration. According to the definitions, a system such as NetBIOS would indicate whether a name is "registered" (e.g., recorded or listed), but it would not indicate that a callee process is accessible (e.g., easy to reach or use or easily approached or entered). See Second Mayer-Patel Declaration, paragraphs 6 and 7.

NetBIOS explicitly provides for permanent registration of names. As described in Section 15.1.3.2 of RFC 1001, "Names held by an NBNS are given a lifetime during name registration." The same section further states "The lifetime period is established through a simple negotiation mechanism during name registration: In the name registration request, the end-node proposes a lifetime value or *requests an infinite lifetime*. The NBNS places an actual lifetime value into the name registration response. The NBNS is *always allowed to respond with an infinite actual period*." (Emphasis added.) Thus, in any number of cases, the NBNS may demand an infinite lifetime for names registered by nodes, with the effect that the NBNS would deliberately preserve the name and address information registered by a node permanently on the NBNS even though the node had stopped using the name or had gone off-line altogether years earlier. Therefore, the correspondence between a name and an IP address is not indicative of a first callee process being accessible. See Second Mayer-Patel Declaration, paragraph 8. This deliberate name preservation feature of NetBIOS teaches away from the limitation of a callee processing being accessible.

Moreover, the node requesting information on whether a name is registered does not receive an indication from the NBNS that the registered name corresponds to a name that has been given an infinite lifetime by the NBNS and could therefore be completely out-of-date. Section 4.2.13 of RFC 1002 describes the Positive Name Query Response (reproduced below) that is returned when a name has been registered, and there is no indication that the returned address is for a name associated with an identified lifetime, let alone an infinite lifetime:

4.2.13. POSITIVE NAME QUERY RESPONSE

1111111111222222222233 01234567890123456789012345678901
NAME_TRN_ID 1 Ux0 1 T 1 ? 0 0 0 0x0
0x0000 0x0001
0x0000 0x0000
RR_NAME
++++++++++++++++++++++++++++++++++++++
+-+.+.+.+.+.+.+.+.+.+.+.+.+.+.+.+.+.+.+
• + + + + + + + + + + + + + + + + + + +
ADDR_ENTRY ARRAY //
The ADDR_ENTRY ARRAY a sequence of zero or more ADDR_ENTRY records. Each ADDR_ENTRY record represents an owner of a name. For group names there may be multiple entries. However, the list may be incomplete due to packet size limitations. Bit 22, "T", will be set to indicate truncated data.
Each ADDR_ENTRY has the following format:
NB_PLAGS NB_ADDRESS NB_ADDRESS (continued) ++++++++++++++++++++++++++++++++++++

See Second Mayer-Patel Declaration, paragraph 9.

Also, there is no indication in the Positive Name Query Response disclosed by NetBIOS that the returned address necessarily corresponds with a computer or process that was ever accessible as asserted by the pending office action. For example, a first user could manually enter a dummy address in the NB_Address field associated with a claimed name that he wanted to register and still be compliant with the NetBIOS protocol standard since queries by other users for that name are "not necessarily a prelude to NetBIOS session establishment or NetBIOS datagram transmission." Section 15.3.1. See Second Mayer-Patel Declaration, paragraph 10.

RFC 1002 further shows that a name registration is not an indication of whether "a first callee process is accessible" given that a NetBIOS server may refuse to release registered names for policy reasons. As described in Section 4.2.9, a node may request that a name be released using a Name Release Request (reproduced below).

4.2.9. NAME RELEASE REQUEST & DEMAND

1 1 1 1 1 1 1 1 1 2 2 2 2 2 2 2 2 2 2 3 3 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 NAME_TRN_ID |0| 0x6 |0|0|0|0 0|B| 0x0 | 0×0000 0x0001 0×0000 0×0001 QUESTION_NAME NB (0x0020) IN (0x0001) RR NAME NB (0x0020) | IN (0x0001) 0x00000000 -+-+ NB_FLAGS 0×0006 ╶**┼**╺╪╼╪╾┿╾┿╾┽╾┿╾╈╾╋╾╋╴┿╸┿**╸┿╺┿╺┿╸┿╸┿╸┿╸┽╴**╪╴┽╴╪╼╄╸╄╸╋╸╫╴┼╴┿╸┿ NB ADDRESS

See Second Mayer-Patel Declaration, paragraph 11.

In response, as shown in Section 4.2.11, a server can generate a Negative Name Release Response, as shown below.

4.2.11. NEGATIVE NAME RELEASE RESPONSE

1 1 1 1 1 1 1 1 1 2 2 2 2 2 2 2 2 2 2 3 3 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 NAME_TRN_ID |1| 0x6 |1|0|0|0|0 0|0| RCODE | 0×0001 0x0000 0x000000000RR NAME **┼╶┊╶┼╶┊┈┼┈┼┈┼╶┼┈╉╴╬╶┽╶┼╶┽╸╋╸╋╸┼╸┼╸┼╸┼╸┼**╸╉╸╉ NB (0x0020) IN (0x0001) TTL ╪╶┊╴┼╶┼┈┼┈┼┈┼┈┼╴┽╶┽╶┽╶┼╸╂╸╂╸┼╸┼╸┼╸┼╸┼╸┼╸┼╸┼╸┼╸┼╸┼╸┼ NB_FLAGS 0x0006NB ADDRESS

The RCODE field indicates the response from the server. One such response is RFS_ERR which is described as follows:

RFS_ERR 0x5 Refused error. For policy reasons server will not release this name from this host.

See Second Mayer-Patel Declaration, paragraph 12.

Thus, the registration of a name does not indicate that a corresponding process is accessible. Accordingly, the limitation of "determin[ing] if the first callee process is accessible" is not taught by NetBIOS. Since this limitation is not alleged to be taught by Pinard, the combination of references fails to teach this limitation that is not taught by the references individually. See Second Mayer-Patel Declaration, paragraph 13.

Claim 8 also recites "generating a user interface element representing a first callee process" and querying "the server process to determine if the first callee process is accessible." The Office Action admits that NetBIOS "does not explicitly teach ... generating a user interface representing a first callee process." In order to address this admitted deficiency, the Office Action alleges that "Pinard teaches a user interface element representing a first communication line and callee process (Pinard, Figure 6 and col. 5 lines 23-30), and also teaches clicking and dragging an icon representing a callee from a directory into a call setup icon to establish a call link." However, both the portion of Pinard in col. 5 cited by the Office Action and the Office Action itself show that the Office Action's assertion is incorrect.

Col. 5, lines 23-30 of Pinard states:

Now what the local user Debbie sees on the screen is a call in progress between her and Mary, by noting the Debbie and Mary icons 13 and 29 in the call icon 29. She also sees a ghost 13A of her icon (indicating inactive) in the same call icon as John 23, which indicates that John's line is on hold. If desired, the John icon can be made to flash or change colors at some frequency (which could increase, if desired, with increase in time).

Nowhere in that section does it state that any of the icons are representative of a "callee process." Instead, as described in the Office Action, the icon represents "a callee from a directory" which does not inherently have a corresponding process. In fact, col. 4, lines 27-31, of Pinard states "The directory can be formed of alphanumeric characters, designating the names of persons listed in the directory (as shown), or the names and telephone numbers, or images of the faces of the persons listed in the directory, or combinations of the above." Thus, Pinard is directed to using a conventional telephone number and not a process.

As further described in col. 4, lines 43-48:

The application software program then creates an icon 21 representing the party to be called (i.e. John) and places it with his name in the call setup icon. It looks up the directory number of John from directory (if it had not been typed in

by the local subscriber), and causes the server to dial John's telephone number. As soon as John answers the call, the application software program changes the call setup icon to a call icon designated as 23, and establishes a new call setup icon 24 spaced from the icon 23.

The fact that the server that dials John's telephone number is a "server [that] contains telephone interface circuits 8, conference digital signal processing circuits 9, dialing circuits, trunk circuits, etc." (Pinard, col. 3, last paragraph) is also indicative that Pinard is not describing "generating a user interface element representing a first callee process." Thus, neither Pinard nor NetBIOS nor their combination teach "generating a user interface element representing a first callee process." Accordingly, the patentability of claim 8 and its dependent claims should be confirmed.

No Motivation to Combine the References as in Claims 8, 9, 14, 15, 17 and 18 The Office Action alleges that:

it would have been obvious to one skilled in the art at the time the invention was made to utiliz[e] the user-interface elements and interactions taught by Pinard in the inventions taught by NetBIOS since Pinard teaches that the invention can be used in any system in which a personal computer in conjunction with a server operates..., since NetBIOS teaches that it can be implemented using different operating systems ..., and since examiner notes that both NetBIOS and Pinard relate to communications between at least two users implemented in a computerized environment.

The Office Action, however, provides no evidence to support this allegation. For example, the Office Action does not point to a problem identified in the art which was known to exist in one reference and for which the second references was the solution. Moreover, just because two

references could be combined does not mean that one of ordinary skill in the art would have been motivated to do so absent the teachings in the patentee's specification.

In addition, the fact that NetBIOS allegedly "teaches that it can be implemented using different operating systems" does not mean that NetBIOS should be combined with other, *different* systems. At best, it is an indication that the *same* unmodified services could be available under different operating systems.

Moreover, the use of a personal computer with "a server" is not a general discussion in col. 2 of Pinard, and the cited portion of col. 2 is taken out of context. That section states "Once the present invention is understood, it will be also understood that it is not restricted for use with those systems, but can be used with any system in which a telephony application on a personal computer or personal computer in conjunction with a server operates." Thus, it is the telephony application that can be used with a server, as is shown in, for example, figure 1 of Pinard. The cited section therefore is not an invitation to combine other services on other servers with Pinard but rather an indication that the telephony services can be implemented on a server instead of on the personal computer directly. Moreover, the server of Pinard is not a generic server but rather a "server [that] contains telephone interface circuits 8, conference digital signal processing circuits 9, dialing circuits, trunk circuits, etc." (Pinard, col. 3, last paragraph) which the Office Action has not shown to be relevant to a NetBIOS environment.

The last alleged motivation is that "both NetBIOS and Pinard relate to communications between at least two users implemented in a computerized environment"; however, this is incorrect (the callee in Pinard used a conventional telephone and need not have been implemented in a computerized environment), and it provides no evidence that the applied references are sufficiently related that one of ordinary skill in the art would have been motivated to combine them. The assertion is tantamount to a declaration that one of ordinary skill in the art would have been motivated to combine all computerized communication systems without regard for their use. Such a position has no support in the law. Accordingly, the patentability of claim 8 and its dependent claims should be confirmed.

The Rejection of Claims 8, 9, 14, 15, 17 and 18 Over the Combination of the Etherphone Papers in view of Pinard

<u>Claim 8</u>

Claim 8 recites "generating a user interface element representing a first callee process" and querying "the server process to determine if the first callee process is accessible." The Office Action admits that EtherPhone "does not explicitly teach ... generating a user interface representing a first callee process." In order to address this admitted deficiency, the Office Action alleges that "Pinard teaches a user interface element representing a first communication line and callee process (Pinard, Figure 6 and col. 5 lines 23-30), and also teaches clicking and dragging an icon representing a callee from a directory into a call setup icon to establish a call link." However, both the portion of Pinard in col. 5 cited by the Office Action and the Office Action itself show that the Office Action's assertion is incorrect.

Col. 5, lines 23-30 of Pinard states:

Now what the local user Debbie sees on the screen is a call in progress between her and Mary, by noting the Debbie and Mary icons 13 and 29 in the call icon 29. She also sees a ghost 13A of her icon (indicating inactive) in the same call icon as John 23, which indicates that John's line is on hold. If desired, the John icon can be made to flash or change colors at some frequency (which could increase, if desired, with increase in time).

Nowhere in that section does it state that any of the icons are representative of a "callee process." Instead, as described in the Office Action, the icon represents "a callee from a directory" which does not inherently have a corresponding process. In fact, col. 4, lines 27-31, of Pinard states "The directory can be formed of alphanumeric characters, designating the names of persons listed in the directory (as shown), or the names and telephone numbers, or images of the faces of

the persons listed in the directory, or combinations of the above." Thus, Pinard is directed to using a conventional telephone number and not a process.

As further described in col. 4, lines 43-48:

The application software program then creates an icon 21 representing the party to be called (i.e. John) and places it with his name in the call setup icon. It looks up the directory number of John from directory (if it had not been typed in by the local subscriber), and causes the server to dial John's telephone number. As soon as John answers the call, the application software program changes the call setup icon to a call icon designated as 23, and establishes a new call setup icon 24 spaced from the icon 23.

The fact that the server that dials John's telephone number is a "server [that] contains telephone interface circuits 8, conference digital signal processing circuits 9, dialing circuits, trunk circuits, etc." (Pinard, col. 3, last paragraph) is also indicative that Pinard is not describing "generating a user interface element representing a first callee process." Thus, neither Pinard nor EtherPhone nor their combination teach "generating a user interface element representing a first callee process." Accordingly, the patentability of claim 8 and its dependent claims should be confirmed.

No Motivation to Combine the References as in Claims 8, 9, 14, 15, 17 and 18 The Office Action alleges that:

it would have been obvious to one skilled in the art at the time the invention was made to utiliz[e] the user-interface elements and interactions taught by Pinard in the invention taught by EtherPhone since Pinard teaches that the invention can be used in any system in which a personal computer in conjunction with a server operates..., and since examiner notes that both EtherPhone and Pinard relate to communications between at least two users implemented in a computerized environment. Re-Examination of Patent No. 6,009,469 Control No.: 90/010,422 Filed: February 24, 2009 Reply to Office Action of May 10, 2010

The Office Action, however, provides no evidence to support this allegation. For example, the Office Action does not point to a problem identified in the art which was known to exist in one reference and for which the second references was the solution. Moreover, just because two references could be combined does not mean that one of ordinary skill in the art would have been motivated to do so absent the teachings in the patentee's specification.

Moreover, the use of a personal computer with "a server" is not a general discussion in col. 2 of Pinard, and the cited portion of col. 2 is taken out of context. That section states "Once the present invention is understood, it will be also understood that it is not restricted for use with those systems, but can be used with any system in which a telephony application on a personal computer or personal computer in conjunction with a server operates." Thus, it is the telephony application that can be used with a server, as is shown in, for example, figure 1 of Pinard. The cited section therefore is not an invitation to combine other services on other servers with Pinard but rather an indication that the telephony services can be implemented on a server instead of on the personal computer directly.

The last alleged motivation is that "both EtherPhone and Pinard relate to communications between at least two users implemented in a computerized environment"; however, this is incorrect (the callee in Pinard used a conventional telephone and need not have been implemented in a computerized environment), and it provides no evidence that the applied references are sufficiently related that one of ordinary skill in the art would have been motivated to combine them. The assertion is tantamount to a declaration that one of ordinary skill in the art would have been motivated to combine all computerized communication systems without regard for their use. Such a position has no support in the law. Accordingly, the patentability of claim 8 and its dependent claims should be confirmed.

13

Re-Examination of Patent No. 6,009,469Control No.: 90/010,422Filed:February 24, 2009Reply to Office Action of May 10, 2010

Consequently, in light of the above discussions, the outstanding grounds for rejection are believed to have been overcome and the patentability of the claims subject to re-examination should be indicated as confirmed. An early and favorable action to that effect is respectfully requested.

CHARGE STATEMENT: Deposit Account No. 501860, order no. 2655-0185.

The Commissioner is hereby authorized to charge any fee specifically authorized hereafter, or any missing or insufficient fee(s) filed, or asserted to be filed, or which should have been filed herewith or concerning any paper filed hereafter, and which may be required under Rules 16-18 (missing or insufficiencies only) now or hereafter relative to this application and the resulting Official Document under Rule 20, or credit any overpayment, to our Accounting/ Order Nos. shown above, for which purpose a <u>duplicate</u> copy of this sheet is attached.

This CHARGE STATEMENT <u>does not authorize</u> charge of the <u>issue fee</u> until/unless an issue fee transmittal sheet is filed.

	Respectfully submitted,			
CUSTOMER NUMBER 42624	By: / Michael R. Casey /			
	Michael R. Casey, Ph.D. Registration No.: 40,294			
Davidson Berquist Jackson & Gowdey LLP 4300 Wilson Blvd., 7th Floor, Arlington, Virginia 22203 Main: (703) 894-6400 • FAX: (703) 894-6430				

Re-Examination of Patent No. 6,009,469 Control No.: 90/010,422 Filed: February 24, 2009 Reply to Office Action of May 10, 2010

CERTIFICATE OF SERVICE

The undersigned hereby certifies that, on July 12, 2010, the RESPONSE TO FINAL REJECTION IN A RE-EXAMINATION filed in Re-examination Control No. 90/010,422 was served by U.S. First Class Mail, postage pre-paid, on Requestor as follows:

Blakely, Sokoloff, Taylor & Zafman LLP 1279 Oakmead Parkway Sunnyvale, CA 94085-4040

/ Michael R. Casey /

Michael R. Casey, Ph.D.

EXHIBIT 1

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re PATENT APPLICATION OF: Net2Phone, Inc. (Patent No. 6,009,469) Control No.: 90/010,422 Issue Date: December 28, 1999 Title: GRAPHIC USER INTERFACE FOR INTERNET TELEPHONY APPLICATION Attorney Docket: 2655-0185 Group Art Unit: 3992 Examiner: KOSOWSKI, Alexander Confirmation No.: 6565

SECOND DECLARATION OF KETAN MAYER-PATEL UNDER 37 C.F.R. 1.132

Hon. Commissioner of Patents P.O. Box 1450 Alexandria, VA 22313-1450

I. INTRODUCTION

1. I am the same Ketan Mayer-Patel that filed a Declaration in response to the first Office Action in the re-examination of U.S. Patent No. 6,009,469 (hereinafter "the '469 patent").

2. I have reviewed the outstanding Office Action dated May 10, 2010.

3. I understand that claims 8, 9, and 14-18 were alleged to be obvious over the combination of NetBIOS and Pinard (U.S. Patent No. 5,533,110), either alone or in combination with the VocalChat User's Guide, and claims 8, 9, and 14-18 were alleged to be obvious over the combination of the Etherphone papers in view of Pinard, either alone or in combination with the VocalChat User's Guide.

4. I understand that in response to evidence presented in my first Declaration the Office Action now alleges "under a broadest reasonable interpretation, this [accessible] limitation could simply mean that a user is registered with the system." As this argument was not presented in the first Office Action, I was not able to know that such a position needed to be addressed.

5. I do not believe that one of ordinary skill in the art at the time the invention was made would have believed that the definitions proposed by the Office Action are proper -- even under a "broadest reasonable interpretation" standard.

6. The dictionary definitions of "accessible" and "registered" show that they are not synonymous with each other. See Exhibit 1 attached hereto. According to the definitions, a system such as NetBIOS would indicate whether a name is "registered" (e.g., recorded or listed), but it would not indicate that a callee process is accessible (e.g., easy to reach or use or easily approached or entered).

7. Accordingly, I do not agree that "under a broadest reasonable interpretation, this [accessible] limitation could simply mean that a user is registered with the system."

8. In fact, NetBIOS explicitly provides for permanent registration of names. As described in Section 15.1.3.2 of RFC 1001, "Names held by an NBNS are given a lifetime during name registration." The same section further states "The lifetime period is established through a simple negotiation mechanism during name registration: In the name registration request, the end-node proposes a lifetime value or *requests an infinite lifetime*. The NBNS places an actual lifetime value into the name registration response. The NBNS is always allowed to respond with an infinite actual period." (Emphasis added.) Thus, in any number of cases, the NBNS may demand an infinite lifetime for names registered by nodes, with the effect that the NBNS would deliberately preserve the name and address information registered by a node permanently on the NBNS even weeks, months or years after the node had stopped using the name or had gone off-line altogether. Therefore, the correspondence between a name and an IP address is not indicative that a first callee process is accessible.


9. Moreover, the node requesting information on whether a name is registered does not receive an indication from the NBNS that the registered name corresponds to a name that has been given an infinite lifetime and could therefore be completely out-of-date. Section 4.2.13 of RFC 1002 describes the Positive Name Query Response (reproduced below) that is returned when a name has been registered, and there is no indication that the returned address is for a name associated with an identified lifetime, let alone an infinite lifetime.

2

> 4.2.13. POSITIVE NAME QUERY RESPONSE 1 1 1 1 1 1 1 1 1 2 2 2 2 2 2 2 2 2 2 3 3 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
> NAME_TRN_ID
> 1
> 0x0
> 1
> 1
> 0x0
> 0
> 0x0
> 0x0000 0x0001 5 RR NAME NB (0x0020) IN (0x0001) TTL. RDLENGTH ADDR_ENTRY ARRAY 。 むうぜく私く女くそくそくそくかくやくやくなくないないかくやくやくやくなくなくなくなくなくなくなくかくかくかくかくかくかくかくないか。 The ADDR_ENTRY ARRAY a sequence of zero or more ADDR_ENTRY For group names there may be multiple entries. However, the list may be incomplete due to packet size limitations. Bit 22, "T", will be set to indicate truncated data. Each ADDR_ENTRY has the following format: NB_FLAGS NB ADDRESS DRESS (continued) NB_ADDRESS (continued) . Ta da ta da u da andara da andar andar

10. In addition, there is no indication in the Positive Name Query Response disclosed by NetBIOS that the returned address necessarily corresponds with a computer or process that was ever accessible as asserted by the pending office action. For example, a first user could manually enter a dummy address in the NB_Address field associated with a claimed name that he wanted to register and still be compliant with the NetBIOS protocol standard since queries by other users for that name are "not necessarily a prelude to NetBIOS session establishment or NetBIOS datagram transmission." Section 15.3.1.

11. Furthermore, RFC 1002 further shows that a name registration is not an indication of whether a first callee process is accessible since a NBNS can refuse to release registered names for policy reasons. As described in Section 4.2.9, a node may request that a name be released using a Name Release Request (reproduced below).

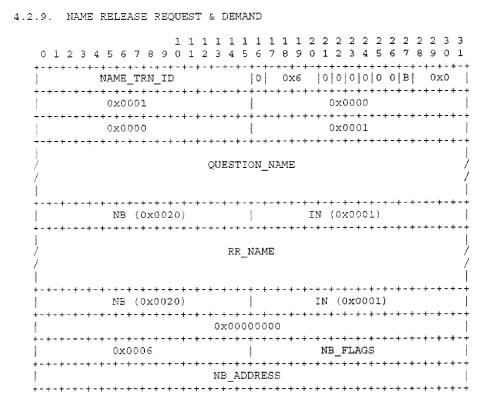

12. In response, as shown in Section 4.2.11, a server can generate a Negative Name Release Response, as shown below.

4

4.2.11. NEGATIVE NAME RELEASE RESPONSE 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 NAME_TRN_ID |1| 0x6 |1|0|0|0|0 0|0| RCODE | - dillana 0x0000 0x0001 +-+-+-+-+ 0x0000 0x0000 1 RR NAME <u>┾</u>┈┼<mark>╴┽╶┽╶┽╸┽╸╪╸╪</mark>╺┼┈┽┈┽┈┼┈┼┈┼┈┼┈┽┈┽┑┽╸┽╸┽╸┽╸┽╸┽╸┼╴┼╴┼╸┼╴┼╴┼╸┽╸┿╸┽╴┼ NB (0x0020) IN (0x0001) TTL0x0006 NB_FLAGS NB ADDRESS

The RCODE field indicates the response from the server. One such response is RFS_ERR which is described as follows:

RFS_ERR 0x5 Refused error. For policy reasons server will not release this name from this host.

13. Thus, the registration of a name does not indicate that NetBIOS discloses that a "first callee process is accessible."

14. I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Dated: July 12, 2010

Kthat

Ketan Mayer-Patel, Ph.D.

EXHIBIT 1

ac·ces·si·ble [ak-ses-uh-buh1]

-adjective

1. easy to approach, reach, enter, speak with, or use.

2. that can be used, entered, reached, etc.: an accessible road; accessible ruins.

3. obtainable; attainable: accessible evidence.

4. open to the influence of (usually fol. by to): accessible to bribery.

Dictionary.com Unabridged

Based on the Random House Dictionary, © Random House, Inc. 2010.

ac·ces·si·ble (āk-sĕs'ə-bəl) adj.

- 1. Easily approached or entered.
- 2. Easily obtained: accessible money.
- 3. Easy to talk to or get along with: an accessible manager.
- 4. Easily swayed or influenced: accessible to flattery.

ac·ces'si·bil'i·ty, ac·ces'si·ble·ness n., ac·ces'si·bly adv. The American Heritage® Dictionary of the English Language, Fourth Edition Copyright © 2009 by Houghton Mifflin Company. Published by Houghton Mifflin Company. All rights reserved.

8

reg is tered [rej-uh-sterd]

-adjective

1. recorded, as in a register or book; enrolled.

2. Commerce . officially listing the owner's name with the issuing corporation and suitably inscribing the certificate, as with bonds to evidence title. Abbreviation: r

3. officially or legally certified by a government officer or board: a registered patent.

4. denoting cattle, horses, dogs, etc., having pedigrees verified and filed by authorized associations of breeders.

dictionary.com

reg·is·tered (rěj'ĭ-stərd) adj.

1. Having the owner's name listed in a register: registered bonds.

2. Having the pedigree recorded and verified by an authorized association of breeders: a registered golden retriever.

3. Officially qualified or certified: a registered pharmacist.

The American Heritage® Dictionary of the English Language, Fourth Edition Copyright © 2009 by Houghton Mifflin Company. Published by Houghton Mifflin Company. All rights reserved.

Main Entry: registered Part of Speech: adjective Definition: recorded Synonyms: cataloged, certified, enrolled

Main Entry: registered Part of Speech: adjective Definition: pedigreed Synonyms: blooded, full-blooded, pure-blooded, purebred, thoroughbred

Electronic A	Electronic Acknowledgement Receipt					
EFS ID:	7999155					
Application Number:	90010422					
International Application Number:						
Confirmation Number:	6565					
Title of Invention:	Graphic User Interface For Internet Telephony Application					
First Named Inventor/Applicant Name:	6,009,469					
Customer Number:	42624					
Filer:	Michael R. Casey					
Filer Authorized By:						
Attorney Docket Number:	2655-0185					
Receipt Date:	12-JUL-2010					
Filing Date:	26-FEB-2009					
Time Stamp:	19:14:31					
Application Type:	Reexam (Third Party)					

Payment information:

Submitted with Payment			no					
File Listing:								
Document Number	Document Description		File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)		
1 Amendment After Final		20100712_469_cover.pdf	82954	no	1			
•			20100712_409_cover.pu	b1594ae7d97422e8750489bebbb5b8b8fa 9f4998	110	I		
Warnings:								
Information: Cisco - Exhibit 1003 - Page 158								

Warnings:		Applicant Arguments/Remarks Made in an Amendment 20100712_469_remarks.pdf							
Information:									
3	Reexam Certificate of Service	20100712 469 COS.pdf	59425	no	1				
	43		433c977de471bf2376cc36d690568bed94e 1c130						
Warnings:									
Information:									
4	Rule 130, 131 or 132 Affidavits	20100712 469 exhibit 1.pdf	856300	no	10				
		20100/12_105_exilibit_1.pdf	db659bb04b3ca1263aaef1a4586e1b4d531 e4fb3						
Warnings:									
Information:									
		Total Files Size (in bytes):	28	356195					
characterized by Post Card, as de <u>New Application</u> If a new applicat 1.53(b)-(d) and I Acknowledgem	This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to Post Card, as described in MPEP 503. New Applications Under 35 U.S.C. 111 If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.								
If a timely subm U.S.C. 371 and o national stage s <u>New Internation</u> If a new internation	of an International Application un ission to enter the national stage other applicable requirements a Fo ubmission under 35 U.S.C. 371 wi nal Application Filed with the USP tional application is being filed ar I filing date (see PCT Article 11 an national Filing Date (Form PCT/RC	of an international applicati orm PCT/DO/EO/903 indicati Il be issued in addition to the <u>TO as a Receiving Office</u> nd the international applicati d MPEP 1810), a Notification	ng acceptance of the e Filing Receipt, in du ion includes the nece of the International	applicatior le course. essary comp Application	n as a ponents for n Number				

A A A A A A A A A A A A A A A A A A A			UNITED STATES DEPAR United States Patent and Address: COMMISSIONER F P.O. Box 1450 Alexandria, Virginia 223 www.uspto.gov	Trademark Office OR PATENTS
APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
90/010,422	02/26/2009	6,009,469	2655-0185	6565
42624 7	590 05/10/2010		EXAM	INER
	BERQUIST JACKSON &	& GOWDEY LLP		- · · · · · · · · · · · · · · · · · · ·
	VA 22203		ART UNIT	PAPER NUMBER

Please find below and/or attached an Office communication concerning this application or proceeding.

TOTT AND D



Commissioner for Patents United States Patent and Trademark Office P.O. Box 1450 Alexandria, VA 22313-1450 www.uspto.gov

DO NOT USE IN PALM PRINTER

(THIRD PARTY REQUESTER'S CORRESPONDENCE ADDRESS)

BLAKELY SOKOLOFF TAYLOR & ZAFMAN LLP

1279 OAKMEAD PARKWAY

SUNNYVALE, CA 94085-4040

MAILED

MAY 1 0 2010

CENTRAL REEXAMINATION UNIT

EX PARTE REEXAMINATION COMMUNICATION TRANSMITTAL FORM

REEXAMINATION CONTROL NO. 90/010,422.

PATENT NO. <u>6,009,469</u>.

ART UNIT <u>3992</u>.

Enclosed is a copy of the latest communication from the United States Patent and Trademark Office in the above identified *ex parte* reexamination proceeding (37 CFR 1.550(f)).

Where this copy is supplied after the reply by requester, 37 CFR 1.535, or the time for filing a reply has passed, no submission on behalf of the *ex parte* reexamination requester will be acknowledged or considered (37 CFR 1.550(g)).

	90	Control No. 0/010,422	Patent Under Reexamination 6,009,469					
Office Action in Ex Parte Reexamination	xaminer LEXANDER J. KOSOWSKI	Art Unit 3992						
The MAILING DATE of this communication	n appear:	s on the cover sheet with the co	rrespondence address					
a⊠ Responsive to the communication(s) filed on <u>25 No</u> c□ A statement under 37 CFR 1.530 has not been rec	a⊠ Responsive to the communication(s) filed on <u>25 November 2009</u> . b⊠ This action is made FINAL. c□ A statement under 37 CFR 1.530 has not been received from the patent owner.							
A shortened statutory period for response to this action is set to expire <u>2</u> month(s) from the mailing date of this letter. Failure to respond within the period for response will result in termination of the proceeding and issuance of an <i>ex parte</i> reexamination certificate in accordance with this action. 37 CFR 1.550(d). EXTENSIONS OF TIME ARE GOVERNED BY 37 CFR 1.550(c) . If the period for response specified above is less than thirty (30) days, a response within the statutory minimum of thirty (30) days will be considered timely.								
Part I THE FOLLOWING ATTACHMENT(S) ARE PAR	RT OF TH	IIS ACTION:						
1. Dotice of References Cited by Examiner, P	'TO-892.	3. 🔲 Interview Summar	y, PTO-474.					
2. X Information Disclosure Statement, PTO/SB	/08.	4. 🔲						
Part II SUMMARY OF ACTION								
1a. 🛛 Claims <u>1-3,5,6,8,9 and 14-18</u> are subject to	o reexami	nation.						
1b. 🛛 Claims <u>4,7 and 10-13</u> are not subject to ree	examinatio	on.						
2.	ent reexa	imination proceeding.						
3. 🛛 Claims <u>1-3,5 and 6</u> are patentable and/or c	onfirmed.	,						
4. 🛛 Claims <u>8-9,14-18</u> are rejected.		•						
5. Claims <u>are</u> objected to.								
6. 🔲 The drawings, filed on <u>are</u> acceptable.								
7. 🔲 The proposed drawing correction, filed on _	<u>ha</u> s be	en (7a)	disapproved.					
8. 🔲 Acknowledgment is made of the priority cla	im under	35 U.S.C. § 119(a)-(d) or (f).						
a) All b) Some* c) None of the	certified	copies have						
1 been received.								
2 not been received.								
3 been filed in Application No.			,					
4 been filed in reexamination Control No	0							
5 been received by the International Bu	reau in P(CT application No						
* See the attached detailed Office action for	a list of th	ne certified copies not received.						
9. Since the proceeding appears to be in con matters, prosecution as to the merits is clo 11, 453 O.G. 213.								
10. 🔲 Other:								

1) This Office action addresses claims 1-3, 5-6, 8-9, 14-18 of United States Patent Number

6,009,469 (Mattaway et al), for which it has been determined in the Order Granting Ex Parte

Reexamination (hereafter the "Order") mailed 3/13/09 that a substantial new question of

patentability was raised in the Request for Ex Parte reexamination filed on 2/26/09 (hereafter the

"Request"). Claims 4, 7, 10-13 are not subject to reexamination. This is a final office action in

response to the amendment filed 11/25/09. The rejection of claims 8, 9, 14-18 are maintained

below. Amended claims 1-3 and 5-6 are allowable and/or confirmed below.

IDS

2) With regard to the IDS's filed 12/14/09, 12/16/09, 1/26/10, 2/24/10, 3/5/10, 5/6/10:

Where the IDS citations are submitted but not described, the examiner is only responsible for cursorily reviewing the references. The initials of the examiner on the PTO-1449 indicate only that degree of review unless the reference is either applied against the claims, or discussed by the examiner as pertinent art of interest, in a subsequent office action. See Guidelines for Reexamination of Cases in View of In re Portola Packaging, Inc., 110 F.3d 786, 42 USPQ2d 1295 (Fed. Cir. 1997), 64 FR at 15347, 1223 Off. Gaz. Pat. Office at 125 (response to comment 6).

Consideration by the examiner of the information submitted in an IDS means that the examiner will consider the documents in the same manner as other documents in Office search files are considered by the examiner while conducting a search of the prior art in a proper field of search. The initials of the examiner placed adjacent to the citations on the PTO-1449 or PTO/SB/08A and 08B or its equivalent mean that the information has been considered by the examiner to the extent noted above.

Regarding IDS submissions MPEP 2256 recites the following: "Where patents, publications, and other such items of information are submitted by a party (patent owner or requester) in compliance with the requirements of the rules, the requisite degree of consideration to be given to such information will be normally limited by the degree to which the party filing the information citation has explained the content and relevance of the information."

Accordingly, the IDS submissions have been considered by the Examiner only with the scope required by MPEP 2256, unless otherwise noted.

In addition, that which are not either prior art patents or prior art printed publications have been crossed out so as not to appear reprinted on the front page of the patent.

Claim Rejection Paragraphs

3) Claim Rejections - 35 USC § 103

The following is a quotation of 35 U.S.C. 103(a) which forms the basis for all

obviousness rejections set forth in this Office action:

(a) A patent may not be obtained though the invention is not identically disclosed or described as set forth in section 102 of this title, if the differences between the subject matter sought to be patented and the prior art are such that the subject matter as a whole would have been obvious at the time the invention was made to a person having ordinary skill in the art to which said subject matter pertains. Patentability shall not be negatived by the manner in which the invention was made.

Issue 1

4) Claims 8-9, 14-15, and 17-18 are rejected under 35 U.S.C. 103(a) as being unpatentable by NetBIOS, further in view of Pinard.

Referring to (Claim 8), NetBIOS teaches in a computer system having a display and capable of executing a process, a method for establishing a point-to-point communication from a caller process to a callee process over a computer network, the caller process capable of generating a user interface and being operatively connected to the callee process and a server process over the computer network (NetBIOS, pg. 356, 357, whereby the system is run on personal computers over TCP/IP networks, personal computers inherently containing a display), the method comprising the steps of: querying the server process to determine if the first callee process is accessible (NetBIOS, pg. 377, 388-389, 446, whereby a query is sent to the NBNS to determine if another node is logged in and discover the nodes IP address); and establishing a point-to-point communication link from the caller process to the first callee process (NetBIOS, pg. 397-400, whereby a point-point communication link is established between end nodes).

However, NetBIOS does not explicitly teach generating a user-interface element representing a first communication line, generating a user interface element representing a first callee process, and establishing the link in response to a user associating the element representing the first callee process with the element representing the first communication line

Pinard teaches a human machine interface for telephone feature invocation which is utilized on a personal computer and allows a user to make telephone calls by moving graphics around a screen. Pinard teaches a user interface element representing a first communication line and callee process (Pinard, Figure 6 and col. 5 lines 23-30), and also teaches clicking and dragging an icon representing a callee from a directory into a call setup icon to establish a call link (Pinard, Figure 3, col. 4 lines 38-51, Figure 6, col. 5 lines 36-37).

Therefore, it would have been obvious to one skilled in the art at the time the invention was made to utilizing the user-interface elements and interactions taught by Pinard in the invention taught by NetBIOS since Pinard teaches that the invention can be used with any system in which a personal computer in conjunction with a server operates (Pinard, col. 2 lines 43-46), since NetBIOS teaches that it can be implemented using different operating systems (NetBIOS, pg. 359), and since examiner notes that both NetBIOS and Pinard relate to communications between at least two users implemented in a computerized environment.

Referring to (Claim 9), NetBIOS teaches the method of claim 8 wherein step C further comprises the steps of: querying the server process as to the on-line status of the first callee process (NetBIOS, pg. 377, 388-389, 446, 393-394, whereby name queries are used to discover if a node is connected and active); and receiving a network protocol address of the first callee

process over the computer network from the server process (<u>NetBIOS</u>, pg. 389, 440, 464-465, whereby the NBNS answers queries with a list of IP addresses of connected nodes).

Referring to (Claims 14-15 and 17-18), NetBIOS teaches the above. However, NetBIOS does not explicitly teach generating a user interface element representing a communication line having a temporarily disabled status; and temporarily disabling the point-to-point communication between the caller process and the first callee process, in response to the user associating the element representing the first callee process with the element representing the communication line having a temporarily disabled status, wherein the element generated represents a communication line on hold status, wherein the display further comprises a visual display, and wherein the user interface is a graphic user interface and the user-interface elements generated in steps A and B are graphic elements.

Pinard teaches a "hard hold" icon to which saller/callees may be dragged to be put on hold status (Pinard, Figure 12, col. 6 lines 36-53), teaches a visual display (Pinard, col. 4 lines 10-11, Figure 2), and teaches a graphical user interface in which the elements are graphic elements (Pinard, Figures 2-16).

Therefore, it would have been obvious to one skilled in the art at the time the invention was made to utilizing the user-interface elements and interactions taught by Pinard in the invention taught by NetBIOS since Pinard teaches that the invention can be used with any system in which a personal computer in conjunction with a server operates (Pinard, col. 2 lines 43-46), since NetBIOS teaches that it can be implemented using different operating systems

(NetBIOS, pg. 359), and since examiner notes that both NetBIOS and Pinard relate to communications between at least two users implemented in a computerized environment.

.5) Claim 16 is rejected under 35 U.S.C. 103(a) as being unpatentable by NetBIOS, further in view of Pinard, further in view of VocalChat User's Guide.

Referring to (Claim 16), NetBIOS teaches the above. However, NetBIOS does not explicitly teach wherein the element generated represents a communication line on mute status.

<u>VocalChat User's Guide teaches the use of a MUTE option on a phone so that a user can</u> talk without being heard by the other user's system (VocalChat User's Guide, pg. 57).

Therefore, it would have been obvious to one skilled in the art at the time the invention was made to utilize an element representing a communication line on MUTE status in the invention taught by NetBIOS and Pinard above since all three references relate to the field of communications over a computer network, since VocalChat and Pinard utilize a computer system for telephony features specifically, and since examiner notes that the use of a MUTE feature in telephone conversations is old and well known in the art.

Issue 2

6) Examiner notes the following will represent the Etherphone references utilized for the rejection below (All considered a single reference as published together):

"Zellweger": An Overview of the Etherphone System and its Applications "Swinehart": Telephone Management in the Etherphone System "Terry": Managing Stored Voice in the Etherphone System Page 6

7) Claims 8-9, 14-15, and 17-18 are rejected under 35 U.S.C. 103(a) as being unpatentable by Etherphone, further in view of Pinard.

Referring to (**Claim 8**), Etherphone teaches in a computer system having a display and capable of executing a process, a method for establishing a point-to-point communication from a caller process to a callee process over a computer network, the caller process capable of generating a user interface and being operatively connected to the callee process and a server process over the computer network (Zellweger, pg. 1, 3, Figure 1, Swinehart Figures 1-10), the method comprising the steps of: querying the server process to determine if the first callee process is accessible (Swinehart, pg. 2, 4, Zellweger, pg. 5, whereby a query is transmitted to determine the location of a second Etherphone by contacting a server); and establishing a point-to-point communication link from the caller process to the first callee process (Swinehart, pg. 2, Zellweger, Figure 4, whereby voice datagrams are transmitted directly among participants).

However, Etherphone does not explicitly teach generating a user-interface element representing a first communication line, generating a user interface element representing a first callee process, and establishing the link in response to a user associating the element representing the first callee process with the element representing the first communication line

<u>Pinard teaches a human machine interface for telephone feature invocation which is</u> <u>utilized on a personal computer and allows a user to make telephone calls by moving graphics</u> <u>around a screen. Pinard teaches a user interface element representing a first communication line</u> <u>and callee process (Pinard, Figure 6 and col. 5 lines 23-30), and also teaches clicking and</u>

Page 7

dragging an icon representing a callee from a directory into a call setup icon to establish a call link (Pinard, Figure 3, col. 4 lines 38-51, Figure 6, col. 5 lines 36-37).

Therefore, it would have been obvious to one skilled in the art at the time the invention was made to utilizing the user-interface elements and interactions taught by Pinard in the invention taught by Etherphone since Pinard teaches that the invention can be used with any system in which a personal computer in conjunction with a server operates (Pinard, col. 2 lines 43-46), and since examiner notes that both Etherphone and Pinard relate to communications between at least two users implemented in a computerized environment.

Referring to (Claim 9), Etherphone teaches the method of claim 8 wherein step C further comprises the steps of: querying the server process as to the on-line status of the first callee process (Swinehart, pg. 2, 4, Zellweger, pg. 5, whereby queries are transmitted to Voice Control Server); and receiving a network protocol address of the first callee process over the computer network from the server process (Swinehart, pg. 2, whereby the server sends the network protocol address of the logged in user to caller process on request).

Referring to (Claims 14-15), Etherphone teaches the above. However, Etherphone does not explicitly teach generating a user interface element representing a communication line having a temporarily disabled status; and temporarily disabling the point-to-point communication between the caller process and the first callee process, in response to the user associating the element representing the first callee process with the element representing the communication

line having a temporarily disabled status, and wherein the element generated represents a communication line on hold status.

Pinard teaches a "hard hold" icon to which saller/callees may be dragged to be put on hold status (Pinard, Figure 12, col. 6 lines 36-53).

Therefore, it would have been obvious to one skilled in the art at the time the invention was made to utilizing the user-interface elements and interactions taught by Pinard in the invention taught by Etherphone since Pinard teaches that the invention can be used with any system in which a personal computer in conjunction with a server operates (Pinard, col. 2 lines 43-46), and since examiner notes that both Etherphone and Pinard relate to communications between at least two users implemented in a computerized environment.

Referring to (Claims 17-18), Etherphone teaches_wherein the display further comprises a visual display (Swinehart, Fig. 1-10, Zellweger, Fig. 3-4, whereby computer displays are considered visual displays), and wherein the user interface is a graphic user interface and the user-interface elements generated in steps A and B are graphic elements (Swinehart, Fig. 1-10, Zellweger, Fig. 3-4, whereby a GUI is used showing graphic elements of call display).

8) Claim 16 is rejected under 35 U.S.C. 103(a) as being unpatentable by Etherphone, further in view of Pinard, further in view of VocalChat User's Guide.

Referring to (Claim 16), Etherphone teaches the above. However, Etherphone does not explicitly teach wherein the element generated represents a communication line on mute status.

Cisco - Exhibit 1003 - Page 170

<u>VocalChat User's Guide teaches the use of a MUTE option on a phone so that a user can</u> talk without being heard by the other user's system (VocalChat User's Guide, pg. 57).

Therefore, it would have been obvious to one skilled in the art at the time the invention was made to utilize an element representing a communication line on MUTE status in the invention taught by Etherphone and Pinard above since all three references relate to the field of communications over a computer network, since VocalChat and Pinard utilize a computer system for telephony features specifically, and since examiner notes that the use of a MUTE feature in telephone conversations is old and well known in the art.

Response to Arguments

9) In response to the amendment filed 11/25/09, some rejections are sustained as noted above, and others have been withdrawn. The following aspects of the current prosecution will be addressed as noted below:

- a) VocalChat are not printed publications.
- b) The 1.132 Declaration
- c) Objective evidence of non-obviousness
- d) Withdrawn rejections
- e) Maintained rejections

a) The amendment submitted 11/25/09 includes arguments that the VocalChat references are not printed publications. The Patent Owner (PO) cites exhibit L of the Request (the declaration of Alon Cohen) as the only evidence provided by PO that the VocalChat references

are printed publications. Examiner notes that the Alon Cohen declaration fails to comply with 37 C.F.R. 1.68, including not setting forth in the body of the declaration that all statements made of the declarant's own knowledge are true and that all statements made on information and belief are believed to be true. Therefore, PO's arguments questioning the declaration as well as whether printed publication status has been established as set forth under statute are found persuasive. Examiner therefore withdraws all rejections utilizing the VocalChat references.

b) Examiner notes that all evidence presented has been considered in its entirety, including both PO's arguments, including secondary considerations, as well as the 1.132 Declaration submitted by expert Ketan Mayer-Patel.

c) Examiner notes that PO's arguments regarding objective evidence of non-obviousness, including commercial success and failure of others have been considered, however no nexus has been provided between the claimed invention and the submitted evidence as required by at least MPEP 716.03. Therefore, this evidence is not found persuasive.

d) In light of PO's arguments and amendments filed 11/25/09, as well as the declaration of expert Mayer-Patel, examiner withdraws the rejections of claims 1-3 and 5-6. Examiner finds the presented arguments to be persuasive.

With regard to the NetBios rejection, examiner agrees with declarant Mayer-Patel that bringing dynamic addressing into a NetBIOS type system would create a new set of obstacles that would need to be solved that are not obvious in view of the combination of references.

With regard to the rejection under Etherphone, examiner notes that a similar argument applies to Etherphone as to Netbios, namely that combining the system with dynamic addressing would create new, non obvious obstacles to overcome.

A reasons for confirmation for the claims discussed above will follow in a subsequent office action.

e) The rejection of claims 8, 9, 14-18 are maintained in view of NetBIOS and Etherphone.With regard to the rejection of claim 8 under NetBIOS, maintained above:

Examiner first notes that claim 8 does not require any dynamic addressing limitations, unlike claims 1 and 5. Therefore, any arguments directed towards a combination with RFC 1531 do not apply to claim 8.

PO argues with regard to claim 8 that NetBIOS does not teach "determining if the first callee process is accessible". PO argues that having an "active name" is not synonymous with "determining if a first callee process is accessible", and that an "active name" simply refers to "a name that has been registered and that has not yet been de-registered". Examiner first notes that the term "accessible" is not specifically defined in PO's specification. Therefore, under a broadest reasonable interpretation, this limitation could simply mean that a user is registered with the system. In addition, examiner notes that PO's specification at col. 5 lines 39-44 teaches that the on-line status information may not always be current, and may be updated, for example, only every 24 hours based on operator configuration. Assuming a user being "accessible" is comparable to that user being "on-line", then the database of NetBIOS which contains active name information reads on claim 8, whether or not the user data is current.

Page 12

PO also argues that NetBIOS does not teach "that the active status of a name in the NetBIOS server is an indication of the active status of the owner of that name". However, examiner notes that claim 8 only requires connecting to a callee process, not necessarily to a particular name.

With regard to the rejection under Etherphone, maintained above:

PO argues with regard to claim 8 that if the Etherphone are "participants", then "there is no indication that the combination meets the limitation of 'the caller process capable of generating a user interface". Examiner notes that PO appears to be arguing that the Etherphones are not capable of generating user interfaces by themselves. If this is the case, examiner points to Zellweger, page 2. Zellweger teaches that workstations work in combination with the Etherphones and provided the enhanced user interface functionality. The Etherphones are only used separately to split up voice-processing functionality due to hardware processing requirements. Therefore, the caller process is a function of the workstation in combination with the Etherphone.

Therefore, the current arguments regarding claims 8-9 and 14-18 are not persuasive, and the rejections above are maintained.

. . .

Conclusion

THIS ACTION IS MADE FINAL.

Extensions of time under 37 CFR 1.136(a) do not apply in reexamination

proceedings. The provisions of 37 CFR 1.136 apply only to "an applicant" and not to parties in a reexamination proceeding. Further, in 35 U.S.C. 305 and in 37 CFR 1.550(a), it is required that reexamination proceedings "will be conducted with special dispatch within the Office."

Extensions of time in reexamination proceedings are provided for in 37 CFR

1.550(c). A request for extension of time must be filed on or before the day on which a response to this action is due, and it must be accompanied by the petition fee set forth in 37 CFR 1.17(g). The mere filing of a request will not effect any extension of time. An extension of time will be granted only for sufficient cause, and for a reasonable time specified.

The filing of a timely first response to this final rejection will be construed as including a request to extend the shortened statutory period for an additional month, which will be granted even if previous extensions have been granted. In no event however, will the statutory period for response expire later than SIX MONTHS from the mailing date of the final action. See MPEP § 2265.

All correspondence relating to this ex parte reexamination proceeding should be directed as follows:

By U.S. Postal Service Mail to:

Mail Stop Ex Parte Reexam

> ATTN: Central Reexamination Unit Commissioner for Patents P.O. Box 1450 Alexandria, VA 22313-1450

By FAX to:

(571) 273-9900 Central Reexamination Unit

By hand to:

Customer Service Window Randolph Building 401 Dulany St. Alexandria, VA 22314

By EFS-Web:

Registered users of EFS-Web may alternatively submit such correspondence via the electronic filing system EFS-Web, at

https://sportal.uspto.gov/authenticate/authenticateuserlocalepf.html

EFS-Web offers the benefit of quick submission to the particular area of the Office that needs to act on the correspondence. Also, EFS-Web submissions are "soft scanned" (i.e., electronically uploaded) directly into the official file for the reexamination proceeding, which offers parties the opportunity to review the content of their submissions after the "soft scanning" process is complete.

Any inquiry concerning this communication or earlier communications from the

Reexamination Legal Advisor or Examiner, or as to the status of this proceeding, should be

directed to the Central Reexamination Unit at telephone number (571) 272-7705.

/Alexander J Kosowski/

Primary Examiner, Art Unit 3992

			Reexam numb	er	90/010,422	
			First Named In	ventor	Mattaway et al.	
INFORMATION DISCLOSURE		Patent Under F	Re-Exam	6009469		
	STATEMENT BY APPLICANT FORM PTO-1449 (modified)		Issue Date		1999/12/28	
		,	Group Art Unit	· · · .	3992	
			Examiner Nam	e	KOSOWSKI, ALEXANDER J	
			Attorney Docke	et No.	2655-0185	
,	Sheet 1	Lof 29	Confirmation N		6565	
		U	S. PATENT DOCU	MENTS		
Examiner Initials*	Cite No.	Document No.	Publication/ Issue Date	Name of Applican	Patentee or t of Cited Document	
	1-1	US-2003/0050075	2003/13/03	Rangara	an et al.	
	1-2	US-2004/0204146	2004/14/10	Deeds		
	1-3	US-2005/0032435	2005/10/02	Tischer e	et al.	
	1-4	US-2005/0130611	2005/16/06	Lu et al.		
	1-5	US-4332982	1982/01/06	Thomas		
	1-6	US-4410765	1983/18/10	Hestad e	t al.	
	1-7	US-4446519	1984/01/05	Thomas		
	1-8	US-4450554	1984/22/05	Steensm	a, et al.	
	1-9	US-4468529	1984/28/08	Samuel e	et al.	
	1-10	US-4528659	1985/09/07	Jones, Ji	-	
	1-11	US-4589107	1986/13/05	Middleto	n, et al.	
	1-12	US-4594477	1986/10/06	Noirot		
	1-13	US-4598397	1986/01/07	Nelson, e	et al.	
	1-14	US-4630262	1986/16/12	Callens,	et al.	
	1-15	US-4652703	1987/24/03	Lu, et al.		
	1-16	US-4654483	1987/03	Imai et al	•	
	1-17	US-4694492	1987/09	Wirstrom	et al.	
	1-18	US-4740963	1988/26/04	Eckley		
	1-19	US-4782485	1988/01/11	Gollub		
	1-20	US-4799153	1989/01	Hann et a	al	
	1-21	US-4809271	1989/28/02	Kondo, e	t al.	
	1-22	US-4813040	1989/14/03	Futato		
	1-23	US-4819228	1989/04/04	Baran, et	al	
	1-24	US-4821263	1989/04	Lundh		

Examiner Signature	/Alexander Kosowski/	Date Considered	05/06/2010

ALL REFERENCES CONSIDERED EXCEPT WHERE LINED THROUGH. /AK/ Cisco - Exhibit 1003 - Page 177

			Reexam numb	ber ·	90/010,422
			First Named I	nventor	Mattaway et al.
INFORMATION DISCLOSURE STATEMENT BY APPLICANT FORM PTO-1449 (modified)		Patent Under	Re-Exam	6009469	
		Issue Date		1999/12/28	
	VIPIO-	1449 (modilied)	Group Art Unit	t	3992
		·	Examiner Nan		
					KOSOWSKI, ALEXANDER J
	•		Attorney Dock		2655-0185
	Sheet 2	2 of 29	Confirmation I	No.	6565
		U	.S. PATENT DOCL	JMENTS	· ·
Examiner	Cite	Document No.	Publication/	Name of	Patentee or
Initials*	No.		Issue Date		t of Cited Document
	2-1	US-4829554	1989/09/05	Barnes e	t al.
	2-2	US-4837797	1989/06		Jr., Charles C.
	2-3	US-4866704	1989/12/09	Bergmar	
	2-4	US-4866732	1989/12/09	Carey, e	t al.
	2-5	US-4873715	1989/10/10	Shibata	
	2-6	US-4887265	1989/12/12	Felix	
	2-7	US-4890282	1989/26/12	Lambert,	et al.
	2-8	US-4912705	1990/27/03	Paneth, e	et al.
	2-9	US-4932022	1990/05/06	Keeney,	et al.
	2-10	US-4981371	1991/01/01	Gurak, e	t al.
	2-11	US-4989230	1991/29/01	Gillig et a	al.
_	2-12	US-4995074	1991/02	Goldman	n et al.
	2-13	US-5031089	1991/07	Liu et al.	
	2-14	US-5036513	1991/30/07	Greenbla	att -
	2-15	US-5040141	1991/13/08	Yazima e	et al
	2-16	US-5056140	1991/10	Kimbell	
	2-17	US-5065425	1991/12/11	Lecomte	, et al.
	2-18	US-5107443	1992/04	Smith et	al.
	2-19	US-5121385	1992/09/06	Tominag	a, et al.
	2-20	US-5127003	1992/30/06	Dell Jr. e	
	2-21	US-5130985	1992/14/07	Kondo, e	t al.
	2-22	US-5150410	1992/22/09	Bertrand	
	2-23	US-5155726	1992/13/10	Spinney,	et al.
	2-24	US-5157592	1992/20/10	Walters	

	 a contract of the second se		
Examiner Signature		Date Considered	

				·····	
			Reexam numb	er	90/010,422
		•	First Named In	ventor	Mattaway et al.
			Patent Under F	Re-Exam	6009469
STATEMENT BY APPLICANT FORM PTO-1449 (modified)		Issue Date		1999/12/28	
			Group Art Unit		3992
			Examiner Nam		KOSOWSKI, ALEXANDER J
			Attorney Docke		2655-0185
	Shoot (3 of 29	Confirmation N		6565
	sneet a				
		U	.S. PATENT DOCU	MENTS	
Examiner Initials*	Cite No.	Document No.	Publication/ Issue Date		Patentee or
miniais	INU.			Applicant	of Cited Document
	3-1	US-5187591	1993/16/02	Guy, et a	I.
	3-2	US-5212789	1993/18/05	Rago	
	3-3	US-5214650	1993/25/05	Renner, e	et al.
	3-4	US-5220599	1993/06	Sasano e	et al
	3-5	US-5241594	1993/31/08	1993/31/08 Kung	
	3-6	US-5241625	1993/08	Epard et	al.
	3-7	US-5247620	1993/09/21	Fukuzaw	a et al.
	3-8	US-5249290	1993/28/09	Heizer	
	3-9	US-5274635	1993/12	Rahman	et al.
	3-10	US-5282197	1994/25/01	Kreitzer	
	3-11	US-5283819	1994/01/02	Glick, et a	al.
	3-12	US-5287103	1994/15/02	Kasprzyk	Marlon Z et al
	3-13	US-5305312	1994/19/04	Fornek, e	t al.
	3-14	US-5327486	1994/07	Wolff et a	l
	3-15	US-5335276	1994/02/08	Thompso	n et al.
	3-16	US-5341374	1994/23/08	Lewen et	al.
	3-17·	US-5347632	1994/09	Filepp et	al.
	3-18	US-5377260	1994/12	Long	
	3-19	US-5396485	1995/03	Ohno et a	al
	3-20	US-5410754	1994/15/02	Favreau I	Keith et al
	3-21	US-5428608	1995/06	Freeman	et al.
	3-22	US-5440547	1995/08/08	Esaki Hiro	oshi et al
	3-23	US-5446891	1995/29/08	Kaplan et	al.
	3-24	US-5446919	1995/29/08	Wilkins	

r				· · · · · · · · · · · · · · · · · · ·		
INFORMATION DISCLOSURE STATEMENT BY APPLICANT FORM PTO-1449 (modified)			Reexam numb	ber	90/010,422	
			First Named Inventor		Mattaway et al.	
			Patent Under Re-Exam		6009469	
			Issue Date		1999/12/28	
			Group Art Unit		3992	
			Examiner Name		KOSOWSKI, ALEXANDER J	
					2655-0185	
			Attorney Docket No.			
Sheet 4 of 29			Confirmation N	NO.	6565	
U.S. PATENT DOCUMENTS						
Examiner Initials*	Cite No.	Document No.	Publication/ Issue Date		ame of Patentee or oplicant of Cited Document	
	4-1	US-5459864	1995/10	Brent et a	al.	
	4-2	US-5461611	1995/10	Drake, Jr	: et al.	
	4-3	US-5467388	1995/11	Redd et a	al.	
	4-4	US-5473531	1995/10	Flora-Ho	ra-Holmquist et al.	
	4-5	US-5474741	1995/12/12	Mikeska	et al.	
	4-6	US-5474819	1995/12/12	Chamber	Chambers et al. Lev et al. Kane Goldsmith et al. Rogge et al. Chandra et al. Ryu et al. Robinson et al. Baran Cheng et al.	
	4-7	US-5483524	1996/01	Lev et al.		
	4-8	US-5487100	1996/01	Kane		
	4-9	US-5491800	1996/13/02	Goldsmit		
	4-10	US-5500890	1996/03	Rogge et		
	4-11	US-5517432	1996/05	Chandra		
	4-12	US-5528671	1996/18/06	Ryu et al.		
	4-13	US-5533102	1996/02/07	Robinson		
	4-14	US-5544164	1996/08	Baran		
	4-15	US-5544322	1996/06/08	Cheng et		
	4-16	US-5546448	1996/08	Caswell e	et al.	
	4-17	US-5546452	1996/13/08	Andrews	et al.	
	4-18	US-5548636	1996/08	Bannister	et al.	
	4-19	US-5548694	1996/08	Frisken G	libson	
	4-20	US-5563882	1996/10	Bruno et a	al.	
	4-21	US-5572643	1996/11	Judson, D		
·	4-22	US-5574774	1996/11	Ahlberg e	t al.	
	4-23	US-5574934	1996/12/11	Mirashraf		
	4-24	US-5581522	1996/12/03	Shibuya e	et al.	

Examiner Signature	Date Considered	
Signalure	Considered	

		· · · · · · · · · · · · · · · · · · ·	Reexam numb	per	90/010,422	
			First Named Ir	ventor	Mattaway et al.	
		ON DISCLOSURE	Patent Under	Re-Exam	6009469	
	STATEMENT BY APPLICANT FORM PTO-1449 (modified)				1999/12/28	
FURN				<u> </u>	3992	
			Group Art Unit			
			Examiner Nam		KOSOWSKI, ALEXANDER J	
			Attorney Dock	et No.	2655-0185	
S	Sheet 5	5 of 29	Confirmation N	10.	6565	
			.S. PATENT DOCU	MENTS		
		· · · · · · · · · · · · · · · · · · ·				
Examiner Initials*	Cite No.	Document No.	Publication/ Issue Date		Patentee or of Cited Document	
	5-1	US-5581702	1996/12	McArdle	et al.	
	5-2	US-5586257	1996/17/12	Perlman	۱	
	5-3	US-5586260	1996/17/12	Hu		
	5-4	US-5591800	1996/02	Goldsmit	h et al.	
	5-5	US-5604737	1997/02	Iwami et	al.	
	5-6	US-5606669	1997/25/02	Bertin et	al.	
	5-7	US-5614940	1997/25/03	Cobbley	et al.	
	5-8	US-5619557	1997/08/04	Van Berk	· · · · · · · · · · · · · · · · · · ·	
	5-9	US-5623483	1997/22/04	Agrawal	Agrawal et al.	
	5-10	US-5623490	1997/04	Richter e	t al.	
	5-11	US-5623605	1997/22/04	Keshav e	t al.	
	5-12	US-5625407	1997/29/04	Biggs et a	al.	
	5-13	US-5636282	1997/06	Holmquis	t et al.	
	5-14	US-5636346	1997/06	Saxe		
	5-15	US-5642156	1997/24/06	Saiki		
	5-16	US-5644629	1997/07	Chow		
	5-17	US-5651006	1997/07	Fujino et		
	5-18	US-5652759	1997/07	Stringfelle		
	5-19	US-5655120	1997/08	Witte et a	l. •	
·	5-20	US-5659542	1997/08	Bell et al.		
	5-21	US-5659596	1997/19/08	Dunn		
	5-22	US-5668862	1997/09	Bannister		
	5-23	US-5671428	1997/23/09	Muranaga	a et al.	
	5-24	US-5675507	1997/10	Bobo		

Examiner Signature	· · · · · · · · · · · · · · · · · · ·	Date Considered	
-----------------------	---------------------------------------	--------------------	--

		······································	Reexam numb	er	90/010,422	
			First Named In	ventor	Mattaway et al.	
		ON DISCLOSURE	Patent Under F		6009469	
		BY APPLICANT	Issue Date		1999/12/28	
FORM PTO-1449 (modified)			Group Art Unit			
	· · ·				3992	
			Examiner Nam	e	KOSOWSKI, ALEXANDER J	
			Attorney Docke	et No.	2655-0185	
S	Sheet 6	6 of 29	Confirmation N	0.	6565	
		U	S. PATENT DOCU	MENTS		
Examiner Initials*	Cite No.	Document No.	Publication/ Issue Date	Name of Applican	Patentee or t of Cited Document	
	6-1	US-5680392	1997/10	Semaan		
	6-2	US-5684800	1997/11	Dobbins	et al.	
	6-3	US-5689553	1997/18/11	Ahuja et	et al. al.	
	6-4	US-5692192	1997/11	Sudo		
	6-5	US-5694594	1997/02/12	Chang		
	6-6	US-5701463	1997/23/12	Malcolm		
	6-7	US-5708422	1998/13/01	Blonder		
	6-8	US-5708655	1998/01	Toth et a		
	6-9	US-5710884	1998/20/01	Dedrick		
	6-10	US-5717923	1998/10/02	Dedrick		
	6-11	US-5719786	1998/02	Nelson e	t al.	
	6-12	US-5721827	1998/24/02	Logan et	al.	
	6-13	US-5724092	1998/03/03	Davidsol	nn et al.	
	6-14	US-5724412	1998/03	Srinivasa	an .	
	6-15	US-5724506	1998/03/03	Cleron et	t al.	
	6-16	US-5726984	1998/10/03	Kubler et	al.	
	6-17	US-5729748	1998/03	Robbins	et al.	
	6-18	US-5732078	1998/03	Arango		
	6-19	US-5736968	1998/04	Tsakiris,	Alexander L.	
	6-20	US-5742668	1998/04	Pepe et a	al.	
	6-21	US-5742675	1998/21/04	Kilander	et al.	
	6-22	US-5742762	1998/21/04	Scholl et	al.	
	6-23	US-5742905	1998/04	Pepe et a	al.	
	6-24	US-5745642	1998/28/04	Ahn		

	-		Reexam num	ber	90/010,422	
			First Named I	nventor	Mattaway et al.	
-			Patent Under	Re-Exam	6009469	
STATEMENT BY APPLICANT FORM PTO-1449 (modified)			Issue Date		1999/12/28	
			Group Art Uni	<u>.</u>	3992	
			Examiner Nar		KOSOWSKI, ALEXANDER J	
					2655-0185	
			Attorney Dock			
	Sheet 7	7 of 29	Confirmation	No.	6565	
,		L	I.S. PATENT DOCI	JMENTS		
Examiner Initials*	Cite No.	Document No.	Publication/ Issue Date		Patentee or t of Cited Document	
	7-1	US-5745702	1998/04	Morozum	1i	
	7-2	US-5745711	1998/04	Kitahara	et al.	
	7-3	US-5751712	1998/05	Farwelle	t al.	
	7-4	US-5751961	1998/05	Smyk	Smyk	
	7-5	US-5754636	1998/05	Bayless et al.		
	. 7-6	US-5754939	1998/19/05	Herz et a		
	7-7	US-5758110	1998/05	Boss et a		
	7-8	US-5758257	1998/26/03	Herz et a	<u>1</u>	
	7-9	US-5761606	1998/06	Wolzien		
	7-10	US-5764736	1998/06	Shachar	et al.	
	7-11	US-5764741	1998/09/06	Barak	· · · · · · · · · · · · · · · · · · ·	
	7-12	US-5764756	1998/09/06	Onweller	, 	
	7-13	US-5767897	1998/16/06	Howell		
	7-14	US-5768527	1998/06	Zhu et al	· · · · · · · · · · · · · · · · · · ·	
	7-15	US-5771355	1998/23/06	Kuzma	······	
	7-16	US-5774660	1998/30/06	Brendel	et al.	
	7-17	US-5774666	1998/30/06	Portuesi		
	7-18	US-5778181	1998/07	Hidary et		
	7-19	US-5778187	1998/07	Monteiro		
	7-20	US-5784564	1998/21/07	Camaisa		
	7-21	US-5784619	1998/21/07	Evans et		
	7-22	US-5787253	1998/07	McCreen		
	7-23	US-5790548	1998/08		deh et al.	
	7-24	US-5790792	1998/08	Dudgeon	et al.	

Examiner Signature	Date Considered	
		•

•			Reexam num	per	90/010,422	
			First Named I	nventor	Mattaway et al.	
	INFORMATION DISCLOSURE STATEMENT BY APPLICANT			Re-Exam	6009469	
STATEMENT BY APPLICANI FORM PTO-1449 (modified)			Issue Date		1999/12/28	
			Group Art Uni	t	3992	
			Examiner Nan		KOSOWSKI, ALEXANDER J	
	•		Attorney Dock		2655-0185	
c	thaat 8	3 of 29	Confirmation I		6565	
	sneet c	50129	Commation	VO .	0000	
			J.S. PATENT DOCU	JMENTS		
Examiner Initials*	Cite No.	Document No.	Publication/ Issue Date		Patentee or t of Cited Document	
	8-1	US-5790793	1998/08	Higley		
	8-2	US-5793365	1998/11/08	Tang et a	al.	
	8-3 US-5794018		1998/08	Vrvilo et	al.	
	8-4	US-5794257	1998/08	Liu et al.		
	8-5	US-5796394	1998/08	Wicks et al.		
	8-6	US-5799063	1998/08	Krane Vulcan et al.		
	8-7	US-5799072	1998/08			
	8-8	US-5799150	1998/08	Hamilton	et al.	
	8-9	US-5805587	1998/09	Norris et	al.	
	8-10	US-5805810	1998/09	Maxwell		
	8-11	US-5805822	1998/08/09	Long et a	al.	
	8-12	US-5809233	1998/15/09	Shur		
	8-13	US-5812819	1998/22/08	Rodwin e	et al.	
	8-14	US-5816919	1998/10	Scagnell	i et al.	
	8-15	US-5818510	1998/10	Cobbley	et al.	
	8-16	US-5818836	1998/10	DuVal		
	8-17	US-5822524	1998/10	Chen et a	al.	
	8-18	US-5828837	1998/10	Eikeland		
	8-19	US-5828843	1998/27/10	Grimm e	t al.	
	8-20	US-5828846	1998/10	Kirby et a	al.	
	8-21	US-5832119	1998/11	Rhoads	•	
	8-22	US-5832240	1998/11	Larsen e	t al.	
	8-23	US-5835720	1998/10/11	Nelson e	t al.	
	8-24	US-5835723	1998/11	Andrews	et al.	

Examiner Signature	Date Considered	

·			Reexam numb	er	90/010,422	1
· .			First Named In	ventor	Mattaway et al.	1
		ON DISCLOSURE	Patent Under F	Re-Exam	6009469	
	STATEMENT BY APPLICANT FORM PTO-1449 (modified)				1999/12/28	1
FORM					3992	1
						┨
			Examiner Nam		KOSOWSKI, ALEXANDER J	1
ŀ			Attorney Docke	et No.	2655-0185	
	Sheet S	9 of 29	Confirmation N	lo.	6565	
			.S. PATENT DOCU	MENTS		ī
	0:1-0	Desument No	Dublication	Nome of	Detentos or	ł
Examiner Initials*	Cite No.	Document No.	Publication/ Issue Date		Patentee or t of Cited Document	
	9-1	US-5835725	1998/10/11	Chiang e	et al.	1
	9-2	US-5838683	1998/11	Corley et	t al.]
	9-3	US-5838970	1998/17/11	Thomas	\$	
	9-4	US-5841769	1998/11	Okanoue	e et al.	
	9-5	US-5842216	1998/11	Anderso	n et al.	
	9-6	US-5848143	. 1998/08/12	Andrews	s et al.	
	9 -7	US-5848396	1998/12	Gerace		
	9-8	<u>US-5854901</u>	1998/12	Cole et a	al.	
	9-9	US-5857072	1999/01	Crowle		
	9-10	US-5864684	1999/26/01	Nielsen		
	9-11	US-5867156	1999/02	Beard et	al.	
	9-12	US-5867654	1999/02/02	Ludwig e	t al.	
	9-13	US-5867665	1999/02/02	Butman e	et al.	1
	9-14	US-5872850	1999/16/02	Klein et a	al.	1
	9-15	US-5872922	1999/02	Hogan et		1
	9-16	US-5872972	1999/02	Boland e	tal.	1
	9-17	US-5884032	1999/03	Bateman	et al.	1
	9-18	US-5884035	1999/16/03	Butman e	et al.	
	9-19	US-5884077	1999/03			
	9-20	US-5890162	1999/03			1
	9-21	US-5892825	1999/06/04	Mages et	tal.	1
	9-22	US-5892903	1999/06/04	Klaus		
	9-23	US-5892924	1999/04	Lyon et a	ıl.	
	9 -24	US-5903721	1999/11/05	Sixtus		I

Examiner Signature	Date Considered	

				•	- 	
			Reexam number	er	90/010,422	
			First Named In	ventor	Mattaway et al.	
		ON DISCLOSURE	Patent Under F	Re-Exam	6009469	
		BY APPLICANT 449 (modified)	Issue Date	······	1999/12/28	
	WP10-1	449 (mouned)	Group Art Unit		3992	
			Examiner Nam		KOSOWSKI, ALEXANDER J	
			Attorney Docke		2655-0185	
5	Sheet 1	0 of 29	Confirmation N	0. .	6565	
		U.	S. PATENT DOCUM	MENTS		
Examiner Initials*	Cite No.	Document No.	Publication/ Issue Date	Name of Applicant	Patentee or t of Cited Document	
	10-1	US-5903723	1999/11/05	Beck et a	al. ·	
	10-2	US-5903727	1999/11/05	Nielsen		
	10-3	US-5905719	1999/05	Arnold et	t al.	
	10-4	US-5905736	1999/18/05	Ronen el	tal.	
	10-5	US-5905865	1999/05	Palmer e	t al	
	10-6	US-5905872	1999/05	DeSimor	e et al.	
	10-7	US-5915001	1999/06	Uppaluru		
· <u></u>	10-8_	US-5923736	1999/07	Shachar,	Yuval	
	10-9	US-5924093	1999/07	Potter et	al.	
	10-10	US-5925103	1999/10/07	Magallan	es et al.	
	10-11	US-5928327	1999/07	Wang et	al.	
	10-12	US-5929849	1999/07	Kikinis		
	10-13	US-5937162	1999/08	Funk et a	al	
	10-14	US-5946386	1999/08	Rogers e	et al.	
	10-15	US-5946629	1999/08	Sawyer e	et al.	
	10-16	US-5950123	1999/09	Schwelb	et al.	
	10-17	US-5950172	1999/09	Klingmar	1	
	10-18	US-5956482	1999/09	Agrahara	am et al.	
	10-19	US-5961584	1999/10	Wolf		
	10-20	US-5964872	1999/12/10	Turpin		
	10-21	US-5969967	1999/10	Aahlad e	t al.	
	10-22	US-5982774	1999/11	Foladare	et al	
	10-23	US-5983005	1999/11	Monteiro	et al.	
	10-24	US-5999965	1999/07/12	Kelly	· ·	

Examiner Signature	Date Considered	

- -

ſ				Reexam numb	ег	90/010,422
				First Named In	ventor	Mattaway et al.
	INFORMATION DISCLOSURE		Patent Under F	Re-Exam	6009469	
			BY APPLICANT 449 (modified)	Issue Date		1999/12/28
				Group Art Unit		3992
				Examiner Nam	e	KOSOWSKI, ALEXANDER J
				Attorney Docke		2655-0185
			4 - 5 00	Confirmation N		6565
L		sneet 1	1 of 29	Commation	0.	6565
ſ			U.	S. PATENT DOCU	MENTS	
	Examiner Initials*	Cite No.	Document No.	Publication/ Issue Date	Name of Applican	Patentee or t of Cited Document
ł		11-1	US-6005870	1999/21/12	Leung	
Ī		11-2	US-6006257	1999/12	Slezak	
ſ		11-3	US-6014379	2000/01	White et	al
Ī		11-4	US-6014710	2000/01	Talluri et	al.
ſ		11-5	US-6016393	2000/18/01	White et	al.
ſ		11-6	US-6018768	2000/01	Ullman e	t al.
ſ		11-7	US-6018771	2000/25/01	Hayden	
_ [11-8	US-6021126	2000/02	White et	al.
ſ		11-9	US-6026086	2000/02	Lancelot	et al.
Ī		11-10	US-6026425	2000/02	Suguri et	al.
Γ		11-11	US-6029175	2000/22/02	Chow et	al.
Ī		11-12	US-6032192	2000/29/02	Wegner	et al.
ſ		11-13	US-6041345	2000/03	Levi et al	l
Ī		11-14	US-6047292	2000/04/04	Kelly et a	al.
ſ		11-15	US-6055594	2000/04	Lo et al.	
		11-16	US-6061716	2000/05	Moncreif	
ſ		11-17	US-6064975	2000/05	Moon et	al
ſ		11-18	US-6065048	2000/16/05	Highley White et al. Ault et al.	
ſ		11-19	US-6069890	2000/30/05		
ſ		11-20	US-6085217	2000/07		
ſ		11-21	US-6101182	2000/08	Sistaniza	deh et al.
Ī		11-22	US-6105053	2000/08	Kimmel e	et al.
Ī		11-23	US-6122255	2000/09	Bartholor	mew et al.
Ī		11-24	US-6125113	2000/09	Farris et	al.

Examiner Signature	Date Considered	

<u> </u>			Reexam numb	er	90/010,422	
			First Named Ir	ventor	Mattaway et al.	
INFORMATION DISCLOSURE		Patent Under	Re-Exam	6009469		
	STATEMENT BY APPLICANT FORM PTO-1449 (modified)		Issue Date		1999/12/28	
FORM					3992	
			Group Art Unit			
			Examiner Nam		KOSOWSKI, ALEXANDER J	
			Attorney Dock	et No.	2655-0185	
S	Sheet 1	2 of 29	Confirmation N	lo.	6565	
· · · · · · · · · · · · · · · · · · ·		U	.S. PATENT DOCU	MENTS		
Evaminar	Cite	Document No.	Publication/	Name of	Patentee or	
Examiner Initials*	No.	Document NO.	Issue Date	Applican	t of Cited Document	
	12-1	US-6137877	2000/24/10	Robin et	al.	
	12-2	US-6141341	2000/31/10	Jones et	al.	
· ·	12-3	US-6151643	2000/11	Cheng e		
	12-4	US-6154445	2000/11	Farris et	al	
	12-5	US-6163316	2000/12	Killian		
·	12-6	US-6173044	2001/01	Hortensi	us et al.	
	12-7	US-6178453	2001/23/01	Mattawa	y et al.	
	12-8	US-6181689	2001/01	Choung	et al.	
	12-9	US-6185184	2001/06/02	Mattawa	y et al.	
	12-10	US-6188677	2001/02	Oyama e	et al.	
	12-11	US-6195357	2001/02	Polcyn		
	12-12	US-6198303	2001/03	Rangasa	yee	
	12-13	US-6205135	2001/20/03	Chinni et	al.	
	12-14	US-6212625	2001/04	Russell	· .	
	12-15	US-6226678	2001/05	Mattawa	y et al.	
	12-16	US-6226690	2001/05	Banda et	al.	
	12-17		2001/05	Fin et al.		
		US-6243373	2001/06	Turock	·	
	12-19	US-6266539	2001/07	Pardo	<u></u>	
	12-20	US-6275490	2001/14/08	Mattawa	y et al.	
	12-21	US-6282272	2001/08	Noonen	et al.	
	12-22	US-6289369	2001/11/09	Sundares	san	
	12-23		2001/10	Cotichini		
	12-24	US-6338078	2002/01	Chang et	al.	

Examiner Date Signature Considered	
--	--

			Reexam num	ber	90/010,422
			First Named I	nventor	Mattaway et al.
INFORMATION DISCLOSURE		Patent Under	Re-Exam	6009469	
	STATEMENT BY APPLICANT		Issue Date		1999/12/28
		Group Art Un	it	3992	
		Examiner Na		KOSOWSKI, ALEXANDER J	
			Attorney Doc		2655-0185
c	boot 1	3 of 29	Confirmation		6565
3		5 01 29	Commination	INU	0000
		U	.S. PATENT DOC	UMENTS	
Examiner Initials*	Cite No.	Document No.	Publication/ Issue Date	Name of Applicant	Patentee or of Cited Document
	13-1	US-6343115	2002/01	Foladare	et al.
	13-2	US-6343220	2002/29/01	Van Der	Salm
	13-3	US-6347085	2002/02	Kelly	
	13-4	US-6347342	2002/02	Marcos e	t al.
	13-5	US-6377568	2002/04	Kelly	
	13-6	US-6385583	2002/05	Ladd et a	l.
	13-7	US-6393455	2002/05	Eilert et a	l
	13-8	US-6427064	2002/07	Henderso	on, Daniel
	13-9	US-6434552	2002/08	Leong, Ji	n Fye
	13-10	US-6463565	2002/08/10	Keith C. I	(eily
	13-11	US-6477586	2002/11	Achenso	n et al.
	13-12	US-6594254	2003/15/07	Kelly	
	13-13	US-6687738	2004/03/02	Glenn W.	Hutton
,	13-14	US-6704802	2004/03	Finch et a	al.
	13-15	US-6728784	2004/27/04	Mattaway	/
	13-16	US-6772335	2004/08	Curtis et	al.
	13-17	US-6829645	2004/07/12	Glenn W.	Hutton
	13-18	US-6888836	2005/03/05	Cherkaso	
	13-19	US-6909708	2005/06	Krishnasy	wamy et al.
	13-20				·
	13-21	· · · · · · · · · · · · · · · · · · ·			
	13-22				
	13-23				
	13-24				

Examiner Date Signature Considered		

	Reexam number	90/010,422
•	First Named Inventor	Mattaway et al.
INFORMATION DISCLOSURE	Patent Under Re-Exam	6009469
STATEMENT BY APPLICANT FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 14 of 29	Confirmation No.	6565

FOREIGN PATENT DOCUMENTS					
Examiner Initials*	Cite No.	Document No.	Publication Date	Name of Patentee or Applicant of Cited Document	Notes
	.14-1	AU-200059377-A1	11-23-2000	Glenn W. Hutton et al.	
	14-2	AU-200059378-A1	11-30-2000	Glenn W. Hutton et al.	
	14-3	AU-200059379-A1	11-23-2000	Glenn W. Hutton et al.	
	14-4	EP-0518596	12/16/1992	Digital Equipment Corp	
	14-5	EP-0559047	09-1993	Igiehart	
	14-6	EP-0597691	05/18/1994	IBM	
1	14-7	EP-0632672	01/04/1995	IBM	
	14-8	EP-0648038	04/12/1995	IBM	
	14-9	EP-1379039-A2	01-07-2004	Glenn W. Hutton	
	14-10	EP-1379050-A2	01-07-2004	Glenn W. Hutton	
	14-11	GB-2283645	05/10/1995	Digital Equipment Int.	
	14-12	JP 63-131637	3/6/1988	Y. Takehiko (w/ English abstract)	Т
	14-13	JP 6-62020 (w/ SOR and E	1994/03/04	Masatoshi et al.	
	14-14	JP-5944140	03-12-1984	Junichi Kimura et al.	т
	14-15	WO-9422087	09/29/1994	3Com Corp	
	14-16	WO-9714234	04-17-1997	Glenn W. Hutton	
	14-17	WO-9811704	03/19/1998	Don Joon Lee et al.	
	14-18				
	14-19				
•	14-20				
	14-21				
	14-22				
	14-23				
	14-24				

Examiner Date Signature Considered	

	Reexam number	90/010,422
·	First Named Inventor	Mattaway et al.
INFORMATION DISCLOSURE STATEMENT BY APPLICANT	Patent Under Re-Exam	6009469
FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
· · ·	Attorney Docket No.	2655-0185
Sheet 15 of 29	Confirmation No.	6565

			Note		
Examiner Cite Initials* No.					
	15-1	"Circuit Switching", Ericsson, last published July 5, 2001, found at http://www.ericsson.com/multiservicenetworks/circuitswitching/axe/ printed on August 1, 2001, 2 pages.			
	15-2	"Data Communication Over the Telephone Network", International Telecommunication Union, CCITT The International Telegraph and Telephone Consultative Committee, Blue Book, Volume VIII - Fascicle VIII.1, IXth Plenary Assembly, Melbourne, November 14-25, 1988, pages 296-370			
	15-3	"Full Duplex Speakerphone", IBM Technical Disclosure Bulletin, Vol. 29, No. 12, May 1987, pages 5599-5602			
	15-4	"ICL OPD - One Per Desk", Issue 01 August 1990, A Comprehensive Technical Information Document (24 pages)			
	15-5	"Information Processing Techniques Program. Volume II. Wideband Integrated Voice/Data Technology" Semiannual Technical Summary Report, Massachusetts Institute of Technology Lexington, MA, 1 October 1977 - 31 March 1978, Issued 31 August 1978, pages 1-25 and 27-31, ADA067014			
	15-6	"Integrated Voice/Data PABX Communications", IBM Technical Disclosure Bulletin, September 1986, http://patents.ibm.com			
	15-7	"Level 1-5 of 65 Stories" 1990 Network World, Inc., April 16, 1990, pages 114-115			

Examiner	Date	
Signature	Considered	

· · · · · · · · · · · · · · · · · · ·			Reexam number	90/010,422	
			First Named Inventor	Mattaway et al.	
INFORMATION DISCLOSURE STATEMENT BY APPLICANT FORM PTO-1449 (modified)			Patent Under Re-Exam		
			Issue Date	1999/12/28	
	FORM FTO-1449 (modilied)		Group Art Unit	3992	
			Examiner Name	KOSOWSKI, ALEXANDER	l J
			Attorney Docket No.	2655-0185	•
5	Sheet 1	l6 of 29	Confirmation No.	6565	
		N	ON-PATENT REFERENCES		
	<u>.</u>			·····	L Nata a
Examiner Initials*	Cite No.	Non-patent Reference	bibliographic information, when	e available	Notes
	16-1		s", Ericsson, last published Jur m/multiservicenetworks/circuits		
	16-2		IT', January 15, 1999, 2 pages, istory.html printed on August 8		
	16-3	A. A. Kapauan, et al. "Widet on the UNIX+"PC", IEEE Git 1986, Conference Record Vo	band Packet Access for Workstations: I bbal Telecommunications Conference, bl. 3, pages 1439-1441	ntegrated Voice/Data/Image Services Houston, Texas, December 1-4,	-
	16-4	AHRENS, Richard L., ' FAQ Version: 1.0'', 199	Frequently-Asked Questions a 94, 6 pages.	bout Internet VoiceChat 1.1	
	16-5		a - An Experimental System for view, January 12, 1990, pages		
	16-6	BENNETT, Geoff, "Dea and 323, Van Nostrand	signing TCP/IP Internetworks", I Reinhold, 1995.	Chapter 11, pages 290, 291	
	16-7	Bernard Gold "Digital S December 1977, pages	Speech Networks", Proceedings s 1636-1658	of the IEEE, Vol. 65, No. 12,	

Examiner Signature	· · · · · · · · · · · · · · · · · · ·	Date Considered	
			· .

.

			Deeven number	00/010 422	
	•		Reexam number	90/010,422	
		ON DISCLOSURE	First Named Inventor	Mattaway et al.	
•	STATEMENT BY APPLICANT FORM PTO-1449 (modified)		Patent Under Re-Exam	6009469	
			Issue Date	1999/12/28	
			Group Art Unit	3992	·
			Examiner Name	KOSOWSKI, ALEXANDEF	۶J
			Attorney Docket No.	2655-0185	
ę	Sheet 1	7 of 29	Confirmation No.	6565	
		N	ON-PATENT REFERENCES		
Examiner	Cite	Non-patent Reference	bibliographic information, wher	e available	Notes
Initials*	No.		,,,,,		
	17-1	Bill Newman "An ISDN Data Global Telecommunications December 2-5, 1985, pages	and Voice Terminal Based on a Perso Conference, Conference Record Volui 1048-1052	nal Computer", Globecom'85, IEEE ne 3, New Orleans, Louisiana,	
	17-2	BORLAND, John, "Tec 17, 2001, 3 pages, four 0.html.	hnology uses one number to find at http://news.cnet.com/new	nd you on any device", May s/0-1004-201-5939191-	
	17-3	C. MALAMUD et al., "F Principles and Policy",	Principles of Operation for the T RFC 1530, October 1993, page	PC.INT Subdomain: General es 1-7.	
	17-4	C. MALAMUD et al., "F Printing Administrativ	Principles of Operation for the T ve Policies", RFC 1529, Octobe	PC.INT Subdomain: Remote er 1993, pages 1-5.	
	17-5		Principles of Operation for the T ocedures", RFC 1528, October		
	17-6		ntal Internet Stream Protocol, V ber 1990, pages 1-148	ersion 2 (ST-II)", Request for	
	17-7	C. YANG, "INETPhone Comments 1789, pp. 1	: Telephone Services and Services	vers on Internet", Request for	

Examiner Signature	Date Considered	
Signature	00110100100	Ì

*Examiner: Initial if reference was considered, whether or not citation is in conformance with MPEP 609. Draw a line through citation if not in conformance and not considered. Include a copy of this form with next communication to applicant. Notes: If identified, the following is provided: EA = English Abtract, T = Translation, PF = Patent Family.

	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
INFORMATION DISCLOSURE	Patent Under Re-Exam	6009469
STATEMENT BY APPLICANT FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 18 of 29	Confirmation No.	6565

		NON-PATENT REFERENCES	
Examiner Initials*	Cite No.	Non-patent Reference bibliographic information, where available	Notes
	18-1	Carl A. Sunshine, et al. "Broad-Band Personal Computer LAN's", IEEE Journal on Selected Areas in Communications, Vol. SAC-3, No.3, May 1985, pages 408-415	
	18-2	Cindy MUELLER et al., "ATD Data Services", http://www.iita.ucar.edu/ws/datawkshop/Abstract-ATD.html, January 5, 1995, 2 pages.	
	18-3	Clifford J. Weinstein, et al. "Experience with Speech Communication in Packet Networks" IEEE Journal on Selected Areas in Communications, Vol. SAC-1, No. 6, (ISSN 0733-8716), December 1983, pages 963-980	
	18-4	D. Adolphs, et al. "Adapters for the Public ISDN", pages 72-80	
	18-5	D. Perkins "The Point-to-Point Protocol for the Transmission of Multi-Protocol Datagrams Over Point-to-Point Links", Request for Comments 1171, ftp://ftp.isi.edu/in-notes/rfc1171.txt, July 1990, pages 1-48	
	18-6	D.C. Swinehart et al., "Adding Voice to an Office Computer Network", IEEE Global Telecommunications Conference, Nov. 28-Dec 1, 1983, Conference Record Volume 1 of 3, pages 392-398	
	18-7	Dale Gulick et al., "Interface the ISDN to Your PC With a Voice/Data Board", Design Applications, 2328 Electronic Design, 35 (1987) Dec. 10, No. 29, Hashbrouck Heights, NJ, USA, pages 85-88, XP 000004313	

		· · · · · · · · · · · · · · · · · · ·
Examiner Signature	Date Considered	

	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
INFORMATION DISCLOSURE	Patent Under Re-Exam	6009469
STATEMENT BY APPLICANT FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 19 of 29	Confirmation No.	6565

		NON-PATENT REFERENCES	
Examiner Initials*	Cite No.	Non-patent Reference bibliographic information, where available	Notes
	19-1	Daniel C. Swinehart "Telephone Management in the Etherphone System", IEEE/IEICE Global Telecommunications Conference '87, Conference Record Volume 2 of 3, November 15-18, 1987, pages 1176-1180	
	19-2	Danny Cohen "A Network Voice Protocol NVP-II", April 1, 1981, pages 1-68	
	19-3	Danny Cohen "Packet Communication of Online Speech", AFIPS Conference Proceedings, 1981 National Computer Conference, May 4-7, 1981, Chicago, Illinois, pages 169-176	
	19-4	Danny Cohen "Specifications for the Network Voice Protocol (NVP)", Request for Comments 741, January 29, 1976, pages 1-30	
	19-5	Don H. Johnson, et al. "A Local Access Network for Packetized Digital Voice Communication", IEEE Transactions on Communications, Vol. Com. 29, No. 5, May 1981, pages 679-688	
	19-6	Douglas B. Terry and Daniel C. Swinehart, "Managing Stored Voice in the Etherphone System", 1987 ACM 089791-242-X/87/0011/0103, pages 103-104	
	19-7	Douglas B. Terry and Daniel C. Swinehart, "Managing Stored Voice in the Etherphone System", ACM Transactions on Computer Systems, Vol. 6, No. 1, February 1988, pages 3-27	

Examiner Signature	Date Considered	

	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
INFORMATION DISCLOSURE	Patent Under Re-Exam	6009469
STATEMENT BY APPLICANT FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 20 of 29	Confirmation No.	6565

Examiner Initials*	Cite No.	Non-patent Reference bibliographic information, where available	Notes
	20-1	Eve M. Schooler, et al. "A Packet-Switched Multimedia Conferencing System", SIGOIS Bulletin, pages 12-22	
	20-2	Gary C. Kessler "ISDN Concepts, Facilities, and Services", McGraw-Hill, Inc., c1990, pages 224-231, ISBN 0-07-034242-3	
	20-3	<u>Giulio Barberis, et al. "Coded Speech in Packet-Switched Networks: Models and</u> Experiments" IEEE Journal on Selected Areas in Communications, Vol. SAC-1, No. 6, December 1983, pages 1028-1038	
	20-4	H. Jonathan Chao, et al. "A Packet Video System Using the Dynamic Time Division Multiplexing Technique", IEEE Global Telecommunications Conference, Houston, Texas, December 1-4, 1988, Conference Record, Vol. 3, pages 0767-0772	
	20-5	H. Opderbeck "Throughput Degredations for Single Packet Messages", Request for Comments 632, ftp://ftp.isi.edu/in-notes/rfc632.txt, May 20, 1974, pages 1-6	
	20-6	Henning Schulzrinne "Voice Communication Across the Internet: A Network Voice Terminal", July 29, 1992, pages 1-34	
	20-7	Hiroshi Kobayashi and Hideaki Haruyama, "Voice, Data and Video Integrated Broadband Metropolitan Area Network", Electronics and Communications in Japan, Part 1, Vol. 73, No. 11, 1990, pages 34-42	

Examiner Signature	Date Considered	

._ _ _ _ _

		· · · · · · · · · · · · · · · · · · ·	Reexam number	90/010,422	
			First Named Inventor	Mattaway et al.	
			Patent Under Re-Exam	6009469	
		FBY APPLICANT	Issue Date	1999/12/28	
		,, (Group Art Unit	3992	
			Examiner Name	KOSOWSKI, ALEXANDEF	s J
	Sheet 21 of 29		Attorney Docket No.	2655-0185	
;			Confirmation No.	6565	
		N	ON-PATENT REFERENCES		
Examiner	Cite	Non-patent Reference	bibliographic information, wher	e available	Notes
Initials*	No.				}
	21-1		h-Speed Packet Switching Systems for in Communications, October 1987, Vol		
,	21-2		g Telephone Line Access to a l California, Marina Del Rey. Info 26270		-
	21_3_		t-Generation Agent-Dedicated Report of IEICE 94-216 (March		
· · · · · · · · · · · · · · · · · · ·	21-4	International Prelimina	ry Examination Report (IPER) i	ssued March 26, 1998 in T/US96/15504	
,			· · · · · · · · · · · · · · · · · · ·		
		International Course D	eport issued January 27, 1998	in corresponding International	
	21-5	Application Serial No. I		· •	
	21-5				
	21-5 21-6	Application Serial No. I Israel GITMAN, et al. "		d Voice and Data Networks: A	

*Examiner: Initial if reference was considered, whether or not citation is in conformance with MPEP 609. Draw a line through citation if not in conformance and not considered. Include a copy of this form with next communication to applicant. Notes: If identified, the following is provided: EA = English Abtract, T = Translation, PF = Patent Family.

		· · · · · · · · · · · · · · · · · · ·	Reexam number	90/010,422		
			First Named Inventor	Mattaway et al.		
INFOF	RMATI	ON DISCLOSURE		6009469		
		BY APPLICANT	Patent Under Re-Exam	1999/12/28		
FOR	M PTO-	449 (modified)				
			Group Art Unit	3992		
			Examiner Name	KOSOWSKI, ALEXANDER	K J	
Sheet 22 of 29			Attorney Docket No.	2655-0185		
		22 of 29	Confirmation No.	6565		
		N	ON-PATENT REFERENCES			
Examiner Initials*	Cite No.	Non-patent Reference	bibliographic information, when	re available	Notes	
	22-1		/oice File Interchange Protocol b.isi.edu/innotes/rfc978.txt, Feb			
	22-2	J. Romkey "A Nonstan Slip", Request for Com 1988, pages 1-6	dard For Transmission of IP Da ments 1055, ftp://ftp.isi.edu/in-	atagrams Over Serial Lines: notes/std/std47.txt, June		
	_22_3_	James D. Mills, et al. "A data IECON '87, 1987 Internation Cambridge, Massachusetts,	a and voice system for the general ser al Conference on IND. Electronics, Co November 3-6, 1987	vice telephone network [*] , Proceedings ntrol, and Instrumentation;		
	22-4	James W. Forgie "Speech T Conference Proceedings,193 pages 137-142	ransmission in Packet-Switched Store 75 National Computer Conference, Ma	-and-Forward Networks", AFIPS y 19-22, 1975, Anaheim, California,		
 	22-5	James W. Forgie "Voice Cor Conference on Communicati 21.3.1-21.3.4	nferencing in Packet Networks", ICC '8 ons, Seattle, WA, June 8-12, 1980, Vo	10, Conference Record, International olume 1, 80CH1505-6 CSCB, pages		
	22-6	Jane's Military Commu	nications 1979-80, pages 452	and 453		
					1	

1		1	
	Examiner Signature	Date Considered	

*Examiner: Initial if reference was considered, whether or not citation is in conformance with MPEP 609. Draw a line through citation if not in conformance and not considered. Include a copy of this form with next communication to applicant. Notes: If identified, the following is provided: EA = English Abtract, T = Translation, PF = Patent Family.

.

			Reexam number	90/010,422		
			First Named Inventor	Mattaway et al.		
		ON DISCLOSURE	Patent Under Re-Exam	6009469		
		1449 (modified)	Issue Date	1999/12/28		
			Group Art Unit	3992		
			Examiner Name	KOSOWSKI, ALEXANDER	s 1	
Sheet 23 of 29			Attorney Docket No.	2655-0185		
		23 of 29	Confirmation No.	6565		
		N	ON-PATENT REFERENCES			
Examiner	Cite	Non-patent Reference	bibliographic information, wher	e available	Notes	
Initials*	No.	· · · · · · · · · · · · · · · · · · ·				
	23-1		inications 1989, Tenth Edition,	Edited by John Williamson,	1	
		ISBN 0710608772, pa	ges 443, 507, and 512			
			· · · · · · · · · · · · · · · · · · ·			
	23-2		ons 1990-91, Eleventh Edition, Edited 4, 357, 398, 406, 450, 454, 456, 560, 5			
	23-3	lane's Military Commu	inications 1992-93, Thirteenth E	Edition Edited by John		
	20-0		0609809, pages 375, 376, 384,			
			•			
	23-4		le Chatter About Reference Models", h			
		mice.cs.uci.ac.uk/muitimedia	a/misc/tcp_ip/8709.mm.www/0041.html	, December 16, 1967, pages 1-9		
_	23-5	John Bellamy, "Digital and 410-412	Telephony", c1982 John Wiley	& Sons, Inc., pages 392-397		
	02.0	ID Apple No. 0000 40	2925 Office Action (Translation	N		
	23-6	JP Appin. No. 2008-16	3825 Office Action (Translation	·		
	23-7		mary Rate Interface Impact on Perform		1	
		CSMA/CD Networks – A Me Telecommunication Confere	easurement and Simulation Study", Glob nce & Exhibition, San Diego, California	becom '90 IEEE Global , December 2-5, 1990, Volume 2,		
		pages 0912-0919				

Examiner Signature		Date Considered	
-----------------------	--	--------------------	--

*Examiner: Initial if reference was considered, whether or not citation is in conformance with MPEP 609. Draw a line through citation if not in conformance and not considered. Include a copy of this form with next communication to applicant. Notes: If identified, the following is provided: EA = English Abtract, T = Translation, PF = Patent Family.

	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
INFORMATION DISCLOSURE STATEMENT BY APPLICANT	Patent Under Re-Exam	6009469
FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
: ·	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 24 of 29	Confirmation No.	6565

	NON-PATENT REFERENCES					
Examiner Initials*	Cite No.	Non-patent Reference bibliographic information, where available	Notes			
	24-1	Ken Sherman "Data Communications - A User's Guide", 3rd Edition, c1981 Prentice-Hall, Inc., pages 296-307 and 404-407				
	24-2	Kevin Jeffay, et al. "Kernel Support for Live Digital Audio and Video", pages 10-21, University of North Carolina at Chapel Hill, Department of Computer Science				
	24-3	Kyuta SAITO, et al. "Voice Packet Communication System for Private Networks", Globecom '89, IEEE Global Telecommunications Conference & Exhibition, Dallas, Texas, November 27-30, 1989, Volume 3, pages 1874-1878				
	24-4	Lawrence G. Roberts "The Evolution of Packet Switching", Proceedings of the IEEE, Vol. 66, No. 11, November 1978, pages 1307-1313				
	24-5	LIN, Hwa-Chun and C.S. Raghavendra, "A Dynamic Load-Balancing Policy With a Central Job Dispatcher (LBC)," IEEE Transactions on Software Engineering, Vol. 18, No. 2, February 1992, pages 148-158.				
	24-6	M. E. Ulug, et al. "Statistical Multiplexing of Data and Encoded Voice in a Transparent Intelligent Network", Fifth Data Communications Symposium, September 27-29, 1977, Snowbird, Utah, pages 6-14 - 6-20				
	24-7	M. Gopalakrishnan, et al. "Integrating Voice and Data SALAN: An Experimtental Local Area Network", Computer Communications, Vol. 9, No. 4, August 1986, pages 186-194 and page 169				

Examiner Signature	· · · · · · · · · · · · · · · · · · ·	Date Considered	
olgilataro			

-						
				Reexam number	90/010,422	
				First Named Inventor	Mattaway et al.	
	-		ON DISCLOSURE	Patent Under Re-Exam	6009469	
			1449 (modified)	Issue Date	1999/12/28	
			· · ·	Group Art Unit	3992	
	Sheet 25 of 29			Examiner Name	KOSOWSKI, ALEXANDER	l J
				Attorney Docket No.	2655-0185	
				Confirmation No.	6565	
ſ			NC	N-PATENT REFERENCES		
\mathbf{F}	Evening	04-				Notes
	Examiner Initials*	Cite No.	Non-patent Reference D	bibliographic information, wher	e avaliadie	NULES
		25-1	M.J. Ross "Alternatives	for Integrating Voice and Data	", 1981 International	
				ISS' 81 CIC Montreal, Septem		
Ī				rview of Recent Developments in the ", IEEE Communications Magazine, C		
			32-45		auber 1000, vol. 20, 110. 10, pageo	
╉		_25-3_		et al. "Variable-Speed Data Tra 27, No. 4A, September 1984,		
					pageo 1200 1210	
\mathbf{F}		25-4	P. Venkat Rangan and Daniel	C. Swinehart, "Software Architecture	for Integration of Video Services in	
		20-4	the Etherphone System", IEEE	E Journal on Selected Areas in Comm		
ł	1991, pages 1395-1404					
ł		25-5		Geographical and Provider-rooted Int		
I			Networks and ISDN Systems	27(3)437-448, 1994 (selected paper fi	rom INET 94/JENC 5)	
I						Ì
Ī		25-6	Paul Gilster, "Internet Navigate translation and SOR)	or", Maruzen Kabushiki-Kaisha (1st E	d.), pgs. 473-476, Feb. 28, 1995 (with	
ļ				<u></u>		
		25-7		g, "Extending the IP Internet T Iter Communications Review, 1		
				ACT COMMUNICATIONS NEVICW,	EU(1).10-00, Jan. 1330	
L						

Examiner Signature	Date Considered	

ALL REFERENCES CONSIDERED EXCEPT WHERE LINED THROUGH. /AK/ Cisco - Exhibit 1003 - Page 201

1

			Reexam number	90/010,422		
			First Named Inventor	Mattaway et al.		
		ON DISCLOSURE	Patent Under Re-Exam	6009469		
		F BY APPLICANT 1449 (modified)	Issue Date	1999/12/28		
FURI	VIPTO-	1449 (1100/lied)	Group Art Unit	3992		
			Examiner Name	KOSOWSKI, ALEXANDER	l J	
•			Attorney Docket No.	2655-0185		
5	Sheet 2	26 of 29	Confirmation No.	6565		
L		NC	N-PATENT REFERENCES			
				1-1-1-	Notes	
Examiner Initials*	Cite No.	Non-patent Reference t	bibliographic information, wher		NUICS	
	26-1	Philip H. Reagan, "Is it t Manager Emerges, 03/1	he PBX or is it the LAN?", Dat 1984, Volume 30 Number 3, pa	amation, The Telecom ages 3-4, 147, 148, 150		
	26-2	Polle T. Zellweger et al., "An Overview of the Etherphone System and its Applications", 2nd IEEE Conference on Computer Workstations, March 7-10, 1988, pages 160-168				
	26-3_		equirements for Multicast Prote Group, May 1993, pp. 1-19.	ocols", Request for Comments		
	26-4	R. W. Meba, et al. "Experimen Directions in Switching and N March 11-13, 1986, pages 13	nts in Wideband Packet Technology", etworks, Proceedings of the Internatio 5-139	Digital Communications - New onal Seminar, Zurich, Switzerland,		
	26-5	-5 R.P. McNamara, "Some Considerations of the Voice-Data Capabilities of Broadband Cable Networks", IEEE Digest of Papers Spring CompCon 82, February 22-25, 1982, pages 312-314				
	26-6	Randy Cole "Packet Vo September/October 198	ice: When It Makes Sense", S 2, pages 52-61.	peech Technology,		
· · · · · ·	26-7	Scott FLINN, "Coordina Independent Application 5-9, 1995, pages 1-16.	ting Heterogeneous Time-Bas s" ACM Multimedia 95 - Elect	ed Media Between ronic Proceedings November		

Examiner Signature	Date Considered	
-----------------------	--------------------	--

	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
INFORMATION DISCLOSURE	Patent Under Re-Exam	6009469
STATEMENT BY APPLICANT FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 27 of 29	Confirmation No.	6565

		NON-PATENT REFERENCES			
Examiner Initials*	r Cite Non-patent Reference bibliographic information, where available No.				
	27-1	Shimmi Hattori et al., "Integrated Digital Switching System with Queueing Storage Facility", IEEE Transactions on Communications, Vol. Com-30, No. 8, August 1982, pages 1900-1905, (ISSN 0090-6778)			
	27-2	Steve Oltmanns, et al. "A Voice and Communications System for the IBM PC", Speech Technology, March/April 1986, pages 94-99			
	27-3	Stuart CHESHIRE et al., "Internet Mobility 4x4", www.acm.org, 1996, pages 1-12.			
	27-4	Susan Angebranndt et al., "Integrating Audio and Telephony in a Distributed Workstation Environment", Proceedings of the Summer 1991 USENIX Conference, June 10-14, 1991, Nashville, Tennessee, pages 419-435			
	27-5	T. Kamae "Visual Terminals and User Interfaces", FGCS North-Holland, pages 257- 278			
	27-6	T. Kamae "Voice/Data Integration in the INS Model System and Local Area Networks" IEEE Communications Magazine, December 1986, Vol. 24, No. 12, pages 7-15			
	27-7	T7540 Digital Telephone Codec, AT&T Microelectronics, January 1991, pages 1-62 and Data Sheet Addendum, July 1991, 4 pages			

Examiner Signature	Date Considered	

	-		Reexam number	90/010,422	
			First Named Inventor	Mattaway et al.	
INFOF	RMATI	ON DISCLOSURE		6009469	
STATI	EMENT	BY APPLICANT	Patent Under Re-Exam	1999/12/28	
FOR	FORM PTO-1449 (modified)		Issue Date		
			Group Art Unit	3992	
			Examiner Name	KOSOWSKI, ALEXANDE	K J
			Attorney Docket No.	2655-0185	
	Sheet 2	28 of 29	Confirmation No.	6565	
		N	ON-PATENT REFERENCES		
Examiner Initials*	Cite No.	Non-patent Reference	bibliographic information, when	e available	Notes
	28-1		l. "New Technologies - Multimed em", NTT Review, Vol. 1, No. 2		
	28-2 talk (software) description from WikiPedia				
	28-3		ei Communications, No. 202, po		
		1995 ("Communicatior	n software appears on the Interr	net") (w/ SOR)	
	28-4	Theodore Bially, et al. "Voic Transactions on Communica	e Communication in Integrated Digital V ations, Vol. Com-28, No. 9, September	/oice and Data Networks", IEEE 1980, pages 1478-1490	
	28-5	Terminals" ISSLS '78, The I	pach to Multi-Service Subscriber Loop S nternational Symposium on Subscriber ference Record, pages 161-165	System Using Packetized Voice/Data Loops and Services, March 20-24,	
	28-5 28-6	Terminals" ISSLS '78, The I 1978, Atlanta, Georgia, Con	nternational Symposium on Subscriber	Loops and Services, March 20-24,	
		Terminals" ISSLS '78, The I 1978, Atlanta, Georgia, Con Translation of Japanes	nternational Symposium on Subscriber ference Record, pages 161-165	Loops and Services, March 20-24, May 19, 1995)	

	Examiner Signature	Date Considered	
I	•		

		· .	Reexam number	90/010,422	
			First Named Inventor	Mattaway et al.	
		ON DISCLOSURE	Patent Under Re-Exam	6009469	
	STATEMENT BY APPLICANT FORM PTO-1449 (modified)		Issue Date	1999/12/28	
			Group Art Unit	3992	·
		•	Examiner Name	KOSOWSKI, ALEXANDER	sl
			Attorney Docket No.	2655-0185	
	Sheet 2	29 of 29	Confirmation No.	6565	
		N	ON-PATENT REFERENCES		
Examiner Initials*	Cite No.	Non-patent Reference	bibliographic information, when	e available	Note
	29-1	U.S. Reexam Control N	No. 90/010,421 - 2009-08-14 P	TO Office Action	
	29-2	U.S. Reexam Control N	No. 90/010,424 - 2009-08-25 P	TO Office Action	
		· · · · ·	· · ·		
	29-3		P Extension for High-Speed Pa -notes/rfc1185.txt, October 199		
	29-4		P Extensions for High Perform -notes/rfc1323.txt, May 1992, p		
	29-5		t Satellite Technology Reference nber 1982, http://www.cis.ohio- 29.html, pages 1-5		
	29-6	VocaiTec Internet Phor pages.	ne (TM) Version 2.5 Readme, V	/ocalTec Ltd., 02/1995, 5	

Examiner Signature	Date Considered	
-----------------------	--------------------	--

		······································	Reexam numb	ber	90/010,422	
			First Named Ir	ventor	Mattaway et al.	
		ON DISCLOSURE	Patent Under	Re-Exam	6009469	
		T BY APPLICANT 1449 (modified)	Issue Date		1999/12/28	
	FORM PTO-1449 (modified)				3992	
		Group Art Unit Examiner Nam		KOSOWSKI, ALEXANDEI	R J	
			Attorney Dock	et No.	2655-0185	
	Sheet '	1 of 10	Confirmation N		6565	
		F		DOCUMENT	ſS	ĺ
Examiner Initials*	Cite No.	Document No.	Publication Date	Name of Applicant	Patentee or t of Cited Document	Notes
	1-1	WO-9003074	03-22-1990	LE CLER	CQ, Patrick	
	1-2					
	1-3					
	1-4					
	1-5					
· · · · · · ·	1-6					
*****	1-7 1-8		,			
· · · ·	1-0			<u> </u>		
	1-10			1		
· · · ·	1-11			<u> </u>	······································	
	1-12				······································	+
	1-13					+
	1-14					1
	1-15					
	1-16					1
	1-17					
	1-18					
	1-19					
	1-20		·····		· · · · · · · · · · · · · · · · · · ·	
	1-21					+
	1-22 1-23		······································			
	1-23					
	1-24					

Examiner Signature	/Alexander Kosowski/	Date Considered	05/06/2010

			Reexam number	90/010,422	
		· · · · · · · · · · · · · · · · · · ·	First Named Inventor	Mattaway et al.	
	INFORMATION DISCLOSURE STATEMENT BY APPLICANT FORM PTO-1449 (modified)		Patent Under Re-Exam	6009469	
			Issue Date	1999/12/28	
			Group Art Unit	3992	
			Examiner Name	KOSOWSKI, ALEXANDE	RJ
			Attorney Docket No.	2655-0185	
	Sheet	2 of 10	Confirmation No.	6565	
· · · ·		N	ION-PATENT REFERENCES	<u></u>	
Examiner Initials*	Cite No.	Non-patent Reference	bibliographic information, when	e available	Note
	2-1	About NetPhone (unda	ated)		
	2-2	After Deventiting: Ove	rcoming Client-Server Chaos (N	Acy 21, 1994)	
	2-2	Alter Downsizing, Ove	icoming Chene-Gerver Chaos (i	nay 21, 1994)	
	2-3	Barrow Street Researd 1995)	ch report on New Paradigm Sof	tware Corp. (dated sep. 20,	
	2-4	Camelot 10-Q for quar	ter ending January 31, 1995		
			·····		
	2-5	Camelot Corporation 1	0-K, 1994		
	2-6	Camelot Corps Shining	g Internet Dream Draws Skeptic	s (Aug. 95)	·
	****				_
	2-7	Completed Beta Teste	r Agreements (May 1995)		
L					

Examiner Signature	Date Considered	

			Reexam number	90/010,422	
	INFORMATION DISCLOSURE		First Named Inventor	Mattaway et al.	
		T BY APPLICANT	Patent Under Re-Exam	6009469	
		1449 (modified)	Issue Date	1999/12/28	
			Group Art Unit	3992	
			Examiner Name	KOSOWSKI, ALEXANDER	א <u>ן</u> א
			Attorney Docket No.	2655-0185	·····
5	Sheet 3	3 of 10	Confirmation No.	6565	
		N	ION-PATENT REFERENCES		
Examiner Initials*	Cite No.	Non-patent Reference	bibliographic information, where	e available	Note
	3-1	Correspondence with	MacZone (AugSept. 1995)		
	3-2	DigiPhone and Camel	ot Documents		
	<u> </u>		or bootments		
	3-3	DigiPhone Documents	(including Q and A) (prior to So	ept. 1995)	
	:				
	3-4	DigiPhone Documents	(prior to Sept. 1995)	· · · · · · · · · · · · · · · · · · ·	
	3-5	DigiPhone for Mac (19	96)		
	3-6	Electric Magic and Jab	ora Correspondence relating to r	new products (prior to 9/1995)	
	3-7	Electric Magic and PS	INet License Negotiation Docun	pentation (prior to Sept. 1995)	
	5,				
		x			

Examiner	Date	
Signature	Considered	

	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
INFORMATION DISCLOSURE STATEMENT BY APPLICANT	Patent Linner Re-Eyam (600)	6009469
FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 4 of 10	Confirmation No.	6565

Cite		
No.	Non-patent Reference bibliographic information, where available	Notes
4-1	Electric Magic Beta Tester Agreement dated July 21, 1995 (SKYPE-N2P01609523)	
4-2	Electric Magic Company Releases NetPhone 1.2 and NetPub Server (dated June 8, 1995)	
4-3	Electric Magic Information (May 1995)	
4-4	Electric Magic Notebooks (prior to Sept. 1995)	
4-5	Electric Magic Notes (including references to 4/18/95) and patent pending	
4-6	Electric Magic Notes (including references to DigiPhone) (prior to Sept. 1995)	
4-7	Electric Magic Notes (undated)	
	4-1 4-2 4-3 4-4 4-5 4-6	 4-1 Electric Magic Beta Tester Agreement dated July 21, 1995 (SKYPE-N2P01609523) 4-2 Electric Magic Company Releases NetPhone 1.2 and NetPub Server (dated June 8, 1995) 4-3 Electric Magic Information (May 1995) 4-4 Electric Magic Notebooks (prior to Sept. 1995) 4-5 Electric Magic Notes (including references to 4/18/95) and patent pending 4-6 Electric Magic Notes (including references to DigiPhone) (prior to Sept. 1995)

Examiner Signature	Date Conside	ered
-----------------------	-----------------	------

			Reexam number	90/010,422	
			First Named Inventor	Mattaway et al.	
•		ON DISCLOSURE	Patent Under Re-Exam	6009469	······································
	FORM PTO-1449 (modified)		Issue Date	1999/12/28	
		. ,	Group Art Unit	3992	
			Examiner Name	KOSOWSKI, ALEXAND	ER J
			Attorney Docket No.	2655-0185	
		5 of 10	Confirmation No.	6565	
		N	ION-PATENT REFERENCES		
Examiner Initials*	Cite No.	Non-patent Reference	bibliographic information, where	e available	Not
	5-1	Electric Magia Drass D			
	9-1	Electric Magic Press R	Release (dated Mar. 13, 1995)		
					ľ
	5-2	ElectricMagic and Wel	bKat Licensing Documents (Sep	t. 1995 and prior)	
	5-3	E-mail dated May 9, 19	995 re NetPhone Development v	with Jabra R/D	
-		Fax dated 5/31/95 to IV	VP including press releases		
	5-5	Google Groups comp.	dcom.videoconf posting (dated J	lul. 5, 1995)	
	5-6	intern toy (detect Ave. (20. 400.4		
	0-C	intern.tex (dated Aug. 3	50, 1994)		
	5-7	Jabra - Corporate and	Product Backgrounder (April 19,	1995)	
·····					

Signature

ALL REFERENCES CONSIDERED EXCEPT WHERE LINED THROUGH. /AK/ :

Considered

	Reexam number	90/010,422		
	First Named Inventor	Mattaway et al.		
INFORMATION DISCLOSURE STATEMENT BY APPLICANT FORM PTO-1449 (modified)	Patent Under Re-Exam	6009469		
	Issue Date	1999/12/28		
· · · · ·	Group Art Unit	3992		
	Examiner Name	KOSOWSKI, ALEXANDER J		
	Attorney Docket No.	2655-0185		
Sheet 6 of 10	Confirmation No.	6565		
Ν	ON-PATENT REFERENCES			
Examiner Cite Non-patent Reference bibliographic information, where available Notes				

Examiner Initials*	No.	Non-patent Reference bibliographic information, where available	Notes
	6-1	Jabra Ear Phone Common Questions and Answers	
	6-2	Jabra Ear phone PC, 1995	
	6-3	Jabra Streamline Ear Phone, 1993	
	6-4	Letter of Intent including target dates (dated 19 Sept 95) (7 pgs)	-
	6-5	List of source modules in NetPhone (dated Oct. 10, 1995)	
	6-6	MagicPhone Distribution Agreement (Aug. 1995)	
	6-7	Maven README (including 1994 copyright notice)	

			Reexam number	90/010,422	
INFORMATION DISCLOSURE STATEMENT BY APPLICANT FORM PTO-1449 (modified)			First Named Inventor	Mattaway et al.	
			Patent Under Re-Exam 6009469		
			Issue Date	1999/12/28	
			Group Art Unit	3992	
			Examiner Name	Examiner Name KOSOWSKI, ALEXANDER	
			Attorney Docket No.	2655-0185	
	Sheet 7	7 of 10	Confirmation No.	6565	
		N	ION-PATENT REFERENCES		
Examiner Initials*	Cite No.	Non-patent Reference	bibliographic information, where	e available	Note
	7-1	Net as Phone (Interne	t World July 1995)		
	7-2	NET phone ad (with Ja	abra fax line) (May 95)		
	7-3	NetPhone 1.1 User Ma	anual (including date 95-01-09)		
	7-4	NetPhone Advertisem	ent (Aug. 1995)		
	7-5	NetPhone Correspond	ence (JunJuly 1995)		
	7-6	NetPhone Developmen	nt Plan (SKYPE-N2P01610487)		
				ng reference to 5/9/1995)	

Examiner Signature	Date Considered	

			Reexam number	90/010,422	
	INFORMATION DISCLOSURE STATEMENT BY APPLICANT		First Named Inventor	Mattaway et al.	
			Patent Under Re-Exam	6009469	
		1449 (modified)	Issue Date	1999/12/28	
			Group Art Unit	3992	
			Examiner Name	KOSOWSKI, ALEXANDER 2655-0185	
			Attorney Docket No.		
	Sheet 8	3 of 10	Confirmation No.	6565	
	<u></u>	Ν	ON-PATENT REFERENCES	<u> </u>	
Examiner Initials*	Cite No.	Non-patent Reference	bibliographic information, where	e available	Note
	8-1	NetPhone Digital User	Manual (dated 95-02-26)		
	8-2	NetPhone gives your N	fac voice over the Internet (Insi	ide the Internet - June 1995)	
	8-3	Netphone invoices (inc	luding invoices prior to 9/1995)		
	8-4	NetPhone Make Free (Calls over the Internet (undated))	
	8-5	NetPhone Screenshots	s (undated)		
	8-6	NetPhone Tasks and F	Plans (dated JanFeb. 1995)		
	8-7	New Paradigm Softwar	re Agreement (dated Oct. 9, 198	95) referencing existing	

Examiner Signature	Date Conside	lered

			Reexam number	90/010,422		
			First Named Inventor	Mattaway et al.		
INFORMATION DISCLOSURE			Patent Under Re-Exam	6009469		
STATEMENT BY APPLICANT FORM PTO-1449 (modified)			Issue Date	1999/12/28		
			Group Art Unit	3992		
			Examiner Name	KOSOWSKI, ALEXANDER J		
			Attorney Docket No.	2655-0185		
9	Sheet 9	9 of 10	Confirmation No.	6565		
		N	DN-PATENT REFERENCES	· · · · · · · · · · · · · · · · · · ·		
Examiner	Cite	Non-natent Reference l	bibliographic information, where	a available	Notes	
Initials*	No.		2	-		
	9-1	Open Systems Today, I	Feb. 20, 1995			
			·			
	9-2	Order for NetPhone version 1.2 labels (dated 6 June 95)				
	9-3	Phoneless Phoning Apr	il 2 1005			
	9-3	Filoheless Filohing Apr				
	9-4	PowWow Chunked Prof	tocol Specification, Last edited	3/12/1999		
	9-5	PowWow Native Protoc	ols, last updated Dec. 8, 1998			
	0.6	Boodmon for the Internet	(March 1005)			
	9-6	Roadmap for the Interne	er (march 1995)			
	9-7	SlipMagic Ad for MacZo	ne (dated 9/28/1995) for selling	g product		

Examiner Signature	Date Considered	

			Reexam number	90/010,422		
			First Named Inventor	Mattaway et al.		
INFORMATION DISCLOSURE STATEMENT BY APPLICANT FORM PTO-1449 (modified)			Patent Under Re-Exam	6009469		
			Issue Date	1999/12/28		
			Group Art Unit	3992		
			Examiner Name	KOSOWSKI, ALEXANDER J		
			Attorney Docket No.	2655-0185		
S	Sheet '	10 of 10	Confirmation No.	6565		
		N	ON-PATENT REFERENCES			
Examiner	Cite	· · · · · · · · · · · · · · · · · · ·	bibliographic information, when	e available	Notes	
Initials*	No.	non-patent iteleience	sishographic intornation, when			
	10-1	The Mac Zone (Catalo	g) dated 1995			
	10-2	Two-way voice calls ov	ver the Internet (11/21/94)			
-						
	10-3	I lbique documents rel:	ating to Virtual Places Products	(dated 1995 and March		
	10-5	1995)	ating to visual Flaces Floodets	(dated 1995 and March,		
	i					
	10-4	Ubique Ships Virtual P	laces Client and Server (dated	March 20, 1995)		
			`			
	•	·				
	10-5	Ubique, Ltd. Fact Shee unknown)	et (referencing NetPhone codec	s and Vocaltec) (date		
		unitriowity				
	10-6	Undated Technical doc	rument			
	10-7	Welcome to NetPhone	Demo (includes copyright date	1994)		

Examiner Signature	/Alexander Kosowski/	Date Considered	05/06/2010
<u>.</u>	· · · · · · · · · · · · · · · · · · ·		

EMENT	DN DISCLOSURE	First Named Inventor Patent Under Re-Exam	Mattaway et al.	
EMENT	BY APPLICANT	· · · · · · · · · · · · · · · · · · ·	0000400	
			6009469	
		Issue Date	1999/12/28 3992	
		Group Art Unit		
		Examiner Name	KOSOWSKI, ALEXANDER	l J
		Attorney Docket No.	2655-0185 6565	
Sheet 1	of 4	Confirmation No.		
	N	ON-PATENT REFERENCES		
Cite No.	Non-patent Reference	bibliographic information, wher	e available	Notes
1-1				
1-2				
1-3			2008) in Net2Phone v. Skype	
1-4				
1-5				
1-6				ļ
		averant Chamber Music (doted)		
1-/				
	Cite No. 1-1 1-2 1-3 1-4	Cite No. Non-patent Reference 1-1 David STROM, "Talking Tele 1996, Vol. 4, No. 9, pages 6, 208. 1-2 Deposition transcript of Net2Phone v. Skype et 1-3 Deposition transcript of et al. (Civil Action No. 0) 1-4 Deposition transcript of Skype et al. (Civil Action 1-5 Deposition transcript of Skype et al. (Civil Action 1-6 Deposition transcript of Skype et al. (Civil Action 1-7 Deposition transcript of	NON-PATENT REFERENCES Cite No. Non-patent Reference bibliographic information, wher 1-1 David STROM, "Talking Telephony", Windows Sources, Ziff-Davis 1996, Vol. 4, No. 9, pages 6, 7, 10, 150-152, 157, 158, 163, 167, 1 208. 1-2 Deposition transcript of Andrew Green (dated Aug. De Net2Phone v. Skype et al. (Civil Action No. 06-2469-K 1-3 Deposition transcript of Daniel Mayer (dated Aug. 26, et al. (Civil Action No. 06-2469-KSH-PS) in DCN.I 1-4 Deposition transcript of Daniel Zwanziger (dated July Skype et al. (Civil Action No. 06-2469-KSH-PS) in DC 1-5 Deposition transcript of expert Bruce Maggs (dated Mag. Skype et al. (Civil Action No. 06-2469-KSH-PS) in DC 1-6 Deposition transcript of expert Kevin Jeffay (dated Mag. Skype et al. (Civil Action No. 06-2469-KSH-PS) in DC 1-6 Deposition transcript of expert Kevin Jeffay (dated Mag. Skype et al. (Civil Action No. 06-2469-KSH-PS) in DC 1-7 Deposition transcript of expert Stephen Kunin (dated Mag. Skype et al. (Civil Action No. 06-2469-KSH-PS) in DC	NON-PATENT REFERENCES Cite No. Non-patent Reference bibliographic information, where available 1-1 David STROM, "Talking Telephony", Windows Sources, Ziff-Davis Publishing Company, September 1996, Vol. 4, No. 9, pages 6, 7, 10, 150-152, 157, 158, 163, 167, 169, 171, 174, 181, 184, 186, 195, 203, 208. 1-2 Deposition transcript of Andrew Green (dated Aug. December 30, 2008) in Net2Phone v. Skype et al. (Civil Action No. 06-2469-KSH-PS) in DCNJ 1-3 Deposition transcript of Daniel Mayer (dated Aug. 26, 2008) in Net2Phone v. Skype et al. (Civil Action No. 06-2469-KSH-PS) in DCNJ 1-4 Deposition transcript of Daniel Zwanziger (dated July 9, 2008) in Net2Phone v. Skype et al. (Civil Action No. 06-2469-KSH-PS) in DCNJ 1-5 Deposition transcript of expert Bruce Maggs (dated May 30, 2008) in Net2Phone v. Skype et al. (Civil Action No. 06-2469-KSH-PS) in DCNJ 1-6 Deposition transcript of expert Kevin Jeffay (dated May 20, 2008) in Net2Phone v. Skype et al. (Civil Action No. 06-2469-KSH-PS) in DCNJ

Examiner Date Consid	red
----------------------	-----

			Reexam number	90/010,422	
			First Named Inventor	Mattaway et al.	
		ON DISCLOSURE	Patent Under Re-Exam	6009469	
		1449 (modified)	Issue Date	1999/12/28	_
			Group Art Unit	3992	_
			Examiner Name	KOSOWSKI, ALEXANDE	RJ
			Attorney Docket No.	2655-0185	
	Sheet 2	2 of 4	Confirmation No.	6565	-
		N	ON-PATENT REFERENCES	· · · · · · · · · · · · · · · · · · ·	
Examine Initials*	er Cite No	Non-patent Reference	bibliographic information, where	e available	Notes
	2-1		f former Tribal Voice employee		-
		Peterson (dated Apr. 9 2469-KSH-PS) in DCN), 2000) -in Net2Phone v. Skypc IJ	et al. (Civil Action No. 06	
					_
	2-2		f former VocalTec employee Al v. Skype et al. (Civil Action No. (
	2-3		f former VocalTec employee Lic Skype et al. (Civil Action No. (
	2-4		f inventor Craig Strickland (date t al. (Civil Action No. 06-2469-K		
	2-5		f inventor Glenn Hutton (dated a t al. (Civil Action No. 06-2469-K		
	2-6	Net2Phone v. Skype e	f inventor Glenn Hutton (dated / t al. (Civil Action No. 06-2460 K	Aug. 24, 2007) (Vol. 2) In SH-PS) in DCNJ	
	2-7		f inventor Shane Mattaway (dat t al. (Civil Action No. 06-2469-K		

Examiner Signature	Date Considered	

ALL REFERENCES CONSIDERED EXCEPT WHERE LINED THROUGH. /AK/

			Reexam number	90/010,422	
			First Named Inventor	Mattaway et al. 4	
1		ON DISCLOSURE	Patent Under Re-Exam	6009469	
		1449 (modified)	Issue Date	1999/12/28	
			Group Art Unit	3992	
			Examiner Name	KOSOWSKI, ALEXANDE	RJ
			Attorney Docket No.	2655-0185	
5	Sheet 3	3 of 4	Confirmation No.	6565	
		N	ON-PATENT REFERENCES	•	
Examiner Initials*	Cite No.	Non-patent Reference	bibliographic information, where	e available	Notes
 	3-1		f inventor Shane Mattaway (dat t al. (Civil Action No. 06-2469-K		
	3-2	Deposition transcript o	f prosecuting attorney Bruce Jo	hse (dated lan 1 2008) in	_
	02		t al. (Civil Action No. 06-2469-K		
	·3-3		f Sheldon Glashow (dated July on No. 06-2469-KSH-PS) in DCI		
				•	
	3-4		ure and network control of a hierarchica nal Phoenix Conference on Computers 71-677.		
	3-5	English translation of J	P-06-62020 (dated 1994-03-04)		-
	3-6		nalysis of a CCSS#7 Network s ference on Information Enginee rol. 1.		
J	3-7		roject Gutenberg Alpha Edition of	of EMAIL 101.	+

Examiner Signature	Date Considered	
	•	

ALL REFERENCES CONSIDERED EXCEPT WHERE LINED THROUGH. /AK/

	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
INFORMATION DISCLOSURE STATEMENT BY APPLICANT	Patent Under Re-Exam	6009469
FORM PTO-1449 (modified)	Issue Date	1999/12/28
· · · · ·	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 4 of 4	Confirmation No.	6565

		NON-PATENT REFERENCES	
Examiner Initials*	Cite No.	Non-patent Reference bibliographic information, where available	Notes
•	4-1	Junichi Kimura, et al. "Voice/Data Multiplexing Transmission Methods", Kokai Japanese Patent, Kokai Sho 59-44140, pages 205-215, with English Abstract, English Translation, pages 1-24	
	4-2	Mark R. BROWN et al. "Special Edition: Using Netscape 2", Que Publishing, 1995, ISBN 0-7897-0612-1, pages 7-35, 37-56, 78, 83, 176, 301-320, 393, 395-467, 469- 506.	
	4-3	Preston GRALLA, "How the Internet Works", Ziff-Davis Press, Emeryville, CA, c1997, pp. 34-37, 202-205, 214-215 and 272-275, ISBN 1-56276-552-3.	
	4-4	·	
	4-5	······································	
	4-6		
	4-7	· · · · · · · · · · · · · · · · · · ·	

Examiner Signature	Date Considered	

ALL REFERENCES CONSIDERED EXCEPT WHERE LINED THROUGH. /AK/ .

			Reexam number	90/010,422		
			First Named Inventor	Mattaway et al.		
		ON DISCLOSURE	Patent Under Re-Exam	6009469		
		1449 (modified)	Issue Date	1999/12/28		
			Group Art Unit	3992		
	Shoot 1 of 1		Examiner Name	KOSOWSKI, ALEXANDE	ANDER J	
Sheet 1 of 1			Attorney Docket No.	2655-0185		
	Sheet	1 of 1	Confirmation No.	6565		
N			ION-PATENT REFERENCES			
Examiner	Cite	Non-patent Reference	bibliographic information, where	e available	Not	
Initials*	No.					
	1-1	(Redacted) Expert Re	port of Professor Bruce M. Mag - Ekype et al. (Civil Action No. 0	gs (as Supplemented Sept. 9,		
	4.0	(Padastad) Pagaasiya Eyr	pert Report of Kevin Jeffay, Ph.D. in Ne	t2Phone v. Slove et al. (Civil Action		
	1-2	No. 06-2469-KSH-PS) in DC				
	1-3		ation file, believed to be include	d with VocalChat GTI version		
		2.12 dated September	, 1994			
	1-4	VocalChat GTI READ	ME.TXT for Version 2.12 Beta, of	dated September, 1994		
	1-5	VocalChat GTI Trouble	eshooting.Inf, believed to be inc	luded with VocalChat GTI		
	1-0	version 2.12 dated Sep				
	1-6					
	1-7			· · · · · · · · · · · · · · · · · · ·	+	

Examiner Signature	/Alexander Kosowski/	Date Considered	05/06/2010

RECEIVED

NAX 0 5 2010

	CENTRAL	REEX-Juirl. And. 19, 117	Reexam number	90/010,422	
			First Named Inventor	Mattaway et al.	
INFOR	MATI	ON DISCLOSURE	Patent Under Re-Exam	6009469	
- · ·		F BY APPLICANT	Issue Date		
FORM	/ PTO-	1449 (modified)		1999/12/28	<u></u>
			Group Art Unit Examiner Name	3992	· · ·
				KOSOWSKI, ALEXANDE	R J
~	No 4 '4	4 4	Attorney Docket No.	2655-0185	
Sheet 1 of 1 Cont			Confirmation No.	6565	
		N	ION-PATENT REFERENCES		
Examiner Initials*	Cite No.	Non-patent Reference	bibliographic information, wher	e available	Notes
	1-1		calChat GTI Version 2.12 Softw leged to be dated September, 1		
	1-2		<u>, , , , , , , , , , , , , , , , , , , </u>		
	1-3				
	1-4	•			
	1-5				
	1.0				
	1-6	· · · · · · · · · · · · · · · · · · ·			
				· · · ·	
	1-7			······································	

Examiner Signature /Alexander Kosowski/	Date Considered	05/06/2010
--	--------------------	------------

			Reexam number	90/010,422	_
			First Named Inventor	Mattaway et al.	
		ON DISCLOSURE	Patent Under Re-Exam	6009469	
		1449 (modified)	Issue Date	1999/12/28	
			Group Art Unit	3992	
			Examiner Name	KOSOWSKI, ALEXANDE	ER J
			Attorney Docket No.	2655-0185	
	Sheet	1 of 1	Confirmation No.	6565	_
		N	ON-PATENT REFERENCES		
Examiner Initials*	Cite No.	Non-patent Reference	bibliographic information, where	e available	Note
	1-1		ansfer Venue To The Western	District of Arkasas, Civ.	
		Action No. 06-2469			
	1-2	Reply Brief In Further S	Support Of Net2Phone's Motion ansas, CIV. Action No. 06-2469	To Transfer Venue To The	
	1-3				
1					
		· · · · · · · · · · · · · · · · · · ·			
	1-4				
	1-5	· · · · · · · · · · · · · · · · · · ·		·····	
	1-0				
	1-6				
	1-7				
			·		

Examiner Signature	/Alexander Kosowski/	Date Considered	05/07/2010

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

BLACK BORDERS

□ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

□ FADED TEXT OR DRAWING

BLURRED OR ILLEGIBLE TEXT OR DRAWING

SKEWED/SLANTED IMAGES

COLOR OR BLACK AND WHITE PHOTOGRAPHS

GRAY SCALE DOCUMENTS

LINES OR MARKS ON ORIGINAL DOCUMENT

□ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

OTHER:

IMAGES ARE BEST AVAILABLE COPY. As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

Reexamination	Application/Control No.	Applicant(s)/Patent Under Reexamination	
	90010422	6,009,469	
	Certificate Date	Certificate Number	

Requester Correspondence Address:	Patent Owner	\boxtimes	Third Party
BLAKELY SOKOLOFF TAYLOR & ZAFMAN LLP 1279 OAKMEAD PARKWAY SUNNYVALE, CA 94085-4040			

	AJK (examiner initials)	05/06/2010 (date)
Ca	se Name	Director Initials
OPEN: 2:06cv2469 Net2phone v. Eb	bay	an rearl to

COPENDING OFFICE PROCEEDINGS				
TYPE OF PROCEEDING	NUMBER			
1. no copending proceedings				
· · · · · · · · · · · · · · · · · · ·				
	······			

	Application/Control No.	Applicant(s)/Patent Under Reexamination
Search Notes	90010422	6,009,469
	Examiner	Art Unit
	ALEXANDER J KOSOWSKI	3992

SEARCHED						
	·					

SEARCH NOTES				
Search Notes	Date	Examiner		
Reviewed proposed prior art and prosecution history	5/6/10	AJK		

INTERFERENCE SEARCH				
Class	Subclass	Date	Examiner	

	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
INFORMATION DISCLOSURE STATEMENT BY APPLICANT	Patent Under Re-Exam	6009469
FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 1 of 1	Confirmation No.	6565

		NON-PATENT REFERENCES	1 1 1 1100
Examiner Initials*	Cite No.	Non-patent Reference bibliographic information, where available	Notes
	1-1	Notice Of Motion To Transfer Venue To The Western District of Arkasas, Civ. Action No. 06-2469	
	1-2	Reply Brief In Further Support Of Net2Phone's Motion To Transfer Venue To The Western District Of Arkansas, Civ. Action No. 06-2469	
	1-3		
	1-4		
	1-5		
	1-6		
	1-7		

Electronic Acknowledgement Receipt				
EFS ID:	7566967			
Application Number:	90010422			
International Application Number:				
Confirmation Number:	6565			
Title of Invention:	Graphic User Interface For Internet Telephony Application			
First Named Inventor/Applicant Name:	6,009,469			
Customer Number:	42624			
Filer:	Michael R. Casey			
Filer Authorized By:				
Attorney Docket Number:	2655-0185			
Receipt Date:	06-MAY-2010			
Filing Date:	26-FEB-2009			
Time Stamp:	18:07:27			
Application Type:	Reexam (Third Party)			

Payment information:

Submitted with Payment		no				
File Listing:						
Document Number	Document Description		File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1 Transmittal Letter	T		20100506 0185 IDS.pdf	133986		2
		20100300_0103_103.pdf	188c8ed2a8219e138cb5350bbe8db18176 4957dd	no	2	
Warnings:				·		
Information: Cisco - Exhibit 1003 - Page 227				27		

2	Information Disclosure Statement (IDS)	led (SB/08)	127222	no	1
_	Filed (SB/08)		3604aa0efc189e11e5cde3598fff8430ad76e 35c		
Warnings:					
Information					
This is not an U	ISPTO supplied IDS fillable form				
3	NPL Documents	NP0000.pdf	102125	no	19
			a7d17c07971330af903f13907088be7b3d2 b1e0d		
Warnings:					
Information		I	1		1
4	NPL Documents	NP0001.pdf	545041	no	78
			63514a7bacbf524502040085964c36bbfa0 3fe99		
Warnings:					
Information					
5	NPL Documents	20100506_0185_COS.pdf	57284	no	1
			a263ccc398fd0f5d6112b5a4c1a2cebc925e 17c0		
Warnings:					
Information:					
		Total Files Size (in bytes)	9	65658	
characterize Post Card, as <u>New Applica</u> If a new appl 1.53(b)-(d) a Acknowledg	ledgement Receipt evidences receip d by the applicant, and including pages described in MPEP 503. <u>tions Under 35 U.S.C. 111</u> lication is being filed and the applica nd MPEP 506), a Filing Receipt (37 CF ement Receipt will establish the filin ge of an International Application ur	ge counts, where applicable. tion includes the necessary o R 1.54) will be issued in due g date of the application.	. It serves as evidence components for a filir	e of receipt : ng date (see	similar to a 37 CFR
If a timely su U.S.C. 371 ar national stag <u>New Interna</u> If a new inter an internatic and of the In	bmission to enter the national stage of other applicable requirements a F ge submission under 35 U.S.C. 371 wi tional Application Filed with the USP rnational application is being filed an onal filing date (see PCT Article 11 an ternational Filing Date (Form PCT/R urity, and the date shown on this Ack	of an international applicat orm PCT/DO/EO/903 indicat ill be issued in addition to th <u>PTO as a Receiving Office</u> nd the international applicat d MPEP 1810), a Notification D/105) will be issued in due c	ing acceptance of the e Filing Receipt, in du tion includes the nece of the International course, subject to pres	application le course. Issary comp Application scriptions c	n as a conents for Number oncerning

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re PATENT APPLICATION OF: Net2Phone, Inc. (Patent No. 6,009,469) Control No.: 90/010,422 Issue Date: December 28, 1999 Title: GRAPHIC USER INTERFACE FOR INTERNET TELEPHONY APPLICATION Attorney Docket:2655-0185Group Art Unit:3992Examiner:KOSOWSKI, AlexanderDate:May 6, 2010Confirmation No.:6565

INFORMATION DISCLOSURE STATEMENT

Hon. Commissioner of Patents P.O. Box 1450 Alexandria, VA 22313-1450

Sir:

Pursuant to 37 C.F.R. § 1.56, the attention of the Patent and Trademark Office is hereby directed to the reference(s) listed on the attached PTO-1449. One copy of each non-U.S. Patent reference is attached. It is respectfully requested that the information be expressly considered during the prosecution of this application, and that the reference(s) be made of record therein and appear among the "References Cited" on any patent to issue therefrom.

The submission of any document herewith, which is not a statutory bar, is not intended that any such document constitutes prior art against any of the claims of the present application or is considered to be material to patentability as defined in 37 C.F.R. § 1.56(b). Applicants do not waive any rights to take any action which would be appropriate to antedate or otherwise remove as a competent reference against the claims of the present application. The Opposition to the enclosed Motion will be filed under separate cover.

CHARGE STATEMENT: Deposit Account No. 501860, order no. 2655-0185.

The Commissioner is hereby authorized to charge any fee specifically authorized hereafter, or any missing or insufficient fee(s) filed, or asserted to be filed, or which should have been filed herewith or concerning any paper filed hereafter, and which may be required under Rules 16-18 (<u>missing or insufficiencies only</u>) now or hereafter relative to this application and the resulting Official Document under Rule 20, or credit any overpayment, to our Accounting/Order Nos. shown above, for which purpose a <u>duplicate</u> copy of this sheet is attached

This CHARGE STATEMENT <u>does not authorize</u> charge of the <u>issue fee</u> until/unless an issue fee transmittal sheet is filed.

CUSTOMER NUMBER	Respectfully submitted,
42624	
Davidson Berquist Jackson & Gowdey LLP 4300 Wilson Blvd., 7th Floor, Arlington Virginia 22203 Main: (703) 894-6400 • FAX: (703) 894-6430	By: / Michael R. Casey / Michael R. Casey, Ph.D. (Reg. No.: 40,294)



RECEIVED

Nax 0.5 2010

CENTRAL REEX-MINATION UNIT IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re PATENT APPLICATION OF: Net2Phone, Inc. (Patent No. 6,009,469) Control No.: 90/010,422 Issue Date: December 28, 1999 Title: GRAPHIC USER INTERFACE FOR INTERNET TELEPHONY APPLICATION Attorney Docket:2655-0185Group Art Unit:3992Examiner:KOSOWSKI, AlexanderDate:March 5, 2010Confirmation No.:6565

le exam

INFORMATION DISCLOSURE STATEMENT

Hon. Commissioner of Patents P.O. Box 1450 Alexandria, VA 22313-1450

Sir:

Pursuant to 37 C.F.R. § 1.56, the attention of the Patent and Trademark Office is hereby directed to the reference(s) listed on the attached PTO-1449. One copy of each non-U.S. Patent reference is attached. It is respectfully requested that the information be expressly considered during the prosecution of this application, and that the reference(s) be made of record therein and appear among the "References Cited" on any patent to issue therefrom.

The submission of any document herewith, which is not a statutory bar, is not intended that any such document constitutes prior art against any of the claims of the present application or is considered to be material to patentability as defined in 37 C.F.R. § 1.56(b). Applicants do not waive any rights to take any action which would be appropriate to antedate or otherwise remove as a competent reference against the claims of the present application.

The enclosed CD-ROM includes electronic copies of the help files (.hlp files) filed in the IDS submitted February 24, 2010 (as References 1-3 and 1-5)

In re Application of: Net2Phone, Inc. Control No.: 90/010,422 Information Disclosure Statement dated March 5, 2010 Page 2 of 2

which were inadvertently referred to as ".inf" files in that IDS. The enclosed CD-ROM further includes a copy of the VocalChat GTI installation program (setup.exe) and its corresponding data file (voclchat.001). As described in the Redacted expert reports (References 1-1 and 1-2 of the IDS dated February 24, 2010), the VocalChat GTI software (including the .hlp files and the README.TXT file) is alleged to have been distributed more than one year prior to the effective filing date of this application.

CHARGE STATEMENT: Deposit Account No. 501860, order no. 2655-0185.

The Commissioner is hereby authorized to charge any fee specifically authorized hereafter, or any missing or insufficient fee(s) filed, or asserted to be filed, or which should have been filed herewith or concerning any paper filed hereafter, and which may be required under Rules 16-18 (missing or insufficiencies only) now or hereafter relative to this application and the resulting Official Document under Rule 20, or credit any overpayment, to our Accounting/Order Nos. shown above, for which purpose a <u>duplicate</u> copy of this sheet is attached

This CHARGE STATEMENT <u>does not authorize</u> charge of the <u>issue fee</u> until/unless an issue fee transmittal sheet is filed.

CUSTOMER NUMBER 42624

Davidson Berquist Jackson & Gowdey LLP 4300 Wilson Blvd., 7th Floor, Arlington Virginia 22203 Main: (703) 894-6400 • FAX: (703) 894-6430 Respectfully submitted,

By:

Michael R. Casey, Ph.D. (Reg. No.: 40,294)

RECEIVED

NAX 0 5 2010

CENTRAL REEXFLorid Anton U.IT	Reexam number	90/010,422
INFORMATION DISCLOSURE STATEMENT BY APPLICANT FORM PTO-1449 (modified)	First Named Inventor	Mattaway et al.
	Patent Under Re-Exam	6009469
	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 1 of 1	Confirmation No.	6565

NON-PATENT REFERENCES			
Cite No.	Non-patent Reference bibliographic information, where available	Notes	
1-1	CD-ROM including VocalChat GTI Version 2.12 Software (including .hlp files and README.TXT file), alleged to be dated September, 1994		
1-2			
1-3			
1-4			
1-5			
1-6			
1-7			
	No. 1-1 1-2 1-3 1-4 1-5 1-6	Cite No. Non-patent Reference bibliographic information, where available 1-1 CD-ROM including VocalChat GTI Version 2.12 Software (including .hlp files and README.TXT file), alleged to be dated September, 1994 1-2	

Examiner Signature	Date Considered	

In re PATENT APPLICATION OF: Net2Phone, Inc. (Patent No. 6,009,469) Control No.: 90/010,422 Issue Date: December 28, 1999 Title: GRAPHIC USER INTERFACE FOR INTERNET TELEPHONY APPLICATION Attorney Docket: 2655-0185 Group Art Unit: 3992 Examiner: KOSOWSKI, Alexander Date: March 5, 2010 Confirmation No.: 6565

TRANSMITTAL LETTER

This compact disc is in the IBM-PC format and compatible with MS-Windows-based systems. The files contained on the compact disc are:

File Date	File Time	File Size (bytes)	File Name
03/05/2010	02:47 PM	574	files.txt
02/02/2010	11:28 AM	23,886	info.hlp
03/05/2010	01:55 PM	1,517	README.TXT
03/05/2010	01:55 PM	233,282	setup.exe
02/02/2010	11:28 AM	125,066	trouble.hlp
03/05/2010	01:55 PM	885,233	VOCLCHAT.001

The text of this file is contained in the file: files.txt.

CUSTOMER NUMBER 42624

Respectfully submitted,

Mahad (C By:

Michael R. Casey, Ph.D. (Reg. No.: 40,294)

Davidson Berquist Jackson & Gowdey LLP 4300 Wilson Blvd., 7th Floor, Arlington Virginia 22203 Main: (703) 894-6400 • FAX: (703) 894-6430

ARTIFACT SHEET

Enter artifact number below. Artifact number is application number + artifact type code (see list below) + sequential letter (A, B, C ...). The first artifact folder for an artifact type receives the letter A, the second B, etc.. Examples: 59123456PA, 59123456PB, 59123456ZA, 59123456ZB fa

Indicate quantity of a single type of artifact received but not scanned. Create individual artifact folder/box and artifact number for each Artifact Type.

/	
V	CD(s) containing:
· · ·	computer program listingImage: ComputerDoc Code: ComputerArtifact Type Code: Ppages of specificationArtifact Type Code: P
	and/or sequence listing and/or table
	Doc Code: Artifact Artifact Type Code: S content unspecified or combined
	Doc Code: Artifact Artifact Type Code: U
	Stapled Set(s) Color Documents or B/W Photographs Doc Code: Artifact Artifact Type Code: C
	Microfilm(s) Doc Code: Artifact Artifact Type Code: F
	Video tape(s) Doc Code: Artifact Artifact Type Code: V
	Model(s) Doc Code: Artifact Artifact Type Code: M
	Bound Document(s) Doc Code: Artifact Artifact Type Code: B
· .	Confidential Information Disclosure Statement or Other Documents marked Proprietary, Trade Secrets, Subject to Protective Order,
	Material Submitted under MPEP 724.02, etc. Doc Code: Artifact Artifact Type Code X
	Other, description: Doc Code: Artifact Artifact Type Code: Z
	Thatact Type Coue. Z

March 8, 2004

INFORMATION DISCLOSURE STATEMENT BY APPLICANT FORM PTO-1449 (modified)	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
	Patent Under Re-Exam	6009469
	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 1 of 1	Confirmation No.	6565

NON-PATENT REFERENCES				
Examiner Initials*	Cite No.	Non-patent Reference bibliographic information, where available	Notes	
	1-1	(Redacted) Expert Report of Professor Bruce M. Maggs (as Supplemented Sept. 9, 2008) in Net2Phone v. Skype et al. (Civil Action No. 06-2469-KSH-PS) in DCNJ		
	1-2	(Redacted) Responsive Expert Report of Kevin Jeffay, Ph.D. in Net2Phone v. Skype et al. (Civil Action No. 06-2469-KSH-PS) in DCNJ, Aug. 7, 2008		
	1-3	VocalChat GTI Information file, believed to be included with VocalChat GTI version 2.12 dated September, 1994		
	1-4	VocalChat GTI README.TXT for Version 2.12 Beta, dated September, 1994		
	1-5	VocalChat GTI Troubleshooting.Inf, believed to be included with VocalChat GTI version 2.12 dated September, 1994		
	1-6			
	1-7			

Examiner Signature	Date Considered	

Electronic A	Electronic Acknowledgement Receipt			
EFS ID:	7079480			
Application Number:	90010422			
International Application Number:				
Confirmation Number:	6565			
Title of Invention:	Graphic User Interface For Internet Telephony Application			
First Named Inventor/Applicant Name:	6,009,469			
Customer Number:	42624			
Filer:	Michael R. Casey			
Filer Authorized By:				
Attorney Docket Number:	2655-0185			
Receipt Date:	24-FEB-2010			
Filing Date:	26-FEB-2009			
Time Stamp:	16:07:55			
Application Type:	Reexam (Third Party)			

Payment information:

Submitted with Payment		no				
File Listing:						
Document Number	Document Description		File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Transmittal Letter		20100224 IDS 0185.pdf	122391	no	2
'			20100224_103_0185.pdf	49f6490e571483d99ecdf45f721a5d11923c 3c2c	110	2
Warnings:				· ·		
Information: Cisco - Exhibit 1003 - Page 237						

		Total Files Size (in bytes): 238	14800	
Information					
Warnings:	ΙΙ		1		I
8	Reexam Certificate of Service	20100224_COS_0185.pdf		no	1
Information:			52165		
Warnings:			31dd0b006cf48147ce4ed2f5ce4a54e94b1 5e2bb		
7	NPL Documents	NP0004.pdf	1920797	no	33
Information					
Warnings:	1 1		1		1
6	NPL Documents	NP0003.pdf	31729 3c3fa76b6f608e01672697686901d4f92bba cc47	no	2
Information	; []				
Warnings:					
5	NPL Documents	NP0002.pdf	1487bd49cf03d60e47137272cc06b82ff35b f425	no	14
-			459371		14
Information:					
Warnings:			3acb9		
4	NPL Documents	NP0001.pdf	44dba22520e559a2aa39babaa6d2d99f77c	no	379
			19102486		
Information:					
Warnings:			a449a91e441753b8d66cd6c68a2596713f5 6a7e8		
3	NPL Documents	NP0000.pdf	1979901	no	555
This is not an U	ISPTO supplied IDS fillable form		1 1		1
Information					
Warnings:					•
L	Filed (SB/08)	20100224_1445_0103.pdf	c7f2d9a7f4d5763d818505b3f3af0cb41cf63 26f		
2	Information Disclosure Statement (IDS)	20100224_1449_0185.pdf	145960	no	1

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re PATENT APPLICATION OF: Net2Phone, Inc. (Patent No. 6,009,469) Control No.: 90/010,422 Issue Date: December 28, 1999 Title: GRAPHIC USER INTERFACE FOR INTERNET TELEPHONY APPLICATION Attorney Docket: 2655-0185 Group Art Unit: 3992 Examiner: KOSOWSKI, Alexander Date: February 24, 2010 Confirmation No.: 6565

INFORMATION DISCLOSURE STATEMENT

Hon. Commissioner of Patents P.O. Box 1450 Alexandria, VA 22313-1450

Sir:

Pursuant to 37 C.F.R. § 1.56, the attention of the Patent and Trademark Office is hereby directed to the reference(s) listed on the attached PTO-1449. One copy of each non-U.S. Patent reference is attached. It is respectfully requested that the information be expressly considered during the prosecution of this application, and that the reference(s) be made of record therein and appear among the "References Cited" on any patent to issue therefrom.

The submission of any document herewith, which is not a statutory bar, is not intended that any such document constitutes prior art against any of the claims of the present application or is considered to be material to patentability as defined in 37 C.F.R. § 1.56(b). Applicants do not waive any rights to take any action which would be appropriate to antedate or otherwise remove as a competent reference against the claims of the present application.

It is noted that References 1-1 and 1-2 are Redacted expert reports. Those reports have been redacted to protect third party confidential information.

In re Application of: Net2Phone, Inc. Control No.: 90/010,422 Information Disclosure Statement dated February 24, 2010 Page 2 of 2

References 1-3 and 1-5 are printed copies of ".inf" files that are alleged to have been distributed with the VocalChat GTI version 2.12 Beta which is referenced in Reference 1-4.

CHARGE STATEMENT: Deposit Account No. 501860, order no. 2655-0185.

The Commissioner is hereby authorized to charge any fee specifically authorized hereafter, or any missing or insufficient fee(s) filed, or asserted to be filed, or which should have been filed herewith or concerning any paper filed hereafter, and which may be required under Rules 16-18 (<u>missing or insufficiencies only</u>) now or hereafter relative to this application and the resulting Official Document under Rule 20, or credit any overpayment, to our Accounting/Order Nos. shown above, for which purpose a <u>duplicate</u> copy of this sheet is attached

This CHARGE STATEMENT <u>does not authorize</u> charge of the <u>issue fee</u> until/unless an issue fee transmittal sheet is filed.

CUSTOMER NUMBER	Respectfully submitted,
42624	
Davidson Berquist Jackson & Gowdey LLP 4300 Wilson Blvd., 7th Floor,	By: /Michael R. Casey /
Arlington Virginia 22203 Main: (703) 894-6400 • FAX: (703) 894-6430	Michael R. Casey, Ph.D. (Reg. No.: 40,294)

	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
INFORMATION DISCLOSURE	Patent Under Re-Exam	6009469
STATEMENT BY APPLICANT FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 1 of 4	Confirmation No.	6565

NON-PATENT REFERENCES			
Examiner Initials*	Cite No.	Non-patent Reference bibliographic information, where available	Notes
	1-1	David STROM, "Talking Telephony", Windows Sources, Ziff-Davis Publishing Company, September 1996, Vol. 4, No. 9, pages 6, 7, 10, 150-152, 157, 158, 163, 167, 169, 171, 174, 181, 184, 186, 195, 203, 208.	
	1-2	Deposition transcript of Andrew Green (dated Aug. December 30, 2008) in Net2Phone v. Skype et al. (Civil Action No. 06-2469-KSH-PS) in DCNJ	
	1-3	Deposition transcript of Daniel Mayer (dated Aug. 26, 2008) in Net2Phone v. Skype et al. (Civil Action No. 06-2469-KSH-PS) in DCNJ	
	1-4	Deposition transcript of Daniel Zwanziger (dated July 9, 2008) in Net2Phone v. Skype et al. (Civil Action No. 06-2469-KSH-PS) in DCNJ	
	1-5	Deposition transcript of expert Bruce Maggs (dated May 30, 2008) in Net2Phone v. Skype et al. (Civil Action No. 06-2469-KSH-PS) in DCNJ	
	1-6	Deposition transcript of expert Kevin Jeffay (dated May 20, 2008) in Net2Phone v. Skype et al. (Civil Action No. 06-2469-KSH-PS) in DCNJ	
	1-7	Deposition transcript of expert Stephen Kunin (dated June 3, 2008) in Net2Phone v. Skype et al. (Civil Action No. 06-2469-KSH-PS) in DCNJ	

Examiner	Date	
Signature	Considered	

	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
INFORMATION DISCLOSURE	Patent Under Re-Exam	6009469
STATEMENT BY APPLICANT FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 2 of 4	Confirmation No.	6565

NON-PATENT REFERENCES			
Examiner Initials*	Cite No	Non-patent Reference bibliographic information, where available	Notes
	2-1	Deposition transcript of former Tribal Voice employee and PowWow designer Paul Peterson (dated Apr. 9, 2008) in Net2Phone v. Skype et al. (Civil Action No. 06- 2469-KSH-PS) in DCNJ	
	2-2	Deposition transcript of former VocalTec employee Alon Cohen (dated Mar. 11, 2008) in Net2Phone v. Skype et al. (Civil Action No. 06-2469-KSH-PS) in DCNJ	
	2-3	Deposition transcript of former VocalTec employee Lior Haramaty (dated Mar. 6, 2008) in Net2Phone v. Skype et al. (Civil Action No. 06-2469-KSH-PS) in DCNJ	
	2-4	Deposition transcript of inventor Craig Strickland (dated Sep. 19, 2007) in Net2Phone v. Skype et al. (Civil Action No. 06-2469-KSH-PS) in DCNJ	
	2-5	Deposition transcript of inventor Glenn Hutton (dated Aug. 24, 2007) (vol. 1) in Net2Phone v. Skype et al. (Civil Action No. 06-2469-KSH-PS) in DCNJ	
	2-6	Deposition transcript of inventor Glenn Hutton (dated Aug. 24, 2007) (vol. 2) in Net2Phone v. Skype et al. (Civil Action No. 06-2469-KSH-PS) in DCNJ	
	2-7	Deposition transcript of inventor Shane Mattaway (dated Sep. 10, 2007) (vol. 1) in Net2Phone v. Skype et al. (Civil Action No. 06-2469-KSH-PS) in DCNJ	

	Dete	
Examiner	Date	
Signature	Considered	

INFORMATION DISCLOSURE	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
	Patent Under Re-Exam	6009469
STATEMENT BY APPLICANT FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 3 of 4	Confirmation No.	6565

		NON-PATENT REFERENCES		
Examiner Initials*	Cite Non-patent Reference bibliographic information, where available No.			
	3-1	Deposition transcript of inventor Shane Mattaway (dated Sep. 10, 2007) (vol. 2) in Net2Phone v. Skype et al. (Civil Action No. 06-2469-KSH-PS) in DCNJ		
	3-2	Deposition transcript of prosecuting attorney Bruce Jobse (dated Jan. 1, 2008) in Net2Phone v. Skype et al. (Civil Action No. 06-2469-KSH-PS) in DCNJ		
	3-3	Deposition transcript of Sheldon Glashow (dated July 16, 2008) in Net2Phone v. Skype et al. (Civil Action No. 06-2469-KSH-PS) in DCNJ	-	
	3-4	Emad FARAG et al., "Structure and network control of a hierarchical mobile network architecture", IEEE Fourteenth Annual International Phoenix Conference on Computers and Communications, 03/1995, ISBN: 0-7803-2492-7, pp. 671-677.		
	3-5	English translation of JP-06-62020 (dated 1994-03-04)		
	3-6	Huanxu PAN et al., "Analysis of a CCSS#7 Network supporting database services", IEEE International Conference on Information Engineering, 09/1993, ISBN: 0-7803- 1445-X, pp. 193-197, vol. 1.		
	3-7	John E. GOODWIN, Project Gutenberg Alpha Edition of EMAIL 101, http://metalab.unc.edu/pub/docs/books/gutenberg/etext93/email025.txt, July 1993.		

Examiner Signature	Date Considered	
	l	

	Reexam number	90/010,422
INFORMATION DISCLOSURE STATEMENT BY APPLICANT FORM PTO-1449 (modified)	First Named Inventor	Mattaway et al.
	Patent Under Re-Exam	6009469
	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 4 of 4	Confirmation No.	6565

		NON-PATENT REFERENCES		
Examiner Initials*	Cite Non-patent Reference bibliographic information, where available No.			
	4-1	Junichi Kimura, et al. "Voice/Data Multiplexing Transmission Methods", Kokai Japanese Patent, Kokai Sho 59-44140, pages 205-215, with English Abstract, English Translation, pages 1-24		
	4-2	Mark R. BROWN et al. "Special Edition: Using Netscape 2", Que Publishing, 1995, ISBN 0-7897-0612-1, pages 7-35, 37-56, 78, 83, 176, 301-320, 393, 395-467, 469- 506.		
	4-3	Preston GRALLA, "How the Internet Works", Ziff-Davis Press, Emeryville, CA, c1997, pp. 34-37, 202-205, 214-215 and 272-275, ISBN 1-56276-552-3.		
	4-4			
	4-5			
	4-6			
	4-7			

Examiner Signature	Date Considered	

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re PATENT APPLICATION OF: Net2Phone, Inc. (Patent No. 6,009,469) Control No.: 90/010,422 Issue Date: December 28, 1999 Title: GRAPHIC USER INTERFACE FOR INTERNET TELEPHONY APPLICATION Attorney Docket: 2655-0185 Group Art Unit: 3992 Examiner: KOSOWSKI, Alexander Date: January 26, 2010 Confirmation No.: 6565

INFORMATION DISCLOSURE STATEMENT

Hon. Commissioner of Patents P.O. Box 1450 Alexandria, VA 22313-1450

Sir:

Pursuant to 37 C.F.R. § 1.56, the attention of the Patent and Trademark Office is hereby directed to the reference(s) listed on the attached PTO-1449. One copy of each non-U.S. Patent reference is attached. It is respectfully requested that the information be expressly considered during the prosecution of this application, and that the reference(s) be made of record therein and appear among the "References Cited" on any patent to issue therefrom.

The submission of any document herewith, which is not a statutory bar, is not intended that any such document constitutes prior art against any of the claims of the present application or is considered to be material to patentability as defined in 37 C.F.R. § 1.56(b). Applicants do not waive any rights to take any action which would be appropriate to antedate or otherwise remove as a competent reference against the claims of the present application. In re Application of: Net2Phone, Inc. Control No.: 90/010,422 Information Disclosure Statement dated January 26, 2010 Page 2 of 2

CHARGE STATEMENT: Deposit Account No. 501860, order no. 2655-0185.

The Commissioner is hereby authorized to charge any fee specifically authorized hereafter, or any missing or insufficient fee(s) filed, or asserted to be filed, or which should have been filed herewith or concerning any paper filed hereafter, and which may be required under Rules 16-18 (<u>missing or insufficiencies only</u>) now or hereafter relative to this application and the resulting Official Document under Rule 20, or credit any overpayment, to our Accounting/Order Nos. shown above, for which purpose a <u>duplicate</u> copy of this sheet is attached

This CHARGE STATEMENT <u>does not authorize</u> charge of the <u>issue fee</u> until/unless an issue fee transmittal sheet is filed.

CUSTOMER NUMBER	Respectfully submitted,
42624	
Davidson Berquist Jackson & Gowdey LLP 4300 Wilson Blvd., 7th Floor,	By: /Michael R. Casey /
Arlington Virginia 22203 Main: (703) 894-6400 • FAX: (703) 894-6430	Michael R. Casey, Ph.D. (Reg. No.: 40,294)

Electronic Acknowledgement Receipt				
EFS ID:	6885471			
Application Number:	90010422			
International Application Number:				
Confirmation Number:	6565			
Title of Invention:	Graphic User Interface For Internet Telephony Application			
First Named Inventor/Applicant Name:	6,009,469			
Customer Number:	42624			
Filer:	Michael R. Casey			
Filer Authorized By:				
Attorney Docket Number:	2655-0185			
Receipt Date:	26-JAN-2010			
Filing Date:	26-FEB-2009			
Time Stamp:	17:35:47			
Application Type:	Reexam (Third Party)			

Payment information:

Submitted with Payment		no				
File Listin	g:					
Document Number	Document Description		File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Information Disclosure Statement (IDS)	20100126 1449 0185.pdf	668401	no	4	
·	Filed (SB/08)			52f6d48c011ffa9f4abab202e113e9d0d266 6507		·
Warnings:						
Information: Cisco - Exhibit 1003 - Page 248				48		

This is not an USP	TO supplied IDS fillable form				
	Reexam Certificate of Service		51646		
2		20100126_COS_0185.pdf	f6c1b8a67b9288bbd10f298f26ade744b9c ba193	no	1
Warnings:		1	ч I		
Information:					
			119510		
3	Transmittal Letter	20100126_IDS_0185.pdf	b0a2874f2d50adff1750a119ac5a156c4e55 500e	no	2
Warnings:		1		I	
Information:					
			2849230		21
4	NPL Documents	NP0000.pdf	f6cf70ebc7a75070c48a444ce952700a97947 0617	no	21
Warnings:		1	1	I	
Information:					
_			324894	no	
5	NPL Documents	NP0001.pdf	0d4e7d18798d0547ab9f7217bf438d32d4a ca151		165
Warnings:		1		I	
Information:					
	NPL Documents	NP0002.pdf	158137	no	
6			9d019ba52ea92885a4de182f30a26e83407 97d17		76
Warnings:		1	1	I	
Information:					
			197976		
7	NPL Documents	NP0003.pdf	e77951235711e2e7a11a53c2103667cbcc8 7ee4b	no	97
Warnings:			1	I	
- Information:					
			536699		
8	NPL Documents	NP0004.pdf	a5f42c11f6a61da6ed373eb9beeafc8b1cdb e410	no	296
Warnings:					
- Information:					
			538883		
9	NPL Documents	NP0005.pdf	775254c12e40277ca609e2e4917ac30603d	no	310
Warnings:		1	df7e1		
Information:					
		NP0006.pdf	143967		
10	NPL Documents		8dd5cd21d27fba7687f0157d2f1e035809b 8f680	no	30
		1	Cisco - Exhibit 100	 3 - Page 2	<u>4</u> 9

Warnings:					
Information:					
11	NPL Documents	NP0007.pdf	234922	no	123
			c54976a90b5f782a7b5261f39abf45e67de3 0392		
Warnings:					
Information:		1			
12	NPL Documents	NP0008.pdf	243217	no	120
			de51ab6bd3717584d8f259603d52b1b9fc1 b5a20		
Warnings:					
Information:		1			
13	NPL Documents	NP0009.pdf	191407	no	89
			64f22007d6f00c2d952572a5ee4bf8103cd9 ed69		
Warnings:					
Information:					
14	NPL Documents	NP0010.pdf	406575	no	216
			d5366a0e76b1b131fe8398023425bc00052 85cc3	110	210
Warnings:					
Information:					
15	NPL Documents	NP0011.pdf	293003	no	153
			11de56d0b56cef5be91de574e37335118ec e03bc		
Warnings:					
Information:					
16		NP0012.pdf	356895	no	194
10	NPL Documents	Ni oo iz.pui	f67059d2ddaef30cb87335cdc8f819a30f55f bb3	110	194
Warnings:		÷	· ·		
Information:					
17	NPL Documents	ND0012 mdf	341088		177
17	NPL Documents	NP0013.pdf	ddb8b7e2ed765fd5b656445eddc36b9b3e 3cb689	no	177
Warnings:		·	· · ·	•	
Information:					
			237011		11.0
18	NPL Documents	NP0014.pdf	e6bc987cfb2c3e70586f860117cb5267e9ed 47a0	no	116
Warnings:		1	<u> </u>	I	
Information:					
10			390203		
19	NPL Documents	NP0015.pdf		no	225

Warnings:					
Information:					
20	NPL Documents	NP0016.pdf	246519	no	122
			7dbb73e5f0bbdfa6ca112d1b438a981bd59 187d9		
Warnings:					
Information:		1			
21	NPL Documents	NP0017.pdf	557280	no	8
			bd59240ef179ad7b550b46e2e3e6987533e de89c		
Warnings:					
Information:					
22	NPL Documents	NP0018.pdf	488130	no	28
			b78dc26c39396504962862c2554d073552d b1348		
Warnings:					
Information:					
23	NPL Documents	NP0019.pdf	381732	no	5
25			bf2b1d0ed5f2043102da896eb14363c17bb 22de6	10	
Warnings:		·	· · ·		
Information:					
24	NPL Documents	NP0020.pdf	2436121	no	44
24			78a7093d4c52334980555bdffd13ec7fa3291 5ed7		
Warnings:		1			
Information:					
25		ND0007 K	1315455		26
25	NPL Documents	NP0021.pdf	0599b13abf1c7fc807f2612c5d47eaf88fcf78 d6	no	36
Warnings:		1			
Information:					
			12867743		1
26	NPL Documents	NP0022.pdf	1b175ba39ec382d8eb4a37187275a4eff09 9eec8	no	187
Warnings:		1	1		
Information:					
			710975		1
27	NPL Documents	NP0023.pdf	182d26e9f78b2d565d519aadcf049bdd3a9 8a89f	no	5
Warnings:		<u> </u>			
Information:					
		Total Files Size (in by	tes): 2728	37619	

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
INFORMATION DISCLOSURE STATEMENT BY APPLICANT	Patent Under Re-Exam	6009469
FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 1 of 10	Confirmation No.	6565

			FOREIGN PATENT	DOCUMENTS	
Examiner Initials*	Cite No.	Document No.	Publication Date	Name of Patentee or Applicant of Cited Document	Notes
	1-1	WO-9003074	03-22-1990	LE CLERCQ, Patrick	
	1-2				
	1-3				
	1-4				
	1-5				
	1-6				
	1-7				
	1-8				
	1-9				
	1-10				
	1-11				
	1-12				
	1-13				
	1-14				
	1-15				
	1-16				
	1-17				
	1-18				
	1-19				
	1-20				
	1-21				
	1-22				
	1-23				
	1-24				

Examiner Signature	Date Considered	

	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
INFORMATION DISCLOSURE STATEMENT BY APPLICANT	Patent Under Re-Exam	6009469
FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 2 of 10	Confirmation No.	6565

	NON-PATENT REFERENCES	
Cite No.	Non-patent Reference bibliographic information, where available	Notes
2-1	About NetPhone (undated)	
2-2	After Downsizing: Overcoming Client-Server Chaos (May 21, 1994)	
2-3	Barrow Street Research report on New Paradigm Software Corp. (dated sep. 20, 1995)	
2-4	Camelot 10-Q for quarter ending January 31, 1995	
2-5	Camelot Corporation 10-K, 1994	
2-6	Camelot Corps Shining Internet Dream Draws Skeptics (Aug. 95)	
2-7	Completed Beta Tester Agreements (May 1995)	
	No. 2-1 2-2 2-3 2-4 2-5 2-6	Cite No.Non-patent Reference bibliographic information, where available2-1About NetPhone (undated)2-2After Downsizing: Overcoming Client-Server Chaos (May 21, 1994)2-3Barrow Street Research report on New Paradigm Software Corp. (dated sep. 20, 1995)2-4Camelot 10-Q for quarter ending January 31, 19952-5Camelot Corporation 10-K, 19942-6Camelot Corps Shining Internet Dream Draws Skeptics (Aug. 95)

Examiner Signature	Date Considered	

	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
INFORMATION DISCLOSURE STATEMENT BY APPLICANT	Patent Under Re-Exam	6009469
FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 3 of 10	Confirmation No.	6565

	NON-PATENT REFERENCES	
Cite No.	Non-patent Reference bibliographic information, where available	Notes
3-1	Correspondence with MacZone (AugSept. 1995)	
3-2	DigiPhone and Camelot Documents	
3-3	DigiPhone Documents (including Q and A) (prior to Sept. 1995)	
3-4	DigiPhone Documents (prior to Sept. 1995)	
3-5	DigiPhone for Mac (1996)	
3-6	Electric Magic and Jabra Correspondence relating to new products (prior to 9/1995)	
3-7	Electric Magic and PSINet License Negotiation Documentation (prior to Sept. 1995)	
	No. 3-1 3-2 3-3 3-4 3-5 3-6	Cite No.Non-patent Reference bibliographic information, where available3-1Correspondence with MacZone (AugSept. 1995)3-2DigiPhone and Camelot Documents3-3DigiPhone Documents (including Q and A) (prior to Sept. 1995)3-4DigiPhone Documents (prior to Sept. 1995)3-5DigiPhone for Mac (1996)3-6Electric Magic and Jabra Correspondence relating to new products (prior to 9/1995)

Examiner Signature	Date Considered	

	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
INFORMATION DISCLOSURE STATEMENT BY APPLICANT	Patent Under Re-Exam	6009469
FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 4 of 10	Confirmation No.	6565

		NON-PATENT REFERENCES	
Examiner Initials*	Cite No.	Non-patent Reference bibliographic information, where available	Notes
	4-1	Electric Magic Beta Tester Agreement dated July 21, 1995 (SKYPE-N2P01609523)	
	4-2	Electric Magic Company Releases NetPhone 1.2 and NetPub Server (dated June 8, 1995)	
	4-3	Electric Magic Information (May 1995)	
	4-4	Electric Magic Notebooks (prior to Sept. 1995)	
	4-5	Electric Magic Notes (including references to 4/18/95) and patent pending	
	4-6	Electric Magic Notes (including references to DigiPhone) (prior to Sept. 1995)	
	4-7	Electric Magic Notes (undated)	

|--|

	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
INFORMATION DISCLOSURE STATEMENT BY APPLICANT	Patent Under Re-Exam	6009469
FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 5 of 10	Confirmation No.	6565

	NON-PATENT REFERENCES		
Examiner Initials*	Cite No.	Non-patent Reference bibliographic information, where available	Notes
	5-1	Electric Magic Press Release (dated Mar. 13, 1995)	
	5-2	ElectricMagic and WebKat Licensing Documents (Sept. 1995 and prior)	
	5-3	E-mail dated May 9, 1995 re NetPhone Development with Jabra R/D	
	5-4	Fax dated 5/31/95 to IVP including press releases	
	5-5	Google Groups comp.dcom.videoconf posting (dated Jul. 5, 1995)	
	5-6	intern.tex (dated Aug. 30, 1994)	
	5-7	Jabra - Corporate and Product Backgrounder (April 19, 1995)	

Examiner Signature	Date Considered	
-----------------------	--------------------	--

	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
INFORMATION DISCLOSURE STATEMENT BY APPLICANT	Patent Under Re-Exam	6009469
FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 6 of 10	Confirmation No.	6565

	NON-PATENT REFERENCES		
Examiner Initials*	Cite No.	Non-patent Reference bibliographic information, where available	Notes
	6-1	Jabra Ear Phone Common Questions and Answers	
	6-2	Jabra Ear phone PC, 1995	
	6-3	Jabra Streamline Ear Phone, 1993	
	6-4	Letter of Intent including target dates (dated 19 Sept 95) (7 pgs)	
	6-5	List of source modules in NetPhone (dated Oct. 10, 1995)	
	6-6	MagicPhone Distribution Agreement (Aug. 1995)	
	6-7	Maven README (including 1994 copyright notice)	
	6-7	Maven README (including 1994 copyright notice)	

Examiner	Date
Signature	Considered

	Reexam number	90/010,422
INFORMATION DISCLOSURE STATEMENT BY APPLICANT FORM PTO-1449 (modified)	First Named Inventor	Mattaway et al.
	Patent Under Re-Exam	6009469
	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 7 of 10	Confirmation No.	6565

Examiner Initials*	Cite No.	Non-patent Reference bibliographic information, where available	Notes
	7-1	Net as Phone (Internet World July 1995)	
	7-2	NET phone ad (with Jabra fax line) (May 95)	
	7-3	NetPhone 1.1 User Manual (including date 95-01-09)	
	7-4	NetPhone Advertisement (Aug. 1995)	
	7-5	NetPhone Correspondence (JunJuly 1995)	
	7-6	NetPhone Development Plan (SKYPE-N2P01610487)	
	7-7	NetPhone Development Plan with time charts (including reference to 5/9/1995)	

Examiner Signature	Date Considered	

	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
INFORMATION DISCLOSURE	Patent Under Re-Exam	6009469
STATEMENT BY APPLICANT FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 8 of 10	Confirmation No.	6565

NON-PATENT REFERENCES			
Examiner Initials*	Cite No.	Non-patent Reference bibliographic information, where available	Notes
	8-1	NetPhone Digital User Manual (dated 95-02-26)	
	8-2	NetPhone gives your Mac voice over the Internet (Inside the Internet - June 1995)	
	8-3	Netphone invoices (including invoices prior to 9/1995)	
	8-4	NetPhone Make Free Calls over the Internet (undated)	
	8-5	NetPhone Screenshots (undated)	
	8-6	NetPhone Tasks and Plans (dated JanFeb. 1995)	
	8-7	New Paradigm Software Agreement (dated Oct. 9, 1995) referencing existing software as of that date	

Examiner Signature	Date Considered	

INFORMATION DISCLOSURE STATEMENT BY APPLICANT FORM PTO-1449 (modified)	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
	Patent Under Re-Exam	6009469
	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 9 of 10	Confirmation No.	6565

	NON-PATENT REFERENCES				
Examiner Initials*	niner Cite Non-patent Reference bibliographic information, where available ls* No.				
	9-1	Open Systems Today, Feb. 20, 1995			
	9-2	Order for NetPhone version 1.2 labels (dated 6 June 95)			
	9-3	Phoneless Phoning April 2, 1995			
	9-4	PowWow Chunked Protocol Specification, Last edited 3/12/1999			
	9-5	PowWow Native Protocols, last updated Dec. 8, 1998			
	9-6	Roadmap for the Internet (March 1995)			
	9-7	SlipMagic Ad for MacZone (dated 9/28/1995) for selling product			
	9-7	SlipMagic Ad for MacZone (dated 9/28/1995) for selling product			

Examiner	Date
Signature	Considered

	Reexam number	90/010,422
INFORMATION DISCLOSURE	First Named Inventor	Mattaway et al.
	Patent Under Re-Exam	6009469
	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 10 of 10	Confirmation No.	6565

		
Cite No.	Non-patent Reference bibliographic information, where available	Notes
10-1	The Mac Zone (Catalog) dated 1995	
10-2	Two-way voice calls over the Internet (11/21/94)	
10-3	Ubique documents relating to Virtual Places Products (dated 1995 and March, 1995)	
10-4	Ubique Ships Virtual Places Client and Server (dated March 20, 1995)	
10-5	Ubique, Ltd. Fact Sheet (referencing NetPhone codecs and Vocaltec) (date unknown)	
10-6	Undated Technical document	
10-7	Welcome to NetPhone Demo (includes copyright date 1994)	
	No. 10-1 10-2 10-3 10-4 10-5 10-6	No. Image: An analysis of the state o

Examiner Signature	Date Considered	
Signature	Considered	



ORGANISATION MONDIALE DE LA PROPRIETE INTELLECTUELLE Bureau international



DEMANDE INTERNATIONALE PUBLIEE EN VERTU DU TRAITE DE COOPERATION EN MATIERE DE BREVETS (PCT)

(51) Classification internationale des brevets ⁴ :	Al	(11) Numéro de publication internationale: WO 90/03074
H04L 11/20, H04M 11/08	23.1	(43) Date de publication internationale: 22 mars 1990 (22.03.90
(21) Numéro de la demande internationale : PCT/E (22) Date de dépôt international : 6 septembre 1988	(06.09.)	 péen), CH (brevet européen), DE (brevet européen), FI (brevet européen), GB (brevet européen), IT (brevet européen), JP, LU (brevet européen), NL (brevet européen), SE (brevet européen), US.
(71) Déposant (pour tous les Etats désignés sauf US): CA S.A. [LU/LU]; 40, boulevard Joseph II, L-184 bourg (LU).	APRICO 40 Luxe	M m- Publiée Avec rapport de recherche internationale.
 (72) Inventeur; et (75) Inventeur/Déposant (US seulement) : LE CLERC [BE/BE]; 381, avenue de la Forêt-de-Soigne Rhode-Saint-Genèse (BE). 	Q, Patri s, B-16	ck 40
(74) Mandataires: VANDERPERRE, Robert etc. ; Bu der Haeghen, 63, avenue de la Toison d'O Bruxelles (BE).	ireau Va br, B-10	m- 60
(54) THE: SYSTEM FOR THE AUTOMATIC NOT	IFICA	TION OF MESSAGE RECEPTION IN AN ELECTRONIC ME

(54) Titre: SYSTEME D'AVERTISSEMENT AUTOMATIQUE DE LA RECEPTION DE MESSAGES DANS UN SYS-TEME DE MESSAGERIE ELECTRONIQUE

(57) Abstract

SAGING SYSTEM

A microprocessor (12) is connected to the electronic messaging system for receiving the information identifying the messages in stand-by. A random access memory (16) is organized so as

To initiation identifying the inclusion of the term of term of term of the term of term of term of term of the term of te

(57) Abrégé

Un microprocesseur (12) est relié au système de messagerie électronique pour recevoir les informations qui identifient les messages en attente et une mémoire vive (16) est organisée pour constituer un fichier (FIL) contenant des codes $(u_1, u_2 \dots u_n)$ qui identifient des destinataires de messages prédéterminés et des informations $(n_1, n_2 \dots n_n)$ représentant les numéros de téléphone de ces destinataires. Un modem (17) connecté à une ligne téléphonique (6) est organisé pour extraire les informations de téléphone de ces destinataires. Un modem (17) connecté à une ligne téléphonique (6) est organisé pour extraire les informations de numéros de téléphone des destinataires afin de leur transmettre des signaux d'appel sur la ligne téléphonique. Le microprocesseur (12) est organisé pour lire la file d'attente des messages reçus dans le système de messagerie électronique, pour y détecter la présence des codes d'identification $(u_1, u_2 \dots u_n)$ résidant dans le fichier (FIL), pour extraire du fichier l'information de numéro de téléphone correspondant à chaque code d'identification détecté, et pour donner ordre au modem (17) de composer automatiquement les numéros d'appel correspondants afin de lancer un signal d'appel sur la ligne téléphonique (6) pendant un intervalle de temps prédéterminé.

UNIQUEMENT A TITRE D'INFORMATION

Codes utilisés pour identifier les Etats parties au PCT, sur les pages de couverture des brochures publiant des demandes internationales en vertu du PCT.

AT	Autriche	ES	Espagne	MG	Madagascar
AU	Australie	FI	Frilande	ML.	Mali
B B	Barbade	FR	France	MR	Mauritanie
BE	Belgique	GA	Gabon	MW.	Malawi
BF	Burkina Famo	GB	Royaume-Uni	NL	Pays-Bas
BG	Bulgarie	HU	Hongrie	NO	Norvège
ri Bi	Bénin	11	Italie	80	Roumanic
BR	Brésil	\mathcal{P}	Japon	SD	Soudan
CA	Canada	XP	République populaire démocratique	SE	Suede
CF	République Centraficaine		de Corée	SN	Sénégal
CG	Congo	KR	République de Corée	SU	Union soviétique
СН	Suisse	L	Liechtenstein	TD	Tchad
CM	Cameroun	LK	Sri Lanka	TG	Togo
DE	Allemagne, République fedérale d'	LU	Luxinbourg	LS	Etats-Unis d'Amérique
DK.	Danemark	MC	Monaco		

1

Système d'avertissement automatique de la réception de messages dans un système de messagerie électronique

DESCRIPTION

Description de l'art antérieur

Un système de messagerie électronique tel que le système DISOSS (Distributed Office Support System) de 5 marque IBM assure l'archivage et la distribution automatiques de messages et de documents au sein d'une entreprise ou d'une organisation. Un tel système comprend un ordinateur central sur lequel tourne un logiciel de messagerie électronique, un contrôleur 10 d'écran connecté à l'ordinateur et plusieurs terminaux connectés au contrôleur d'écran. L'arrivée de messages ou documents dans l'ordinateur central est signalée par l'apparition d'une information dans une liste de messages et documents reçus (file d'attente). La file 15 d'attente se trouve transmise en permanence vers les divers terminaux et sur l'écran de ceux-ci, les usagers peuvent consulter la file d'attente et demander la réception d'un message ou consulter un document identifié. Un système de messagerie électronique de ce genre rend de grands services en ce sens qu'il permet notamment d'améliorer l'efficacité du travail administratif, d'améliorer la communication entre décideurs et de réduire l'espace nécessaire pour les archives. Cependant, un tel système ne permet pas d'avertir les

destinataires de messages ou de documents de l'arrivée de ces messages et de ces documents. Il s'agit là d'un désavantage universellement reconnu. La présentation d'un message ou d'un document, en effet, nécessite la consultation régulière sinon permanente de la file d'attente des messages reçus, ce qui peut entraîner des délais dans la réception des messages ou la communication des documents et requiert une surveillance quasi-constante des utilisateurs.

10

5

Résumé de l'invention

L'invention a pour objet un système électronique automatique qui remédie au désavantage évoqué plus haut et assure que les destinataires de messages ou de documents soient avertis automatiquement de l'arrivée de ces messages ou documents. Les particularités caractéristiques du système selon l'invention sont définies dans les revendications ci-annexées.

Un microprocesseur est relié au système de messagerie électronique pour recevoir les informations qui identifient les messages en attente et une mémoire vive 25 est organisée pour constituer un fichier contenant des codes qui identifient des destinataires de messages prédéterminés et des informations représentant les numéros de téléphone de ces destinataires. Un modem connecté à une ligne téléphonique est organisé pour 30 extraire les informations de numéros de téléphone dudit fichier et composer automatiquement les numéros de téléphone des destinataires afin de leur transmettre des signaux d'appel sur la ligne téléphonique. Le microprocesseur est organisé pour lire la file d'at-35 tente des messages reçus dans le système de messa5.

gerie électronique, pour y détecter la présence des codes d'identification résidant dans le fichier, pour extraire du fichier l'information de numéro de téléphone correspondant à chaque code d'identification détecté, et pour donner ordre au modem de composer automatiquement les numéros d'appel correspondants afin de lancer un signal d'appel sur la ligne téléphonique pendant un intervalle de temps prédéterminé.

Le système selon l'invention a pour avantages que les 10 destinataires de messages ou de documents reçus sont avertis immédiatement par téléphone de la réception d'un message ou document qui leur est destiné et que les messages et documents peuvent être réceptionnés plus rapidement par leurs destinataires et cela sans 15 nécessiter de surveillance particulière. De plus, les destinataires peuvent être prévenus non seulement localement par l'intermédiaire d'un réseau téléphonique intérieur mais également à longue distance par l'intermédiaire d'un réseau téléphonique extérieur. Ce 20 système selon l'invention peut également remplacer avec avantage l'utilisation telex en cas d'urgence au sein d'un groupe utilisant un système de messagerie électronique. Enfin, le système selon l'invention est d'un faible coût en matériel et en logiciel. 25

Description des dessins

30 La Fig. 1 représente schématiquement un système de messagerie électronique auquel est intégré un système d'avertissement automatique selon l'invention.

La Fig. 2 représente schématiquement l'architecture 35 générale du système d'avertissement automatique selon l'invention.

La Fig. 3 est un organigramme du processus d'avertissement téléphonique mis en œuvre dans le système selon l'invention.

5

Description d'un mode de réalisation exemplaire

Dans la figure 1 est représenté schématiquement un système de messagerie électronique tel que le système 10 DISOSS. Un système de ce genre comprend un processeur central ou processeur-hôte 1, un contrôleur d'écran 2 et un ensemble de terminaux dont un terminal 4 est représenté. Le processeur-hôte gère la réception et la distribution des messages et documents. La réception d'un message ou document est signalée par l'insertion 15 d'une information dans une liste ou file d'attente (QUEUE). Cette liste d'attente peut être transmise sur la ligne 3 et visualisée sur l'écran de chaque terminal 4 à la demande de l'usager. Un exemple de liste 20 d'attente est reproduit au tableau 1 ci-après.

Tableau 1

25	1	2	3	4 5 6	7 8	9
				, , ,	snor one snor one son date. Out also date late un-	•
	QUEUE				WT DATE	,
					(H:M) (M/D)	
30					332:19 08/03	*
	BXLDIS32	BXLPC2EX	RECP	2008/05	284:13 08/05	284:13
	BXLDIS32	EPSPC1GS	RECP	1008/16	24:46 08/16	24:46

Dans cet exemple, chaque rubrique de la liste d'attente contient la référence de la liste (colonne 1), le code d'identification d'un destinataire (colonne 2), le type de liste d'attente (colonne 3), le nombre đe messages entrés pour le destinataire (colonne 4), le 5 nombre de tentatives de réception des messages (colonne 5), la date et le temps d'attente du premier message entré (colonnes 6 et 7), la date et le temps d'attente du message le plus ancien (colonnes 8 et 9). Lorsqu'un message ou document a été réceptionné par 10 son destinataire, la rubrique correspondante se trouve mise à jour ou effacée selon qu'il reste encore un message à réceptionner par le destinataire en question ou que le dernier message ou document en attente a été réceptionné. Dans ce système connu, chaque usager doit 1.5 consulter la file d'attente et pour cela manipuler le clavier de son terminal pour savoir si un message ou document lui est destiné.

Suivant l'invention, le système décrit ci-dessus est 20 avantageusement complété par un système d'avertissement automatique 10 destiné à avertir automatiquement destinataire d'un message ou d'un document par le téléphone sitôt qu'un tel message ou document est reçu. Le système d'avertissement automatique selon l'in-25 vention est connecté d'une part au contrôleur d'écran 2 au moyen d'un câble coaxial 5 et il est connecté d'autre part à une ligne téléphonique 6 qui peut être reliée à un central téléphonique prive ou a un réseau 30 téléphonique public représenté par le bloc 7.

L'architecture générale du système d'avertissement automatique 10 est représentée schématiquement par blocs à la figure 2. Le câble coaxial 5 est connecté à un circuit de connexion 11 qui sert d'interface avec

le bus 20 reliant entre elles les différentes unités organiques du système. Ces unités sont essentiellement un microprocesseur 12, un écran de contrôle 13 avec son interface 14, une mémoire ROM de grande capacité 15 pour stocker les programmes de commande, une mémoire vive 16 pour constituer un fichier comme on le verra plus loin, et un circuit modem 17 dont la fonc-

Le microprocesseur 12 est un dispositif bien connu en soi, qui peut être réalisé dans divers modes d'exécution relevant de la compétence normale de l'homme de l'art pour exécuter différentes connexions et tâches fonctionnelles sous la direction de signaux de commande prévus dans un programme d'opération enregistré dans la mémoire morte 15. Celle-ci a par exemple une

capacité d'au moins 10 MB (mégabytes ou méga-octets).

tion sera décrite ultérieurement.

Suivant l'invention, on attribue un code particulier à 20 chaque destinataire pour lequel un avertissement automatique est demandé et dans la mémoire vive 16 est constitué un fichier d'avertissement FIL. Les codes de destinataires sont appelés dans la suite codes u₁, u₂ ... u_n. Dans le fichier FIL sont enregistrés les codes u₁, u₂ ... u_n identifiant les destinataires et pour 25 chaque code, des données numériques n₁, n₂ ··· n_n représentant le numéro de téléphone du destinataire ainsi que des données t₁, t₂ ... t_n représentant des paramètres de transmission pour chaque appel télépho-30 nique ainsi qu'on le verra plus loin. Les numéros de téléphone peuvent être des numéros d'extension dans un réseau intérieur d'un groupe, des numéros d'appel d'une zone téléphonique locale ou des numéros d'appel interzonal ou à longue distance. Le modem 17 est un dispositif connu en soi, organisé pour composer auto-35

- ¹

matiquement des numéros de téléphone à partir de données numériques et produire des signaux propres à la transmission sur la ligne téléphonique 6.

5 Le système d'avertissement automatique selon l'invention fonctionne sous la direction du microprocesseur 12 animé ou organisé par un système de commande résidant dans la mémoire 15. Le fonctionnement du système selon l'invention est illustré par l'organigramme de la figure 3.

Après démarrage du système (étape 100), la première étape du fonctionnement (étape 101) consiste à établir la liaison avec le processeur-hôte 1 du système de 15 messagerie électronique par l'intermédiaire du câble 3. Le microprocesseur 12 commande ensuite l'envoi au processeur-hôte 1 d'un signal de requête REQ demandant la présentation des codes d'identification des messages en attente (étape 102). En réponse au signal de 20 requête REQ, le processeur-hôte l envoie les codes d'identification de destinataires figurant dans la liste d'attente QUEUE et le microprocesseur 12 en commande l'affichage sur l'écran de contrôle 14.

Le microprocesseur 12 commande alors la lecture 25 đu contenu du fichier FIL résidant dans la mémoire 16 et la comparaison de chaque code d'identification u1, u, ... un du fichier FIL avec les codes d'identification de la liste d'attente QUEUE (étape 103). Lorsque celle-ci contient un code correspondant à un des codes 30 u₁, u₂... u_n du fichier FIL, le microprocesseur 12 commande la production d'un signal d'adresse ADR pour adresser la mémoire 16 et extraire du fichier FIL les informations n, représentant le numéro d'appel du 35 destinataire identifié et les données paramétriques t.

précédemment mentionnées. Ces données servent à fixer les modalités ou conditions de transmission des signaux d'appel sur la ligne téléphonique 6. On peut par exemple fixer la durée de l'appel téléphonique, la tranche horaire durant laquelle l'appel doit être effectué, les jours pendant lesquels un appel peut être effectué, ou d'autres indications éventuelles. Le microprocesseur 12 commande l'affichage de ces informations sur l'écran de contrôle 14 en regard de chaque code d'identification. Sur l'écran de contrôle 14 apparaît par exemple une table du type montré au tableau 2 ci-après.

15

20

25

30

35

10

Tableau 2

		DATE		
the were not one one one and the fill the		dia 200 000 400 are dia are		
BXLPC1DI	4	28/04	2:56	3280
BXLPC1RE	2	28/04	2:56	9145
EPSPC10A	2	27/04	0:25	4302

Dans cette table exemplaire, chaque rubrique contient le code u_i d'un destinataire, le nombre N de messages ou documents reçus pour ce destinataire, la date de réception, la durée t_i (minutes et secondes) fixée pour chaque appel téléphonique, le numéro de téléphone n_i du destinataire. Les informations u_i , t_i et n_i , ainsi qu'il a été dit plus haut, sont extraites du fichier FIL selon l'invention.

Le microprocesseur 12 commande ensuite le transfert des informations numériques n₁, n₂ ... n_n au modem 17 (étape 104) et le modem répond en composant automatiquement le numéro de téléphone et produisant les im-

Cisco - Exhibit 1003 - Page 272

pulsions propres à la transmission sur la ligne téléphonique 6 (étape 105), suivant un processus bien connu dans le domaine de l'art.

5 Après un laps de temps correspondant aux informations paramétriques t, extraites du fichier FIL, le microprocesseur 12 envoie au modem 17 un ordre d'interruption en réponse auquel le modem interrompt la transmission des impulsions sur la ligne téléphonique 6. Le même processus se déroule pour chacun des codes 10 d'identification u1, u2 ... u du fichier FIL. Lorsque tous les codes ont été scrutés (étape 106), le processus de commande se poursuit (ligne 107) en répétant les opérations à partir de l'étape 102 et ce, jusqu'à ce qu'un ordre de fin soit reçu (étape 108). L'affi-15 chage sur l'écran de contrôle 14 est mis à jour automatiquement à intervalles réguliers ajustables.

Grâce au système selon l'invention, les destinataires de messages ou documents reçus dans un système de mes-20 sagerie électronique se trouvent avertis immédiatement par téléphone de la réception des messages et documents qui leur sont destinés. Ces messages et documents peuvent ainsi être réceptionnés très rapidement par leurs destinataires, ce qui accroît avec avantage 25 optimise l'efficacité du système de messagerie et électronique. Il est à remarquer que les destinataires messages et documents peuvent être prévenus aussi de bien localement par l'intermédiaire d'un réseau télé-30 phonique intérieur que par communication téléphonique à longue distance.

Dans un mode de réalisation exemplaire, le système d'avertissement électronique 10 est constitué à partir 35 d'un appareil disponible sur le marché sous l'appella-

10

tion d'ordinateur personnel, par exemple un appareil PC 3270 de marque IBM. Pour pouvoir communiquer, selon l'invention, avec le contrôleur d'écran 2 du système de messagerie électronique, l'ordinateur personnel doit être équipé d'une carte de connexion coaxiale, par exemple la carte d'interface 3270 Adapter de marque IBM. De plus, pour pouvoir convertir les données numériques extraites de la mémoire 16 en signaux propres à être transmis sur la ligne téléphonique 6, l'ordinateur personnel doit être équipé d'une carte modem, par exemple une carte modem de la firme Devlonics Terminals N.V. compatible avec les protocoles de transmission Hayes et CCITT V25bis bien connus de l'homme de l'art.

15

20

10

La mémoire vive de l'ordinateur personnel est utilisée pour contenir le fichier FIL précité et la mémoire morte de l'appareil est utilisée pour mémoriser le système de commande destiné à diriger le processus d'avertissement téléphonique automatique décrit dans ce qui précède. Il suffit de recopier sur disque dur, par exemple, le système de commande d'application enregistré préalablement sur une disquette.

25 Dans ce mode d'exécution exemplaire, dans lequel il est fait usage d'un ordinateur personnel pour réaliser le système selon l'invention, le système d'avertissement entre en liaison opérationnelle avec l'équipement de l'ordinateur personnel par l'intermédiaire de logiciels d'interfaçage, par exemple : le logiciel d'interfaçage DOS 3.30 pour la gestion d'un fichier et le logiciel API pour l'interfaçage avec le logiciel d'application (processus d'avertissement téléphonique) dans le cas d'un ordinateur personnel PC 3270. La liaison entre celui-ci et le système de messagerie

électronique peut s'effectuer au moyen d'un logiciel d'opération Workstation Program 1.00. Tous ces logiciels d'interfaçage, ainsi qu'il est clair pour l'homme de l'art, sont démarrés avant le démarrage du processus d'avertissement téléphonique selon l'invention.

L'homme de l'art reconnaîtra que l'invention n'est nullement limitée au mode d'exécution exemplaire décrit à titre illustratif. Toute variante, modification ou tout agencement équivalent doit être considéré comme compris dans le cadre de l'invention.

10

5

REVENDICATIONS

1. Système d'avertissement automatique de la réception d'un message dans un système de messagerie électronique, comprenant un microprocesseur (12) relié pour recevoir du système de messagerie électronique, les 5 informations identifiant les messages en attente, une mémoire vive (16) organisée pour constituer un fichier (FIL) contenant les codes d'identification (u_1 , u_2 ... u_n) de destinataires de messages prédéterminés et leurs numéros d'appel téléphonique (n₁, n₂ ... n_n), et 10 un circuit modem (17) connecté à une ligne téléphonique (6), ce circuit modem étant agencé et organisé pour convertir les informations d'appel numériques $(n_1, n_2 \dots n_n)$ résidant dans ledit fichier (FIL) en signaux analogiques propres à la transmission sur la 15 ligne téléphonique (6), le microprocesseur (12) étant organisé pour lire la file d'attente des messages (Queue) dans le système de messagerie électronique, pour y détecter la présence de codes d'identification (u1, u2 ... un), pour extraire du fichier (FIL) l'information d'appel numérique correspondant à chaque 20 code d'identification (u_1 , u_2 ... u_n) détecté, et pour donner ordre au circuit modem (17) de composer automatiquement les numéros d'appel correspondants pour leur transmission sur la ligne téléphonique (6).

25

30

2. Système selon la revendication 1, caractérisé en ce que le fichier (FIL) constitué dans la mémoire vive (16) contient en outre pour chaque numéro d'appel enregistré, des données fixant la durée de transmission de chaque appel téléphonique et/ou d'autres données de transmission.

Cisco - Exhibit 1003 - Page 276

3. Système selon la revendication 1 ou 2, caractérisé en ce qu'il est organisé pour afficher les données résidant dans le fichier (FIL) sur un écran de contrôle.


5 4. Système selon l'une quelconque des revendications précédentes, caractérisé en ce que la ligne téléphonique (6) est connectée à un central téléphonique privé.

5. Système selon l'une quelconque des revendications
précédentes, caractérisé en ce que la ligne téléphonique que (6) est connectée à un central téléphonique public.


6. Système selon l'une quelconque des revendications
précédentes, caractérisé en ce qu'il est réalisé à partir d'un ordinateur personnel équipé d'une carte de connexion pour la connexion avec la ligne (5) allant vers le contrôleur d'écran (2), et d'une carte modem (17) pour la connexion avec la ligne téléphonique (6),
la mémoire vive de l'ordinateur personnel étant utilisée pour contenir le fichier (FIL) précité et la mémoire morte étant utilisée pour mémoriser le système de commande d'avertissement automatique.

Cisco - Exhibit 1003 - Page 277

,

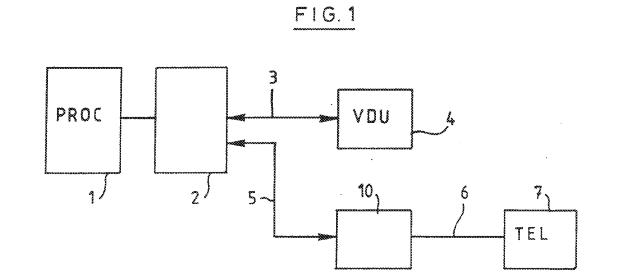

٠

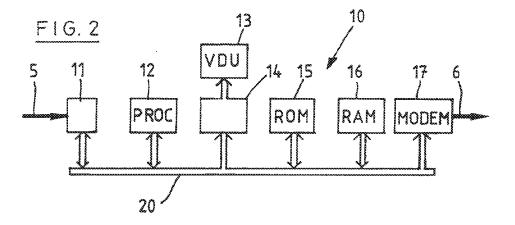

Cisco - Exhibit 1003 - Page 278

.


-9

5

æ

,

2/2

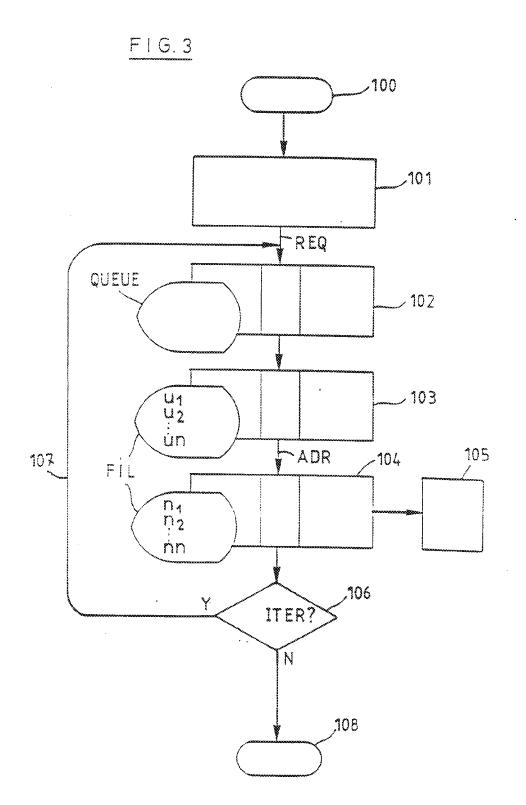

Cisco - Exhibit 1003 - Page 279

INTERNATIONAL SEARCH REPORT

International Application No PCT/EP88/00814

I. CLASSI	FICATION OF SUBJECT MATTER (11 Several class	stfication sympole apply, indicate ally *
	o International Patent Classification (IPC) or to both N	
Int.Cl	L.4 H04L 11/20 ;	H04M 11/08
II. FIELDS	SEARCHED	
		ientation Searched ?
Cisssification	d System	Classification Sympols
Int.Cl	H04L ; H04M	
		r then Minimum Documentation hts are included in the Fields Searched *
	MENTS CONSIDERED TO BE RELEVANT	
Category *	Citation of Document, 11 with indication, where a	ppropriate, of the relevant passages 12 Relevant to Claim No. 13
Y	US,A, 4506111 (TAKENOUCE see column 1, lines 3 lines 47-51; column 4 column 5, lines 9-17, column 6, line 8; col column 9, lines 4-12;	0-45; column 2, , lines 61-65; column 5, line 64- .umn 8, lines 23-28; column 10, lines
A	31-36;COLUMN 12, line	s 42-45;figures 1,5A 2,3,5
Y	IBM Technical Disclosure Nr. 11, April 1985, (N "Beeper-electronic ma paging system", page see the whole documen	ew York, US), il and reminder 6367
X	EP,A, 0087849 (VMX INC) see page 7, lines 13- 5-19 ; page 45, lines lines 16-35; page 66,	28; page 9, lines 19-33; page 54,
	j 1	, ,
"A' so co "E' sa fui "L' ac wi cu "O oc of "P' ac	isi calegones of cited occumants: "C icument defining the general state of the art which is n insidered to be of particular relevance ifter document but published on or after the internation ing date countent which may throw doubts on priority claim(s) inch is used to setablish the sublication date of anoth tation or other special reason iss satchfied) bounent telerring to an oral pisciosure, use, exhibition ner mass ocument published prior to the international filing date s ter finan the priority date claimed	 ¹³¹ "X" document of particular relevance: the claimag invention cannot be considered novel or cannot be considered to involve an inventive step. ¹⁴⁷ "Y" occument of particular relevance: the claimag invention cannot be considered to involve an inventive step when the occument is combined with one or more other such opcu- ments, such combination being obvious to a paragon axilied in the state combination being obvious to a paragon axilied in the state combination being obvious to a paragon axilied
I IV. CER	TIFICATION	
1	ay 1989 (02.05.89)	Date of Mailing of this international Search Report 5 June 1989 (05.06.89)
internati	snal Starthing Authorn) opean Patent Office	Signature of Authonized Office

Form PCT/ISA/210 (Second sheet) (January 1985

×

ð

3

8188657 ×	Creation of Occurrent, with industrian, which successive and some and the successive additional	i Reievant to Claim No
A		4-6
A	Patent Abstracts of Japan, Vol. 9, Nr.325 (E-368)(2048),20 December 1985, & JP,A, 60157363 (FUJITSU K.K.) 17 August 1985 see the whole document	1
A	Patent Abstracts of Japan, Vol. 4, Nr 181 (E-37)(663), 13 December 1980; & JP,A, 55123268 (FUJITSU K.K.) 22 September 1980 see the whole document	1-4
ananan i Karda Angala (
999994 VJJJerenistva 1	- - -	
		1

•

[

Form PCT/ISA/210 (string sheet) Latertary 1985)

ANNEX TO THE INTERNATIONAL SEARCH REPORT ON INTERNATIONAL PATENT APPLICATION NO.

EP 8800814 SA 24136

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on 26/05/89 The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

.2

а,

Patent document cited in search report	Publication date		nt family nber(s)	Publication date
US-A- 4506111	19-03-85	JP-A-	58040965	10-03-83
EP-A- 0087849	07~09~83	US-A- CA-A- EP-A, B US-A- US-A- US-A- US-A- US-A- US-A- US-A-	4371752 1157551 0029938 4581486 4602129 4640991 4585906 4580012 4652700	01-02-83 22-11-83 10-06-81 08-04-86 22-07-86 03-02-87 29-04-86 01-04-86 24-03-87

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

Cisco - Exhibit 1003 - Page 282

PCT/EP 88/00814 Demande internationale N* I. CLASSEMENT DE L'INVENTION (si plusieurs sympoles de classification sont applicables, les indiquer tous)? Selon la classification internationale des prevats (CIB) ou à la fois selon la classification nationale et la CIB CIB⁴: H 04 L 11/20; H 04 M 11/08 II. DOMAINES SUR LESQUELS LA RECHERCHE A PORTE Documentation minimals consultée 8 Symboles de classification Système de classification H 04 L; H 04 M CIB4 Documentation consultée autre que la documentation minimale dans la mesure où de tels documents font partie des domaines sur lesquels la recherche a porté * III. DOCUMENTS CONSIDÉRÉS COMME PERTINENTS " Identification des documents cités, ¹⁷ avec indication, si necessaire. des passages pertinents ¹² Nº des revendications visées '* Categorie *

Ŷ	US,	A, 4506111 (TAKENOU 19 mars 1985 voir colonne 1, lign 2, lignes 47-51; col 65; colonne 5, ligne ligne 64 - colonne 6 8, lignes 23-28; col 12; colonne 10, lign 12, lignes 42-45; fi	nes 30-45; colonne lonne 4, lignes 61- es 9-17, colonne 5, 5, ligne 8; colonne lonne 9, lignes 4- nes 31-36; colonne	1
A				2,3,5
Y	IBM	Technical Disclosure 27, no. 11, avril 19 "Beeper - electronic paging system", page voir le document en	<pre>985, (New York, US), mail and reminder 6367</pre>	1
X	EP,	A, 0087849 (VMX INC. 7 septembre 1983 voir page 7, lignes lignes 5-19; page 45	13-28; page 9,	1-3.
A X A X con con con con con con con con con con	cumant céfin nsidéré comm cumant antér tal ou après cument pouvré ris citation pu cument sa réfi s esposition cumant public	3 de documents cités: ¹³ issant l'état général de la technique, non ne particulierement persinent ieur, meis publié à la date de dépôt interna- cette date ans jeter un doute sur une revendication de pour une raison apaciale (telle qu'indiquée) férant à une divulgation orale, à un usage, à du tous suttes mayons é avant la date de dépôt international, mais a la date de priorité revendiquée	 « T » document ultérieur publié postéri international ou à la date de pri à l'âtat de la technique certinéni, le principe du la théorie constitu « X » document particulièrement perti- quée ne peut être considérés ce impliquent une scivité inventive x 9 » document particulièrement per- diques ne peut être considérés activité inventive loraque le docu plusieurs autres documents de ri naison étant evidente pour une ş 	onte et n'appartenant pas meis cité pour comprendre isni la base de l'invention nent: l'invention revendi- mme nouvelle ou comme timent: l'invention reven- e comme impliquant une iment est essocié a un ou neme neture, cette combi- personne du métier.
	FICATION			
Propuso	i 1989	rche internationale a été effectivement)	Date d'expérition du present rapport de D 5. Ud. 89	recherche internationale
		ce la recherche internationale ROPEEN DES BREVETS	Signature du tenstiognère sutorisé	VAN DER PUTTEN

RAPPORT DE RECHERCHE INTERNATIONALE

Ę.

Ť

si.

2

Demande internationale Nº

PCT/EP 88/00814

III. DOCUME	(SUITE DES RENSEIGNEMENTS INDIQUES SUR LA III. DOCUMENTS CONSIDÉRÉS COMME PERTINENTS DEUXIÈME FEUILLE)					
Catégoria *	identification des documents cités, avec indication, a nécessaire, des passages pertinents	Nº 085 /8v8ndx81ions				
• • *	page 54, lignes 16-35; page 66, lignes 27-31	§				
A		4-6				
A t	Patent Abstracts of Japan, volume 9, no. 325 (E-368)(2048), 20 décembre 1985, & JP, A, 60157363 (FUJITSU K.K.) 17 août 1985 voir le document en entier	. 1				
A	Patent Abstracts of Japan, volume 4, no. 181 (E-37)(663), 13 décembre 1980, & JP, A, 55123268 (FUJITSU K.K.) 22 septembre 1980 voir le document en entier	1,4				
	200 00° 100 100 100 100 100 100					
		i				
	· · ·	:				
*		* * * *				
		2 • •				
<u>ة</u> -		4 44 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4				
:		2 2 2 2 2 2 2 2				
WWwwwwwwwwww						

Formulaire PCT/ISA 210 (leuille additionnelle) (Janvier 1985)

.

-2-

-

ŧ

ţ

ANNEXE AU RAPPORT DE RECHERCHE INTERNATIONALE RELATIF A LA DEMANDE INTERNATIONALE NO.

24136

EP 8800814

SA

La présente annexe indique les membres de la famille de brevets relatifs aux documents brevets cités dans le rapport de recherche internationale visé ci-dessus.

Les dits membres sont contenus au fichier informatique de l'Office européen des brevets à la date du 26/05/89 Les renseignements fournis sont donnes à titre indicatif et n'engagent pas la responsabilité de l'Office europeen des brevets.

Document brevet cité au rapport de recherche	Date de publication		re(s) de la le brevet(s)	Date de publication
US-A- 4506111	19-03-85	JP-A-	58040965	10-03-83
EP-A- 0087849	07-09-83	US-A- CA-A- EP-A, B US-A- US-A- US-A- US-A- US-A- US-A- US-A-	4371752 1157551 0029938 4581486 4602129 4640991 4585906 4580012 4652700	01-02-83 22-11-83 10-06-81 08-04-86 22-07-86 03-02-87 29-04-86 01-04-86 24-03-87

KPG NURM P0472

Ĵ,

¢

3

 \dot{f}_i

Pour tout renseignement concernant cette annexe : voir Journal Officiel de l'Office européen des brevets, No.12/82

Electronic A	Electronic Acknowledgement Receipt				
EFS ID:	6653367				
Application Number:	90010422				
International Application Number:					
Confirmation Number:	6565				
Title of Invention:	Graphic User Interface For Internet Telephony Application				
First Named Inventor/Applicant Name:	6,009,469				
Customer Number:	42624				
Filer:	Michael R. Casey				
Filer Authorized By:					
Attorney Docket Number:	2655-0185				
Receipt Date:	16-DEC-2009				
Filing Date:	26-FEB-2009				
Time Stamp:	23:36:02				
Application Type:	Reexam (Third Party)				

Payment information:

Submitted with Payment		no	no				
File Listing:							
Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)		
1	Transmittal Letter	20091216_IDS_0185.pdf	119502	no	2		
			20f58eb64ebafd84d90087f9e0d139a89894 8c2d				
Warnings:							
Information:			Cisco - Exhibit 10	03 - Page 2	86		

	•		1		
2	Information Disclosure Statement (IDS) Filed (SB/08)	20091216_1449_0185.pdf	1358525	no	10
			a890cffc16800709db1d7c4f01c5d386c421 abe1		
Warnings:					
Information:					
This is not an U	SPTO supplied IDS fillable form				
3	Foreign Reference	F0000.pdf	5776244	no	23
J	, oreign therefore	, coccipan	5db55d4eda8a0d2fd0196df6f864d30cd61 3945d		25
Warnings:					
Information:					
4	NPL Documents	NP0000.pdf	838513	20	12
4	NPL Documents	NP0000.pai	66a00754dc0d285ad4ae2a16eb29ca5535a 7e23e	no	12
Warnings:	I				
Information:					
			1241879	- no	
5	NPL Documents	NP0001.pdf	818dbd15befd8fb98a18d81893660208beb 586e2		10
Warnings:	'		1		
Information:					
		NP0002.pdf	3422190	no	
6	NPL Documents		68898f5dfa25e78fd99ffe3116cd6b41ac1b9 a3c		10
Warnings:	I				
Information:					
		NP0003.pdf	526182	- no	
7	NPL Documents		6f29622e18272de514a8b523c8c558d727e 22251		13
Warnings:			22231		
Information:					
			1007001		
8	NPL Documents	NP0004.pdf	4227094	no	79
			d64e00a142a7bd72a370ba0d27aa633753a fd920		
Warnings:					
Information:					
9	NPL Documents	NP0005.pdf	208083	- no	
			31eca1a7e09cc7b2cc282768acb8614ede8 9ac93		4
Warnings:	Ι		1		
Information:					
			425889		
10	NPL Documents	NP0006.pdf		no	8
			6ae5def5036f84cfae5ffbb37fb62bac02050 75b Cisco - Exhibit 10		

Warnings:					
Information:					
11	NPL Documents NP0007.pdf	NP0007.pdf	302525	no	5
			f3bc0d9816e9f047696df85bb96a21525726 4f6a		
Warnings:					
Information:		1			
12	NPL Documents	NP0008.pdf	1330198	no	6
			2bdf74423abf934b7ca1331c58fd9f6c8f455 60c		
Warnings:					
Information:		1			
13	NPL Documents	NP0009.pdf	833351	no	17
			19ff45b96990ce8af408921cca37030759a5 c19b		
Warnings:					
Information:					
14	NPL Documents	NP0010.pdf	2368381	no	16
			9fa3e3672017796e58e337584fd708dab33 3c69f		
Warnings:					
Information:					
15	NPL Documents	NP0011.pdf	46655	no	1
			097bb5fe01f7fd3f9596a67fcb1f4eae95ed2 cea		
Warnings:			· · · · · ·		
Information:					
16	NPL Documents	NP0012.pdf	3918575	no	63
10		Ni oo iz.pui	42e0839f8342ede5ab6eef591af94e229f58 20c9		63
Warnings:		÷	· · ·		
Information:					
17	NPL Documents	NP0013.pdf	1730069	no	38
17	NPL Documents		ab452329d457eda50aea323e0e225d0ea2c ff95d		
Warnings:		÷	· · ·		
Information:					
	18 NPL Documents	NP0014.pdf	159215	no	4
Ið			439d8fd36ca8c8d9945937caa2e886b48e4 6ff67		
Warnings:				I	
Information:					
10			112236		2
19 NPL Documents	NP0015.pdf		no	2	

Warnings:					
Information:					
20	NPL Documents	NP0016.pdf	746742	no	13
			ee6d3da204e570c757b7a86be06d667d0c d85a89		
Warnings:					
Information:		1			
21	NPL Documents	NP0017.pdf	10192099	no	137
			8bb5837e3483404a7764d5d6129a613537 c04cd6		
Warnings:					
Information:		1			
22	NPL Documents	NP0018.pdf	1252953	no	2
			e46b8e3413a412002c26043b8382cc75ff2d 3ff5		
Warnings:					
Information:					
23	NPL Documents	NP0019.pdf	355718	no	6
			- 89ec17b41322acbb71f1318f061e0c7b7305 28ce		
Warnings:					
Information:					
24	NPL Documents	NP0020.pdf	2283804	no	3
			86055346dfaed7d63f86617a14c5ae674498 2192		
Warnings:					
Information:					
25	NPL Documents	NP0021.pdf	99080	no	2
			fe8c39ed19be2d96019e636e215676703b7 9914a		_
Warnings:					
Information:					
26	NPL Documents	NP0022.pdf	1260193	no	21
20		N 0022.pu	20aafdf94b1c44010bd829d2b76133ca794f 4673	110	21
Warnings:					
Information:					
27	NPL Documents	NP0023.pdf	232340		3
21			2854ffc648d5a38810d8be922f9c18299cf9a 1e2	no	
Warnings:					
Information:					
28	NPI Decuments	NIP0024 add	1118134	20	15
28	NPL Documents	NP0024.pdf	1b7f3@isc@907aExhibitd64@0	no	13

Warnings:					
Information:					
29	NPL Documents	NP0025.pdf	370243	no	7
			4377b41ad1bc96ad25df31dd0ca994ddfbe 63252		
Warnings:					
Information:		I			
30	NPL Documents	NP0026.pdf	625297	no	8
			dfd75e88176ecfdaf9f0dd5b7b72084a1cf7 eb5b		
Warnings:					
Information:		1			
31	NPL Documents	NP0027.pdf	357801	no	9
			9a7f703503864ca9e5b7f7ff34c5f58a5a8cb 037		
Warnings:			I	I	
Information:					
32	NPL Documents		108767	50	2
52	NPL Documents NP0028.pdf		146881bf059f216b875725260702c177b64f 4f5e	no	2
Warnings:			· · ·		
Information:					
33	NPL Documents	NP0029.pdf	51345	no	1
			0e0f4c96aa529db630cae76b8413382fa7f3 332b		
Warnings:					
Information:					
34	NPL Documents	NP0030.pdf	126229	no	2
			361e07da86ba0cb56897ae94e3e404db30 8ddfe1		_
Warnings:			·		
Information:					
35	NPL Documents	NP0031.pdf	334366	no	7
55		Ni 6651.pdi	31ca9e4e27adcf8ecc2531972138dc0412f4 1895	110	/
Warnings:					
Information:					
	NPL Documents		283557		6
36	INFL Documents	NP0032.pdf	334be481ef41bdf101f2d682d1ed3367a91f d5a1	no	O
Warnings:				•	
Information:					
37	NPL Documents	NP0033.pdf	984086	no	28
37			89d2@isco9e15Exhibit17400		

Warnings:					
Information:					
38	NPL Documents	NP0034.pdf	622455	no	6
			5aac29f9118eae3b35dc4e22539675a8577 1dcc0		
Warnings:					
Information:		1			
39	NPL Documents	NP0035.pdf	328173	no	3
			0b3488e7ceb550715aee21189ae20323db9 06ab6		
Warnings:					
Information:		1			
40	NPL Documents	NP0036.pdf	82042	no	1
			68eace526727b55011a0d49ba2f44c23d97 4ed13		
Warnings:					
Information:					
41	NPL Documents	NP0037.pdf	794823	no	15
			0aea74a46b1b248ff8949464e562d047a43 e2953		15
Warnings:					
Information:					
42	NPL Documents	NP0038.pdf	188253	no	4
			7efb6563a32913ab5f1381e2382a825bdc2 d9954		
Warnings:					
Information:					
43	NPL Documents	NP0039.pdf	1341931	no	7
		Ni ooss.pai	a5f927ccfec575f2babac8eb0642029cf227b d98	110	,
Warnings:		•	-		
Information:					
44			270279		
44	NPL Documents	NP0040.pdf	0b1197f973354dd7c09150aae4b4ef89a8b 6db30	no	4
Warnings:		•		•	
Information:					
			515282		
45	NPL Documents	NP0041.pdf	992f0ab173da4e34fe9e929239dfe14ca8a4 730b	no	8
Warnings:		1	I	I	
Information:					
16			1374917		
46	NPL Documents	NP0042.pdf	ab4ab @isco fal4 Exhitoit 0\$00	no	9

Warnings:						
Information:						
47	NPL Documents	NP0043.pdf	129364	no	2	
47	NEL DOCUMENTS	Nr 0043.pui	25894fdd723151278a66d67669a5ce13f14 18da9	no	2	
Warnings:						
Information:						
48	NPL Documents	NP0044.pdf	4559066	50	60	
40	NEL DOCUMENTS	Nr 0044.pui	556cac20bfc5237c7450cbed0c1da914e34 b0330	no	00	
Warnings:					•	
Information:						
10		NP0045.pdf	1125310			
49	NPL Documents		1d3a599b89f8fedb3d13523b9636e1bf535 80783	no	2	
Warnings:					1	
Information:						
50	NPL Documents	NP0046.pdf	129444	no	1	
50			bf86ec075e0838ae77053709645285863d2 2f668		1	
Warnings:					1	
Information:						
		Total Files Size (in bytes)	: 61 ⁻	189399		
This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503. New Applications Under 35 U.S.C. 111 If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application. National Stage of an International Application under 35 U.S.C. 371 If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/E0/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course. New International Application Filed with the USPTO as a Receiving Office If a new international application is being filed and the international application includes the necessary components for an international Filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.						

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re PATENT APPLICATION OF: Net2Phone, Inc. (Patent No. 6,009,469) Control No.: 90/010,422 Issue Date: December 28, 1999 Title: GRAPHIC USER INTERFACE FOR INTERNET TELEPHONY APPLICATION Attorney Docket:2655-0185Group Art Unit:3992Examiner:KOSOWSKI, AlexanderDate:December 16, 2009Confirmation No.:6565

INFORMATION DISCLOSURE STATEMENT

Hon. Commissioner of Patents P.O. Box 1450 Alexandria, VA 22313-1450

Sir:

Pursuant to 37 C.F.R. § 1.56, the attention of the Patent and Trademark Office is hereby directed to the reference(s) listed on the attached PTO-1449. One copy of each non-U.S. Patent reference is attached. It is respectfully requested that the information be expressly considered during the prosecution of this application, and that the reference(s) be made of record therein and appear among the "References Cited" on any patent to issue therefrom.

The submission of any document herewith, which is not a statutory bar, is not intended that any such document constitutes prior art against any of the claims of the present application or is considered to be material to patentability as defined in 37 C.F.R. § 1.56(b). Applicants do not waive any rights to take any action which would be appropriate to antedate or otherwise remove as a competent reference against the claims of the present application. In re Application of: Net2Phone, Inc. Control No.: 90/010,422 Information Disclosure Statement dated December 16, 2009 Page 2 of 2

CHARGE STATEMENT: Deposit Account No. 501860, order no. 2655-0185.

The Commissioner is hereby authorized to charge any fee specifically authorized hereafter, or any missing or insufficient fee(s) filed, or asserted to be filed, or which should have been filed herewith or concerning any paper filed hereafter, and which may be required under Rules 16-18 (<u>missing or insufficiencies only</u>) now or hereafter relative to this application and the resulting Official Document under Rule 20, or credit any overpayment, to our Accounting/Order Nos. shown above, for which purpose a <u>duplicate</u> copy of this sheet is attached

This CHARGE STATEMENT <u>does not authorize</u> charge of the <u>issue fee</u> until/unless an issue fee transmittal sheet is filed.

CUSTOMER NUMBER	Respectfully submitted,
42624	
Davidson Berquist Jackson & Gowdey LLP 4300 Wilson Blvd., 7th Floor,	By: /Michael R. Casey /
Arlington Virginia 22203 Main: (703) 894-6400 • FAX: (703) 894-6430	Michael R. Casey, Ph.D. (Reg. No.: 40,294)

Electronic A	Electronic Acknowledgement Receipt				
EFS ID:	6653381				
Application Number:	90010422				
International Application Number:					
Confirmation Number:	6565				
Title of Invention:	Graphic User Interface For Internet Telephony Application				
First Named Inventor/Applicant Name:	6,009,469				
Customer Number:	42624				
Filer:	Michael R. Casey				
Filer Authorized By:					
Attorney Docket Number:	2655-0185				
Receipt Date:	16-DEC-2009				
Filing Date:	26-FEB-2009				
Time Stamp:	23:44:40				
Application Type:	Reexam (Third Party)				

Payment information:

Submitted with Payment no						
File Listing:						
Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)	
1	NPL Documents	NP0047.pdf	372034 04829c731f16636e5bc5b0353ce0fbee080a 4fd4	no	6	
Warnings:						
Information: Cisco - Exhibit 1003 - Page 295					95	

2	NPL Documents	NP0048.pdf	1632756	no	40
Warnings:			f88		
Information:					
2			106160		
3	NPL Documents	NP0049.pdf	811171af7c20d05a7ab94ff31f00955da7f07 a10	no	1
Warnings:		·	· ·		
Information:					
4	NPL Documents	NP0050.pdf	84902	no	2
-	Ni E Bocamento		53e340b1c19c6f28b25adf24422de815645c 5da8	no	
Warnings:					
Information:					
5	NPL Documents	NP0051.pdf	34224		1
	NFL Documents	NF0051.put	42189422f4f7a9915e0889f1e57621050f3ac 74a	no	
Warnings:		·	· ·		
Information:					
6	NPL Documents	NP0052 adf	449807		14
0	NPL Documents NP0052.pdf		84918706614b66bff75d5ca17574df2a6d57 da5a	no	14
Warnings:		·	· ·		
Information:					
7			2382021		76
7	NPL Documents	NP0053.pdf	54973552c2d219244652826c3b0a1338c80 6d6f6	no	76
Warnings:			•		
Information:					
			332973		
8	NPL Documents	NP0054.pdf	9df5ea65e334ad7aceef41bfd937a511d7a5 3b58	no	3
Warnings:					
Information:					
			245043		
9	NPL Documents	NP0055.pdf	167884b4176f7a116e0ac7d9d647da90281 32eb4	no	2
Warnings:			·		•
Information:					
10			20293336		100
10	NPL Documents	NP0056.pdf	f8a2b73d6f4ed0a13f19c778f4462f02d3eaa ca7	no	120
Warnings:		1	1		1
Information:			Cisco - Exhibit 1003	3 - Page 2	296

11	NPL Documents	NP0057.pdf	198007	no	2
			7c6dac2f326fa5d9b2e26d9bdcbfcf9ae64a 2f4f		
Warnings:					
Information:					
12	NPL Documents	NP0058.pdf	152156	no	4
			9a4f73e8c0868a24856b98ce159a37f83c1e 553d		
Warnings:					
Information:					
13	NPL Documents	NP0059.pdf	714939	no	11
			4237ad09b674a5185893aeef43389bad416 ca699	no	
Warnings:					
Information:					
14	NPL Documents	NP0060.pdf	319167	no	8
			43e0bbb0eeeaadc80560b1c62432d523db c1b1a8	110	
Warnings:					
Information:					
15	NPL Documents	NP0061.pdf	1432267	no	21
13			425b51cc4725a08491d4a2c62becad16186 ac3d2		21
Warnings:					
Information:					
16	NPL Documents	NP0062.pdf	1044072	no	9
		Ni 0002.pai	ebe3c41605b1878ac51b4d7d0bc9a04bd5f 7544f	no	
Warnings:					
Information:					
17	Reexam Certificate of Service	20091216_COS_0185.pdf	58729	no	1
			29c57a48690546cc3e211d3a3848ab75377 544f8		
Warnings:					
Information:					
		Total Files Size (in bytes): 298	352593	

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

			Reexam numb	er	90/010,422
			First Named In	ventor	Mattaway et al.
INFORMATION DISCLOSURE STATEMENT BY APPLICANT FORM PTO-1449 (modified) Patent Under Re Issue Date		Patent Under F	Re-Exam	6009469	
			1999/12/28		
FURI		1449 (Modilled)	Group Art Unit		3992
			Examiner Nam		KOSOWSKI, ALEXANDER J
			Attorney Docke		2655-0185
		1 of 20	Confirmation N		6565
	Sheet 1	I OT 29	Commation	10.	6969
U.S. PATENT DOCUMENTS					
Examiner Initials*	Cite No.	Document No.	Publication/ Issue Date		Patentee or of Cited Document
	1-1	US-2003/0050075	2003/13/03	Rangaraj	an et al.
	1-2	US-2004/0204146	2004/14/10	Deeds	
	1-3	US-2005/0032435	2005/10/02	Tischer e	t al.
	1-4	US-2005/0130611	2005/16/06	Lu et al.	
	1-5	US-4332982	1982/01/06	Thomas	
	1-6	US-4410765	1983/18/10	Hestad e	t al.
	1-7	US-4446519	1984/01/05	Thomas	
	1-8	US-4450554	1984/22/05	Steensm	
	1-9	US-4468529	1984/28/08	Samuel e	
	1-10	US-4528659	1985/09/07	Jones, Jr	
	1-11	US-4589107	1986/13/05	Middletor	n, et al.
	1-12	US-4594477	1986/10/06	Noirot	
	1-13	US-4598397	1986/01/07	Nelson, e	
	1-14	US-4630262	1986/16/12	Callens, e	et al.
	1-15	US-4652703	1987/24/03	Lu, et al.	
	1-16	US-4654483	1987/03	Imai et al	
	1-17	US-4694492	1987/09	Wirstrom	et al.
	1-18	US-4740963	1988/26/04	Eckley	
	1-19	US-4782485	1988/01/11	Gollub	
 	1-20	US-4799153	1989/01	Hann et a	
	1-21	US-4809271	1989/28/02	Kondo, e	
	1-22	US-4813040	1989/14/03	Futato	
	1-23	US-4819228	1989/04/04	Baran, et	äl.
	1-24	US-4821263	1989/04	Lundh	

Examiner Signature	Date Considered	

			Reexam numb	ber	90/010,422
	INFORMATION DISCLOSURE		First Named Ir		Mattaway et al.
					6009469
STATEMENT BY APPLICANT			Re-Exam		
	FORM PTO-1449 (modified)		Issue Date		1999/12/28
			Group Art Unit		3992
			Examiner Nam	ne	KOSOWSKI, ALEXANDER J
			Attorney Dock	et No.	2655-0185
	Sheet 2	2 of 29	Confirmation N		6565
		U	.S. PATENT DOCU	IMENTS	
Examiner Initials*	Cite No.	Document No.	Publication/ Issue Date	Name of Applicant	Patentee or t of Cited Document
	2-1	US-4829554	1989/09/05	Barnes e	t al.
	2-2	US-4837797	1989/06	Freeny,	Ir., Charles C.
	2-3	US-4866704	1989/12/09	Bergman	
	2-4	US-4866732	1989/12/09	Carey, et	al.
	2-5	US-4873715	1989/10/10	Shibata	
	2-6	US-4887265	1989/12/12	Felix	
	2-7	US-4890282	1989/26/12	Lambert,	et al.
	2-8	US-4912705	1990/27/03	Paneth, e	ət al.
	2-9	US-4932022	1990/05/06	Keeney,	et al.
	2-10	US-4981371	1991/01/01	Gurak, et	al.
	2-11	US-4989230	1991/29/01	Gillig et a	
×	2-12	US-4995074	1991/02	Goldman	et al.
	2-13	US-5031089	1991/07	Liu et al.	
	2-14	US-5036513	1991/30/07	Greenbla	
	2-15	US-5040141	1991/13/08	Yazima e	et al
	2-16	US-5056140	1991/10	Kimbell	
	2-17	US-5065425	1991/12/11	Lecomte,	
	2-18	US-5107443	1992/04	Smith et a	
	2-19	US-5121385	1992/09/06	Tominaga	
	2-20	US-5127003	1992/30/06	Dell Jr. et	
	2-21	US-5130985	1992/14/07	Kondo, e	t al.
	2-22	US-5150410	1992/22/09	Bertrand	
	2-23	US-5155726	1992/13/10	Spinney,	et al.
	2-24	US-5157592	1992/20/10	Walters	

Examiner	Date
Signature	Considered

			Reexam numb	er	90/010,422	
			First Named In	ventor	Mattaway et al.	
STATEMENT BY APPLICANT			Patent Under F	Re-Exam	6009469	
			Issue Date		1999/12/28	
	<i>и</i> гт0-	1449 (mounied)	Group Art Unit	· · · · · · · · · · · · · · · · · · ·	3992	
			Examiner Nam		KOSOWSKI, ALEXANDER J	
			Attorney Docke		2655-0185	
		0 of 20			6565	
2	sneet a	3 of 29	Confirmation N	0.	6565	
		U	.S. PATENT DOCU	MENTS		
Examiner Initials*	Cite No.	Document No.	Publication/ Issue Date		Patentee or t of Cited Document	
	3-1	US-5187591	1993/16/02	Guy, et a	l.	
	3-2	US-5212789	1993/18/05	Rago		
	3-3	US-5214650	1993/25/05	Renner, e	et al.	
	3-4	US-5220599	1993/06	Sasano e	et al	
	3-5	US-5241594	1993/31/08	Kung		
	3-6	US-5241625	1993/08	Epard et	al.	
	3-7	US-5247620	1993/09/21	Fukuzaw	a et al.	
	3-8	US-5249290	1993/28/09	Heizer		
	3-9	US-5274635	1993/12	Rahman et al.		
	3-10	US-5282197	1994/25/01	Kreitzer		
	3-11	US-5283819	1994/01/02	Glick, et a	al.	
	3-12	US-5287103	1994/15/02	Kasprzyk	k Marlon Z et al	
	3-13	US-5305312	1994/19/04	Fornek, e		
	3-14	US-5327486	1994/07	Wolff et a		
	3-15	US-5335276	1994/02/08	Thompso		
	3-16	US-5341374	1994/23/08	Lewen et	al.	
	3-17	US-5347632	1994/09	Filepp et	al.	
	3-18	US-5377260	1994/12	Long		
	3-19	US-5396485	1995/03	Ohno et a	al.	
	3-20	US-5410754	1994/15/02	Favreau	Keith et al	
	3-21	US-5428608	1995/06	Freeman	et al.	
	3-22	US-5440547	1995/08/08	Esaki Hir	oshi et al	
	3-23	US-5446891	1995/29/08	Kaplan el	al.	
	3-24	US-5446919	1995/29/08	Wilkins		

_ _ ____

Examiner	Date
Signature	Considered

				Deexers sursh		00/010 400	
				Reexam numbe		90/010,422	
		First Named Inv	ventor	Mattaway et al.			
STATEMENT BY APPLICANT FORM PTO-1449 (modified)			Patent Under R	le-Exam	6009469		
			Issue Date		1999/12/28		
		(Group Art Unit		3992	
				Examiner Name		KOSOWSKI, ALEXANDER J	
				Attorney Docke		2655-0185	
	N						
2	Sheet 4	l of 29		Confirmation No	0.	6565	
		U	J.S	. PATENT DOCUM	/IENTS		
Examiner Initials*	Cite No.	Document No.		Publication/ Issue Date		Patentee or of Cited Document	
	4-1	US-5459864	T	1995/10	Brent et a	al.	
	4-2	US-5461611		1995/10	Drake, Jr	. et al.	
	4-3	US-5467388		1995/11 Redd et al. 1995/10 Flora-Holm		al.	
	4-4	US-5473531				mquist et al.	
	4-5	US-5474741		1995/12/12	Mikeska e		
	4-6	US-5474819		1995/12/12	Chamber		
	4-7	US-5483524		1996/01	Lev et al.		
	4-8	US-5487100		1996/01	Kane		
	4-9	US-5491800	L	1996/13/02	Goldsmith et al.		
	4-10	US-5500890		1996/03	Rogge et al.		
	4-11	US-5517432		1996/05	Chandra	et al.	
	4-12	US-5528671		1996/18/06	Ryu et al.		
	4-13	US-5533102		1996/02/07	Robinson	et al.	
	4-14	US-5544164		1996/08	Baran		
	4-15	US-5544322	-	1996/06/08	Cheng et		
	4-16	US-5546448	-	1996/08	Caswell e		
	4-17	US-5546452		1996/13/08	Andrews		
	4-18	US-5548636	_	1996/08	Bannister		
	4-19	US-5548694		1996/08	Frisken G		
	4-20	US-5563882		1996/10	Bruno et a		
	4-21	US-5572643		1996/11	Judson, D		
	4-22	US-5574774		1996/11	Ahlberg e		
	4-23	US-5574934		1996/12/11	Mirashraf		
	4-24	US-5581522		1996/12/03	Shibuya e	it al.	

_ _ _ _ _ _ _ _ _ _ _ _

Examiner	Date
Signature	Considered

			Reexam numb	er	90/010,422	
			First Named In	ventor	Mattaway et al.	
INFORMATION DISCLOSURE STATEMENT BY APPLICANT FORM PTO-1449 (modified)			Patent Under I	Re-Exam	6009469	
			Issue Date		1999/12/28	
FURI	FORM PTO-1449 (modified)				3992	
			Group Art Unit Examiner Nam		KOSOWSKI, ALEXANDER J	
					2655-0185	
			Attorney Dock			
S	Sheet 5	5 of 29	Confirmation N	10.	6565	
		U	.S. PATENT DOCU	MENTS		
Examiner Initials*	Cite No.	Document No.	Publication/ Issue Date		Patentee or t of Cited Document	
	5-1	US-5581702	1996/12	McArdle	et al.	
	5-2	US-5586257	1996/17/12	Perlman		
	5-3	US-5586260	1996/17/12	Hu		
	5-4	US-5591800	1996/02	Goldsmit	h et al.	
	5-5	US-5604737	1997/02	Iwami et	n et al.	
	5-6	US-5606669	1997/25/02	Bertin et		
	5-7	US-5614940	1997/25/03	Cobbley		
	5-8	US-5619557	1997/08/04	Van Berk	um	
	5-9	US-5623483	1997/22/04	Agrawal	et al.	
	5-10	US-5623490	1997/04	Richter et al.		
	5-11	US-5623605	1997/22/04	Keshav e	t al.	
	5-12	US-5625407	1997/29/04	Biggs et a	al.	
	5-13	US-5636282	1997/06	Holmquis	t et al.	
	5-14	US-5636346	1997/06	Saxe		
	5-15	US-5642156	1997/24/06	Saiki		
	5-16	US-5644629	1997/07	Chow		
	5-17	US-5651006	1997/07	Fujino et		
	5-18	US-5652759	1997/07	Stringfell		
	5-19	US-5655120	1997/08	Witte et a		
	5-20	US-5659542	1997/08	Bell et al.		
ļ	5-21	US-5659596	1997/19/08	Dunn		
	5-22	US-5668862	1997/09	Bannister		
	5-23	US-5671428	1997/23/09	Muranaga	a et al.	
	5-24	US-5675507	1997/10	Bobo		

Examiner Signature	Date Considered	

			Reexam numb	er	90/010,422	
			First Named In	ventor	Mattaway et al.	
INFORMATION DISCLOSURE STATEMENT BY APPLICANT FORM PTO-1449 (modified)			Patent Under F	Re-Exam	6009469	
			Issue Date		1999/12/28	
FORM	MPIO-	1449 (moairiea)	Group Art Unit		3992	
			Examiner Nam		KOSOWSKI, ALEXANDER J	
			Attorney Docke		2655-0185	
5	Sheet 6	6 of 29	Confirmation N	10.	6565	
		U	.S. PATENT DOCU	MENTS		
Examiner Initials*			Publication/ Issue Date	Name of Applican	Patentee or t of Cited Document	
	6-1	US-5680392	1997/10	Semaan		
	6-2	US-5684800	1997/11	Dobbins	et al.	
	6-3	US-5689553	1997/18/11	Ahuja et	al.	
	6-4	US-5692192	1997/11	Sudo		
	6-5	US-5694594	1997/02/12	Chang	et al.	
	6-6	US-5701463	1997/23/12	Malcolm		
	6-7	US-5708422	1998/13/01	Blonder		
	6-8	US-5708655	1998/01	Toth et al.		
	6-9	US-5710884	1998/20/01	Dedrick		
	6-10	US-5717923	1998/10/02	Dedrick		
	6-11	US-5719786	1998/02	Nelson e		
	6-12	US-5721827	1998/24/02	Logan et		
	6-13	US-5724092	1998/03/03	Davidsol		
	6-14	US-5724412	1998/03	Srinivasa		
	6-15	US-5724506	1998/03/03	Cleron et		
	6-16	US-5726984	1998/10/03	Kubler et		
	6-17	US-5729748	1998/03	Robbins	et al.	
	6-18	US-5732078	1998/03	Arango		
	6-19	US-5736968	1998/04		Alexander L.	
	6-20	US-5742668	1998/04	Pepe et a		
	6-21	US-5742675	1998/21/04	Kilander		
	6-22	US-5742762	1998/21/04	Scholl et		
	6-23	US-5742905	1998/04	Pepe et a	al.	
	6-24	US-5745642	1998/28/04	Ahn		

Examiner	Date
Signature	Considered

			Reexam numb	er	90/010,422	
	F		First Named In		Mattaway et al.	
INFOR	INFORMATION DISCLOSURE			Re-Exam	6009469	
STATEMENT BY APPLICANT FORM PTO-1449 (modified)						
			Issue Date		1999/12/28	
			Group Art Unit		3992	
			Examiner Nam	e	KOSOWSKI, ALEXANDER J	
			Attorney Dock	et No.	2655-0185	
5	Sheet 7	7 of 29	Confirmation N	lo.	6565	
		U	.S. PATENT DOCU			
Examiner Initials*	Cite No.	Document No.	Publication/ Issue Date	Name of Applicant	Patentee or of Cited Document	
	7-1	US-5745702	1998/04	Morozum	i	
	7-2	US-5745711	1998/04	Kitahara	et al.	
	7-3	US-5751712	1998/05	Farwell e	et al.	
	7-4	US-5751961	1998/05	Smyk		
	7-5	US-5754636	1998/05	Bayless	al.	
	7-6	US-5754939	1998/19/05	Herz et a		
	7-7	US-5758110	1998/05	Boss et a		
	7-8	US-5758257	1998/26/03	Herz et a	l.	
	7-9	US-5761606	1998/06	Wolzien		
	7-10	US-5764736	1998/06	Shachar	et al.	
	7-11	US-5764741	1998/09/06	Barak		
	7-12	US-5764756	1998/09/06	Onweller		
	7-13	US-5767897	1998/16/06	Howell		
	7-14	US-5768527	1998/06	Zhu et al		
	7-15	US-5771355	1998/23/06	Kuzma		
	7-16	US-5774660	1998/30/06	Brendel e	et al.	
	7-17	US-5774666	1998/30/06	Portuesi		
	7-18	US-5778181	1998/07	Hidary et		
	7-19	US-5778187	1998/07	Monteiro		
	7-20	US-5784564	1998/21/07	Camaisa		
	7-21	US-5784619	1998/21/07	Evans et	······································	
	7-22	US-5787253	1998/07	McCreen		
	7-23	US-5790548	1998/08	Sistaniza		
	7-24	US-5790792	1998/08	Dudgeon	et al.	

Examiner Signature	Date Considered	

				Reexam numbe	۲	90/010,422	
				First Named Inv		Mattaway et al.	
INFORMATION DISCLOSURE							
STATEMENT BY APPLICANT			Patent Under R	e-Exam	6009469		
			Issue Date		1999/12/28		
		· · ·		Group Art Unit		3992	
				Examiner Name	Э	KOSOWSKI, ALEXANDER J	
				Attorney Docke	t No.	2655-0185	
	Sheet 8	3 of 29		Confirmation No		6565	
	meerc			Commation I	J.	0000	
		U	I.S	. PATENT DOCUN	IENTS		
Examiner Initials*	Cite No.	Document No.		Publication/ Issue Date		Patentee or of Cited Document	
	8-1	US-5790793		1998/08	Higley		
	8-2	US-5793365		1998/11/08	Tang et a	al.	
	8-3	US-5794018		1998/08	Vrvilo et a	al.	
	8-4	US-5794257		1998/08 Liu et al.			
	8-5	US-5796394		1998/08	Wicks et	t al.	
	8-6	US-5799063		1998/08	Krane		
	8-7	US-5799072	L	1998/08	Vulcan et		
	8-8	US-5799150		1998/08	Hamilton et al. Norris et al.		
	8-9	US-5805587		1998/09			
	8-10	US-5805810	-	1998/09	Maxwell		
	8-11	US-5805822	⊢	1998/08/09	Long et a	I	
	8-12	US-5809233		1998/15/09	Shur		
	8-13	US-5812819		1998/22/08	Rodwin e		
	8-14	US-5816919	<u> </u>	1998/10	Scagnelli		
	8-15	US-5818510		1998/10	Cobbley e	et al.	
	8-16	US-5818836		1998/10	DuVal		
	8-17	US-5822524		1998/10	Chen et a	ll.	
	8-18	US-5828837		1998/10	Eikeland		
-	8-19	US-5828843		1998/27/10	Grimm et		
	8-20	US-5828846		1998/10	Kirby et a	1	
	8-21	US-5832119		1998/11	Rhoads		
	8-22	US-5832240	-	1998/11	Larsen et		
	8-23	US-5835720	-	1998/10/11	Nelson et		
<u> </u>	8-24	US-5835723		1998/11	Andrews		

Examiner Date Signature Considered
--

			Reexam num	ber	90/010,422
	ſ		First Named II	nventor	Mattaway et al.
INFORMATION DISCLOSURE		Patent Under	Re-Exam	6009469	
			Issue Date		1999/12/28
FORM	/1910-1	1449 (modified)	Group Art Uni		3992
- - -			· · · · · · · · · · · · · · · · · · ·		KOSOWSKI, ALEXANDER J
			Examiner Nan		,
			Attorney Dock		2655-0185
5	Sheet 9) of 29	Confirmation I	No.	6565
		U	.S. PATENT DOCL	JMENTS	
Examiner Initials*	Cite No.	Document No.	Publication/ Issue Date		Patentee or t of Cited Document
	9-1	US-5835725	1998/10/11	Chiang e	t al.
	9-2	US-5838683	1998/11	Corley et	al.
	9-3	US-5838970	1998/17/11	Thomas	
	9-4	US-5841769	1998/11	Okanoue	et al.
	9-5	US-5842216	1998/11	Andersor	n et al.
	9-6	US-5848143	1998/08/12	Andrews	et al.
	9-7	US-5848396	1998/12	Gerace	
	9-8	US-5854901	1998/12	Cole et a	I.
	9-9	US-5857072	1999/01	Crowle	
	9-10	US-5864684	1999/26/01	Nielsen	
	9-11	US-5867156	1999/02	Beard et	al.
	9-12	US-5867654	1999/02/02	Ludwig e	t al.
	9-13	US-5867665	1999/02/02	Butman e	
	9-14	US-5872850	1999/16/02	Klein et a	
	9-15	US-5872922	1999/02	Hogan et	
	9-16	US-5872972	1999/02	Boland e	
	9-17	US-5884032	1999/03	Bateman	
	9-18	US-5884035	1999/16/03	Butman e	et al.
	9-19	US-5884077	1999/03	Suzuki	
	9-20	US-5890162	1999/03	Huckins	
	9-21	US-5892825	1999/06/04	Mages et	al.
	9-22	US-5892903	1999/06/04	Klaus	
	9-23	US-5892924	1999/04	Lyon et a	II.
	9-24	US-5903721	1999/11/05	Sixtus	

Examiner Signature	Date Considered	

			Reexam numb	er	90/010,422
	F		First Named In	ventor	Mattaway et al.
INFORMATION DISCLOSURE		Patent Under F	Re-Exam	6009469	
		BY APPLICANT	Issue Date		1999/12/28
FURI	MP10-1	449 (modified)	Group Art Unit		3992
			Examiner Nam		KOSOWSKI, ALEXANDER J
					2655-0185
			Attorney Docke		
S	Sheet 1	0 of 29	Confirmation N	0.	6565
		U	S. PATENT DOCU	MENTS	
Examiner Initials*	Cite No.	Document No.	Publication/ Issue Date	Name of Applican	Patentee or t of Cited Document
	10-1	US-5903723	1999/11/05	Beck et a	al.
	10-2	US-5903727	1999/11/05	Nielsen	
	10-3	US-5905719	1999/05	Arnold et	al.
	10-4	US-5905736	1999/18/05	Ronen e	al.
	10-5	US-5905865	1999/05	Palmer e	t al.
	10-6	US-5905872	1999/05	DeSimor	ie et al.
	10-7	US-5915001	1999/06	Uppaluru	
	10-8	US-5923736	1999/07	Shachar,	
	10-9	US-5924093	1999/07	Potter et	
	10-10	US-5925103	1999/10/07	Magallan	
	10-11	US-5928327	1999/07	Wang et	al.
	10-12	US-5929849	1999/07	Kikinis	
	10-13	US-5937162	1999/08	Funk et a	
	10-14		1999/08	Rogers e	
	10-15	US-5946629	1999/08	Sawyer e	
	10-16	US-5950123	1999/09	Schwelb	
ļļ	10-17	US-5950172	1999/09	Klingmar	
	10-18		1999/09	Agrahara	im et al.
	10-19		1999/10	Wolf	
	10-20		1999/12/10	Turpin	
	10-21		1999/10	Aahlad e	
	10-22		1999/11	Foladare	
 	10-23		1999/11	Monteiro	et al.
	10-24	US-5999965	1999/07/12	Kelly	

Examiner Signature	Date Considered	
Oignature		

			Reexam numb	er	90/010,422
	1		First Named In	ventor	Mattaway et al.
INFORMATION DISCLOSURE		Patent Under F	Re-Exam	6009469	
		BY APPLICANT 449 (modified)	Issue Date		1999/12/28
FURI	WF10-1	449 (mouneu)	Group Art Unit		3992
			Examiner Nam	e	KOSOWSKI, ALEXANDER J
			Attorney Docke		2655-0185
		1 - 5 - 0 0	Confirmation N		6565
	Sheet 1	1 of 29	Commation	0.	8505
		U	.S. PATENT DOCU	MENTS	
Examiner Initials*	Cite No.	Document No.	Publication/ Issue Date	Name of Applicant	Patentee or t of Cited Document
	11-1	US-6005870	1999/21/12	Leung	
	11-2	US-6006257	1999/12	Slezak	
	11-3	US-6014379	2000/01	White et	al.
	11-4	US-6014710	2000/01	Talluri et	al.
	11-5	US-6016393	2000/18/01	White et	al.
	11-6	US-6018768	2000/01	Ullman e	t al.
	11-7	US-6018771	2000/25/01	Hayden	
	11-8	US-6021126	2000/02	White et	
	11-9	US-6026086	2000/02	Lancelot	
	11-10	US-6026425	2000/02	Suguri et	
	11-11	US-6029175	2000/22/02	Chow et	
	11-12	US-6032192	2000/29/02	Wegner	
	11-13	US-6041345	2000/03	Levi et al	
	11-14	US-6047292	2000/04/04	Kelly et a	ıl.
	11-15	US-6055594	2000/04	Lo et al.	
	11-16	US-6061716	2000/05	Moncreif	
	11-17	US-6064975	2000/05	Moon et	al.
	11-18	US-6065048	2000/16/05	Highley	
	11-19	Man	2000/30/05	White et	
	11-20		2000/07	Ault et al	
	11-21	US-6101182	2000/08		deh et al.
	11-22		2000/08	Kimmel e	
	11-23		2000/09		new et al.
	11-24	US-6125113	2000/09	Farris et	ai.

_ _ _ _ _ _ _ _ _ _ _ _

	Examiner Signature	Date Considered
--	-----------------------	--------------------

			Reexam numb	er	90/010,422
			First Named Ir	ventor	Mattaway et al.
INFORMATION DISCLOSURE		Patent Under I		6009469	
	STATEMENT BY APPLICANT		Issue Date		1999/12/28
FORM	ИРТО-1	449 (modified)			
			Group Art Unit		3992
			Examiner Nam	ie	KOSOWSKI, ALEXANDER J
			Attorney Dock	et No.	2655-0185
S	Sheet 1	2 of 29	Confirmation N	lo.	6565
		U	.S. PATENT DOCU	MENTS	
Examiner	Cite	Document No.	Publication/	Name of	Patentee or
Initials*	No.		Issue Date		t of Cited Document
	12-1	US-6137877	2000/24/10	Robin et	al.
	12-2	US-6141341	2000/31/10	Jones et	al.
	12-3	US-6151643	2000/11	Cheng et	al.
	12-4	US-6154445	2000/11	Farris et	al.
	12-5	US-6163316	2000/12	Killian	
	12-6	US-6173044	2001/01	Hortensiu	us et al.
	12-7	US-6178453	2001/23/01	Mattaway	/ et al.
	12-8	US-6181689	2001/01	Choung e	et al.
	12-9	US-6185184	2001/06/02	Mattaway	/ et al.
	12-10	US-6188677	2001/02	Oyama e	t al.
	12-11	US-6195357	2001/02	Polcyn	
	12-12	US-6198303	2001/03	Rangasa	уее
	12-13	US-6205135	2001/20/03	Chinni et	al.
	12-14	US-6212625	2001/04	Russell	
	12-15	US-6226678	2001/05	Mattaway	/ et al.
	12-16	US-6226690	2001/05	Banda et	al.
	12-17	US-6240444	2001/05	Fin et al.	
	12-18	US-6243373	2001/06	Turock	
	12-19	US-6266539	2001/07	Pardo	
	12-20	US-6275490	2001/14/08	Mattaway	/ et al.
	12-21	US-6282272	2001/08	Noonen e	ət al.
	12-22	US-6289369	2001/11/09	Sundares	san
	12-23	US-6300863	2001/10	Cotichini	et al.
	12-24	US-6338078	2002/01	Chang et	al.

_ _ _ _ _ _ _ _ _ _ _ _

Examiner	Date
Signature	Considered

		÷-	Reexam numb	er	90/010,422
			First Named In	ventor	Mattaway et al.
INFORMATION DISCLOSURE		Patent Under F	Re-Exam	6009469	
		BY APPLICANT	Issue Date		1999/12/28
FUR	MPIO-1	449 (modified)	Group Art Unit		3992
			Examiner Nam	~	KOSOWSKI, ALEXANDER J
			Attorney Docke		2655-0185
S	Sheet 1	3 of 29	Confirmation N	0.	6565
		U	.S. PATENT DOCU	MENTS	
Examiner	Cite	Document No.	Publication/	Name of	Patentee or
Initials*	No.	Boodinione reo.	Issue Date	Applicant	of Cited Document
	13-1	US-6343115	2002/01	Foladare	et al.
	13-2	US-6343220	2002/29/01	Van Der	
	13-3	US-6347085	2002/02	Kelly	
	13-4	US-6347342	2002/02	Marcos e	t al.
	13-5	US-6377568	2002/04	Kelly	
	13-6	US-6385583	2002/05	Ladd et a	l.
	13-7	US-6393455	2002/05	Eilert et a	l.
	13-8	US-6427064	2002/07	Henderso	on, Daniel
	13-9	US-6434552	2002/08	Leong, Ji	n Fye
	13-10	US-6463565	2002/08/10	Keith C. I	Kelly
	13-11	US-6477586	2002/11	Achenso	n et al.
	13-12	US-6594254	2003/15/07	Kelly	
	13-13	US-6687738	2004/03/02	Glenn W.	
	13-14	US-6704802	2004/03	Finch et a	al.
	13-15	US-6728784	2004/27/04	Mattaway	
	13-16		2004/08	Curtis et	
	13-17	US-6829645	2004/07/12	Glenn W.	
	13-18		2005/03/05	Cherkaso	
	13-19	US-6909708	2005/06	Krishnasv	wamy et al.
ļ	13-20				
 	13-21				
	13-22				
	13-23				
	13-24				

_ _ _ _ _ _ _ _

Examiner Signature	Date Considered	

	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
	Patent Under Re-Exam	6009469
STATEMENT BY APPLICANT FORM PTO-1449 (modified)	Issue Date	1999/12/28
(,	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 14 of 29	Confirmation No.	6565

FOREIGN PATENT DOCUMENTS

Examiner Initials*	Cite No.	Document No.	Publication Date	Name of Patentee or Applicant of Cited Document	Notes
	14-1	AU-200059377-A1	11-23-2000	Glenn W. Hutton et al.	
	14-2	AU-200059378-A1	11-30-2000	Glenn W. Hutton et al.	
	14-3	AU-200059379-A1	11-23-2000	Glenn W. Hutton et al.	
	14-4	EP-0518596	12/16/1992	Digital Equipment Corp	
	14-5	EP-0559047	09-1993	Iglehart	
	14-6	EP-0597691	05/18/1994	IBM	
	14-7	EP-0632672	01/04/1995	IBM	
	14-8	EP-0648038	04/12/1995	IBM	
	14-9	EP-1379039-A2	01-07-2004	Glenn W. Hutton	
	14-10	EP-1379050-A2	01-07-2004	Glenn W. Hutton	
	14-11	GB-2283645	05/10/1995	Digital Equipment Int.	
	14-12	JP 63-131637	3/6/1988	Y. Takehiko (w/ English abstract)	Т
	14-13	JP 6-62020 (w/ SOR and E	^A 1994/03/04	Masatoshi et al.	
	14-14	JP-5944140	03-12-1984	Junichi Kimura et al.	Т
	14-15	WO-9422087	09/29/1994	3Com Corp	
	14-16	WO-9714234	04-17-1997	Glenn W. Hutton	
	14-17	WO-9811704	03/19/1998	Don Joon Lee et al.	
	14-18				
	14-19				
	14-20				
	14-21				
	14-22				
	14-23				
	14-24				

Examiner Signature	Date Considered	

	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
	Patent Under Re-Exam	6009469
STATEMENT BY APPLICANT FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 15 of 29	Confirmation No.	6565

	NON-PATENT REFERENCES	
Cite No.	Non-patent Reference bibliographic information, where available	Notes
15-1	"Circuit Switching", Ericsson, last published July 5, 2001, found at http://www.ericsson.com/multiservicenetworks/circuitswitching/axe/ printed on August 1, 2001, 2 pages.	
15-2	"Data Communication Over the Telephone Network", International Telecommunication Union, CCITT The International Telegraph and Telephone Consultative Committee, Blue Book, Volume VIII - Fascicle VIII.1, IXth Plenary Assembly, Melbourne, November 14-25, 1988, pages 296-370	
15-3	"Full Duplex Speakerphone", IBM Technical Disclosure Bulletin, Vol. 29, No. 12, May 1987, pages 5599-5602	
15-4	"ICL OPD - One Per Desk", Issue 01 August 1990, A Comprehensive Technical Information Document (24 pages)	
15-5	"Information Processing Techniques Program. Volume II. Wideband Integrated Voice/Data Technology" Semiannual Technical Summary Report, Massachusetts Institute of Technology Lexington, MA, 1 October 1977 - 31 March 1978, Issued 31 August 1978, pages 1-25 and 27-31, ADA067014	
15-6	"Integrated Voice/Data PABX Communications", IBM Technical Disclosure Bulletin, September 1986, http://patents.ibm.com	
15-7	"Level 1-5 of 65 Stories" 1990 Network World, Inc., April 16, 1990, pages 114-115	
	No. 15-1 15-2 15-3 15-4 15-5 15-6	Cite No. Non-patent Reference bibliographic information, where available 15-1 "Circuit Switching", Ericsson, last published July 5, 2001, found at http://www.ericsson.com/multiservicenetworks/circuitswitching/axe/ printed on August 1, 2001, 2 pages. 15-2 "Data Communication Over the Telephone Network", International Telecommunication Union, CCITT The International Telegraph and Telephone Consultative Committee, Blue Book, Volume VIII - Fascicle VIII.1, IXth Plenary Assembly, Melbourne, November 14-25, 1988, pages 296-370 15-3 "Full Duplex Speakerphone", IBM Technical Disclosure Bulletin, Vol. 29, No. 12, May 1987, pages 5599-5602 15-4 "ICL OPD - One Per Desk", Issue 01 August 1990, A Comprehensive Technical Information Document (24 pages) 15-5 "Information Processing Techniques Program. Volume II. Wideband Integrated Voice/Data Technology" Semiannual Technical Summary Report, Massachusetts Institute of Technology Lexington, MA, 1 October 1977 - 31 March 1978, Issue 31 August 1978, pages 1-25 and 27-31, ADA067014 15-6 "Integrated Voice/Data PABX Communications", IBM Technical Disclosure Bulletin, September 1986, http://patents.ibm.com

Examiner Signature	Date Considered	

	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
INFORMATION DISCLOSURE	Patent Under Re-Exam	6009469
STATEMENT BY APPLICANT FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 16 of 29	Confirmation No.	6565

		NON-PATENT REFERENCES	
Examiner Initials*			Notes
	16-1	"Multi-Service Networks", Ericsson, last published June 27, 2001, found at http://www.ericsson.com/multiservicenetworks/circuitswitching/ printed on August 1, 2001, 2 pages.	
	16-2	"The History of TPC.INT", January 15, 1999, 2 pages, found at http://www.tpc.int/faq/history.html printed on August 8, 2002.	
	16-3	A. A. Kapauan, et al. "Wideband Packet Access for Workstations: Integrated Voice/Data/Image Services on the UNIX+ PC", IEEE Global Telecommunications Conference, Houston, Texas, December 1-4, 1986, Conference Record Vol. 3, pages 1439-1441	
	16-4	AHRENS, Richard L., "Frequently-Asked Questions about Internet VoiceChat 1.1 FAQ Version: 1.0", 1994, 6 pages.	
	16-5	Andy Hopper "Pandora - An Experimental System for Multimedia Applications", Operating Systems Review, January 12, 1990, pages 1-16	
	16-6	BENNETT, Geoff, "Designing TCP/IP Internetworks", Chapter 11, pages 290, 291 and 323, Van Nostrand Reinhold, 1995.	
	16-7	Bernard Gold "Digital Speech Networks", Proceedings of the IEEE, Vol. 65, No. 12, December 1977, pages 1636-1658	

Examiner	Date
Signature	Considered

	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
	Patent Under Re-Exam	6009469
STATEMENT BY APPLICANT FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 17 of 29	Confirmation No.	6565

		NON-PATENT REFERENCES	
Examiner Initials*	Cite No.	Non-patent Reference bibliographic information, where available	Notes
	17-1	Bill Newman "An ISDN Data and Voice Terminal Based on a Personal Computer", Globecom'85, IEEE Global Telecommunications Conference, Conference Record Volume 3, New Orleans, Louisiana, December 2-5, 1985, pages 1048-1052	
	17-2	BORLAND, John, "Technology uses one number to find you on any device", May 17, 2001, 3 pages, found at http://news.cnet.com/news/0-1004-201-5939191-0.html.	
	17-3	C. MALAMUD et al., "Principles of Operation for the TPC.INT Subdomain: General Principles and Policy", RFC 1530, October 1993, pages 1-7.	· · · · · · · · · · · · · · · · · · ·
	17-4	C. MALAMUD et al., "Principles of Operation for the TPC.INT Subdomain: Remote Printing Administrative Policies", RFC 1529, October 1993, pages 1-5.	
	17-5	C. MALAMUD et al., "Principles of Operation for the TPC.INT Subdomain: Remote Printing Technical Procedures", RFC 1528, October 1993, pages 1-12.	
	17-6	C. Topolcic "Experimental Internet Stream Protocol, Version 2 (ST-II)", Request for Comments 1190, October 1990, pages 1-148	
	17-7	C. YANG, "INETPhone: Telephone Services and Servers on Internet", Request for Comments 1789, pp. 1-6, April 1995.	

_ _ _ _ _ ... _ _

Examiner Signature	Date Considered	
		_

	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
INFORMATION DISCLOSURE	Patent Under Re-Exam	6009469
STATEMENT BY APPLICANT FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 18 of 29	Confirmation No.	6565

NON-PATENT REFERENCES				
Examiner Initials*	Cite No.	Non-patent Reference bibliographic information, where available	Notes	
	18-1	Carl A. Sunshine, et al. "Broad-Band Personal Computer LAN's", IEEE Journal on Selected Areas in Communications, Vol. SAC-3, No.3, May 1985, pages 408-415		
	18-2	Cindy MUELLER et al., "ATD Data Services", http://www.iita.ucar.edu/ws/datawkshop/Abstract-ATD.html, January 5, 1995, 2 pages.		
	18-3	Clifford J. Weinstein, et al. "Experience with Speech Communication in Packet Networks" IEEE Journal on Selected Areas in Communications, Vol. SAC-1, No. 6, (ISSN 0733-8716), December 1983, pages 963-980		
	18-4	D. Adolphs, et al. "Adapters for the Public ISDN", pages 72-80		
	18-5	D. Perkins "The Point-to-Point Protocol for the Transmission of Multi-Protocol Datagrams Over Point-to-Point Links", Request for Comments 1171, ftp://ftp.isi.edu/in-notes/rfc1171.txt, July 1990, pages 1-48		
	18-6	D.C. Swinehart et al., "Adding Voice to an Office Computer Network", IEEE Global Telecommunications Conference, Nov. 28-Dec 1, 1983, Conference Record Volume 1 of 3, pages 392-398		
	18-7	Dale Gulick et al., "Interface the ISDN to Your PC With a Voice/Data Board", Design Applications, 2328 Electronic Design, 35 (1987) Dec. 10, No. 29, Hashbrouck Heights, NJ, USA, pages 85-88, XP 000004313		

_ _ _ _ _ _ _ _

Examiner Signature	Date Considered	
1		

	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
	Patent Under Re-Exam	6009469
STATEMENT BY APPLICANT FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 19 of 29	Confirmation No.	6565

NON-PATENT REFERENCES				
Examiner Initials*				
	19-1	Daniel C. Swinehart "Telephone Management in the Etherphone System", IEEE/IEICE Global Telecommunications Conference '87, Conference Record Volume 2 of 3, November 15-18, 1987, pages 1176-1180		
	19-2	Danny Cohen "A Network Voice Protocol NVP-II", April 1, 1981, pages 1-68		
	_19-3	Danny Cohen "Packet Communication of Online Speech", AFIPS Conference Proceedings, 1981 National Computer Conference, May 4-7, 1981, Chicago, Illinois, pages 169-176		
	19-4	Danny Cohen "Specifications for the Network Voice Protocol (NVP)", Request for Comments 741, January 29, 1976, pages 1-30		
	19-5	Don H. Johnson, et al. "A Local Access Network for Packetized Digital Voice Communication", IEEE Transactions on Communications, Vol. Com. 29, No. 5, May 1981, pages 679-688		
	19-6	Douglas B. Terry and Daniel C. Swinehart, "Managing Stored Voice in the Etherphone System", 1987 ACM 089791-242-X/87/0011/0103, pages 103-104		
	19-7	Douglas B. Terry and Daniel C. Swinehart, "Managing Stored Voice in the Etherphone System", ACM Transactions on Computer Systems, Vol. 6, No. 1, February 1988, pages 3-27		

Examiner Signature	Date Considered	

	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
	Patent Under Re-Exam	6009469
STATEMENT BY APPLICANT FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 20 of 29	Confirmation No.	6565

NON-PATENT REFERENCES				
Examiner Initials*	Cite No.	Non-patent Reference bibliographic information, where available	Notes	
	20-1	Eve M. Schooler, et al. "A Packet-Switched Multimedia Conferencing System", SIGOIS Bulletin, pages 12-22		
	20-2	Gary C. Kessler "ISDN Concepts, Facilities, and Services", McGraw-Hill, Inc., c1990, pages 224-231, ISBN 0-07-034242-3		
	20-3	Giulio Barberis, et al. "Coded Speech in Packet-Switched Networks: Models and		
	20-0	Experiments" IEEE Journal on Selected Areas in Communications, Vol. SAC-1, No. 6, December 1983, pages 1028-1038		
	20-4	H. Jonathan Chao, et al. "A Packet Video System Using the Dynamic Time Division Multiplexing Technique", IEEE Global Telecommunications Conference, Houston, Texas, December 1-4, 1988, Conference Record, Vol. 3, pages 0767-0772		
	20-5	H. Opderbeck "Throughput Degredations for Single Packet Messages", Request for Comments 632, ftp://ftp.isi.edu/in-notes/rfc632.txt, May 20, 1974, pages 1-6		
	20-6	Henning Schulzrinne "Voice Communication Across the Internet: A Network Voice Terminal", July 29, 1992, pages 1-34		
	20-7	Hiroshi Kobayashi and Hideaki Haruyama, "Voice, Data and Video Integrated Broadband Metropolitan Area Network", Electronics and Communications in Japan, Part 1, Vol. 73, No. 11, 1990, pages 34-42		

Examiner Signature	Date Considered	

	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
	Patent Under Re-Exam	6009469
STATEMENT BY APPLICANT FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 21 of 29	Confirmation No.	6565

NON-PATENT REFERENCES				
Examiner Initials*				
	21-1	Hiroyuki Ichikawa et al. "High-Speed Packet Switching Systems for Multimedia Communications", IEEE Journal on Selected Areas in Communications, October 1987, Volume SAC-5, Number 8 (ISSN 0733- 8716), pages 1336-1345		
	21-2	lan H. Merritt "Providing Telephone Line Access to a Packet Voice Network", University of Southern California, Marina Del Rey. Information Sciences Inst., February 1983, ADA126270		
	21-3	Implementation of Next-Generation Agent-Dedicated Communications, by Agatsuma et al., Tech Report of IEICE 94-216 (March 1995)		
	21-4	International Preliminary Examination Report (IPER) issued March 26, 1998 in corresponding International Application Serial No. PCT/US96/15504.		
	21-5	International Search Report issued January 27, 1998 in corresponding International Application Serial No. PCT/US96/15504.		
	21-6	Israel GITMAN, et al. "Economic Analysis of Integrated Voice and Data Networks: A Case Study" Proceedings of the IEEE, Vol. 66, No. 11, November 1978, pages 1549-1570		
	21-7	J. Huelamo, et al. "End User Premises Equipment and Terminals for Broadband Applications", Electrical Communication, Volume 64, Number 2/3, 1990		

Examiner Signature	Date Considered	

	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
	Patent Under Re-Exam	6009469
STATEMENT BY APPLICANT FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 22 of 29	Confirmation No.	6565

	NON-PATENT REFERENCES	
Cite No.	Non-patent Reference bibliographic information, where available	Notes
22-1	J. K. Reynolds et al., "Voice File Interchange Protocol (VFIP), Request for Comments 978, ftp://ftp.isi.edu/innotes/rfc978.txt, February 1986, pages 1-5	
22-2	J. Romkey "A Nonstandard For Transmission of IP Datagrams Over Serial Lines: Slip", Request for Comments 1055, ftp://ftp.isi.edu/in-notes/std/std47.txt, June 1988, pages 1-6	
22-3	James D. Mills, et al. "A data and voice system for the general service telephone network", Proceedings IECON '87, 1987 International Conference on IND. Electronics, Control, and Instrumentation, Cambridge, Massachusetts, November 3-6, 1987	
22-4	James W. Forgie "Speech Transmission in Packet-Switched Store-and-Forward Networks", AFIPS Conference Proceedings,1975 National Computer Conference, May 19-22, 1975, Anaheim, California, pages 137-142	
22-5	James W. Forgie "Voice Conferencing in Packet Networks", ICC '80, Conference Record, International Conference on Communications, Seattle, WA, June 8-12, 1980, Volume 1, 80CH1505-6 CSCB, pages 21.3.1-21.3.4	
22-6	Jane's Military Communications 1979-80, pages 452 and 453	
22-7	Jane's Military Communications 1985, pages 585, 546, and 545	
	No. 22-1 22-2 22-3 22-4 22-5 22-6	Cite No. Non-patent Reference bibliographic information, where available 22-1 J. K. Reynolds et al., "Voice File Interchange Protocol (VFIP), Request for Comments 978, ftp://ftp.isi.edu/innotes/rfc978.txt, February 1986, pages 1-5 22-2 J. Romkey "A Nonstandard For Transmission of IP Datagrams Over Serial Lines: Slip", Request for Comments 1055, ftp://ftp.isi.edu/in-notes/std/std47.txt, June 1988, pages 1-6 22-3 James D. Mills, et al. "A data and voice system for the general service telephone network", Proceedings IECON '87, 1987 International Conference on IND. Electronics, Control, and Instrumentation, Cambridge, Massachusetts, November 3-6, 1987 22-4 James W. Forgie "Speech Transmission in Packet-Switched Store-and-Forward Networks", AFIPS Conference Proceedings, 1975 National Computer Conference, May 19-22, 1975, Anaheim, California, pages 137-142 22-5 James W. Forgie "Voice Conferencing in Packet Networks", ICC '80, Conference Record, International Conference on Communications, Seattle, WA, June 8-12, 1980, Volume 1, 80CH1505-6 CSCB, pages 21.3.1-21.3.4 22-6 Jane's Military Communications 1979-80, pages 452 and 453

	Date Considered
--	--------------------

	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
INFORMATION DISCLOSURE	Patent Under Re-Exam	6009469
STATEMENT BY APPLICANT FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 23 of 29	Confirmation No.	6565

		NON-PATENT REFERENCES	
Examiner Initials*	Cite No.	Non-patent Reference bibliographic information, where available	Notes
	23-1	Jane's Military Communications 1989, Tenth Edition, Edited by John Williamson, ISBN 0710608772, pages 443, 507, and 512	
	23-2	Jane's Military Communications 1990-91, Eleventh Edition, Edited by John Williamson, ISBN 0710609000, pages [30], 264, 357, 398, 406, 450, 454, 456, 560, 572, 573, 814, 815, and 816	
	23-3	Jane's Military Communications 1992-93, Thirteenth Edition, Edited by John Williamson, ISBN 0710609809, pages 375, 376, 384, and 704	
	23-4	Jim Stevens, "Much More Idle Chatter About Reference Models", http://www- mice.cs.ucl.ac.uk/multimedia/misc/tcp_ip/8709.mm.www/0041.html, December 18, 1987, pages 1-9	
	23-5	John Bellamy, "Digital Telephony", c1982 John Wiley & Sons, Inc., pages 392-397 and 410-412	
	23-6	JP Appln. No. 2008-163825 Office Action (Translation)	
	23-7	K. Sohraby, et al. "ISDN Primary Rate Interface Impact on Performance of Integrated Voice and Data on CSMA/CD Networks A Measurement and Simulation Study", Globecom '90 IEEE Global Telecommunication Conference & Exhibition, San Diego, California, December 2-5, 1990, Volume 2, pages 0912-0919	

_ _ . _ _ _

Examiner Signature	Date Considered	

	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
	Patent Under Re-Exam	6009469
STATEMENT BY APPLICANT FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 24 of 29	Confirmation No.	6565

	NON-PATENT REFERENCES				
Examiner Initials*	Cite No.	Non-patent Reference bibliographic information, where available	Notes		
	24-1	Ken Sherman "Data Communications - A User's Guide", 3rd Edition, c1981 Prentice-Hall, Inc., pages 296-307 and 404-407			
	24-2	Kevin Jeffay, et al. "Kernel Support for Live Digital Audio and Video", pages 10-21, University of North Carolina at Chapel Hill, Department of Computer Science			
· · · · · · · · · · · · · · · · · · ·	24-3	Kyuta SAITO, et al. "Voice Packet Communication System for Private Networks", Globecom '89, IEEE Global Telecommunications Conference & Exhibition, Dallas, Texas, November 27-30, 1989, Volume 3, pages 1874-1878			
	24-4	Lawrence G. Roberts "The Evolution of Packet Switching", Proceedings of the IEEE, Vol. 66, No. 11, November 1978, pages 1307-1313			
	24-5	LIN, Hwa-Chun and C.S. Raghavendra, "A Dynamic Load-Balancing Policy With a Central Job Dispatcher (LBC)," IEEE Transactions on Software Engineering, Vol. 18, No. 2, February 1992, pages 148-158.			
	24-6	M. E. Ulug, et al. "Statistical Multiplexing of Data and Encoded Voice in a Transparent Intelligent Network", Fifth Data Communications Symposium, September 27-29, 1977, Snowbird, Utah, pages 6-14 - 6-20			
	24-7	M. Gopalakrishnan, et al. "Integrating Voice and Data SALAN: An Experimtental Local Area Network", Computer Communications, Vol. 9, No. 4, August 1986, pages 186-194 and page 169			

Examiner Signature	Date Considered	

	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
INFORMATION DISCLOSURE STATEMENT BY APPLICANT	Patent Under Re-Exam	6009469
FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 25 of 29	Confirmation No.	6565

NON-PATENT REFERENCES				
Examiner Initials*	Cite No.	Non-patent Reference bibliographic information, where available	Notes	
	25-1	M.J. Ross "Alternatives for Integrating Voice and Data", 1981 International Switching Symposium, ISS' 81 CIC Montreal, September 21-25, 1981		
	25-2	Natesa Janakiraman "An Overview of Recent Developments in the Designs and Applications of Customer Premises Switches", IEEE Communications Magazine, October 1985, Vol. 23, No. 10, pages 32-45		
	25-3	P. Borgnis-Desbordes, et al. "Variable-Speed Data Transmission", IBM Technical Disclosure Bulletin, Vol. 27, No. 4A, September 1984, pages 2269-2270		
	25-4	P. Venkat Rangan and Daniel C. Swinehart, "Software Architecture for Integration of Video Services in the Etherphone System", IEEE Journal on Selected Areas in Communication, Vol. 9, No. 9, December 1991, pages 1395-1404		
	25-5	Paul Francis, "Comparison of Geographical and Provider-rooted Internet Addressing," Computer Networks and ISDN Systems 27(3)437-448, 1994 (selected paper from INET 94/JENC 5)		
	25-6	Paul Gilster, "Internet Navigator", Maruzen Kabushiki-Kaisha (1st Ed.), pgs. 473-476, Feb. 28, 1995 (with translation and SOR)		
	25-7	Paul Tsuchiya, Tony Eng, "Extending the IP Internet Through Address Reuse," ACM SIGCOMM Computer Communications Review, 23(1):16-33, Jan. 1993		

	Examiner Signature	Date Considered		
--	-----------------------	--------------------	--	--

	Reexam number	90/010,422
	First Named Inventor	Mattaway et al.
	Patent Under Re-Exam	6009469
STATEMENT BY APPLICANT FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 26 of 29	Confirmation No.	6565

NON-PATENT REFERENCES				
Examiner Initials*			Notes	
	26-1	Philip H. Reagan, "Is it the PBX or is it the LAN?", Datamation, The Telecom Manager Emerges, 03/1984, Volume 30 Number 3, pages 3-4, 147, 148, 150		
	26-2	Polle T. Zellweger et al., "An Overview of the Etherphone System and its Applications", 2nd IEEE Conference on Computer Workstations, March 7-10, 1988, pages 160-168		
	26-3	R. BRAUDES et al., "Requirements for Multicast Protocols", Request for Comments 1458, Network Working Group, May 1993, pp. 1-19.		
	26-4	R. W. Meba, et al. "Experiments in Wideband Packet Technology", Digital Communications - New Directions in Switching and Networks, Proceedings of the International Seminar, Zurich, Switzerland, March 11-13, 1986, pages 135-139		
	26-5	R.P. McNamara, "Some Considerations of the Voice-Data Capabilities of Broadband Cable Networks", IEEE Digest of Papers Spring CompCon 82, February 22-25, 1982, pages 312-314		
	26-6	Randy Cole "Packet Voice: When It Makes Sense", Speech Technology, September/October 1982, pages 52-61.		
	26-7	Scott FLINN, "Coordinating Heterogeneous Time-Based Media Between Independent Applications" ACM Multimedia 95 - Electronic Proceedings November 5-9, 1995, pages 1-16.		

Examiner Signature	Date Considered	

	Reexam number	90/010,422
INFORMATION DISCLOSURE	First Named Inventor	Mattaway et al.
	Patent Under Re-Exam	6009469
STATEMENT BY APPLICANT FORM PTO-1449 (modified)		1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 27 of 29	Confirmation No.	6565

		NON-PATENT REFERENCES	
Examiner Initials*	Cite No.	Non-patent Reference bibliographic information, where available	Notes
	27-1	Shimmi Hattori et al., "Integrated Digital Switching System with Queueing Storage Facility", IEEE Transactions on Communications, Vol. Com-30, No. 8, August 1982, pages 1900-1905, (ISSN 0090-6778)	
	27-2	Steve Oltmanns, et al. "A Voice and Communications System for the IBM PC", Speech Technology, March/April 1986, pages 94-99	
	27-3	Stuart CHESHIRE et al., "Internet Mobility 4x4", www.acm.org, 1996, pages 1-12.	
	27-4	Susan Angebranndt et al., "Integrating Audio and Telephony in a Distributed Workstation Environment", Proceedings of the Summer 1991 USENIX Conference, June 10-14, 1991, Nashville, Tennessee, pages 419-435	
	27-5	T. Kamae "Visual Terminals and User Interfaces", FGCS North-Holland, pages 257- 278	
	27-6	T. Kamae "Voice/Data Integration in the INS Model System and Local Area Networks" IEEE Communications Magazine, December 1986, Vol. 24, No. 12, pages 7-15	
	27-7	T7540 Digital Telephone Codec, AT&T Microelectronics, January 1991, pages 1-62 and Data Sheet Addendum, July 1991, 4 pages	

Examiner Signature	Date Considered	
	L	

*Examiner: Initial if reference was considered, whether or not citation is in conformance with MPEP 609. Draw a line through citation if not in conformance and not considered. Include a copy of this form with next communication to applicant. Notes: If identified, the following is provided: EA = English Abtract, T = Translation, PF = Patent Family.

	Reexam number	90/010,422
INFORMATION DISCLOSURE	First Named Inventor	Mattaway et al.
	Patent Under Re-Exam	6009469
STATEMENT BY APPLICANT FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit 3992	3992
		KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 28 of 29	Confirmation No.	6565

	NON-PATENT REFERENCES	
Cite No.	Non-patent Reference bibliographic information, where available	Notes
28-1	Takashi Yamada, et al. "New Technologies - Multimedia High-throughput X.25 Packet Switching System", NTT Review, Vol. 1, No. 2, July 1989, pages 82-88	
28-2	talk (software) description from WikiPedia	
_28-3	Tamohiro Kawai, Nikkei Communications, No. 202, pgs 29-30, Nikkei BP, July 17, 1995 ("Communication software appears on the Internet") (w/ SOR)	
28-4	Theodore Bially, et al. "Voice Communication in Integrated Digital Voice and Data Networks", IEEE Transactions on Communications, Vol. Com-28, No. 9, September 1980, pages 1478-1490	-
28-5	Toru Tsuda, et al. "An Approach to Multi-Service Subscriber Loop System Using Packetized Voice/Data Terminals" ISSLS '78, The International Symposium on Subscriber Loops and Services, March 20-24, 1978, Atlanta, Georgia, Conference Record, pages 161-165	
28-6	Translation of Japanese Kokai H07-129488 (published May 19, 1995)	
28-7	U.S. Reexam Control No. 90/010,416 - 2009-08-27 PTO Office Action	
	No. 28-1 28-2 28-3 28-4 28-5 28-6	Cite No. Non-patent Reference bibliographic information, where available 28-1 Takashi Yamada, et al. "New Technologies - Multimedia High-throughput X.25 Packet Switching System", NTT Review, Vol. 1, No. 2, July 1989, pages 82-88 28-2 talk (software) description from WikiPedia 28-3 Tamohiro Kawai, Nikkei Communications, No. 202, pgs 29-30, Nikkei BP, July 17, 1995 ("Communication software appears on the Internet") (w/ SOR) 28-4 Theodore Bially, et al. "Voice Communication in Integrated Digital Voice and Data Networks", IEEE Transactions on Communications, Vol. Com-28, No. 9, September 1980, pages 1478-1490 28-5 Toru Tsuda, et al. "An Approach to Multi-Service Subscriber Loop System Using Packetized Voice/Data Terminals" ISSLS '78, The International Symposium on Subscriber Loops and Services, March 20-24, 1978, Atlanta, Georgia, Conference Record, pages 161-165 28-6 Translation of Japanese Kokai H07-129488 (published May 19, 1995)

_ _ _ _ _ _ _ _ _ _ _ _ _

Examiner Signature	Date Considered	
L		

*Examiner: Initial if reference was considered, whether or not citation is in conformance with MPEP 609. Draw a line through citation if not in conformance and not considered. Include a copy of this form with next communication to applicant. Notes: If identified, the following is provided: EA = English Abtract, T = Translation, PF = Patent Family.

	Reexam number	90/010,422
INFORMATION DISCLOSURE	First Named Inventor	Mattaway et al.
	Patent Under Re-Exam	6009469
FORM PTO-1449 (modified)	Issue Date	1999/12/28
	Group Art Unit	3992
	Examiner Name	KOSOWSKI, ALEXANDER J
	Attorney Docket No.	2655-0185
Sheet 29 of 29	Confirmation No.	6565

		NON-PATENT REFERENCES	
Examiner Initials*	Cite No.	Non-patent Reference bibliographic information, where available	Notes
	29-1	U.S. Reexam Control No. 90/010,421 - 2009-08-14 PTO Office Action	
	29-2	U.S. Reexam Control No. 90/010,424 - 2009-08-25 PTO Office Action	-
	29-3	V. Jacobson, et al. "TCP Extension for High-Speed Paths", Request for Comments 1185, ftp://ftp.isi.edu/in-notes/rfc1185.txt, October 1990, pages 1-21	
	29-4	V. Jacobson, et al. "TCP Extensions for High Performance", Request for Comments 1323, ftp://ftp.isi.edu/in-notes/rfc1323.txt, May 1992, pages 1-37	
	29-5	Vinton G. Cerf, "Packet Satellite Technology Reference Sources", Request for Comments 829, November 1982, http://www.cis.ohio-state.edu/htbin/rfc/rfc829.html, pages 1-5	
	29-6	VocalTec Internet Phone (TM) Version 2.5 Readme, VocalTec Ltd., 02/1995, 5 pages.	
	29-7	Written Opinion issued February 12, 1998 in corresponding International Application Serial No. PCT/US96/15504.	

Examiner Signature	Date Considered	
-----------------------	--------------------	--

*Examiner: Initial if reference was considered, whether or not citation is in conformance with MPEP 609. Draw a line through citation if not in conformance and not considered. Include a copy of this form with next communication to applicant. Notes: If identified, the following is provided: EA = English Abtract, T = Translation, PF = Patent Family.

(12) (19)	PATENT APPLICATION AUSTRALIAN PATENT OFFICE	(11) App	Dication No. AU 200059377 A	\1
(54)	Title Point-to-point internet protocol	- ,		
(51) ⁷	International Patent Classification(s) H04L 029/00			
(21)	Application No: 200059377	(22)	Application Date: 2000.09.13	
(43) (43)	Publication Date :2000.11.23Publication Journal Date :2000.11.23			
(62)	Divisional of: 199672476			
(71)	Applicant(s) NetSpeak Corporation			
(72)	Inventor(s) Glenn W Hutton; Shane D Mattaway; C	raig B Stric	kland	
(74)	Agent/Attorney DAVIES COLLISON CAVE,1 Little Collins	Street,MELI	BOURNE VIC 3000	

•

,


Abstract

An apparatus for establishing a point-to-point communication link, the apparatus operating in a computer system operatively coupled to another 5 computer system and a server over a computer network, the apparatus comprising means for transmitting an E-mail signal containing a network protocol address from a first process to a second process over the computer network, means for receiving a second network protocol address from the second process over the computer network protocol address for the second network protocol address address for establishing a point-to-point communication link between the first process and the second process over the computer network.

••••••

· _ ·

Cisco - Exhibit 1003 - Page 329

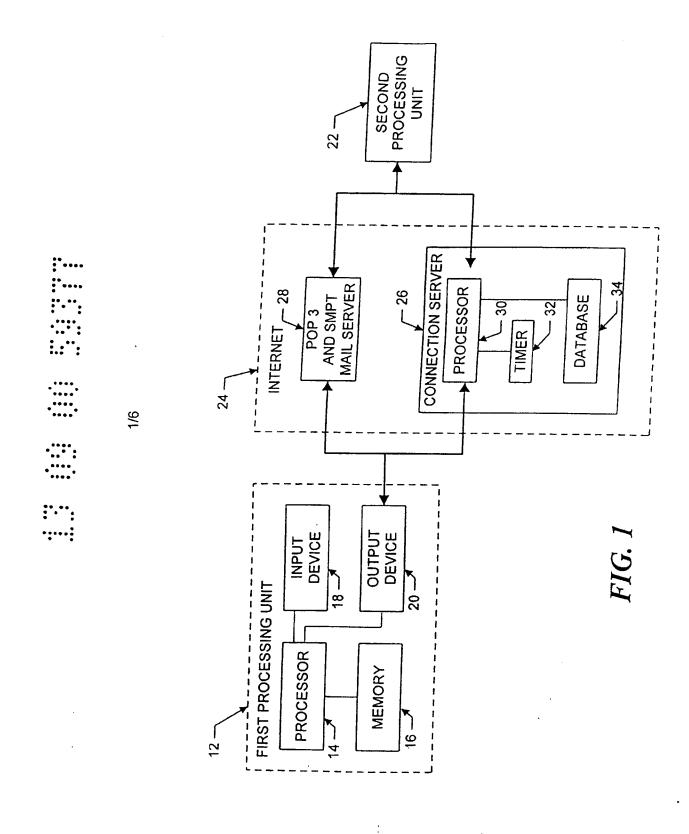

Cisco - Exhibit 1003 - Page 330

P/00/011 28/5/91 Regulation 3.2

A U S T R A L I A Patents Act 1990 COMPLETE SPECIFICATION STANDARD PATENT (ORIGINAL)

Name of Applicant:	NetSpeak Corporation, of 902 Clint Moore Road, Suite 10
	Raton, Florida 33487, United States of America.
Actual Inventors:	HUTTON, Glenn W
	MATTAWAY, Shane D STRICKLAND, Craig B
	STRICKLARD, Clarg B
Address for Service:	DAVIES COLLISON CAVE, Patent Attorneys, of 1 Little
	Street, Melbourne, Victoria 3000, Australia.
Invention Title:	"Point-to-Point Internet Protocol"

The following statement is a full description of this invention, including the best method of performing it known to us:

-1-

· ·-- - -

•

_

~

· ____

POINT-TO-POINT INTERNET PROTOCOL

The present invention relates, in general, to data processing systems, and more specifically, to a method and apparatus for facilitating audio communications over computer networks.

5

10

.....

20

The increased popularity of on-line services such as AMERICA ONLINE[™], COMPUSERVE®, and other services such as Internet gateways have spurred applications to provide multimedia, including video and voice clips, to online users. An example of an online voice clip application is VOICE E-MAIL FOR WINCIM and VOICE E-MAIL FOR AMERICA ONLINE[™], available from Bonzi Software, as described in "Simple Utilities Send Voice E-Mail Online", MULTIMEDIA WORLD, VOL. 2, NO. 9, August 1995, p. 52. Using such Voice E-Mail software, a user may create an audio message to be sent to a predetermined E-mail address specified by the user.

Generally, devices interfacing to the Internet and other online services may communicate with each other upon establishing respective device addresses. One type of device address is the Internet Protocol (IP) address, which acts as a pointer to the device associated with the IP address. A typical device may have a Serial Line Internet Protocol or Point-to-Point Protocol (SLIP/PPP) account with a permanent IP address for receiving E-mail, voicemail, and the like over the Internet. E-mail and voicemail is generally intended to convey text, audio, etc., with any

¹⁵ routing information such as an IP address and routing headers generally

being considered an artifact of the communication, or even gibberish to the recipient.

Devices such as a host computer or server of a company may include multiple modems for connection of users to the Internet, with a temporary IP address allocated to each user. For example, the host computer may have a general IP address "XXX.XXX.XXX," and each user may be allocated a successive IP address of XXX.XXX.XXX.10, XXX.XXX.XXX.11, XXX.XXX.12, etc. Such temporary IP addresses

10 may be reassigned or recycled to the users, for example, as each user is successively connected to an outside party. For example, a host computer of a company may support a maximum of 254 IP addresses which are pooled and shared between devices connected to the host computer.

Permanent IP addresses of users and devices accessing the Internet readily support point-to-point communications of voice and video signals over the Internet. For example, realtime video teleconferencing has been implemented using dedicated IP addresses and mechanisms known as reflectors.

A technique for matching domain names to Internet Protocol addresses is described in the text entitled "Internetworking With TCP/IP", 2nd Edition, by Douglas E. Comer, November 1992, Prentice Hall, Englewood Cliffs, New Jersey, U.S.A. Comer describes a domain name system and cooperative systems of name servers for matching domain names to network addresses. Each name server is a server program that supplies mapping of domain names to IP addresses. The system described in Comer, however, is not designed for use with network nodes whose network names or name to address bindings change frequently. International Publication WO 92/19054 discloses a network

--



•••••••

30

25

5

15

20

monitoring system including an address tracking module which uses passive monitoring of all packet communications over a local area network to maintain a name table of IP address mappings. The disclosed address tracking module is capable of monitoring only a small number of nodes on a local area network and is not suitable for use with a multitude of nodes over a wide area network.

None of the above-described systems are suitable for use with processes which have dynamically assigned network protocol addresses and which are communicating over wide area or global networks.

Due to the dynamic nature of temporary IP addresses of some devices accessing the Internet, point-to-point communications in realtime of voice and video have been generally difficult to attain.

In accordance with the present invention, there is provided an apparatus for establishing a point-to-point communication link, said apparatus operating in a computer system operatively coupled to another computer system and a server over a computer network, said apparatus comprising:

a. means for transmitting an E-mail signal containing a network protocol address from a first process to a second process over the computer network;

b. means for receiving a second network protocol address from the second process over the computer network; and

c. means, responsive to the second network protocol address, for establishing a point-to-point communication link between the first process and the second process over the computer network.

The present invention also provides a method of establishing a point-topoint communication between a first process and a second process, said method

25 for use in a first computer process operatively coupled over a computer network to a second process and a mail server process, said method comprising:

a. transmitting an E-mail signal to the mail server process over the computer network, the E-mail signal containing a first network protocol address assigned to the first process upon connection to the computer network;

•••••

- 2B -

b. receiving a second network protocol address from the second process over the computer network, the second network protocol address assigned to the second process upon connection to the computer network; and

c. establishing a point-to-point communication link between the first
 5 process and the second process over the computer network, in response to receiving the second network protocol address.

The present invention also provides an apparatus for establishing a pointto-point communication link, said apparatus operating in a computer system operatively connectable to other processes and a server process over a computer 10 network, said apparatus comprising:

a. program logic configured to transmit an E-mail signal containing a network protocol address from a first process to a second process over the computer network;

b. program logic configured to receive a second network protocol address from the second process over the computer network; and

c. program logic, responsive to the second network protocol address, and configured to establish a point-to-point communication link between the first process and the second process over the computer network.

The present invention also provides a computer program product for use with a computer system, the computer system capable of executing a first process and operatively connectable to a second process and a server over a computer network, the computer program product comprising a computer useable medium having program code embodied in the medium, the program code further comprising:

25 program code for transmitting an E-mail signal comprising a network protocol address of the first process to the second processor over the computer network;

program code for receiving a second network protocol address from the second process over the computer network; and

30 program code, responsive to the second network protocol address, for establishing a point-to-point communication link between the first process and the

---- --

• •

second process over the computer network.

The present invention also provides a method of establishing a point-topoint communication between a first process and second process, said method for use in a first computer process operatively coupled over a computer network to a 5 second process and an E-mail server, said method comprising the steps of:

A. transmitting to the second process over the computer network an E-mail signal comprising a network protocol address of the first process;

B. receiving from the second process over the computer network a second network protocol address; and

C. in response to the second network protocol address, establishing a point-to-point communication link between the first process and the second process over the computer network.

Preferred embodiments of the present invention are hereinafter described, by way of example only, with reference to the following drawings, wherein:

FIG 1 illustrates, in block diagram format, a system for the disclosed pointto-point Internet protocol:

FIG 2 illustrates, in block diagram format, the system using a secondary point-to-point Internet protocol;

FIG 3 illustrates, in block diagram format; the system of FIGS 1-2 with the point-to-point Internet protocol established;

FIG 4 is another block diagram of the system of FIGS 1-2 with audio communications being conducted;

...

10

20

.

. . .

FIG. 5 illustrates a display screen for a processing unit;

FIG. 6 illustrates another display screen for a processing unit;

FIG. 7 illustrates a flowchart of the initiation of the point-to-point Internet protocols;

5

FIG. 8 illustrates a flowchart of the performance of the primary point-to-point Internet protocols; and

FIG. 9 illustrates a flowchart of the performance of the secondary point-to-point Internet protocol.

•:::•

:··:

· __'

Cisco - Exhibit 1003 - Page 337

Referring now in specific detail to the drawings, with like reference numerals identifying similar or identical elements, as shown in FIG. 1, the present disclosure describes a point-to-point network protocol and system

5

• 10

15

10 for using such a protocol.

In an exemplary embodiment, the system 10 includes a first processing unit 12 for sending at least a voice signal from a first user to a second user. The first processing unit 12 includes a processor 14, a memory 16, an input device 18, and an output device 20. The output device 20 includes at least one modem capable of, for example, 14.4 kbaud communications and operatively connected via wired and/or wireless communication connections to the Internet or other computer networks such as an Intranet, i.e., a private computer network. One skilled in the art would understand that the input device 18 may be implemented at least in part by the modem of the output device 20 to allow input signals from the communication connections to be received. The second processing unit 22 may have a processor, memory, and input and output devices, including at least one modem and associated communication connections, as described above for the first processing unit 12. In an exemplary embodiment, each of the processing units 12, 22 may execute the WEBPHONE™ Internet telephony application available from NetSpeak Corporation, Boca Raton, FL, which is capable of performing the disclosed point-to-point Internet protocol and system 10, as described herein.

The first processing unit 12 and the second processing unit 22 are operatively connected to the Internet 24 by communication devices and software known in the art, such as an Internet Service Provider (ISP) or an Internet gateway. The processing units 12, 22 may be operatively interconnected through the Internet 24 to a connection server 26, and

i (20 t

25

may also be operatively connected to a mail server 28 associated with the Internet 24.

The connection server 26 includes a processor 30, a timer 32 for generating time stamps, and a memory such as a database 34 for 5 storing, for example, E-mail and Internet Protocol (IP) addresses of logged-in units. In an exemplary embodiment, the connection server 26 may be a SPARC 5 server or a SPARC 20 server, available from SUN MICROSYSTEMS, INC., Mountain View, CA, having a central processing unit (CPU) as processor 30, an operating system (OS) such as UNIX, for providing timing operations such as maintaining the timer 32, a hard drive or fixed drive, as well as dynamic random access memory (DRAM) for storing the database 34, and a keyboard and display and/or other input and output devices (not shown in FIG. 1). The database 34 may be an SQL database available from ORACLE or INFORMIX.

In an exemplary embodiment, the mail server 28 may be a Post Office Protocol (POP) Version 3 mail server including a processor, memory, and stored programs operating in a UNIX environment, or, alternatively, another OS, to process E-mail capabilities between processing units and devices over the Internet 24.

15

.....

20

•••••

The first processing unit 12 may operate the disclosed point-topoint Internet protocol by a computer program described hereinbelow in conjunction with FIG. 6, which may be implemented from compiled and /or interpreted source code in the C++ programming language and which may be downloaded to the first processing unit 12 from an external

25 computer. The operating computer program may be stored in the memory 16, which may include about 8 MB RAM and/or a hard or fixed drive having about 8 MB. Alternatively, the source code may be implemented in the first processing unit 12 as firmware, as an erasable read only memory (EPROM), etc. It is understood that one skilled in the

art would be able to use programming languages other than C++ to implement the disclosed point-to-point network protocol and system 10.

The processor 14 receives input commands and data from a first user associated with the first processing unit 12 though the input device 18, which may be an input port connected by a wired, optical, or a wireless connection for electromagnetic transmissions, or alternatively may be transferable storage media, such as floppy disks, magnetic tapes, compact disks, or other storage media including the input data from the first user.

The input device 18 may include a user interface (not shown) having, for example, at least one button actuated by the user to input commands to select from a plurality of operating modes to operate the first processing unit 12. In alternative embodiments, the input device 18 may include a keyboard, a mouse, a touch screen, and/or a data reading device such as a disk drive for receiving the input data from input data files stored in storage media such as a floppy disk or, for example, an 8 mm storage tape. The input device 18 may alternatively include connections to other computer systems to receive the input commands and data therefrom.

The first processing unit 12 may include a visual interface for use in conjunction with the input device 18 and output device 20 similar to those screens illustrated in FIGS. 5-6, discussed below. It is also understood that alternative devices may be used to receive commands and data from the user, such as keyboards, mouse devices, and

25 graphical user interfaces (GUI) such as WINDOWS™ 3.1 available form MICROSOFT Corporation, Redmond, WA., and other operating systems and GUIs, such as OS/2 and OS/2 WARP, available from IBM CORPORATION, Boca Raton, FL. Processing unit 12 may also include microphones and/or telephone handsets for receiving audio voice data

10

5

20 •••••••

and commands, speech or voice recognition devices, dual tone multifrequency (DTMF) based devices, and/or software known in the art to accept voice data and commands and to operate the first processing unit 12.

5

10

••••••

15

.....

20

25

:···:

••••••

In addition, either of the first processing unit 12 and the second processing unit 22 may be implemented in a personal digital assistant (PDA) providing modem and E-mail capabilities and Internet access, with the PDA providing the input/output screens for mouse interactions or for touchscreen activation as shown, for example, in FIGS. 5-6, as a combination of the input device 18 and output device 20.

For clarity of explanation, the illustrative embodiment of the disclosed point-to-point Internet protocol and system 10 is presented as having individual functional blocks, which may include functional blocks labeled as "processor" and "processing unit". The functions represented by these blocks may be provided through the use of either shared or dedicated hardware, including, but not limited to, hardware capable of executing software. For example, the functions of each of the processors and processing units presented herein may be provided by a shared processor or by a plurality of individual processors. Moreover, the use of the functional blocks with accompanying labels herein is not to be construed to refer exclusively to hardware capable of executing software. Illustrative embodiments may include digital signal processor (DSP) hardware, such as the AT&T DSP16 or DSP32C, read-only memory (ROM) for storing software performing the operations discussed below, and random access memory (RAM) for storing DSP results. Very large scale integration (VLSI) hardware embodiments, as well as custom VLSI circuitry in combination with a general purpose DSP circuit, may also be provided. Any and all of these embodiments may be deemed to fail within the meaning of the labels for the functional blocks as used herein.

The processing units 12, 22 are capable of placing calls and connecting to other processing units connected to the Internet 24, for example, via dialup SLIP/PPP lines. In an exemplary embodiment, each processing unit assigns an unsigned long session number, for example, a 32- bit long sequence in a *.ini file for each call. Each call may be assigned a successive session number in sequence, which may be used by the respective processing unit to associate the call with one of the

SLIP/PPP lines, to associate a <ConnectOK> response signal with a <Connect Request> signal, and to allow for multiplexing and demultiplexing of inbound and outbound conversations on conference lines, as explained hereinafter.

For callee (or called) processing units with fixed IP addresses, the caller (or calling) processing unit may open a "socket", i.e. a file handle or address indicating where data is to be sent, and transmit a <Call> command to establish communication with the callee utilizing, for example, datagram services such as Internet Standard network layering as well as transport layering, which may include a Transport Control Protocol (TCP) or a User Datagram Protocol (UDP) on top of the IP. Typically, a processing unit having a fixed IP address may maintain at least one open socket and a called processing unit waits for a <Call> command to assign the open socket to the incoming signal. If all lines are in use, the callee processing unit sends a BUSY signal or message to the callee processing unit. As shown in FIG. 1, the disclosed point-topoint Internet protocol and system 10 operate when a callee processing unit does not have a fixed or predetermined IP address. In the exemplary embodiment and without loss of generality, the first processing unit 12 is the caller processing unit and the second processing unit 22 is the called processing unit. When either of processing units 12, 22 logs on to the Internet via a dial-up connection, the respective unit is provided a

20

5

10

25

.. .

dynamically allocated IP address by the a connection service provider.

Upon the first user initiating the point-to-point Internet protocol when the first user is logged on to the Internet 24, the first processing unit 12 automatically transmits its associated E-mail address and its

dynamically allocated IP address to the connection server 26. The 5 connection server 26 then stores these addresses in the database 34 and time stamps the stored addresses using timer 32. The first user operating the first processing unit 12 is thus established in the database 34 as an active on-line party available for communication using the disclosed point-to-point Internet protocol. Similarly, a second user 10 operating the second processing unit 22, upon connection to the Internet 24 through the a connection service provider, is processed by the connection server 26 to be established in the database 34 as an active on-line party.

The connection server 26 may use the time stamps to update the status of each processing unit; for example, after 2 hours, so that the online status information stored in the database 34 is relatively current. Other predetermined time periods, such as a default value of 24 hours. may be configured by a systems operator.

The first user with the first processing unit 12 initiates a call using, for example, a Send command and/or a command to speeddial an NTH stored number, which may be labeled [SND] and [SPD] [N], respectively, by the input device 18 and/or the output device 20, such as shown in FIGS. 5-6. In response to either the Send or speeddial commands, the first processing unit 12 retrieves from memory 16 a stored E-mail address of the callee corresponding to the NTH stored number. Alternatively, the first user may directly enter the E-mail address of the callee.

The first processing unit 12 then sends a query, including the Email address of the callee, to the connection server 26. The connection

· - · · _ -

.

15 ····: ·:···

server 26 then searches the database 34 to determine whether the callee is logged-in by finding any stored information corresponding to the callee's E-mail address indicating that the callee is active and on-line. If the callee is active and on-line, the connection server 26 then performs the primary point-to-point Internet protocol; i.e. the IP address of the callee is retrieved from the database 34 and sent to the first processing unit 12. The first processing unit 12 may then directly establish the pointto-point Internet communications with the callee using the IP address of the callee.

If the callee is not on-line when the connection server 26 determines the callee's status, the connection server 26 sends an OFF-LINE signal or message to the first processing unit 12. The first processing unit 12 may also display a message such as "Called Party Off-Line" to the first user.

When a user logs off or goes off-line from the Internet 24, the connection server 26 updates the status of the user in the database 34; for example, by removing the user's information, or by flagging the user as being off-line. The connection server 26 may be instructed to update the user's information in the database 34 by an off-line message, such as a data packet, sent automatically from the processing unit of the user prior to being disconnected from the connection server 26. Accordingly, an off-line user is effectively disabled from making and/or receiving point-to-point Internet communications.

As shown in FIGS. 2-4, the disclosed secondary point-to-point Internet protocol may be used as an alternative to the primary point-topoint Internet protocol described above, for example, if the connection server 26 is non-responsive, inoperative, and/or unable to perform the primary point-to-point Internet protocol, as a non-responsive condition. Alternatively, the disclosed secondary point-to-point Internet protocol may

11



25

---- . .---

5

be used independent of the primary point-to-point Internet protocol. In the disclosed secondary point-to-point Internet protocol, the first processing unit 12 sends a <ConnectRequest> message via E-mail over the Internet 24 to the mail server 28. The E-mail including the

5 <ConnectRequest> message may have, for example, the subject [*wp#XXXXXX#nnn.nnn.nnn.#emailAddr]

where nnn.nnn.nnn.nnn. is the current (i.e. temporary or permanent) IP address of the first user, and XXXXXXXX is a session number, which may be unique and associated with the request of the first user to initiate point-to-point communication with the second user.


As described above, the first processing unit 12 may send the <ConnectRequest> message in response to an unsuccessful attempt to perform the primary point-to-point Internet protocol. Alternatively, the first processing unit 12 may send the <ConnectRequest> message in response to the first user initiating a SEND command or the like.

After the <ConnectRequest> message via E-mail is sent, the first processing unit 12 opens a socket and waits to detect a response from the second processing unit 22. A timeout timer, such as timer 32, may be set by the first processing unit 12, in a manner known in the art, to wait for a predetermined duration to receive a <ConnectOK> signal. The processor 14 of the first processing unit 12 may cause the output device 20 to output a Ring signal to the user, such as an audible ringing sound, about every 3 seconds . For example, the processor 14 may output a *.wav file, which may be labeled RING.WAV, which is processed by the output device 20 to output an audible ringing sound.

The mail server 28 then polls the second processing unit 22, for example, every 3-5 seconds, to deliver the E-mail. Generally, the second processing unit 22 checks the incoming lines, for example, at regular intervals to wait for and to detect incoming E-mail from the mail server 28

•••

10



25

through the Internet 24.

Typically, for sending E-mail to users having associated processing units operatively connected to a host computer or server operating an Internet gateway, E-mail for a specific user may be sent over the Internet 24 and directed to the permanent IP address or the SLIP/PPP account designation of the host computer, which then assigns a temporary IP address to the processing unit of the specified user for properly routing the E-mail. The E-mail signal may include a name or other designation such as a user name which identifies the specific user regardless of the processing unit assigned to the user; that is, the host computer may track and store the specific device where a specific user is assigned or logged on, independent of the IP address system, and so the host computer may switch the E-mail signal to the device of the specific user. At that time, a temporary IP address may be generated or assigned to the specific user and device.

Upon detecting and/or receiving the incoming E-mail signal from the first processing unit 12, the second processing unit 22 may assign or may be assigned a temporary IP address. Therefore, the delivery of the E-mail through the Internet 24 provides the second processing unit 22 with a session number as well as IP addresses of both the first processing unit 12 and the second processing unit 22.

Point-to-point communication may then be established by the processing unit 22 processing the E-mail signal to extract the <ConnectRequest> message, including the IP address of the first processing unit 12 and the session number. The second processing unit 22 may then open a socket and generate a <ConnectOK> response signal, which includes the temporary IP address of the second processing unit 22 as well as the session number of the first processing unit.

The second processing unit 22 sends the <ConnectOK> signal

·:···<u>i</u>

5

10

25

directly over the Internet 24 to the IP address of the first processing unit 12 without processing by the mail server 28, and a timeout timer of the second processing unit 22 may be set to wait and detect a <Call> signal expected from the first processing unit 12.

Realtime point-to-point communication of audio signals over the Internet 24, as well as video and voicemail, may thus be established and supported without requiring permanent IP addresses to be assigned to either of the users or processing units 12, 22. For the duration of the realtime point-to-point link, the relative permanence of the current IP addresses of the processing units 12, 22 is sufficient, whether the current IP addresses were permanent (i.e. predetermined or preassigned) or temporary (i.e. assigned upon initiation of the point-to-point communication).

5

10

15

20

•••••

In the exemplary embodiment, a first user operating the first processing unit 12 is not required to be notified by the first processing unit 12 that an E-mail is being generated and sent to establish the point-topoint link with the second user at the second processing unit 22. Similarly, the second user is not required to be notified by the second processing unit 22 that an E-mail has been received and/or a temporary IP address is associated with the second processing unit 22. The processing units 12, 22 may perform the disclosed point-to-point Internet protocol automatically upon initiation of the point-to-point communication command by the first user without displaying the E-mail interactions to either user. Accordingly, the disclosed point-to-point Internet protocol

25 may be transparent to the users. Alternatively, either of the first and second users may receive, for example, a brief message of "CONNECTION IN PROGRESS" or the like on a display of the respective output device of the processing units 12, 22.

After the initiation of either the primary or the secondary point-to-

point Internet protocols described above in conjunction with FIGS. 1-2, the point-to-point communication link over the Internet 24 may be established as shown in FIGS. 3-4 in a manner known in the art. For example, referring to FIG. 3, upon receiving the <ConnectorOK> signal

from the second processing unit 22, the first processing unit 12 extracts the IP address of the second processing unit 22 and the session number, and the session number sent from the second processing unit 22 is then checked with the session number originally sent from the first processing unit 12 in the <ConnectRequest> message as E-mail. If the session

numbers sent and received by the processing unit 12 match, then the first processing unit 12 sends a <Call> signal directly over the Internet 24 to the second processing unit 22; i.e. using the IP address of the second processing unit 22 provided to the first processing unit 12 in the <ConnectOK> signal.

15

20

•••••

Upon receiving the <Call> signal, the second processing unit 22 may then begin a ring sequence, for example, by indicating or annunciating to the second user that an incoming call is being received. For example, the word "CALL" may be displayed on the output device of the second processing unit 22. The second user may then activate the second processing unit 22 to receive the incoming call.

Referring to FIG. 4, after the second processing unit 22 receives the incoming call, realtime audio and/or video conversations may be conducted in a manner known in the art between the first and second users through the Internet 24, for example, by compressed digital audio

25 signals. Each of the processing units 12, 22 also display to each respective user the words "IN USE" to indicate that the point-to-point communication link is established and audio or video signals are being transmitted.

In addition, either user may terminate the point-to-point

communication link by, for example, activating a termination command, such as by activating an [END] button or icon on a respective processing unit, causing the respective processing unit to send an <End> signal which causes both processing units to terminate the respective sockets, as well as to perform other cleanup commands and functions known in the art.

5

10

15

20

.....

•••••

····.

• • • • • •

FIGS. 5-6 illustrate examples of display screens 36 which may be output by a respective output device of each processing unit 12, 22 of FIGS. 1-4 for providing the disclosed point-to-point Internet protocol and system 10. Such display screens may be displayed on a display of a personal computer (PC) or a PDA in a manner known in the art.

As shown in FIG. 5, a first display screen 36 includes a status area 38 for indicating, for example, a called user by name and/or by IP address or telephone number; a current function such as C2; a current time; a current operating status such as "IN USE", and other control icons such as a down arrow icon 40 for scrolling down a list of parties on a current conference line. The operating status may include such annunciators as "IN USE," "IDLE," "BUSY," "NO ANSWER," "OFFLINE," "CALL," "DIALING," "MESSAGES," and "SPEEDDIAL."

Other areas of the display screen 36 may include activation areas or icons for actuating commands or entering data. For example, the display screen 36 may include a set of icons 42 arranged in columns and rows including digits 0-9 and commands such as END, SND, HLD, etc. For example, the END and SND commands may be initiated as described

25 above, and the HLD icon 44 may be actuated to place a current line on hold. Such icons may also be configured to substantially simulate a telephone handset or a cellular telephone interface to facilitate ease of use, as well as to simulate function keys of a keyboard. For example, icons labeled L1-L4 may be mapped to function keys F1-F4 on standard

PC keyboards, and icons C1-C3 may be mapped to perform as combinations of function keys, such as CTRL-F1, CTRL-F2, and CTRL-F3, respectively. In addition, the icons labeled L1-L4 and C1-C3 may include circular regions which may simulate light emitting diodes (LEDs) which indicate that the function or element represented by the respective icon is active or being performed.

5

10

15

····

•••••

25

. .

••••••

Icons L1-L4 may represent each of 4 lines available to the caller, and icons C1-C3 may represent conference calls using at least one line to connect, for example, two or more parties in a conference call. The icons L1-L4 and C1-C3 may indicate the activity of each respective line or conference line. For example, as illustrated in FIG. 5, icons L1-L2 may have lightly shaded or colored circles, such as a green circle, indicating that each of lines 1 and 2 are in use, while icons L3-L4 may have darkly shaded or color circles, such as a red or black circle, indicating that each of lines 3 and 4 are not in use. Similarly, the lightly shaded circle of the icon labeled C2 indicates that the function corresponding to C2 is active, as additionally indicated in the status are 38, while darkly shaded circles of icons labeled C1 and C3 indicate that such corresponding functions are not active.

The icons 42 are used in conjunction with the status area 38. For example, using a mouse for input, a line that is in use, as indicated by the lightly colored circle of the icon, may be activated to indicate a party's name by clicking a right mouse button for 5 seconds until another mouse click is actuated or the [ESC] key or icon is actuated. Thus, the user may switch between multiple calls in progress on respective lines.

Using the icons as well as an input device such as a mouse, a user may enter the name or alias or IP address, if known, of a party to be called by either manually entering the name, by using the speeddial feature, or by double clicking on an entry in a directory stored in the

memory, such as the memory 16 of the first processing unit 12, where the directory entries may be scrolled using the status area 38 and the down arrow icon 40.

Once a called party is listed in the status area 38 as being active on a line, the user may transfer the called party to another line or a conference line by clicking and dragging the status area 38, which is represented by a reduced icon 46. Dragging the reduced icon 46 to any one of line icons L1-L4 transfers the called party in use to the selected line, and dragging the reduced icon 46 to any one of conference line icons C1-C3 adds the called party to the selected conference call.

5

10

15

····

····· 20

25

Other features may be supported, such as icons 48-52, where icon 48 corresponds to, for example, an ALT-X command to exit the communication facility of a processing unit, and icon 50 corresponds to, for example, an ALT-M command to minimize or maximize the display screen 36 by the output device of the processing unit. Icon 52 corresponds to an OPEN command, which may, for example, correspond to pressing the O key on a keyboard, to expand or contract the display screen 36 to represent the opening and closing of a cellular telephone. An "opened" configuration is shown in FIG. 5, and a "closed" configuration is shown in FIG. 6. In the "opened" configuration, additional features such as output volume (VOL) controls, input microphone (MIC) controls, waveform (WAV) sound controls, etc.

The use of display screens such as those shown in FIGS. 5-6 provided flexibility in implementing various features available to the user. It is to be understood that additional features such as those known in the art may be supported by the processing units 12, 22.

Alternatively, it is to be understood that one skilled in the art may implement the processing units 12, 22 to have the features of the display screens in FIGS. 5-6 in hardware; i.e. a wired telephone or wireless

cellular telephone may include various keys, LEDs, liquid crystal displays (LCDs), and touchscreen actuators corresponding to the icons and features shown in FIGS. 5-6. In addition, a PC may have the keys of a keyboard and mouse mapped to the icons and features shown in FIGS.

5

.... 10

••••• 15

...

••••••

20

. 25

5-6.

Referring to FIG. 7, the disclosed point-to-point Internet protocol and system 10 is illustrated. First processing unit 12 initiates the point-topoint Internet protocol in step 56 by sending a query from the first processing unit 12 to the connection server 26. If connection server 26 is operative to perform the point-to-point Internet protocol, in step 58, first processing unit 12 receives an on-line status signal from the connection server 26, such signal may include the IP address of the callee or a "Callee Off-Line" message. Next, first processing unit 12 performs the primary point-to-point Internet protocol in step 60, which may include receiving, at the first processing unit 12, the IP address of the callee if the callee is active and on-line. Alternatively, processing unit 60 may initiate and perform the secondary point-to-point Internet protocol in step 62, if the called party is not active and/or on-line.

Referring to FIG. 8, in conjunction with FIGS. 1 and 3-4, the disclosed point-to-point Internet protocol and system 10 is illustrated. Connection server 26 starts the point-to-point Internet protocol, in step 64, and timestamps and stores E-mail and IP addresses of logged-in users and processing units in the database 34 in step 66. Connection server 26 receives a query from a first processing unit 12 in step 68 to determine whether a second user or second processing unit 22 is logged-in to the Internet 24, with the second user being specified, for example, by an E-mail address. Connection server 26 retrieves the IP address of the specified user from the database 34 in step 70, if the specified user is logged-in to the Internet, and sends the retrieved IP address to the first

processing unit 12 in step 72 to enable first processing unit 12 to establish point-to-point communications with the specified second user.

The disclosed secondary point-to-point Internet protocol operates as shown in FIG. 9. First processing unit 12 generates an E-mail signal, including a session number and a first IP address corresponding to a first 5 processing unit in step 76. First processing unit 12 transmits the E-mail signal as a <ConnectRequest> signal to the Internet 24 in step 78. The E-mail signal is delivered through the Internet 24 using a mail server 28 to the second processing unit 22 in step 80. Second processing unit 22 10 extracts the session number and the first IP address from the E-mail signal in step 82 and transmits or sends the session number and a second IP address corresponding to the second processing unit 22, back to the first processing unit 12 through the Internet 24, in step 84. First processing unit 12 verifies the session number received from the second processing unit 22 in step 86, and establishes a point-to-point Internet communication link between the first processing unit 12 and second processing unit 22 using the first and second IP addresses in step 88.

.... 15

:···.

20

While the disclosed point-to-point Internet protocols and system have been particularly shown and described with reference to the preferred embodiments, it is understood by those skilled in the art that various modifications in form and detail may be made therein without departing from the scope and spirit of the invention. Accordingly, modifications such as those suggested above, but not limited thereto, are to be considered within the scope of the invention.

- --

Throughout this specification and the claims which follow, unless the context requires otherwise, the word "comprise", and variations such as "comprises" and "comprising", will be understood to imply the inclusion of a stated integer or step or group of integers or steps but not the exclusion of any other 5 integer or step or group of integers or steps.

The reference to any prior art in this specification is not, and should not be taken as, an acknowledgment or any form of suggestion that that prior art forms part of the common general knowledge in Australia.

••••••

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

 Apparatus for establishing a point-to-point communication link, said apparatus operating in a computer system operatively coupled to another
 computer system and a server over a computer network, said apparatus comprising:

a. means for transmitting an E-mail signal containing a network protocol address from a first process to a second process over the computer network;

b. means for receiving a second network protocol address from the
 second process over the computer network; and

c. means, responsive to the second network protocol address, for establishing a point-to-point communication link between the first process and the second process over the computer network.

15 2. A method of establishing a point-to-point communication between a first process and a second process, said method for use in a first computer process operatively coupled over a computer network to a second process and a mail server process, said method comprising:

a. transmitting an E-mail signal to the mail server process over the
 20 computer network, the E-mail signal containing a first network protocol address
 assigned to the first process upon connection to the computer network;

b. receiving a second network protocol address from the second process over the computer network, the second network protocol address assigned to the second process upon connection to the computer network; and

25

· _--

:•••:

••••••••••••

c. establishing a point-to-point communication link between the first process and the second process over the computer network, in response to receiving the second network protocol address.

3. Apparatus for establishing a point-to-point communication link, said 30 apparatus operating in a computer system operatively connectable to other processes and a server process over a computer network, said apparatus comprising:

а. program logic configured to transmit an E-mail signal containing a network protocol address from a first process to a second process over the 5 computer network;

program logic configured to receive a second network protocol b. address from the second process over the computer network; and

program logic, responsive to the second network protocol address, C. and configured to establish a point-to-point communication link between the first process and the second process over the computer network.

A computer program product for use with a computer system, the computer 4. system capable of executing a first process and operatively connectable to a second process and a server over a computer network, the computer program product comprising a computer useable medium having program code embodied in the medium, the program code further comprising:

program code for transmitting an E-mail signal comprising a network protocol address of the first process to the second processor over the computer network:

program code for receiving a second network protocol address from the 20 second process over the computer network; and

program code, responsive to the second network protocol address, for establishing a point-to-point communication link between the first process and the second process over the computer network.

25

10

15

····

••••••

A method of establishing a point-to-point communication between a first 5. process and second process, said method for use in a first computer process operatively coupled over a computer network to a second process and an E-mail server, said method comprising the steps of:

- -

30 transmitting to the second process over the computer network an E-mail signal comprising a network protocol address of the first process;

B. receiving from the second process over the computer network a second network protocol address; and

C. in response to the second network protocol address, establishing a point-to-point communication link between the first process and the second
 5 process over the computer network.

6. Apparatus substantially as hereinbefore described with reference to the accompanying drawings.

10 7. A method substantially as hereinbefore described with reference to the accompanying drawings.

8. A computer program product substantially as hereinbefore described with reference to the accompanying drawings.

15


DATED this 8th day of September 2000

Cisco - Exhibit 1003 - Page 357


 NetSpeak Corporation

 20
 By its Patent Attorneys

 DAVIES COLLISON CAVE

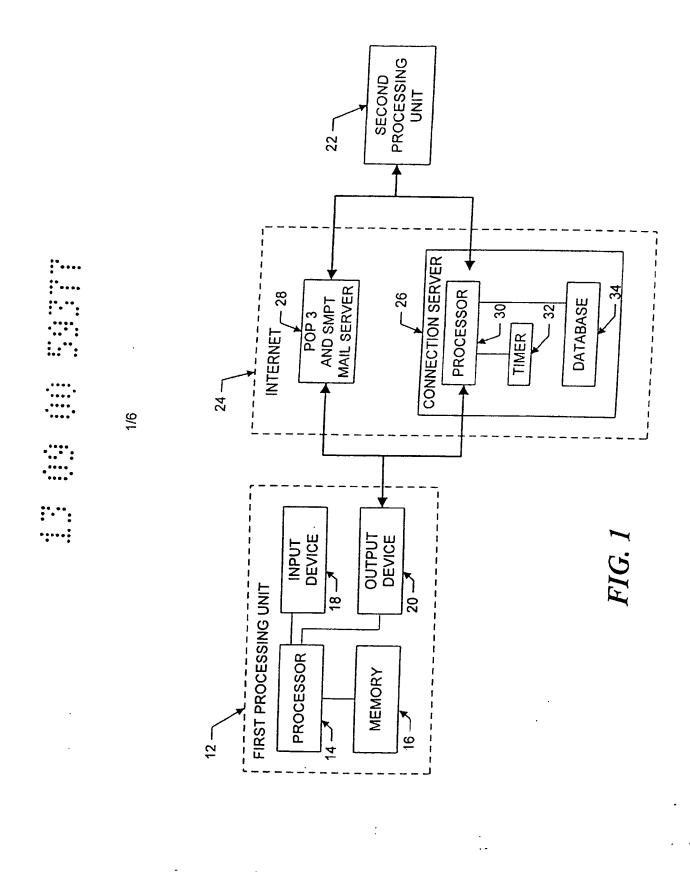

Cisco - Exhibit 1003 - Page 358

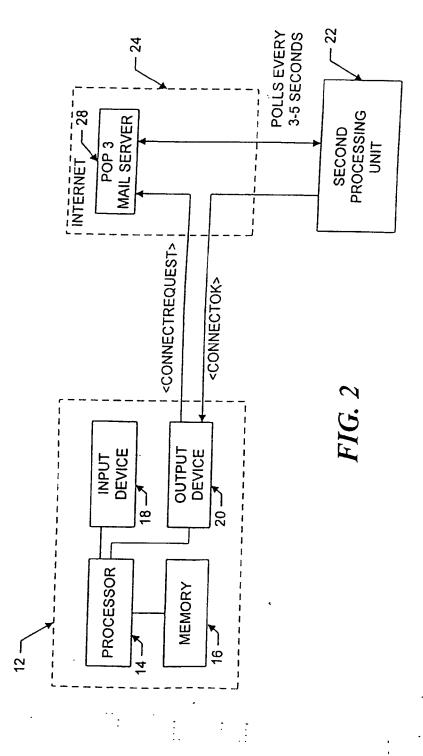

•••


•..•:

·····

:....

÷

2/6

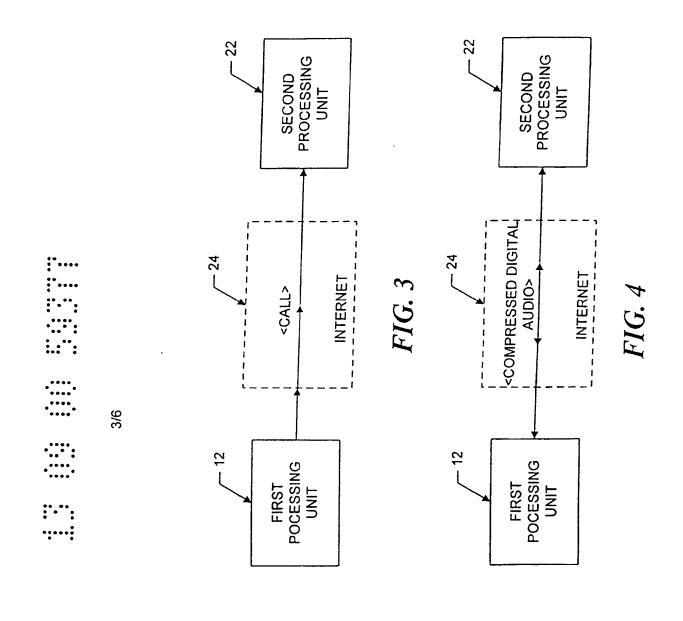


.

. :

Cisco - Exhibit 1003 - Page 360

• • •

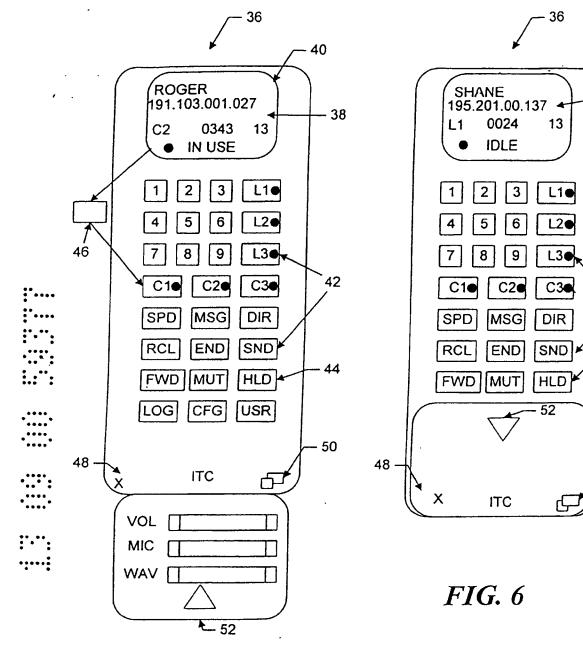

.

FIG. 5

':


4/6

-38

42

44


- 50

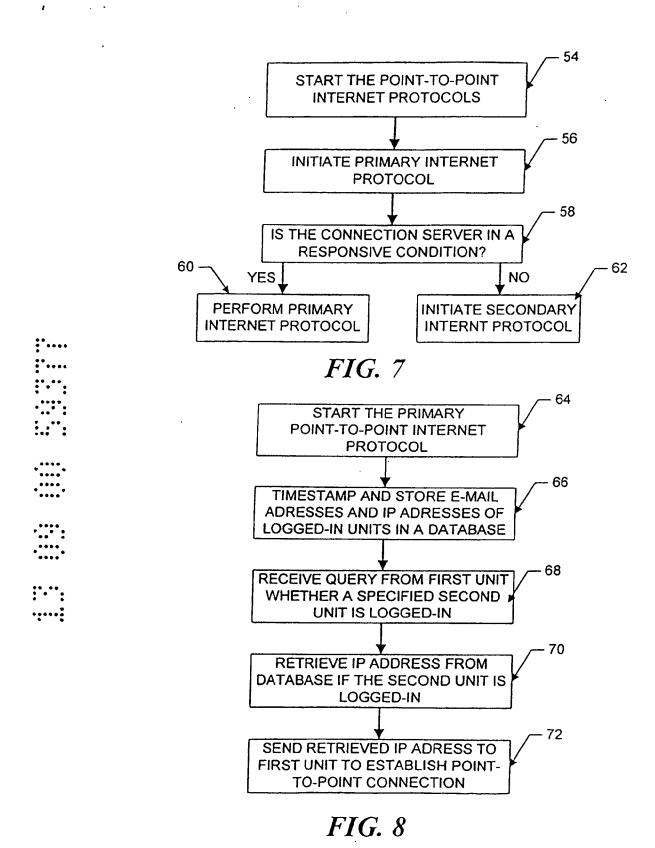

5/6

_ _

. .

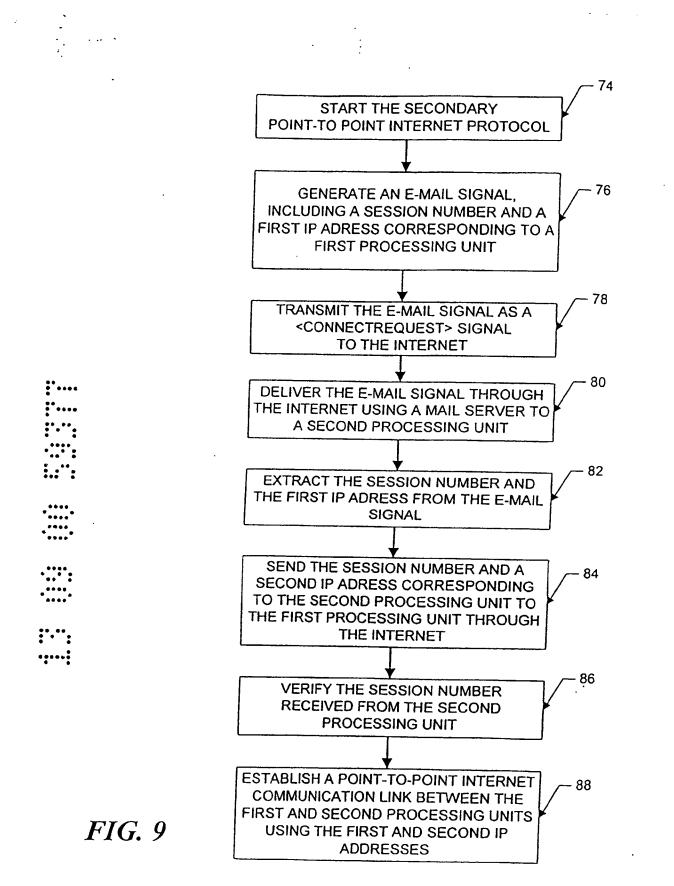

6/6

(12) (19)	PATENT APPLICATION AUSTRALIAN PATENT OFFICE	(11) App	blication No. AU 20	0059378 A1
(54)	Title Point-to-point internet protocol			
(51) ⁷	International Patent Classification(s) H04L 029/00			
(21)	Application No: 200059378	(22)	Application Date:	2000.09.13
(43)	Publication Date : 2000.11.30			
(43)	Publication Journal Date : 2000.11.30			
(62)	Divisional of: 199672476			
(71)	Applicant(s) NetSpeak Corporation			
(72)	Inventor(s) Glenn W Hutton; Shane D Mattaway; C	craig B Stric	kland	
(74)	Agent/Attorney DAVIES COLLISON CAVE,1 Little Collins Street,MELBOURNE VIC 3000			

Abstract

A method for establishing a point-to-point communication link from a caller process to a callee process over a computer network, the caller process having a user interface and being operatively connectable to the callee process and a server over the computer network, said method for use in a computer system, the method comprising, providing a user interface element representing a first communication line, providing a user interface element representing a first callee process, and establishing a point-to-point communication link from the caller process to the first callee process, in response to a user associating the element representing the first callee process with the element representing the first communication line.

•••••

.....

•••••

•...•

••••••

. . .

••••••

9. The method of claim 7 wherein the element provided in step D represents a communication line on mute status.

10. The method of claim 1 wherein the caller process further comprises a visual
5 display and the user interface comprises a graphic user interface.

11. The method of claim 10 wherein the steps of establishing a point-to-point link as described in step C is performed in response to manipulation of the graphic elements on the graphic user interface.

12. A computer program product for use with a computer system comprising:

a computer useable medium having program code embodied in the medium for establishing a point-to-point communication link from a caller process to a callee process over a computer network, the caller process having a user interface 15 and being operatively connectable to the callee process and a server over the computer network, the medium further comprising:

program code for generating an element representing a first communication line;


program code for generating an element representing a first callee process;

20 program code, responsive to a user associating the element representing the first callee process with the element representing the first communication line, for establishing a point-to-point communication link from the caller process to the first callee process.

25 13. The computer program product of claim 12 wherein the program code for establishing a point-to-point communication link further comprises:

program code for querying the server as to the on-line status of the first callee process; and

program code for receiving a network protocol address of the first callee 30 process over the computer network from the server.

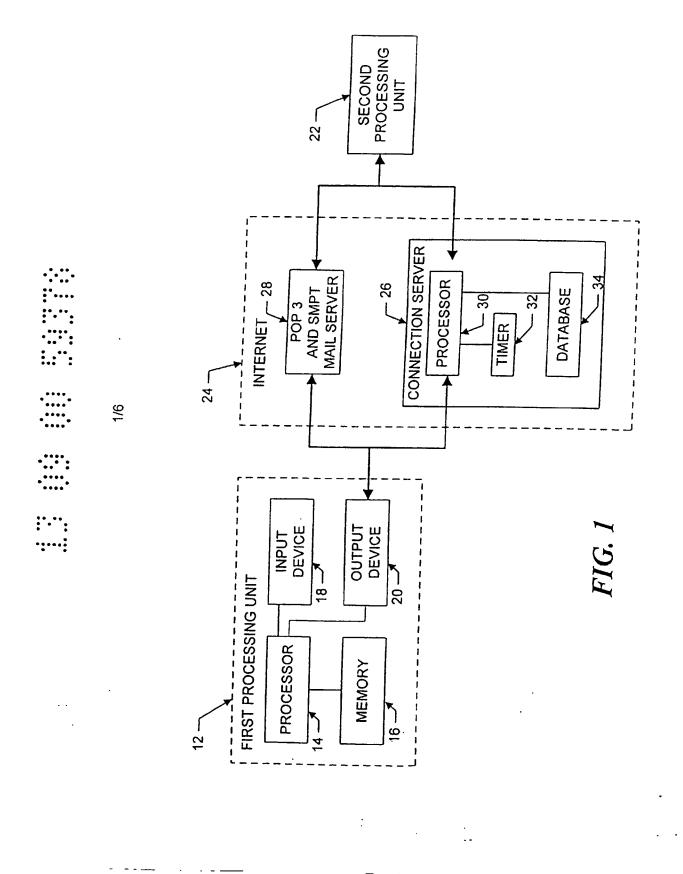

P/00/011 28/5/91 Regulation 3.2

-

A U S T R A L I A Patents Act 1990 COMPLETE SPECIFICATION STANDARD PATENT (ORIGINAL)

Name of Applicant:	NetSpeak Corporation, of 902 Clint Moore Road, Suite 104, Boca Raton, Florida 33487, United States of America.
Actual Inventors:	HUTTON, Glenn W MATTAWAY, Shane D STRICKLAND, Craig B
Address for Service:	DAVIES COLLISON CAVE, Patent Attorneys, of 1 Little Collins Street, Melbourne, Victoria 3000, Australia.
Invention Title:	"Point-to-Point Internet Protocol"

The following statement is a full description of this invention, including the best method of performing it known to us:

··· __ __ ·

- ----

- --- -

...

POINT-TO-POINT INTERNET PROTOCOL

1A

The present invention relates, in general, to data processing systems, and more specifically, to a method and apparatus for facilitating audio communications over computer networks.

The increased popularity of on-line services such as AMERICA ONLINE[™], COMPUSERVE®, and other services such as Internet gateways have spurred applications to provide multimedia, including video and voice clips, to online users. An example of an online voice clip application is VOICE E-MAIL FOR WINCIM and VOICE E-MAIL FOR AMERICA ONLINE[™], available from Bonzi Software, as described in "Simple Utilities Send Voice E-Mail Online", MULTIMEDIA WORLD, VOL. 2, NO. 9, August 1995, p. 52. Using such Voice E-Mail software, a user may create an audio message to be sent to a predetermined E-mail address specified by the user.

Generally, devices interfacing to the Internet and other online services may communicate with each other upon establishing respective device addresses. One type of device address is the Internet Protocol (IP) address, which acts as a pointer to the device associated with the IP address. A typical device may have a Serial Line Internet Protocol or Point-to-Point Protocol (SLIP/PPP) account with a permanent IP address for receiving E-mail, voicemail, and the like over the Internet. E-mail and voicemail is generally intended to convey text, audio, etc., with any

²⁵ routing information such as an IP address and routing headers generally

20

being considered an artifact of the communication, or even gibberish to the recipient.

Devices such as a host computer or server of a company may include multiple modems for connection of users to the Internet, with a 5 temporary IP address allocated to each user. For example, the host computer may have a general IP address "XXX.XXX.XXX," and each user may be allocated a successive IP address of XXX.XXX.XXX.10, XXX.XXX.XXX.11. XXX.XXX.XXX.12, etc. Such temporary IP addresses may be reassigned or recycled to the users, for example, as each user is successively connected to an outside party. For example, a host computer of a company may support a maximum of 254 IP addresses which are pooled and shared between devices connected to the host computer.

Permanent IP addresses of users and devices accessing the Internet readily support point-to-point communications of voice and video signals over the Internet. For example, realtime video teleconferencing has been implemented using dedicated IP addresses and mechanisms known as reflectors.

A technique for matching domain names to Internet Protocol addresses is described in the text entitled "Internetworking With TCP/IP", 2nd Edition, by Douglas E. Comer, November 1992, Prentice Hall, Englewood Cliffs, New Jersey, U.S.A. Comer describes a domain name system and cooperative systems of name servers for matching domain

25 names to network addresses. Each name server is a server program that supplies mapping of domain names to IP addresses. The system described in Comer, however, is not designed for use with network nodes whose network names or name to address bindings change frequently. International Publication WO 92/19054 discloses a network

10





·····i

monitoring system including an address tracking module which uses passive monitoring of all packet communications over a local area network to maintain a name table of IP address mappings. The disclosed address tracking module is capable of monitoring only a small number of nodes on a local area network and is not suitable for use with a multitude of nodes over a wide area network.

None of the above-described systems are suitable for use with processes which have dynamically assigned network protocol addresses and which are communicating over wide area or global networks.

Due to the dynamic nature of temporary IP addresses of some devices accessing the Internet, point-to-point communications in realtime of voice and video have been generally difficult to attain.

In accordance with the present invention, there is provided a method for establishing a point-to-point communication link from a caller process to a callee process over a computer network, the caller process having a user interface and 15 being operatively connectable to the callee process and a server over the computer network, said method for use in a computer system, said method comprising:

A. providing a user interface element representing a first communication line;

B. providing a user interface element representing a first callee process;
 and

C. establishing a point-to-point communication link from the caller process to the first callee process, in response to a user associating the element representing the first callee process with the element representing the first communication line.

The present invention also provides a computer program product for use with a computer system comprising:

a computer useable medium having program code embodied in the medium for establishing a point-to-point communication link from a caller process to a
callee process over a computer network, the caller process having a user interface

• • • • • • •

and being operatively connectable to the callee process and a server over the computer network, the medium further comprising:

program code for generating an element representing a first communication line;

5

15

- ----.

····:

••••••

program code for generating an element representing a first callee process; program code, responsive to a user associating the element representing the first callee process with the element representing the first communication line, for establishing a point-to-point communication link from the caller process to the first callee process.

10 The present invention also provides a computer data signal embodied in a carrier wave comprising:

program code for generating a element representing a first communication line;

program code for generating an element representing a first callee process; program code, responsive to association of the element representing the first callee process with the element representing the first communication line, for establishing a point-to-point communication link from the caller process to the first callee process over a computer network.

20 Preferred embodiments of the present invention are hereinafter described, by way of example only, with reference to the following drawings, wherein:

FIG 1 illustrates, in block diagram format, a system for the disclosed pointto-point Internet protocol:

FIG 2 illustrates, in block diagram format, the system using a secondary point-to-point Internet protocol;

FIG 3 illustrates, in block diagram format; the system of FIGS 1-2 with the point-to-point Internet protocol established;

FIG 4 is another block diagram of the system of FIGS 1-2 with audio communications being conducted;

- ---- --- --

.. .

FIG. 5 illustrates a display screen for a processing unit;

FIG. 6 illustrates another display screen for a processing unit;

FIG. 7 illustrates a flowchart of the initiation of the point-to-point Internet protocols;

5

FIG. 8 illustrates a flowchart of the performance of the primary point-to-point Internet protocols; and

FIG. 9 illustrates a flowchart of the performance of the secondary point-to-point Internet protocol.

•••••

.

- .

_ ._ . . _

Cisco - Exhibit 1003 - Page 373

Referring now in specific detail to the drawings, with like reference numerals identifying similar or identical elements, as shown in FIG. 1, the present disclosure describes a point-to-point network protocol and system 10 for using such a protocol.

In an exemplary embodiment, the system 10 includes a first processing unit 12 for sending at least a voice signal from a first user to a second user. The first processing unit 12 includes a processor 14, a memory 16, an input device 18, and an output device 20. The output device 20 includes at least one modem capable of, for example, 14.4 kbaud communications and operatively connected via wired and/or wireless communication connections to the Internet or other computer networks such as an Intranet, i.e., a private computer network. One skilled in the art would understand that the input device 18 may be implemented at least in part by the modem of the output device 20 to allow input signals from the communication connections to be received: The second processing unit 22 may have a processor, memory, and input and output devices, including at least one modem and associated communication connections, as described above for the first processing unit 12. In an exemplary embodiment, each of the processing units 12, 22 may execute the WEBPHONE™ Internet telephony application available from NetSpeak Corporation, Boca Raton, FL, which is capable of performing the disclosed point-to-point Internet protocol and system 10, as described herein.

The first processing unit 12 and the second processing unit 22 are operatively connected to the Internet 24 by communication devices and software known in the art, such as an Internet Service Provider (ISP) or an Internet gateway. The processing units 12, 22 may be operatively interconnected through the Internet 24 to a connection server 26, and

5

25

may also be operatively connected to a mail server 28 associated with the Internet 24.

The connection server 26 includes a processor 30, a timer 32 for generating time stamps, and a memory such as a database 34 for storing, for example, E-mail and Internet Protocol (IP) addresses of logged-in units. In an exemplary embodiment, the connection server 26 may be a SPARC 5 server or a SPARC 20 server, available from SUN MICROSYSTEMS, INC., Mountain View, CA, having a central processing unit (CPU) as processor 30, an operating system (OS) such as UNIX, for providing timing operations such as maintaining the timer 32, a hard drive or fixed drive, as well as dynamic random access memory (DRAM) for storing the database 34, and a keyboard and display and/or other input and output devices (not shown in FIG. 1). The database 34 may be an SQL database available from ORACLE or INFORMIX.

5

10

.... 15

20

......

In an exemplary embodiment, the mail server 28 may be a Post Office Protocol (POP) Version 3 mail server including a processor, memory, and stored programs operating in a UNIX environment, or, alternatively, another OS, to process E-mail capabilities between processing units and devices over the Internet 24.

The first processing unit 12 may operate the disclosed point-topoint Internet protocol by a computer program described hereinbelow in conjunction with FIG. 6, which may be implemented from compiled and /or interpreted source code in the C++ programming language and which may be downloaded to the first processing unit 12 from an external

25 computer. The operating computer program may be stored in the memory 16, which may include about 8 MB RAM and/or a hard or fixed drive having about 8 MB. Alternatively, the source code may be implemented in the first processing unit 12 as firmware, as an erasable read only memory (EPROM), etc. It is understood that one skilled in the

art would be able to use programming languages other than C++ to implement the disclosed point-to-point network protocol and system 10.

The processor 14 receives input commands and data from a first user associated with the first processing unit 12 though the input device 18, which may be an input port connected by a wired, optical, or a wireless connection for electromagnetic transmissions, or alternatively may be transferable storage media, such as floppy disks, magnetic tapes, compact disks, or other storage media including the input data from the first user.

5

10

.....

·::::

. 20

15

The input device 18 may include a user interface (not shown) having, for example, at least one button actuated by the user to input commands to select from a plurality of operating modes to operate the first processing unit 12. In alternative embodiments, the input device 18 may include a keyboard, a mouse, a touch screen, and/or a data reading device such as a disk drive for receiving the input data from input data files stored in storage media such as a floppy disk or, for example, an 8 mm storage tape. The input device 18 may alternatively include connections to other computer systems to receive the input commands and data therefrom.

The first processing unit 12 may include a visual interface for use in conjunction with the input device 18 and output device 20 similar to those screens illustrated in FIGS. 5-6, discussed below. It is also understood that alternative devices may be used to receive commands and data from the user, such as keyboards, mouse devices, and

²⁵ graphical user interfaces (GUI) such as WINDOWS[™] 3.1 available form MICROSOFT Corporation, Redmond, WA., and other operating systems and GUIs, such as OS/2 and OS/2 WARP, available from IBM CORPORATION, Boca Raton, FL. Processing unit 12 may also include microphones and/or telephone handsets for receiving audio voice data

and commands, speech or voice recognition devices, dual tone multifrequency (DTMF) based devices, and/or software known in the art to accept voice data and commands and to operate the first processing unit 12.

5

10

.....

...₅.

......

20

···:

25

In addition, either of the first processing unit 12 and the second processing unit 22 may be implemented in a personal digital assistant (PDA) providing modem and E-mail capabilities and Internet access, with the PDA providing the input/output screens for mouse interactions or for touchscreen activation as shown, for example, in FIGS. 5-6, as a combination of the input device 18 and output device 20.

For clarity of explanation, the illustrative embodiment of the disclosed point-to-point Internet protocol and system 10 is presented as having individual functional blocks, which may include functional blocks labeled as "processor" and "processing unit". The functions represented by these blocks may be provided through the use of either shared or dedicated hardware, including, but not limited to, hardware capable of executing software. For example, the functions of each of the processors and processing units presented herein may be provided by a shared processor or by a plurality of individual processors. Moreover, the use of the functional blocks with accompanying labels herein is not to be construed to refer exclusively to hardware capable of executing software. Illustrative embodiments may include digital signal processor (DSP) hardware, such as the AT&T DSP16 or DSP32C, read-only memory (ROM) for storing software performing the operations discussed below, and random access memory (RAM) for storing DSP results. Very large scale integration (VLSI) hardware embodiments, as well as custom VLSI circuitry in combination with a general purpose DSP circuit, may also be provided. Any and all of these embodiments may be deemed to fail within the meaning of the labels for the functional blocks as used herein.

The processing units 12, 22 are capable of placing calls and connecting to other processing units connected to the Internet 24, for example, via dialup SLIP/PPP lines. In an exemplary embodiment, each processing unit assigns an unsigned long session number, for example, a 32- bit long sequence in a *.ini file for each call. Each call may be assigned a successive session number in sequence, which may be used by the respective processing unit to associate the call with one of the SLIP/PPP lines, to associate a <ConnectOK> response signal with a <Connect Request> signal, and to allow for multiplexing and demultiplexing of inbound and outbound conversations on conference lines, as explained hereinafter.

5

10

····:

20

25

For callee (or called) processing units with fixed IP addresses, the caller (or calling) processing unit may open a "socket", i.e. a file handle or address indicating where data is to be sent, and transmit a <Call> command to establish communication with the callee utilizing, for example, datagram services such as Internet Standard network layering as well as transport layering, which may include a Transport Control Protocol (TCP) or a User Datagram Protocol (UDP) on top of the IP. Typically, a processing unit having a fixed IP address may maintain at least one open socket and a called processing unit waits for a <Call> command to assign the open socket to the incoming signal. If all lines are in use, the callee processing unit sends a BUSY signal or message to the callee processing unit. As shown in FIG. 1, the disclosed point-topoint Internet protocol and system 10 operate when a callee processing unit does not have a fixed or predetermined IP address. In the exemplary embodiment and without loss of generality, the first processing unit 12 is the caller processing unit and the second processing unit 22 is the called processing unit. When either of processing units 12, 22 logs on to the Internet via a dial-up connection, the respective unit is provided a

dynamically allocated IP address by the a connection service provider.

Upon the first user initiating the point-to-point Internet protocol when the first user is logged on to the Internet 24, the first processing unit 12 automatically transmits its associated E-mail address and its

dynamically allocated IP address to the connection server 26. The
connection server 26 then stores these addresses in the database 34 and
time stamps the stored addresses using timer 32. The first user
operating the first processing unit 12 is thus established in the database
34 as an active on-line party available for communication using the
disclosed point-to-point Internet protocol. Similarly, a second user
operating the second processing unit 22, upon connection to the Internet
24 through the a connection service provider, is processed by the
connection server 26 to be established in the database 34 as an active
on-line party.

The connection server 26 may use the time stamps to update the status of each processing unit; for example, after 2 hours, so that the online status information stored in the database 34 is relatively current. Other predetermined time periods, such as a default value of 24 hours, may be configured by a systems operator.

The first user with the first processing unit 12 initiates a call using, for example, a Send command and/or a command to speeddial an N^{TH} stored number, which may be labeled [SND] and [SPD] [N], respectively, by the input device 18 and/or the output device 20, such as shown in FIGS. 5-6. In response to either the Send or speeddial commands, the first processing unit 12 retrieves from memory 16 a stored E-mail address of the callee corresponding to the N^{TH} stored number. Alternatively, the first user may directly enter the E-mail address of the callee.

The first processing unit 12 then sends a query, including the Email address of the callee, to the connection server 26. The connection

5

10

server 26 then searches the database 34 to determine whether the callee is logged-in by finding any stored information corresponding to the callee's E-mail address indicating that the callee is active and on-line. If the callee is active and on-line, the connection server 26 then performs the primary point-to-point Internet protocol; i.e. the IP address of the callee is retrieved from the database 34 and sent to the first processing

unit 12. The first processing unit 12 may then directly establish the pointto-point Internet communications with the callee using the IP address of the callee.


If the callee is not on-line when the connection server 26 determines the callee's status, the connection server 26 sends an OFF-LINE signal or message to the first processing unit 12. The first processing unit 12 may also display a message such as "Called Party Off-Line" to the first user.

When a user logs off or goes off-line from the Internet 24, the connection server 26 updates the status of the user in the database 34; for example, by removing the user's information, or by flagging the user as being off-line. The connection server 26 may be instructed to update the user's information in the database 34 by an off-line message, such as a data packet, sent automatically from the processing unit of the user prior to being disconnected from the connection server 26. Accordingly, an off-line user is effectively disabled from making and/or receiving point-to-point Internet communications.

As shown in FIGS. 2-4, the disclosed secondary point-to-point Internet protocol may be used as an alternative to the primary point-topoint Internet protocol described above, for example, if the connection server 26 is non-responsive, inoperative, and/or unable to perform the primary point-to-point Internet protocol, as a non-responsive condition. Alternatively, the disclosed secondary point-to-point Internet protocol may

10

5



25

11

- -

be used independent of the primary point-to-point Internet protocol. In the disclosed secondary point-to-point Internet protocol, the first processing unit 12 sends a <ConnectRequest> message via E-mail over the Internet 24 to the mail server 28. The E-mail including the

5 <ConnectRequest> message may have, for example, the subject

10

•____T \$

25

[*wp#XXXXXXX#nnn.nnn.mn.#emailAddr] where nnn.nnn.nnn.nnn. is the current (i.e. temporary or permanent) IP address of the first user, and XXXXXXXX is a session number, which may be unique and associated with the request of the first user to initiate point-to-point communication with the second user.

As described above, the first processing unit 12 may send the <ConnectRequest> message in response to an unsuccessful attempt to perform the primary point-to-point Internet protocol. Alternatively, the first processing unit 12 may send the <ConnectRequest> message in response to the first user initiating a SEND command or the like.

After the <ConnectRequest> message via E-mail is sent, the first processing unit 12 opens a socket and waits to detect a response from the second processing unit 22. A timeout timer, such as timer 32, may be set by the first processing unit 12, in a manner known in the art, to wait for a predetermined duration to receive a <ConnectOK> signal. The processor 14 of the first processing unit 12 may cause the output device 20 to output a Ring signal to the user, such as an audible ringing sound, about every 3 seconds . For example, the processor 14 may output a *.wav file, which may be labeled RING.WAV, which is processed by the output device 20 to output an audible ringing sound.

The mail server 28 then polls the second processing unit 22, for example, every 3-5 seconds, to deliver the E-mail. Generally, the second processing unit 22 checks the incoming lines, for example, at regular intervals to wait for and to detect incoming E-mail from the mail server 28

through the Internet 24.

Typically, for sending E-mail to users having associated processing units operatively connected to a host computer or server operating an Internet gateway, E-mail for a specific user may be sent over the Internet 24 and directed to the permanent IP address or the SLIP/PPP account designation of the host computer, which then assigns a temporary IP address to the processing unit of the specified user for properly routing the E-mail. The E-mail signal may include a name or other designation such as a user name which identifies the specific user regardless of the processing unit assigned to the user; that is, the host computer may track and store the specific device where a specific user is assigned or logged on, independent of the IP address system, and so the host computer may switch the E-mail signal to the device of the specific user. At that time, a temporary IP address may be generated or assigned to the specific user and device.

Upon detecting and/or receiving the incoming E-mail signal from the first processing unit 12, the second processing unit 22 may assign or may be assigned a temporary IP address. Therefore, the delivery of the E-mail through the Internet 24 provides the second processing unit 22 with a session number as well as IP addresses of both the first processing unit 12 and the second processing unit 22.

Point-to-point communication may then be established by the processing unit 22 processing the E-mail signal to extract the <ConnectRequest> message, including the IP address of the first processing unit 12 and the session number. The second processing unit 22 may then open a socket and generate a <ConnectOK> response signal, which includes the temporary IP address of the second processing unit 22 as well as the session number of the first processing unit.

The second processing unit 22 sends the <ConnectOK> signal

10

5

25

_ ._ _

-12

directly over the Internet 24 to the IP address of the first processing unit 12 without processing by the mail server 28, and a timeout timer of the second processing unit 22 may be set to wait and detect a <Call> signal expected from the first processing unit 12.

5

10

•••••

-20

•••••

25

Realtime point-to-point communication of audio signals over the Internet 24, as well as video and voicemail, may thus be established and supported without requiring permanent IP addresses to be assigned to either of the users or processing units 12, 22. For the duration of the realtime point-to-point link, the relative permanence of the current IP addresses of the processing units 12, 22 is sufficient, whether the current IP addresses were permanent (i.e. predetermined or preassigned) or temporary (i.e. assigned upon initiation of the point-to-point communication).

In the exemplary embodiment, a first user operating the first processing unit 12 is not required to be notified by the first processing unit 12 that an E-mail is being generated and sent to establish the point-topoint link with the second user at the second processing unit 22. Similarly, the second user is not required to be notified by the second processing unit 22 that an E-mail has been received and/or a temporary IP address is associated with the second processing unit 22. The processing units 12, 22 may perform the disclosed point-to-point Internet protocol automatically upon initiation of the point-to-point communication command by the first user without displaying the E-mail interactions to either user. Accordingly, the disclosed point-to-point Internet protocol may be transparent to the users. Alternatively, either of the first and

second users may receive, for example, a brief message of
"CONNECTION IN PROGRESS" or the like on a display of the respective output device of the processing units 12, 22.

After the initiation of either the primary or the secondary point-to-

point Internet protocols described above in conjunction with FIGS. 1-2, the point-to-point communication link over the Internet 24 may be established as shown in FIGS. 3-4 in a manner known in the art. For example, referring to FIG. 3, upon receiving the <ConnectorOK> signal

- from the second processing unit 22, the first processing unit 12 extracts the IP address of the second processing unit 22 and the session number, and the session number sent from the second processing unit 22 is then checked with the session number originally sent from the first processing unit 12 in the <ConnectRequest> message as E-mail. If the session
- numbers sent and received by the processing unit 12 match, then the first processing unit 12 sends a <Call> signal directly over the Internet 24 to the second processing unit 22; i.e. using the IP address of the second processing unit 22 provided to the first processing unit 12 in the <ConnectOK> signal.

Upon receiving the <Call> signal, the second processing unit 22 may then begin a ring sequence, for example, by indicating or annunciating to the second user that an incoming call is being received. For example, the word "CALL" may be displayed on the output device of the second processing unit 22. The second user may then activate the second processing unit 22 to receive the incoming call.

20

25

• • • • • •

Referring to FIG. 4, after the second processing unit 22 receives the incoming call, realtime audio and/or video conversations may be conducted in a manner known in the art between the first and second users through the Internet 24, for example, by compressed digital audio signals. Each of the processing units 12, 22 also display to each

respective user the words "IN USE" to indicate that the point-to-point communication link is established and audio or video signals are being transmitted.

In addition, either user may terminate the point-to-point

communication link by, for example, activating a termination command, such as by activating an [END] button or icon on a respective processing unit, causing the respective processing unit to send an <End> signal which causes both processing units to terminate the respective sockets, as well as to perform other cleanup commands and functions known in the art.

5

10

• 20

25

••••

•••••

FIGS. 5-6 illustrate examples of display screens 36 which may be output by a respective output device of each processing unit 12, 22 of FIGS. 1-4 for providing the disclosed point-to-point Internet protocol and system 10. Such display screens may be displayed on a display of a personal computer (PC) or a PDA in a manner known in the art.

As shown in FIG. 5, a first display screen 36 includes a status area 38 for indicating, for example, a called user by name and/or by IP address or telephone number; a current function such as C2; a current time; a current operating status such as "IN USE", and other control icons such as a down arrow icon 40 for scrolling down a list of parties on a current conference line. The operating status may include such annunciators as "IN USE," "IDLE," "BUSY," "NO ANSWER," "OFFLINE," "CALL," "DIALING," "MESSAGES," and "SPEEDDIAL."

Other areas of the display screen 36 may include activation areas or icons for actuating commands or entering data. For example, the display screen 36 may include a set of icons 42 arranged in columns and rows including digits 0-9 and commands such as END, SND, HLD, etc. For example, the END and SND commands may be initiated as described above, and the HLD icon 44 may be actuated to place a current line on hold. Such icons may also be configured to substantially simulate a telephone handset or a cellular telephone interface to facilitate ease of use, as well as to simulate function keys of a keyboard. For example, icons labeled L1-L4 may be mapped to function keys F1-F4 on standard

PC keyboards, and icons C1-C3 may be mapped to perform as combinations of function keys, such as CTRL-F1, CTRL-F2, and CTRL-F3, respectively. In addition, the icons labeled L1-L4 and C1-C3 may include circular regions which may simulate light emitting diodes (LEDs) which indicate that the function or element represented by the respective icon is active or being performed.

5

10

• • • • • •

25

Icons L1-L4 may represent each of 4 lines available to the caller, and icons C1-C3 may represent conference calls using at least one line to connect, for example, two or more parties in a conference call. The icons L1-L4 and C1-C3 may indicate the activity of each respective line or conference line. For example, as illustrated in FIG. 5, icons L1-L2 may have lightly shaded or colored circles, such as a green circle, indicating that each of lines 1 and 2 are in use, while icons L3-L4 may have darkly shaded or color circles, such as a red or black circle, indicating that each of lines 3 and 4 are not in use. Similarly, the lightly shaded circle of the icon labeled C2 indicates that the function corresponding to C2 is active, as additionally indicated in the status are 38, while darkly shaded circles of icons labeled C1 and C3 indicate that such corresponding functions are not active.

The icons 42 are used in conjunction with the status area 38. For example, using a mouse for input, a line that is in use, as indicated by the lightly colored circle of the icon, may be activated to indicate a party's name by clicking a right mouse button for 5 seconds until another mouse click is actuated or the [ESC] key or icon is actuated. Thus, the user may switch between multiple calls in progress on respective lines.

Using the icons as well as an input device such as a mouse, a user may enter the name or alias or IP address, if known, of a party to be called by either manually entering the name, by using the speeddial feature, or by double clicking on an entry in a directory stored in the

memory, such as the memory 16 of the first processing unit 12, where the directory entries may be scrolled using the status area 38 and the down arrow icon 40.

Once a called party is listed in the status area 38 as being active on a line, the user may transfer the called party to another line or a conference line by clicking and dragging the status area 38, which is represented by a reduced icon 46. Dragging the reduced icon 46 to any one of line icons L1-L4 transfers the called party in use to the selected line, and dragging the reduced icon 46 to any one of conference line icons C1-C3 adds the called party to the selected conference call.

Other features may be supported, such as icons 48-52, where icon 48 corresponds to, for example, an ALT-X command to exit the communication facility of a processing unit, and icon 50 corresponds to, for example, an ALT-M command to minimize or maximize the display screen 36 by the output device of the processing unit. Icon 52 corresponds to an OPEN command, which may, for example, correspond to pressing the O key on a keyboard, to expand or contract the display screen 36 to represent the opening and closing of a cellular telephone. An "opened" configuration is shown in FIG. 5, and a "closed" configuration is shown in FIG. 6. In the "opened" configuration, additional features such as output volume (VOL) controls, input microphone (MIC) controls, waveform (WAV) sound controls, etc.

The use of display screens such as those shown in FIGS. 5-6 provided flexibility in implementing various features available to the user. It is to be understood that additional features such as those known in the art may be supported by the processing units 12, 22.

Alternatively, it is to be understood that one skilled in the art may implement the processing units 12, 22 to have the features of the display screens in FIGS. 5-6 in hardware; i.e. a wired telephone or wireless

18



25

5

cellular telephone may include various keys, LEDs, liquid crystal displays (LCDs), and touchscreen actuators corresponding to the icons and features shown in FIGS. 5-6. In addition, a PC may have the keys of a keyboard and mouse mapped to the icons and features shown in FIGS. 5-6.

5

•...• 10

:.:':

• . . • •

20

25

15

Referring to FIG. 7, the disclosed point-to-point Internet protocol and system 10 is illustrated. First processing unit 12 initiates the point-topoint Internet protocol in step 56 by sending a query from the first processing unit 12 to the connection server 26. If connection server 26 is operative to perform the point-to-point Internet protocol, in step 58, first processing unit 12 receives an on-line status signal from the connection server 26, such signal may include the IP address of the callee or a "Callee Off-Line" message. Next, first processing unit 12 performs the primary point-to-point Internet protocol in step 60, which may include receiving, at the first processing unit 12, the IP address of the callee if the callee is active and on-line. Alternatively, processing unit 60 may initiate and perform the secondary point-to-point Internet protocol in step 62, if the called party is not active and/or on-line.

Referring to FIG. 8, in conjunction with FIGS. 1 and 3-4, the disclosed point-to-point Internet protocol and system 10 is illustrated. Connection server 26 starts the point-to-point Internet protocol, in step 64, and timestamps and stores E-mail and IP addresses of logged-in users and processing units in the database 34 in step 66. Connection server 26 receives a query from a first processing unit 12 in step 68 to determine whether a second user or second processing unit 22 is logged-in to the Internet 24, with the second user being specified, for example,

by an E-mail address. Connection server 26 retrieves the IP address of the specified user from the database 34 in step 70, if the specified user is logged-in to the Internet, and sends the retrieved IP address to the first

processing unit 12 in step 72 to enable first processing unit 12 to establish point-to-point communications with the specified second user.

20

The disclosed secondary point-to-point Internet protocol operates as shown in FIG. 9. First processing unit 12 generates an E-mail signal, including a session number and a first IP address corresponding to a first processing unit in step 76. First processing unit 12 transmits the E-mail signal as a <ConnectRequest> signal to the Internet 24 in step 78. The E-mail signal is delivered through the Internet 24 using a mail server 28 to the second processing unit 22 in step 80. Second processing unit 22 extracts the session number and the first IP address from the E-mail signal in step 82 and transmits or sends the session number and a second IP address corresponding to the second processing unit 22, back to the first processing unit 12 through the Internet 24, in step 84. First processing unit 12 verifies the session number received from the second processing unit 22 in step 86, and establishes a point-to-point Internet communication link between the first processing unit 12 and second processing unit 22 using the first and second IP addresses in step 88.

While the disclosed point-to-point Internet protocols and system have been particularly shown and described with reference to the preferred embodiments, it is understood by those skilled in the art that various modifications in form and detail may be made therein without departing from the scope and spirit of the invention. Accordingly, modifications such as those suggested above, but not limited thereto, are to be considered within the scope of the invention.

5

••••10

Throughout this specification and the claims which follow, unless the context requires otherwise, the word "comprise", and variations such as "comprises" and "comprising", will be understood to imply the inclusion of a stated integer or step or group of integers or steps but not the exclusion of any other 5 integer or step or group of integers or steps.

The reference to any prior art in this specification is not, and should not be taken as, an acknowledgment or any form of suggestion that that prior art forms part of the common general knowledge in Australia.

••••••

Cisco - Exhibit 1003 - Page 390

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A method for establishing a point-to-point communication link from a caller process to a callee process over a computer network, the caller process having a

5 user interface and being operatively connectable to the callee process and a server over the computer network, said method for use in a computer system, said method comprising:

A. providing a user interface element representing a first communication line;

B. providing a user interface element representing a first callee process;
 and

C. establishing a point-to-point communication link from the caller process to the first callee process, in response to a user associating the element representing the first callee process with the element representing the first communication line.

2. The method of claim 1 wherein step C further comprises the steps of:

c.1 querying the server as to the on-line status of the first callee process and

20 c.2 receiving a network protocol address of the first callee process over the computer network from the server.

3. The method of claim 1 further comprising the step of:

D. providing an element representing a second communication line.

25

.....

10

15

4. The method of claim 3 further comprising the step of:

E. terminating the point-to-point communication link from the caller process to the first callee process, in response to the user disassociating the element representing the first callee process from the element representing the

30 first communication line; and

- 23 -

F. establishing a different point-to-point communication link from the caller process to the first callee process, in response to the user associating the element representing the first callee process with the element representing the second communication line.

5

15

····.

••••••

5. The method of claim 1 further comprising the steps of:

D. providing a user interface element representing a second callee process; and

E. establishing a conference point-to-point communication link between
 the caller process and the first and second callee process, in response to the user associating the element representing the second callee process with the element representing the first communication line.

6. The method of claim 5 further comprising the step of:

F. removing the second callee process from the conference point-topoint communication link in response to the user disassociating the element representing the second callee process from the element representing the first communication line.

20 7. The method of claim 1 further comprising the steps of:

D. providing a user interface element representing a communication line having a temporarily disabled status; and

E. temporarily disabling a point-to-point communication link between the caller process and the first callee process, in response to the user associating

25 the element representing the first callee process with the element representing the communication line having a temporarily disabled status.

8. The method of claim 7 wherein the element provided in step D represents a communication line on hold status.

9. The method of claim 7 wherein the element provided in step D represents a communication line on mute status.

10. The method of claim 1 wherein the caller process further comprises a visual
5 display and the user interface comprises a graphic user interface.

11. The method of claim 10 wherein the steps of establishing a point-to-point link as described in step C is performed in response to manipulation of the graphic elements on the graphic user interface.

12. A computer program product for use with a computer system comprising:

a computer useable medium having program code embodied in the medium for establishing a point-to-point communication link from a caller process to a callee process over a computer network, the caller process having a user interface 15 and being operatively connectable to the callee process and a server over the computer network, the medium further comprising:

program code for generating an element representing a first communication line;

program code for generating an element representing a first callee process;

20 program code, responsive to a user associating the element representing the first callee process with the element representing the first communication line, for establishing a point-to-point communication link from the caller process to the first callee process.

25 13. The computer program product of claim 12 wherein the program code for establishing a point-to-point communication link further comprises:

program code for querying the server as to the on-line status of the first callee process; and

program code for receiving a network protocol address of the first callee 30 process over the computer network from the server.

•••••

:....

10

_. .___ _ _ _ _ ._

--- - ..

···· •••••••

.....

.....

• : • • • • •

14. A computer program product of claim 12 further comprising:

program code for generating an element representing a second communication line.

5 15. The computer program product of claim 14 further comprising:

program code, responsive to the user disassociating the element representing the first callee process from the element representing the first communication line, for terminating the point-to-point communication link from the caller process to the first callee process; and

program code, responsive to the user associating the element representing the first callee process with the element presenting the second communication line, for establishing a different point-to-point communication link from the caller process to the first callee process.

15 16. The computer program product of claim 12 further comprising: program code for generating an element representing a second callee process; and

program code means, responsive to the user associating the element representing the second callee process with the element representing the first 20 communication line, for establishing a conference communication link between the caller process and the first and second callee process.

17. The computer program product of claim 16 further comprising:

program code, responsive to the user disassociating the element representing the second callee process from the element representing the first communication line, for removing the second callee process from the conference communication link.

18. The computer program product of claim 12 further comprising:

30 program code for generating an element representing a communication line having a temporarily disabled status; and

program code, responsive to the association of the element representing the first callee process with the element representing the communication line having a temporarily disabled status, for temporarily disabling the point-to-point communication link between the caller process and the first callee process.

5

The computer program product of claim 18 wherein the communication line 19. having a temporarily disabled status comprises a communication line on hold status.

The computer program product of claim 18 wherein the communication line 10 20. having a temporarily disabled status comprises a communication line on mute status.

A computer program product of claim 12 wherein the computer system 21. further comprises a visual display and the user interface comprises a graphic user 15 interface.

The computer program product of claim 21 wherein the element 22. representing the first communication line and the element representing the first 20 callee process are graphic elements and wherein the program code for establishing a point-to-point communication link from the caller process to the first callee process further comprises:

program code, responsive to manipulation of the graphic elements on the graphic user interface, for establishing the point-to-point communication link from the caller process to the first callee process. 25

A computer data signal embodied in a carrier wave comprising: 23. program code for generating a element representing a first communication line;

30

program code for generating an element representing a first callee process;

:.....

••••••

15

- 27 -

program code, responsive to association of the element representing the first callee process with the element representing the first communication line, for establishing a point-to-point communication link from the caller process to the first callee process over a computer network.


24. A method substantially as hereinbefore described with reference to the accompanying drawings.

25. A computer program product substantially as hereinbefore described with 10 reference to the accompanying drawings.


26. A computer data signal substantially as hereinbefore described with reference to the accompanying drawings.


DATED this 8th day of September 2000

••••		NetSpeak Corporation	
••••		By its Patent Attorneys	
::	20	DAVIES COLLISON CAVE	
••••••			

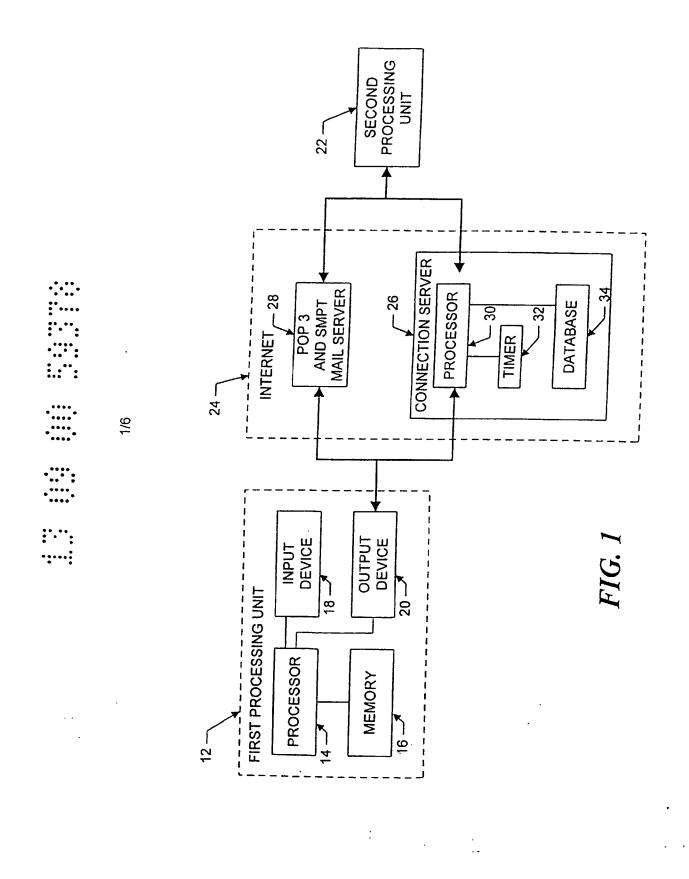

-Cisco - Exhibit 1003 - Page 397

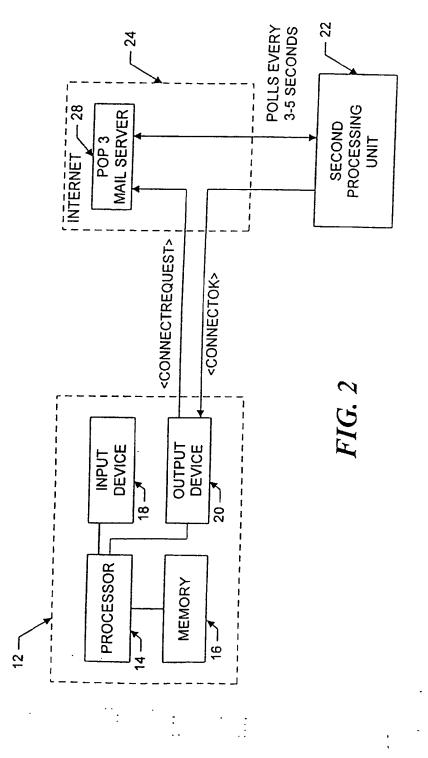




:••••

•::•

2/6

-

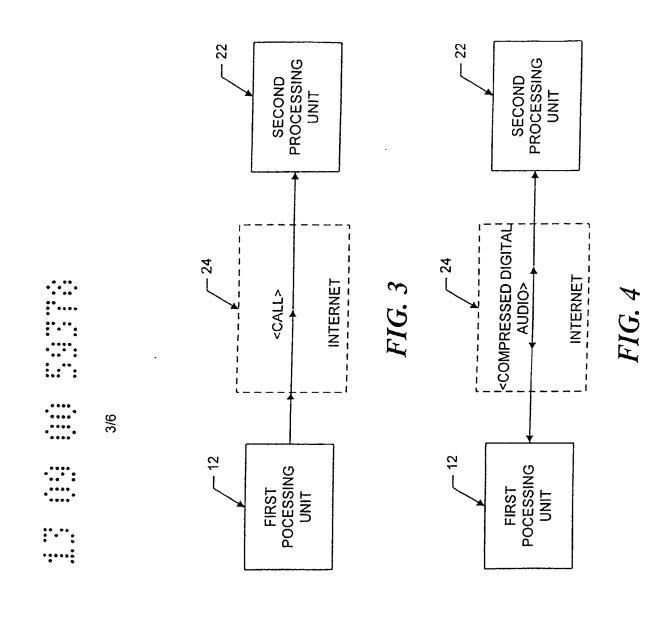

· · · · ·

.

Cisco - Exhibit 1003 - Page 399 ----

•

\$



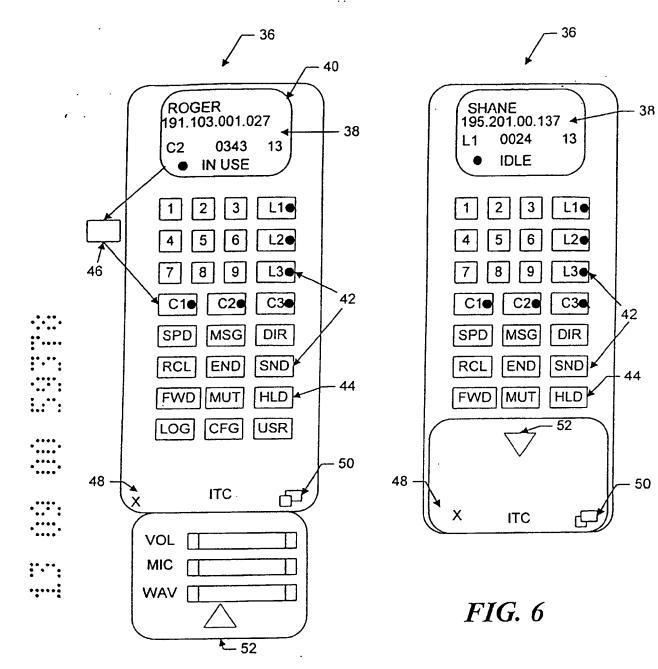


FIG. 5

4/6

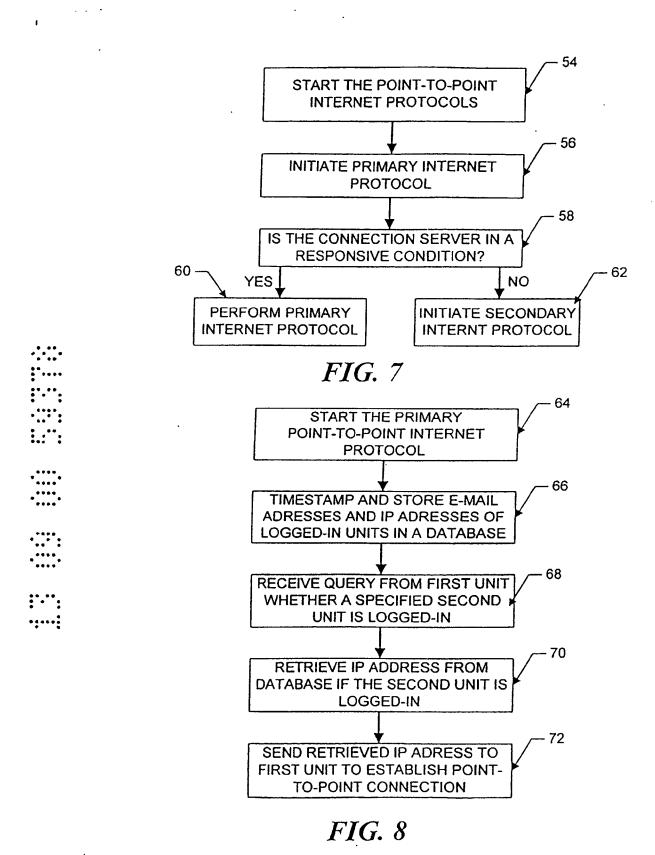

5/6

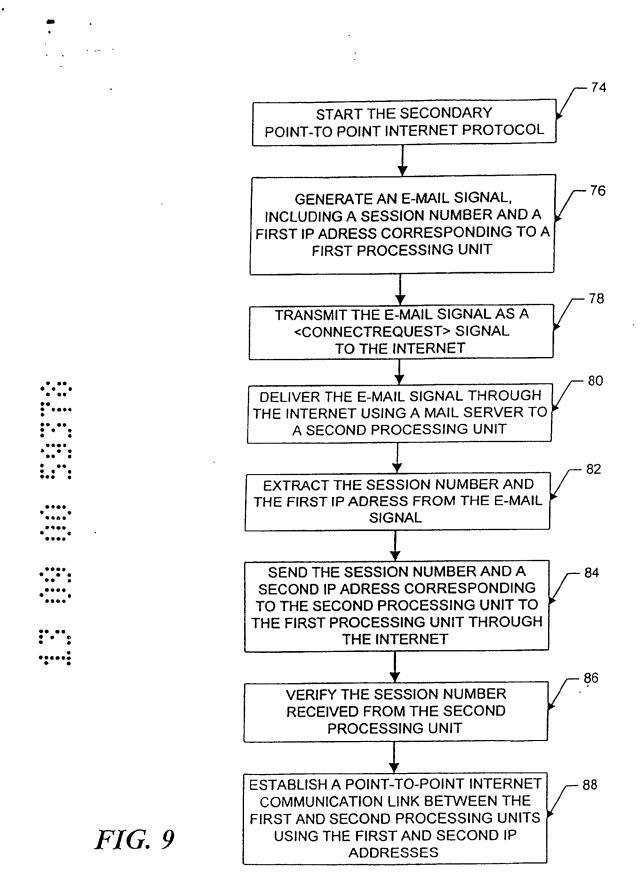

6/6


(12) (19)	PATENT APPLICATION AUSTRALIAN PATENT OFFICE	(11) Application No. AU 200059379 A1
(54)	Title Point-to-point internet protocol	······································
(51) ⁷	International Patent Classification(s) H04L 029/00 G06F 019/00	
(21)	Application No: 200059379	(22) Application Date: 2000.09.13
(43)	Publication Date : 2000.11.23	
(43)	Publication Journal Date : 2000.11.23	
(62)	Divisional of: 199672476	
(71)	Applicant(s) NetSpeak Corporation	
(72)	inventor(s) Glenn W Hutton; Shane D Mattaway; C	Craig B Strickland
(74)	Agent/Attorney DAVIES COLLISON CAVE,1 Little Collins Street, MELBOURNE VIC 3000	

Abstract

· ·-- ---

An apparatus for establishing a point-to-point communication link said apparatus operating in a computer system operatively coupled to other computers 5 and a server over a computer network, the apparatus comprising means for transmitting, from the first process to a server a query as to whether a second process is connected to the computer network, means for receiving a network protocol address of the second process from the server when the second process is connected to the computer network, and means, responsive to the network 10 protocol address of the second process, for establishing a point-to-point communication link between the first process and the second process over the computer network.

••••••

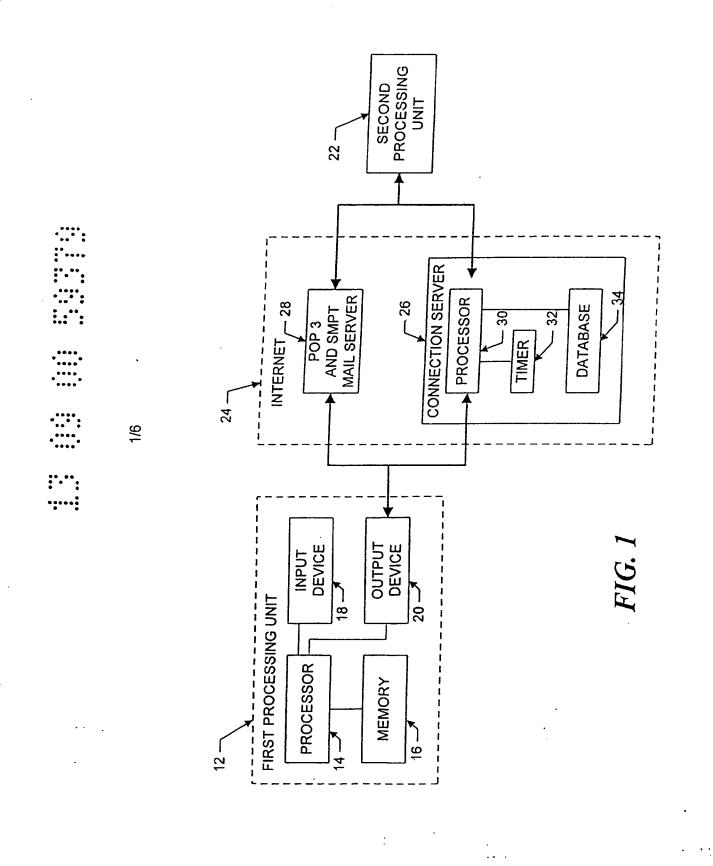

P/00/011 28/5/91 Regulation 3.2

A U S T R A L I A Patents Act 1990 COMPLETE SPECIFICATION STANDARD PATENT (ORIGINAL)

•....•

•.....

•••••

-

Name of Applicant:	NetSpeak Corporation, of 902 Clint Moore Road, Suite 104, Boca Raton, Florida 33487, United States of America.
Actual Inventors:	HUTTON, Glenn W MATTAWAY, Shane D STRICKLAND, Craig B
Address for Service:	DAVIES COLLISON CAVE, Patent Attorneys, of 1 Little Collins Street, Melbourne, Victoria 3000, Australia.
Invention Title:	"Point-to-Point Internet Protocol"

The following statement is a full description of this invention, including the best method of performing it known to us:

-1-

....

- - --

POINT-TO-POINT INTERNET PROTOCOL

1A

The present invention relates, in general, to data processing systems, and more specifically, to a method and apparatus for facilitating audio communications over computer networks.

The increased popularity of on-line services such as AMERICA ONLINE[™], COMPUSERVE®, and other services such as Internet gateways have spurred applications to provide multimedia, including video and voice clips, to online users. An example of an online voice clip application is VOICE E-MAIL FOR WINCIM and VOICE E-MAIL FOR AMERICA ONLINE[™], available from Bonzi Software, as described in "Simple Utilities Send Voice E-Mail Online", MULTIMEDIA WORLD, VOL. 2, NO. 9, August 1995, p. 52. Using such Voice E-Mail software, a user may create an audio message to be sent to a predetermined E-mail address specified by the user.

Generally, devices interfacing to the Internet and other online services may communicate with each other upon establishing respective device addresses. One type of device address is the Internet Protocol (IP) address, which acts as a pointer to the device associated with the IP address. A typical device may have a Serial Line Internet Protocol or Point-to-Point Protocol (SLIP/PPP) account with a permanent IP address for receiving E-mail, voicemail, and the like over the Internet. E-mail and voicemail is generally intended to convey text, audio, etc., with any routing information such as an IP address and routing headers generally

5

20

!5

being considered an artifact of the communication, or even gibberish to the recipient.

Devices such as a host computer or server of a company may 5 include multiple modems for connection of users to the Internet, with a temporary IP address allocated to each user. For example, the host computer may have a general IP address "XXX.XXX.XXX," and each user may be allocated a successive IP address of XXX.XXX.XXX.10, XXX.XXX.XXX.11, XXX.XXX.XXX.12, etc. Such temporary IP addresses 10 may be reassigned or recycled to the users, for example, as each user is


successively connected to an outside party. For example, a host computer of a company may support a maximum of 254 IP addresses which are pooled and shared between devices connected to the host computer.


Permanent IP addresses of users and devices accessing the Internet readily support point-to-point communications of voice and video signals over the Internet. For example, realtime video teleconferencing has been implemented using dedicated IP addresses and mechanisms known as reflectors.

A technique for matching domain names to Internet Protocol addresses is described in the text entitled "Internetworking With TCP/IP", 2nd Edition, by Douglas E. Comer, November 1992, Prentice Hall, Englewood Cliffs, New Jersey, U.S.A. Comer describes a domain name system and cooperative systems of name servers for matching domain

25 names to network addresses. Each name server is a server program that supplies mapping of domain names to IP addresses. The system described in Comer, however, is not designed for use with network nodes whose network names or name to address bindings change frequently. International Publication WO 92/19054 discloses a network

. .





5

.....

......

:···;

••••••

30

monitoring system including an address tracking module which uses passive monitoring of all packet communications over a local area network to maintain a name table of IP address mappings. The disclosed address tracking module is capable of monitoring only a small number of nodes on a local area network and is not suitable for use with a multitude of nodes over a wide area network.

None of the above-described systems are suitable for use with processes which have dynamically assigned network protocol addresses and which are communicating over wide area or global networks.

Due to the dynamic nature of temporary IP addresses of some devices accessing the Internet, point-to-point communications in realtime of voice and video have been generally difficult to attain.

In accordance with the present invention, there is provided an apparatus for establishing a point-to-point communication link said apparatus operating in a computer system operatively coupled to other computers and a server over a 15 computer network, said apparatus comprising:

a. means for transmitting, from the first process to a server a query as to whether a second process is connected to the computer network;

b. means for receiving a network protocol address of the second process from the server when the second process is connected to the
 20 computer network; and

c. means, responsive to the network protocol address of the second process, for establishing a point-to-point communication link between the first process and the second process over the computer network.

The present invention also provides an apparatus for use with a computer system capable of executing a first process and communicating with other processes, a directory server process and a mail server process over a computer network, the apparatus comprising:

A. program logic configured to determine the currently assigned network protocol address of the first process upon connection to the computer network;

B. program logic configured to establish a communication connection

with the directory server process once the assigned network protocol of the first process is known;

C. program logic configured to forward the assigned network protocol address of the first process to the directory server process upon establishing a
 5 communication connection with the directory server process; and

D. program logic configured to establish a point-to-point communication with another process over the computer network.

The present invention also provides an apparatus for use with a computer system, the computer system capable of executing a first process connectable over a computer network to a second process and a directory database server process, the apparatus comprising:

a. program logic configured to access a directory database, the database having a network protocol address for a selected plurality of processes having on-line status with respect to the computer network, the network protocol
 address of each respective process forwarded to the database following connection to the computer network; and

b. program logic responsive to one of the network protocol addresses and configured to establish a point-to-point communication link from the first process to the second process over the computer network.

The present invention also provides a computer program product for use with a computer system, the computer system executing a first process operatively connectable over a computer network to a second process and a server process, the computer program product comprising a computer useable medium having computer readable program code embodied therein, the program code comprising:

25

30

20

.....

••••

• • • • • •

a. program code configured to access a directory database, the database having a network protocol address for a selected plurality of processes having on-line status with respect to the computer network, the network protocol address of each respective process forwarded to the database following connection to the computer network; and

b. program code responsive to one of the network protocol addresses and configured to establish a point-to-point communication link from the first process to the second process over the computer network.

The present invention also provides a method of establishing a point-topoint communication between a first process and a second process, said method for use in a first computer process operatively coupled over a computer network to a second process and an address server, said method comprising:

A. following connection of the first process to the computer network forwarding to the address server a network protocol address at which the first process is connected to the computer network;

B. querying the address server as to whether the second process is
 10 connected to the computer network;

C. receiving a network protocol address of the second process from the address server, when the second process is connected to the computer network; and

D. in response to the network protocol address of the second process,
 establishing a point-to-point communication link with the second process over the computer network.

9 The present invention also provides a method for establishing point-to-point communications with other processes, said method for use in a computer system capable of executing a first process and communicating with other processes and 20 a server process over a computer network, said method comprising:

A. determining the currently assigned network protocol address of the first process upon connection to the computer network;

B. establishing a communication connection with the server process once the assigned network protocol of the first process is known;

25

. .

• • • • • •

5

C. forwarding the assigned network protocol address of the first process to the server process upon establishing a communication connection with the server process; and

D. establishing a point-to-point communication with another process over the computer network.

The present invention also provides A method of establishing a point-topoint communication between a first process and a second process, said method for use in a first computer process operatively coupled over a computer network to a second process and an address server, said method comprising:

a. accessing a directory database, the database having a network protocol address for a selected plurality of processes having on-line status with respect to the computer network, the network protocol address of each respective process forwarded to the database following connection to the computer network; and

b. in response to one of the network protocol addresses, establishing a
point-to-point communication link from the first process to the second process over the computer network.

The present invention also provides a method of establishing a point-topoint communication between a first process and a second process, said method for use in a first computer process operatively coupled over a computer network to

a second process and an address server, said method comprising:

a. transmitting to the server a network protocol address received by the first process following connection to the computer network;

b. transmitting, to the server, a query as to whether the second process
20 is connected to the computer network;

c. receiving a network protocol address of the second process from the server, when the second process is connected to the computer network; and

d. in response to the network protocol address of the second process, establishing a point-to-point communication link between the first process and the
 25 second process over the computer network.

The present invention also provides an apparatus capable of executing a first process and connecting to other processes and a server process over a computer network, the apparatus comprising:

a. program logic configured to generate a user-interface enabling 30 control of a first process executing on the computer system;

b. program logic configured to determine the currently assigned network protocol address of the first process upon connection to the computer network;

c. program logic, responsive to the currently assigned network protocol
 address of the first process, and configured to establish a communication connection with the server process and to forward the assigned network protocol address of the first process to the server process upon establishing a communication connection with the server process; and

d. program logic, responsive to user input commands, and configured
 10 to establish a point-to-point communications with another process over the computer network.

The present invention also provides an apparatus for use with a computer system, the computer system executing a first process operatively coupled over a computer network to a second process and a directory database server process, the apparatus comprising:

A. program logic configured to, following connection of the first process to the computer network, forward to the address server a network protocol address at which the first process is connected to the computer network;

B. program logic configured to query the address server as to whether
20 the second process is connected to the computer network;

C. program logic configured to receive a network protocol address of the second process from the address server, when the second process is connected to the computer network; and

D. program logic configured to, in response to the network protocol
 address of the second process, establish a point-to-point communication link with the second process over the computer network.

The present invention also provides Apparatus for establishing a point-topoint communication link, said apparatus operating in a computer system capable of executing a first process and operatively connectable to other processes and a 30 server over a computer network, said apparatus comprising:

. •

.....

a. means for transmitting, from the first process to the server, a query as to whether a second process is connected to the computer network;

b. means for receiving a network protocol address of the second process from the server when the second process is connected to the computer

5 network; and

. -

c. means, responsive to the network protocol address of the second process, for establishing a point-to-point communication link between the first process and the second process over the computer network.

The present invention also provides a computer data signal embodied in a 10 carrier wave comprising:

program code for transmitting to a server a network protocol address received by a first process following connection to a computer network;

program code for transmitting, to the server, a query as to whether a second process is connected to the computer network;

15 program code for receiving a network protocol address of the second process from the server, when the second process is connected to the computer network; and

program code, responsive to the network protocol address of the second process, for establishing a point-to-point communication link between the first
process and the second process over the computer network.

The present invention also provides a computer program product for use with a computer system, the computer system executing a first process and operatively connectable to a second process and a server over a computer network, the computer program product comprising a computer useable medium

25 having program code embodied in the medium, the program code comprising:

program code for transmitting to the server a network protocol address received by the first process following connection to the computer network;

program code for transmitting, to the server, a query as to whether the second process is connected to the computer network;

program code for receiving a network protocol address of the second process from the server, when the second process is connected to the computer network; and

5

program code, responsive to the network protocol address of the second process; for establishing a point-to-point communication link between the first process and the second process over the computer network.

Preferred embodiments of the present invention are hereinafter described, 10 by way of example only, with reference to the following drawings, wherein:

FIG 1 illustrates, in block diagram format, a system for the disclosed pointto-point Internet protocol:

FIG 2 illustrates, in block diagram format, the system using a secondary point-to-point Internet protocol;

FIG 3 illustrates, in block diagram format; the system of FIGS 1-2 with the point-to-point Internet protocol established;

FIG 4 is another block diagram of the system of FIGS 1-2 with audio communications being conducted;

20

15

•••••

•...•

FIG. 5 illustrates a display screen for a processing unit;

FIG. 6 illustrates another display screen for a processing unit;

FIG. 7 illustrates a flowchart of the initiation of the point-to-point Internet protocols;

5

FIG. 8 illustrates a flowchart of the performance of the primary point-to-point Internet protocols; and

FIG. 9 illustrates a flowchart of the performance of the secondary point-to-point Internet protocol.

••••

••••••

Cisco - Exhibit 1003 - Page 416

••

Referring now in specific detail to the drawings, with like reference numerals identifying similar or identical elements, as shown in FIG. 1, the present disclosure describes a point-to-point network protocol and system 10 for using such a protocol.

1

5

In an exemplary embodiment, the system 10 includes a first processing unit 12 for sending at least a voice signal from a first user to a second user. The first processing unit 12 includes a processor 14, a memory 16, an input device 18, and an output device 20. The output device 20 includes at least one modem capable of, for example, 14.4 kbaud communications and operatively connected via wired and/or wireless communication connections to the Internet or other computer networks such as an Intranet, i.e., a private computer network. One skilled in the art would understand that the input device 18 may be implemented at least in part by the modem of the output device 20 to allow input signals from the communication connections to be received: The second processing unit 22 may have a processor, memory, and input and output devices, including at least one modem and associated communication connections, as described above for the first processing unit 12. In an exemplary embodiment, each of the processing units 12, 22 may execute the WEBPHONE™ Internet telephony application available from NetSpeak Corporation, Boca Raton, FL, which is capable of performing the disclosed point-to-point Internet protocol and system 10, as described herein.

25

••• 15

The first processing unit 12 and the second processing unit 22 are operatively connected to the Internet 24 by communication devices and software known in the art, such as an Internet Service Provider (ISP) or an Internet gateway. The processing units 12, 22 may be operatively interconnected through the Internet 24 to a connection server 26, and

may also be operatively connected to a mail server 28 associated with the Internet 24.

The connection server 26 includes a processor 30, a timer 32 for generating time stamps, and a memory such as a database 34 for storing, for example, E-mail and Internet Protocol (IP) addresses of logged-in units. In an exemplary embodiment, the connection server 26 may be a SPARC 5 server or a SPARC 20 server, available from SUN MICROSYSTEMS, INC., Mountain View, CA, having a central processing unit (CPU) as processor 30, an operating system (OS) such as UNIX, for providing timing operations such as maintaining the timer 32, a hard drive or fixed drive, as well as dynamic random access memory (DRAM) for storing the database 34, and a keyboard and display and/or other input and output devices (not shown in FIG. 1). The database 34 may be an SQL database available from ORACLE or INFORMIX.

5

10

15

.....

20

In an exemplary embodiment, the mail server 28 may be a Post Office Protocol (POP) Version 3 mail server including a processor, memory, and stored programs operating in a UNIX environment, or, alternatively, another OS, to process E-mail capabilities between processing units and devices over the Internet 24.

The first processing unit 12 may operate the disclosed point-topoint Internet protocol by a computer program described hereinbelow in conjunction with FIG. 6, which may be implemented from compiled and /or interpreted source code in the C++ programming language and which may be downloaded to the first processing unit 12 from an external

25 computer. The operating computer program may be stored in the memory 16, which may include about 8 MB RAM and/or a hard or fixed drive having about 8 MB. Alternatively, the source code may be implemented in the first processing unit 12 as firmware, as an erasable read only memory (EPROM), etc. It is understood that one skilled in the

art would be able to use programming languages other than C++ to implement the disclosed point-to-point network protocol and system 10.

7

The processor 14 receives input commands and data from a first user associated with the first processing unit 12 though the input device 18, which may be an input port connected by a wired, optical, or a wireless connection for electromagnetic transmissions, or alternatively may be transferable storage media, such as floppy disks, magnetic tapes, compact disks, or other storage media including the input data from the first user.

The input device 18 may include a user interface (not shown) having, for example, at least one button actuated by the user to input commands to select from a plurality of operating modes to operate the first processing unit 12. In alternative embodiments, the input device 18 may include a keyboard, a mouse, a touch screen, and/or a data reading device such as a disk drive for receiving the input data from input data files stored in storage media such as a floppy disk or, for example, an 8 mm storage tape. The input device 18 may alternatively include connections to other computer systems to receive the input commands and data therefrom.

The first processing unit 12 may include a visual interface for use in conjunction with the input device 18 and output device 20 similar to those screens illustrated in FIGS. 5-6, discussed below. It is also understood that alternative devices may be used to receive commands and data from the user, such as keyboards, mouse devices, and graphical user interfaces (GUI) such as WINDOWS™ 3.1 available form MICROSOFT Corporation, Redmond, WA., and other operating systems and GUIs, such as OS/2 and OS/2 WARP, available from IBM CORPORATION, Boca Raton, FL. Processing unit 12 may also include microphones and/or telephone handsets for receiving audio voice data

10

5



and commands, speech or voice recognition devices, dual tone multifrequency (DTMF) based devices, and/or software known in the art to accept voice data and commands and to operate the first processing unit 12.

5

10

• • • •

••••

:.:'`:

•....•

.....

••••••

25

15

In addition, either of the first processing unit 12 and the second processing unit 22 may be implemented in a personal digital assistant (PDA) providing modem and E-mail capabilities and Internet access, with the PDA providing the input/output screens for mouse interactions or for touchscreen activation as shown, for example, in FIGS. 5-6, as a combination of the input device 18 and output device 20.

For clarity of explanation, the illustrative embodiment of the disclosed point-to-point Internet protocol and system 10 is presented as having individual functional blocks, which may include functional blocks labeled as "processor" and "processing unit". The functions represented by these blocks may be provided through the use of either shared or dedicated hardware, including, but not limited to, hardware capable of executing software. For example, the functions of each of the processors and processing units presented herein may be provided by a shared processor or by a plurality of individual processors. Moreover, the use of the functional blocks with accompanying labels herein is not to be construed to refer exclusively to hardware capable of executing software. Illustrative embodiments may include digital signal processor (DSP) hardware, such as the AT&T DSP16 or DSP32C, read-only memory (ROM) for storing software performing the operations discussed below. and random access memory (RAM) for storing DSP results. Very large scale integration (VLSI) hardware embodiments, as well as custom VLSI circuitry in combination with a general purpose DSP circuit, may also be provided. Any and all of these embodiments may be deemed to fail within the meaning of the labels for the functional blocks as used herein.

The processing units 12, 22 are capable of placing calls and connecting to other processing units connected to the Internet 24, for example, via dialup SLIP/PPP lines. In an exemplary embodiment, each processing unit assigns an unsigned long session number, for example, a 32- bit long sequence in a *.ini file for each call. Each call may be assigned a successive session number in sequence, which may be used by the respective processing unit to associate the call with one of the SLIP/PPP lines, to associate a <ConnectOK> response signal with a <Connect Request> signal, and to allow for multiplexing and demultiplexing of inbound and outbound conversations on conference lines, as explained hereinafter.

For callee (or called) processing units with fixed IP addresses, the caller (or calling) processing unit may open a "socket", i.e. a file handle or address indicating where data is to be sent, and transmit a <Call> command to establish communication with the callee utilizing, for example, datagram services such as Internet Standard network layering as well as transport layering, which may include a Transport Control Protocol (TCP) or a User Datagram Protocol (UDP) on top of the IP. Typically, a processing unit having a fixed IP address may maintain at least one open socket and a called processing unit waits for a <Call> command to assign the open socket to the incoming signal. If all lines are in use, the callee processing unit sends a BUSY signal or message to the callee processing unit. As shown in FIG. 1, the disclosed point-topoint Internet protocol and system 10 operate when a callee processing unit does not have a fixed or predetermined IP address. In the exemplary embodiment and without loss of generality, the first processing unit 12 is the caller processing unit and the second processing unit 22 is the called processing unit. When either of processing units 12, 22 logs on to the Internet via a dial-up connection, the respective unit is provided a

15

-20

••••••

25

10

5

10

dynamically allocated IP address by the a connection service provider.

Upon the first user initiating the point-to-point Internet protocol when the first user is logged on to the Internet 24, the first processing unit 12 automatically transmits its associated E-mail address and its

dynamically allocated IP address to the connection server 26. The
connection server 26 then stores these addresses in the database 34 and
time stamps the stored addresses using timer 32. The first user
operating the first processing unit 12 is thus established in the database
34 as an active on-line party available for communication using the
disclosed point-to-point Internet protocol. Similarly, a second user
operating the second processing unit 22, upon connection to the Internet
24 through the a connection service provider, is processed by the
connection server 26 to be established in the database 34 as an active
on-line party.

The connection server 26 may use the time stamps to update the status of each processing unit; for example, after 2 hours, so that the online status information stored in the database 34 is relatively current. Other predetermined time periods, such as a default value of 24 hours, may be configured by a systems operator.

The first user with the first processing unit 12 initiates a call using, for example, a Send command and/or a command to speeddial an NTH stored number, which may be labeled [SND] and [SPD] [N], respectively, by the input device 18 and/or the output device 20, such as shown in FIGS. 5-6. In response to either the Send or speeddial commands, the first processing unit 12 retrieves from memory 16 a stored E-mail address of the callee corresponding to the NTH stored number. Alternatively, the first user may directly enter the E-mail address of the callee.

The first processing unit 12 then sends a query, including the Email address of the callee, to the connection server 26. The connection

- .

5

10

server 26 then searches the database 34 to determine whether the callee is logged-in by finding any stored information corresponding to the callee's E-mail address indicating that the callee is active and on-line. If the callee is active and on-line, the connection server 26 then performs

the primary point-to-point Internet protocol; i.e. the IP address of the callee is retrieved from the database 34 and sent to the first processing unit 12. The first processing unit 12 may then directly establish the point-to-point Internet communications with the callee using the IP address of the callee.

If the callee is not on-line when the connection server 26 determines the callee's status, the connection server 26 sends an OFF-LINE signal or message to the first processing unit 12. The first processing unit 12 may also display a message such as "Called Party Off-Line" to the first user.

When a user logs off or goes off-line from the Internet 24, the connection server 26 updates the status of the user in the database 34; for example, by removing the user's information, or by flagging the user as being off-line. The connection server 26 may be instructed to update the user's information in the database 34 by an off-line message, such as a data packet, sent automatically from the processing unit of the user prior to being disconnected from the connection server 26. Accordingly, an off-line user is effectively disabled from making and/or receiving point-to-point Internet communications.

As shown in FIGS. 2-4, the disclosed secondary point-to-point Internet protocol may be used as an alternative to the primary point-topoint Internet protocol described above, for example, if the connection server 26 is non-responsive, inoperative, and/or unable to perform the primary point-to-point Internet protocol, as a non-responsive condition. Alternatively, the disclosed secondary point-to-point Internet protocol may

5

be used independent of the primary point-to-point Internet protocol. In the disclosed secondary point-to-point Internet protocol, the first processing unit 12 sends a <ConnectRequest> message via E-mail over the Internet 24 to the mail server 28. The E-mail including the

5 <ConnectRequest> message may have, for example, the subject [*wp#XXXXXX#nnn.nnn.mn.#emailAddr]


where nnn.nnn.nnn.nnn. is the current (i.e. temporary or permanent) IP address of the first user, and XXXXXXXX is a session number, which may be unique and associated with the request of the first user to initiate point-to-point communication with the second user.

As described above, the first processing unit 12 may send the <ConnectRequest> message in response to an unsuccessful attempt to perform the primary point-to-point Internet protocol. Alternatively, the first processing unit 12 may send the <ConnectRequest> message in response to the first user initiating a SEND command or the like.

After the <ConnectRequest> message via E-mail is sent, the first processing unit 12 opens a socket and waits to detect a response from the second processing unit 22. A timeout timer, such as timer 32, may be set by the first processing unit 12, in a manner known in the art, to wait for a predetermined duration to receive a <ConnectOK> signal. The processor 14 of the first processing unit 12 may cause the output device 20 to output a Ring signal to the user, such as an audible ringing sound, about every 3 seconds . For example, the processor 14 may output a *.wav file, which may be labeled RING.WAV, which is processed by the output device 20 to output an audible ringing sound.

The mail server 28 then polls the second processing unit 22, for example, every 3-5 seconds, to deliver the E-mail. Generally, the second processing unit 22 checks the incoming lines, for example, at regular intervals to wait for and to detect incoming E-mail from the mail server 28

12



25

through the Internet 24.

5

10

20

·····

15

Typically, for sending E-mail to users having associated processing units operatively connected to a host computer or server operating an Internet gateway, E-mail for a specific user may be sent over the Internet 24 and directed to the permanent IP address or the SLIP/PPP account designation of the host computer, which then assigns a temporary IP address to the processing unit of the specified user for properly routing the E-mail. The E-mail signal may include a name or other designation such as a user name which identifies the specific user regardless of the processing unit assigned to the user; that is, the host computer may track and store the specific device where a specific user is assigned or logged on, independent of the IP address system, and so the host computer may switch the E-mail signal to the device of the specific

13

user. At that time, a temporary IP address may be generated or assigned to the specific user and device.

Upon detecting and/or receiving the incoming E-mail signal from the first processing unit 12, the second processing unit 22 may assign or may be assigned a temporary IP address. Therefore, the delivery of the E-mail through the Internet 24 provides the second processing unit 22 with a session number as well as IP addresses of both the first processing unit 12 and the second processing unit 22.

Point-to-point communication may then be established by the processing unit 22 processing the E-mail signal to extract the
ConnectRequest> message, including the IP address of the first

25 processing unit 12 and the session number. The second processing unit 22 may then open a socket and generate a <ConnectOK> response signal, which includes the temporary IP address of the second processing unit 22 as well as the session number of the first processing unit.

The second processing unit 22 sends the <ConnectOK> signal

directly over the Internet 24 to the IP address of the first processing unit 12 without processing by the mail server 28, and a timeout timer of the second processing unit 22 may be set to wait and detect a <Call> signal expected from the first processing unit 12.

5

10

•••. 15

20

25

Realtime point-to-point communication of audio signals over the Internet 24, as well as video and voicemail, may thus be established and supported without requiring permanent IP addresses to be assigned to either of the users or processing units 12, 22. For the duration of the realtime point-to-point link, the relative permanence of the current IP addresses of the processing units 12, 22 is sufficient, whether the current IP addresses were permanent (i.e. predetermined or preassigned) or temporary (i.e. assigned upon initiation of the point-to-point communication).

In the exemplary embodiment, a first user operating the first processing unit 12 is not required to be notified by the first processing unit 12 that an E-mail is being generated and sent to establish the point-topoint link with the second user at the second processing unit 22. Similarly, the second user is not required to be notified by the second processing unit 22 that an E-mail has been received and/or a temporary IP address is associated with the second processing unit 22. The processing units 12, 22 may perform the disclosed point-to-point Internet protocol automatically upon initiation of the point-to-point communication command by the first user without displaying the E-mail interactions to either user. Accordingly, the disclosed point-to-point Internet protocol may be transparent to the users. Alternatively, either of the first and

second users may receive, for example, a brief message of "CONNECTION IN PROGRESS" or the like on a display of the respective output device of the processing units 12, 22.

After the initiation of either the primary or the secondary point-to-

point Internet protocols described above in conjunction with FIGS. 1-2, the point-to-point communication link over the Internet 24 may be established as shown in FIGS. 3-4 in a manner known in the art. For example, referring to FIG. 3, upon receiving the <ConnectorOK> signal from the second processing unit 22, the first processing unit 12 extracts the IP address of the second processing unit 22 and the session number, and the session number sent from the second processing unit 22 is then checked with the session number originally sent from the first processing unit 12 in the <ConnectRequest> message as E-mail. If the session numbers sent and received by the processing unit 12 match, then the first processing unit 12 sends a <Call> signal directly over the Internet 24 to the second processing unit 22; i.e. using the IP address of the second processing unit 22 provided to the first processing unit 12 in the

5

10

15

20

<ConnectOK> signal.

Upon receiving the <Call> signal, the second processing unit 22 may then begin a ring sequence, for example, by indicating or annunciating to the second user that an incoming call is being received. For example, the word "CALL" may be displayed on the output device of the second processing unit 22. The second user may then activate the second processing unit 22 to receive the incoming call.

Referring to FIG. 4, after the second processing unit 22 receives the incoming call, realtime audio and/or video conversations may be conducted in a manner known in the art between the first and second users through the Internet 24, for example, by compressed digital audio

25 signals. Each of the processing units 12, 22 also display to each respective user the words "IN USE" to indicate that the point-to-point communication link is established and audio or video signals are being transmitted.

In addition, either user may terminate the point-to-point

Cisco - Exhibit 1003 - Page 427

communication link by, for example, activating a termination command, such as by activating an [END] button or icon on a respective processing unit, causing the respective processing unit to send an <End> signal which causes both processing units to terminate the respective sockets, as well as to perform other cleanup commands and functions known in the art.

5

10

15

20

FIGS. 5-6 illustrate examples of display screens 36 which may be output by a respective output device of each processing unit 12, 22 of FIGS. 1-4 for providing the disclosed point-to-point Internet protocol and system 10. Such display screens may be displayed on a display of a personal computer (PC) or a PDA in a manner known in the art.

As shown in FIG. 5, a first display screen 36 includes a status area 38 for indicating, for example, a called user by name and/or by IP address or telephone number; a current function such as C2; a current time; a current operating status such as "IN USE", and other control icons such as a down arrow icon 40 for scrolling down a list of parties on a current conference line. The operating status may include such annunciators as "IN USE," "IDLE," "BUSY," "NO ANSWER," "OFFLINE," "CALL," "DIALING," "MESSAGES," and "SPEEDDIAL."

Other areas of the display screen 36 may include activation areas or icons for actuating commands or entering data. For example, the display screen 36 may include a set of icons 42 arranged in columns and rows including digits 0-9 and commands such as END, SND, HLD, etc. For example, the END and SND commands may be initiated as described

25 above, and the HLD icon 44 may be actuated to place a current line on hold. Such icons may also be configured to substantially simulate a telephone handset or a cellular telephone interface to facilitate ease of use, as well as to simulate function keys of a keyboard. For example, icons labeled L1-L4 may be mapped to function keys F1-F4 on standard PC keyboards, and icons C1-C3 may be mapped to perform as combinations of function keys, such as CTRL-F1, CTRL-F2, and CTRL-F3, respectively. In addition, the icons labeled L1-L4 and C1-C3 may include circular regions which may simulate light emitting diodes (LEDs) which indicate that the function or element represented by the respective icon is active or being performed.

Icons L1-L4 may represent each of 4 lines available to the caller, and icons C1-C3 may represent conference calls using at least one line to connect, for example, two or more parties in a conference call. The icons L1-L4 and C1-C3 may indicate the activity of each respective line or conference line. For example, as illustrated in FIG. 5, icons L1-L2 may have lightly shaded or colored circles, such as a green circle, indicating that each of lines 1 and 2 are in use, while icons L3-L4 may have darkly shaded or color circles, such as a red or black circle, indicating that each of lines 3 and 4 are not in use. Similarly, the lightly shaded circle of the icon labeled C2 indicates that the function corresponding to C2 is active, as additionally indicated in the status are 38, while darkly shaded circles of icons labeled C1 and C3 indicate that such corresponding functions are not active.

The icons 42 are used in conjunction with the status area 38. For example, using a mouse for input, a line that is in use, as indicated by the lightly colored circle of the icon, may be activated to indicate a party's name by clicking a right mouse button for 5 seconds until another mouse click is actuated or the [ESC] key or icon is actuated. Thus, the user may switch between multiple calls in progress on respective lines.

Using the icons as well as an input device such as a mouse, a user may enter the name or alias or IP address, if known, of a party to be called by either manually entering the name, by using the speeddial feature, or by double clicking on an entry in a directory stored in the

17

25

5

10

• 15

memory, such as the memory 16 of the first processing unit 12, where the directory entries may be scrolled using the status area 38 and the down arrow icon 40.

Once a called party is listed in the status area 38 as being active on a line, the user may transfer the called party to another line or a conference line by clicking and dragging the status area 38, which is represented by a reduced icon 46. Dragging the reduced icon 46 to any one of line icons L1-L4 transfers the called party in use to the selected line, and dragging the reduced icon 46 to any one of conference line icons C1-C3 adds the called party to the selected conference call.

5

10

20

25

Other features may be supported, such as icons 48-52, where icon 48 corresponds to, for example, an ALT-X command to exit the communication facility of a processing unit, and icon 50 corresponds to, for example, an ALT-M command to minimize or maximize the display screen 36 by the output device of the processing unit. Icon 52 corresponds to an OPEN command, which may, for example, correspond to pressing the O key on a keyboard, to expand or contract the display screen 36 to represent the opening and closing of a cellular telephone. An "opened" configuration is shown in FIG. 5, and a "closed" configuration is shown in FIG. 6. In the "opened" configuration, additional features such as output volume (VOL) controls, input microphone (MIC) controls, waveform (WAV) sound controls, etc.

The use of display screens such as those shown in FIGS. 5-6 provided flexibility in implementing various features available to the user. It is to be understood that additional features such as those known in the art may be supported by the processing units 12, 22.

Alternatively, it is to be understood that one skilled in the art may implement the processing units 12, 22 to have the features of the display screens in FIGS. 5-6 in hardware; i.e. a wired telephone or wireless

cellular telephone may include various keys, LEDs, liquid crystal displays (LCDs), and touchscreen actuators corresponding to the icons and features shown in FIGS. 5-6. In addition, a PC may have the keys of a keyboard and mouse mapped to the icons and features shown in FIGS. 5-6.

5

10

•15

20

25

Referring to FIG. 7, the disclosed point-to-point Internet protocol and system 10 is illustrated. First processing unit 12 initiates the point-topoint Internet protocol in step 56 by sending a query from the first processing unit 12 to the connection server 26. If connection server 26 is operative to perform the point-to-point Internet protocol, in step 58, first processing unit 12 receives an on-line status signal from the connection server 26, such signal may include the IP address of the callee or a "Callee Off-Line" message. Next, first processing unit 12 performs the primary point-to-point Internet protocol in step 60, which may include receiving, at the first processing unit 12, the IP address of the callee if the callee is active and on-line. Alternatively, processing unit 60 may initiate and perform the secondary point-to-point Internet protocol in step 62, if the called party is not active and/or on-line.

Referring to FIG. 8, in conjunction with FIGS. 1 and 3-4, the disclosed point-to-point Internet protocol and system 10 is illustrated. Connection server 26 starts the point-to-point Internet protocol, in step 64, and timestamps and stores E-mail and IP addresses of logged-in users and processing units in the database 34 in step 66. Connection server 26 receives a query from a first processing unit 12 in step 68 to determine whether a second user or second processing unit 22 is logged-in to the Internet 24, with the second user being specified, for example, by an E-mail address. Connection server 26 retrieves the IP address of the specified user from the database 34 in step 70, if the specified user is logged-in to the Internet, and sends the retrieved IP address to the first

processing unit 12 in step 72 to enable first processing unit 12 to establish point-to-point communications with the specified second user.

5

10

15

.....

20

The disclosed secondary point-to-point Internet protocol operates as shown in FIG. 9. First processing unit 12 generates an E-mail signal, including a session number and a first IP address corresponding to a first processing unit in step 76. First processing unit 12 transmits the E-mail signal as a <ConnectRequest> signal to the Internet 24 in step 78. The E-mail signal is delivered through the Internet 24 using a mail server 28 to the second processing unit 22 in step 80. Second processing unit 22 extracts the session number and the first IP address from the E-mail signal in step 82 and transmits or sends the session number and a second IP address corresponding to the second processing unit 22, back to the first processing unit 12 through the Internet 24, in step 84. First processing unit 12 verifies the session number received from the second processing unit 22 in step 86, and establishes a point-to-point Internet communication link between the first processing unit 12 and second processing unit 22 using the first and second IP addresses in step 88.

While the disclosed point-to-point Internet protocols and system have been particularly shown and described with reference to the preferred embodiments, it is understood by those skilled in the art that various modifications in form and detail may be made therein without departing from the scope and spirit of the invention. Accordingly, modifications such as those suggested above, but not limited thereto, are to be considered within the scope of the invention.

c-4

. .

•••••••

5

10

Throughout this specification and the claims which follow, unless the context requires otherwise, the word "comprise", and variations such as "comprises" and "comprising", will be understood to imply the inclusion of a stated integer or step or group of integers or steps but not the exclusion of any other integer or step or group of integers or steps.

The reference to any prior art in this specification is not, and should not be taken as, an acknowledgment or any form of suggestion that that prior art forms part of the common general knowledge in Australia.

Cisco - Exhibit 1003 - Page 433

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

 Apparatus for establishing a point-to-point communication link said apparatus operating in a computer system operatively coupled to other computers
 and a server over a computer network, said apparatus comprising:

a. means for transmitting, from the first process to a server a query as to whether a second process is connected to the computer network;

b. means for receiving a network protocol address of the second process from the server when the second process is connected to the
 10 computer network; and

c. means, responsive to the network protocol address of the second process, for establishing a point-to-point communication link between the first process and the second process over the computer network.

15 2. The computer apparatus of claim 1 further comprising:

d. means for receiving audio data and transmitting the audio data to the second processor over the established point-to-point communication link.

20 3. An apparatus for use with a computer system capable of executing a first process and communicating with other processes, a directory server process and a mail server process over a computer network, the apparatus comprising:

A. program logic configured to determine the currently assigned network protocol address of the first process upon connection to the computer network;

B. program logic configured to establish a communication connection with the directory server process once the assigned network protocol of the first process is known;

•••••

••••••

۰.

.....

•::•:

.....

••••••

C. program logic configured to forward the assigned network protocol address of the first process to the directory server process upon establishing a communication connection with the directory server process; and

D. program logic configured to establish a point-to-point communication
 5 with another process over the computer network.

4. The apparatus of claim 3 wherein the program logic D further comprises:

D.1 program logic configured to transmit, from the first process to the directory server process, a query as to whether a second process is connected to
10 the computer network; and

D.2 program logic configured to receive a network protocol address of the second process from the directory server process, when the second process is connected to the computer network.

15 5. The apparatus of claim 3 wherein the program logic D further comprises:

D.1 program logic configured to transmit an E-mail message containing a network protocol address from the first process to the mail server process over the computer network;

D.2 program logic configured to receive a second network protocol address from a second process over the computer network.

An apparatus for use with a computer system, the computer system capable of executing a first process connectable over a computer network to a second process and a directory database server process, the apparatus comprising:

a. program logic configured to access a directory database, the database having a network protocol address for a selected plurality of processes having on-line status with respect to the computer network, the network protocol address of each respective process forwarded to the database following
 30 connection to the computer network; and

b. program logic responsive to one of the network protocol addresses and configured to establish a point-to-point communication link from the first process to the second process over the computer network.

5 7. A computer program product for use with a computer system, the computer system executing a first process operatively connectable over a computer network to a second process and a server process, the computer program product comprising a computer useable medium having computer readable program code embodied therein, the program code comprising:

a. program code configured to access a directory database, the database having a network protocol address for a selected plurality of processes having on-line status with respect to the computer network, the network protocol address of each respective process forwarded to the database following connection to the computer network; and

b. program code responsive to one of the network protocol addresses and configured to establish a point-to-point communication link from the first process to the second process over the computer network.

A method of establishing a point-to-point communication between a first
 process and a second process, said method for use in a first computer process
 operatively coupled over a computer network to a second process and an address
 server, said method comprising:

A. following connection of the first process to the computer network forwarding to the address server a network protocol address at which the first
 process is connected to the computer network;

B. querying the address server as to whether the second process is connected to the computer network;

C. receiving a network protocol address of the second process from the address server, when the second process is connected to the computer network;
 30 and

•••••

•••

.....

10

••••••

20

••••••

D. in response to the network protocol address of the second process, establishing a point-to-point communication link with the second process over the computer network.

5 9. A method for establishing point-to-point communications with other processes, said method for use in a computer system capable of executing a first process and communicating with other processes and a server process over a computer network, said method comprising:

A. determining the currently assigned network protocol address of the
 10 first process upon connection to the computer network;

- B. establishing a communication connection with the server process once the assigned network protocol of the first process is known;
- C. forwarding the assigned network protocol address of the first process to the server process upon establishing a communication connection with the server process; and

D. establishing a point-to-point communication with another process over the computer network.

10. The method of claim 9 wherein the program step D comprises:

D.1 transmitting, from the first process to the server process, a query as to whether a second process is connected to the computer network; and

D.2 receiving a network protocol address of the second process from the server process, when the second process is connected to the computer network.

25 11. A method of establishing a point-to-point communication between a first process and a second process, said method for use in a first computer process operatively coupled over a computer network to a second process and an address server, said method comprising: a. accessing a directory database, the database having a network protocol address for a selected plurality of processes having on-line status with respect to the computer network, the network protocol address of each respective

5 process forwarded to the database following connection to the computer network; and

b. in response to one of the network protocol addresses, establishing a point-to-point communication link from the first process to the second process over the computer network.

10

15

••••••

12. A method of establishing a point-to-point communication between a first process and a second process, said method for use in a first computer process operatively coupled over a computer network to a second process and an address server, said method comprising:

a. transmitting to the server a network protocol address received by the first process following connection to the computer network;

b. transmitting, to the server, a query as to whether the second process is connected to the computer network;

c. receiving a network protocol address of the second process from the 20 - server, when the second process is connected to the computer network; and

d. in response to the network protocol address of the second process, establishing a point-to-point communication link between the first process and the second process over the computer network.

25 13. An apparatus capable of executing a first process and connecting to other processes and a server process over a computer network, the apparatus comprising:

a. program logic configured to generate a user-interface enabling control of a first process executing on the computer system;

b. program logic configured to determine the currently assigned network protocol address of the first process upon connection to the computer network;

c. program logic, responsive to the currently assigned network protocol
 address of the first process, and configured to establish a communication connection with the server process and to forward the assigned network protocol address of the first process to the server process upon establishing a communication connection with the server process; and

d. program logic, responsive to user input commands, and configured
 10 to establish a point-to-point communications with another process over the computer network.

14. The apparatus of claim 13 wherein the program logic configured to establish a point-to-point communication link further comprises:

d.1 program logic, responsive to the network protocol address of a second process, and configured to establish a point-to-point communication link between the first process and the second process over the computer network.

15. The apparatus of claim 14 wherein the program logic configured to 20 establish a point-to-point communication link further comprise:

d.2 program logic configured to transmit, from the first process to the server process, a query as to whether the second process is connected to the computer network; and

d.3 program logic configured to receive a network protocol address of
 the second process from the server process, when the second process is connected to the computer network.

16. An apparatus for use with a computer system, the computer system executing a first process operatively coupled over a computer network to a second
30 process and a directory database server process, the apparatus comprising:

A. program logic configured to, following connection of the first process to the computer network, forward to the address server a network protocol address at which the first process is connected to the computer network;

B. program logic configured to query the address server as to whether
5 the second process is connected to the computer network;

C. program logic configured to receive a network protocol address of the second process from the address server, when the second process is connected to the computer network; and

D. program logic configured to, in response to the network protocol
 address of the second process, establish a point-to-point communication link with the second process over the computer network.

17. Apparatus for establishing a point-to-point communication link, said apparatus operating in a computer system capable of executing a first process and

15 operatively connectable to other processes and a server over a computer network, said apparatus comprising:

a. means for transmitting, from the first process to the server, a query as to whether a second process is connected to the computer network;

b. means for receiving a network protocol address of the second
 20 process from the server when the second process is connected to the computer network; and

c. means, responsive to the network protocol address of the second process, for establishing a point-to-point communication link between the first process and the second process over the computer network.

25

.....

••••••

18. A computer data signal embodied in a carrier wave comprising:

program code for transmitting to a server a network protocol address received by a first process following connection to a computer network;

program code for transmitting, to the server, a query as to whether a
second process is connected to the computer network;

.....

.....

••••••

15

program code for receiving a network protocol address of the second process from the server, when the second process is connected to the computer network; and

program code, responsive to the network protocol address of the second 5 process, for establishing a point-to-point communication link between the first

process and the second process over the computer network.

19. A computer program product for use with a computer system, the computer system executing a first process and operatively connectable to a second process
and a server over a computer network, the computer program product comprising a computer useable medium having program code embodied in the medium, the program code comprising:

program code for transmitting to the server a network protocol address received by the first process following connection to the computer network;

program code for transmitting, to the server, a query as to whether the second process is connected to the computer network;

program code for receiving a network protocol address of the second process from the server, when the second process is connected to the computer network; and

20 program code, responsive to the network protocol address of the second process, for establishing a point-to-point communication link between the first process and the second process over the computer network.

20. Apparatus substantially as hereinbefore described with reference to the 25 accompanying drawings.

21. A computer program product substantially as hereinbefore described with reference to the accompanying drawings.

30 22. A method substantially as hereinbefore described with reference to the accompanying drawings.

23. A computer data signal substantially as hereinbefore described with reference to the accompanying drawings.

DATED this 8th day of September 2000

NetSpeak Corporation By its Patent Attorneys DAVIES COLLISON CAVE


·:··:

5

10


...

····

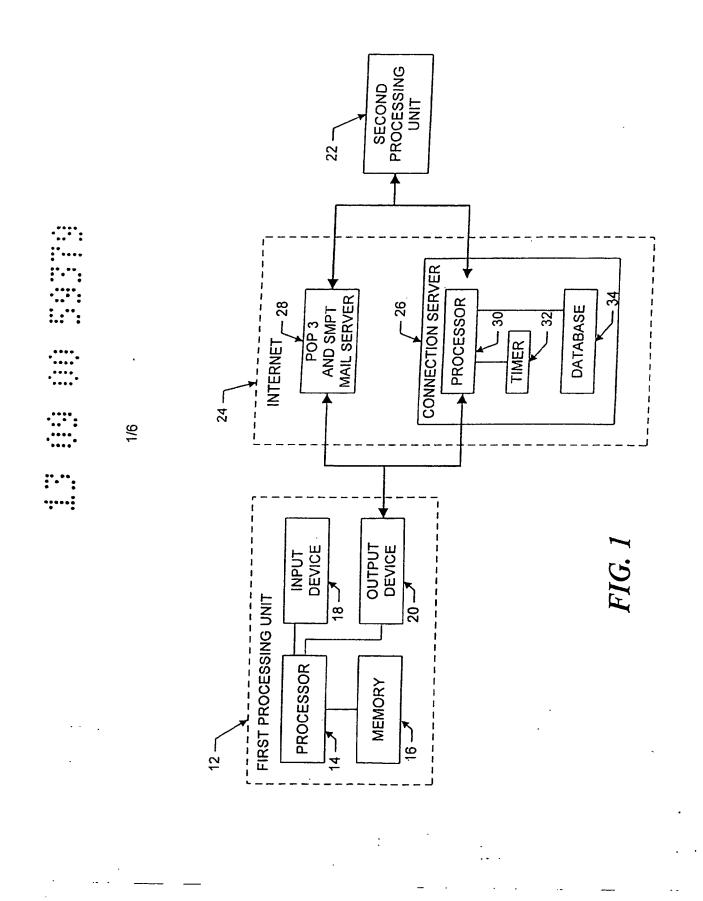

Cisco - Exhibit 1003 - Page 443

-

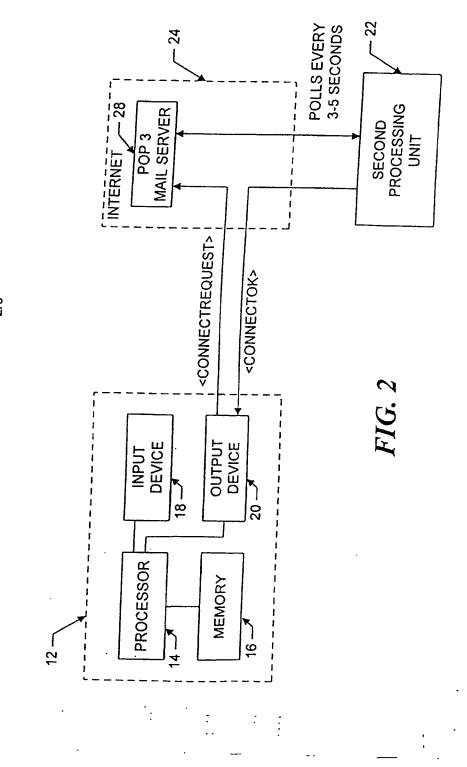

•

:

:

:.:'

.....

•.,

2/6

Cisco - Exhibit 1003 - Page 444

- 22 - 22 SECOND PROCESSING UNIT SECOND PROCESSING UNIT *....* <COMPRESSED DIGITAL AUDIO> - 24 - 24 INTERNET INTERNET FIG. 3 FIG. 4 <CALL> 1 •..•: 3/6 - 12 - 12 FIRST POCESSING UNIT :···: FIRST POCESSING UNIT

•••••

÷

Cisco - Exhibit 1003 - Page 445

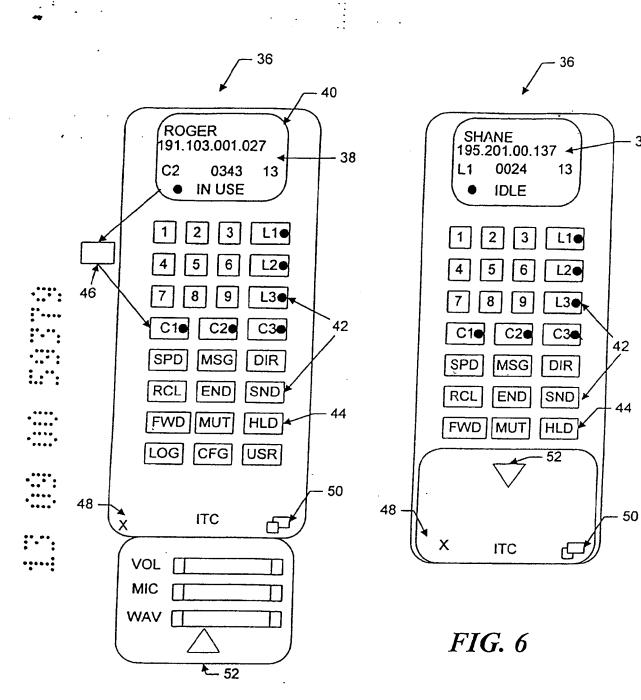


FIG. 5

· · ·

4/6



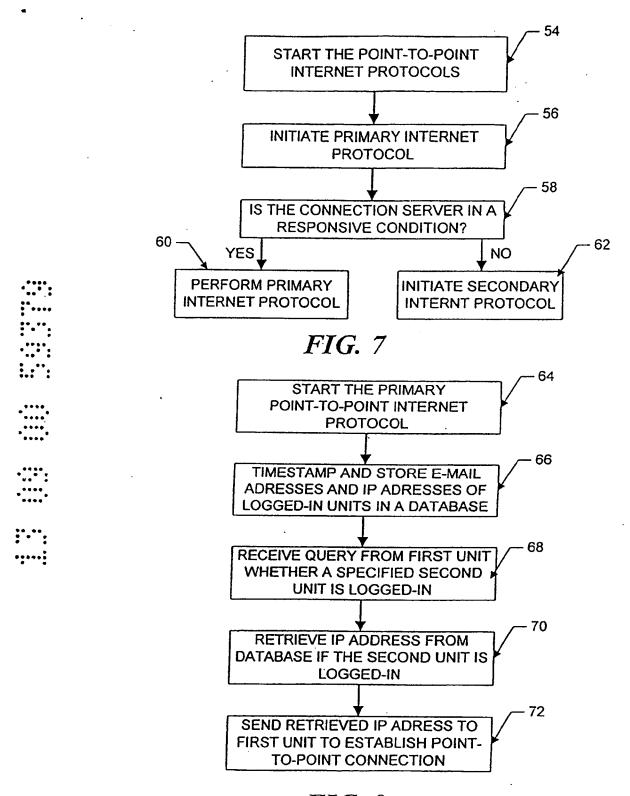


FIG. 8

5/6

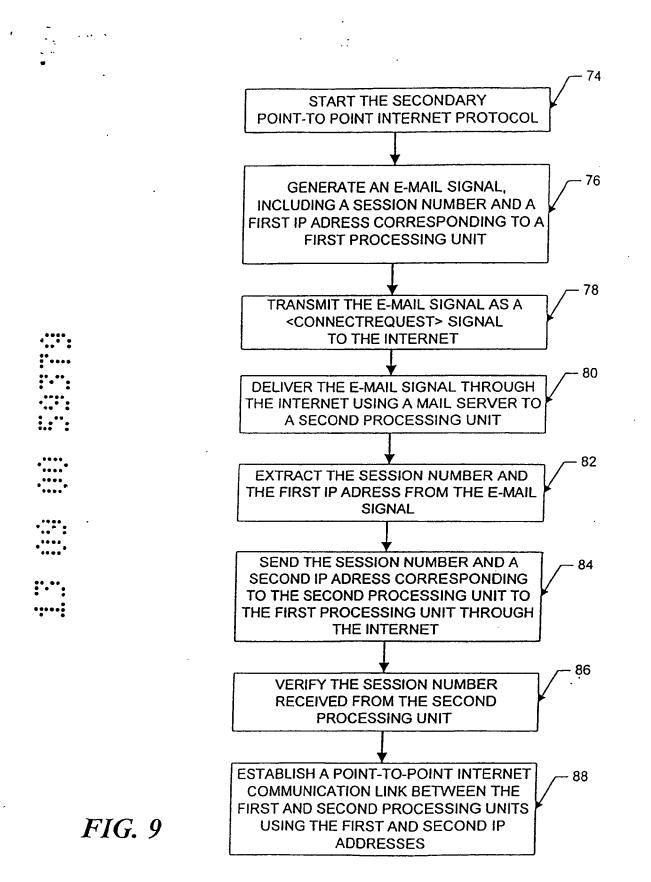

6/6

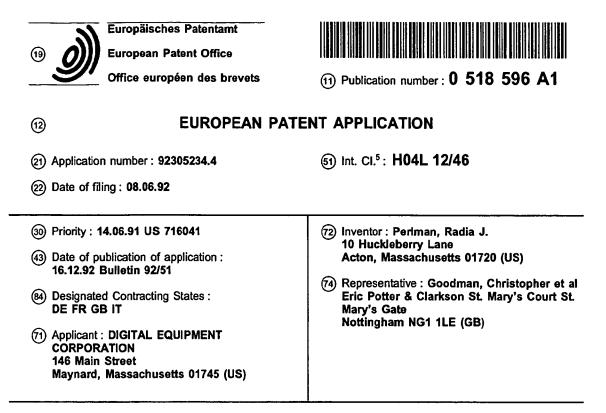

(54) Router using remote address resolution to enable bridge like data forwarding.

(57) A communications system has a first communications link (110) and a second communications link (112), at least one end station (111,113) capable of communicating on each of the communications links, an apparatus (100) for forwarding a packet from the first link to the second link, the apparatus capable of detecting a network layer header on a data packet, the network layer header having a destination address. There is assigned, to the apparatus, an apparatus mask having a forwarding mask length for distinguishing the destination address into a subnet address part and into a host address part. Also there is assigned, to an end station, an end station mask having an end station mask length for distinguishing the destination address into a subnet address part and into a host address part. And there is assigned a greater length to the forwarding mask length than to the end station mask length, to enable the end station in using the end station mask to identify all end stations on the first link and the second link as being on a single link, and to enable the apparatus in using the forwarding mask to distinguish which of the first link or the second link an end station addressed by the network layer address is located.

A selected end station transmits an Address

Request Protocol (hereinafter ARP) message

onto the first communications link, the ARP

message requesting a data link address from a

receiving end station, and the apparatus sends

the ARP message to a second forwarding ap-

paratus connected to the second link having the receiving end station connected thereto. The

apparatus receives an ARP response message

containing the data link address of the receiving

end station from the second forwarding ap-


paratus. And finally, the apparatus forwards the

ARP response message to the selected end

EP 0 518 596 A1

data packet as a bridge in the event that a data link address in a message packet is not a data link address of the apparatus. The forwarding apparatus forwards a data packet as a router in the event that a data link address in the message packet is a data link address of the apparatus.

station. The forwarding apparatus forwards a

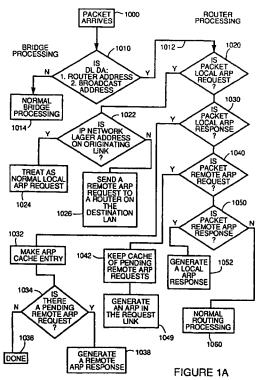

10

15

20

25

30

35

40

45

50

FIELD OF THE INVENTION

This invention relates to forwarding messages from a first link to another link, and more particularly relates to reducing the time required to forward data packets.

BACKGROUND OF THE INVENTION

Communications systems between computers are presently capable of connecting tens of thousands of computers. Typically, a computer will originate a message directed to another computer, and will transmit the message as a sequence of data packets onto the communications system. Because of the large number of computers connected to the system, and the large number of data packets transferred between the computers, throughput of packets transferred by the system is an important issue.

Communications systems are often divided into a number of links. Typically, a link may be a local area network, where each local area network is capable of supporting a few hundred computers. A local area network will hereinafter be referred to as a LAN. The LANs are connected together by a number of different standard devices which forward packets. With the increasingly large size of modern communications systems, the time required to forward a data packet between LANs becomes an important parameter of system design.

Other types of links in a communications system may be, for example, a wide area network formed by joining other links such as LANs, a point to point connection between computers, etc. Maintaining high throughput of system packet traffic is also an important problem in all link to link connections.

Also, all types of links may be connected together by standard devices.

Before discussing standard devices used to connect links together, data packets and the headers of data packets added by different layers of the communications protocol must be discussed. A data packet is typically formed in a higher level of the communications protocol, and finally is transferred down to the Transport Layer which passes the packet into the Network layer. The Network layer attaches a header, the Network Layer Header, to the data packet, and then passes the packet into the Data Link Layer. The Data Link Layer then attaches a header, the Data Link Layer Header, to the data packet. The packet is then transmitted onto the communications system by the physical layer.

A packet, once transmitted onto the communications system, is then forwarded from link to link until it reaches its destination end station.

A first type of device connecting links of the communications system is a bridge. A bridge operates in the Data Link level of the communications protocol, which is the level immediately above the physical level. A bridge receives data packets from one link, typically a LAN, and then parses the Data Link Header. The bridge then makes a decision on what to do with the data packet, where the decision is based upon the contents found in the Data Link Header.

A second type of device linking LANs is a router. A router operates in the network layer, a layer above the data link layer'. A router operates by parsing both the Data Link Header and the Network Layer Header, and making decisions based on the contents of both headers.

In some designs a bridge may be on the order of 200 times faster than a router in forwarding a data packet from a first link to a second link.

Even though a router is slower in forwarding packets from one link, such as a LAN, to another link, it is necessary to use routers rather than bridges at certain locations between multiple numbers of links. The router performs functions beyond those of a bridge, such as: forwarding along better routes than a bridge; incrementing a "hop count" field of a forwarded packet to show the number of passes of the packet through a router in order to prevent indefinite looping of the packet; preventing certain management traffic such as "hello" messages from end stations on one link from being forwarded to the other link; maintaining "network layer addresses" of stations on the links that it connects; fragmentation and reassembly of packets because of different protocols employed by different links; performing explicit handshaking protocols with end stations connected to links connected to the router; participating in routing algorithms, and other functions.

However, a difficulty in operation of large computer communications networks is that the time required for a router to forward messages may result in lower throughput.

SUMMARY OF THE INVENTION

The invention resides in an apparatus for forwarding packets, and solves the difficulty of a router requiring too much time for forwarding a packet, along with the difficulty of a bridge increasing address request protocol (ARP) traffic by forwarding ARP messages.

A communications system has a first communications link and a second communications link, at least one end station capable of communicating on each of the communications links, an apparatus for forwarding a packet from the first link to the second link, the apparatus capable of detecting a network layer header on a data packet, the network layer header having a destination address. There is assigned, to the apparatus, an apparatus mask having a forwarding mask length for distinguishing the destination address into a subnet address part and into a host address part. Also there is assigned, to an end station, an end sta-

2

10

15

20

25

30

40

45

50

tion mask having an end station mask length for distinguishing the destination address into a subnet address part and into a host address part. And there is assigned a greater length to the forwarding mask length than to the end station mask length, to enable the end station in using the end station mask to identify all end stations on the first link and the second link as being on a single link, and to enable the apparatus in using the forwarding mask to distinguish which of the first link or the second link an end station addressed by the network layer address is located.

Also there is a first means for a selected end station to transmit a local Address Request Protocol (hereinafter ARP) request message onto the first communications link, the local ARP request message requesting a data link address of a receiving end station. Further, there is a second means, in response to the local ARP request message, for the apparatus to create a remote ARP request message and to send the remote ARP request message to a second forwarding apparatus connected to the second link having the receiving end station connected thereto. There is also a third means for the apparatus to receive a remote ARP response message containing the data link address of the receiving end station from the second forwarding apparatus. And there is a fourth means, responsive to the remote ARP request message, for the apparatus to create a local ARP response message and to send the local ARP response message to the selected end station.

The forwarding apparatus forwards a data packet as a bridge in the event that a data link address in a message packet is not a data link address of the apparatus.

The forwarding apparatus forwards a data packet 35 as a router in the event that a data link address in the message packet is a data link address of the apparatus.

BRIEF DESCRIPTION OF THE DRAWINGS

A more detailed understanding of the invention may be had from the following description of preferred exemplary embodiments to be understood in conjunction with the accompanying drawing wherein:

Fig. 1 is a logic diagram of two LANs connected by a router in accordance with a preferred embodiment of the invention.

Fig. 1A is a flow chart of a brox in accordance with the invention.

Fig. 2 is a field diagram of a data packet in accordance with a preferred embodiment of the invention.

Fig. 3A is field diagram of an address field.

Fig. 3B is a field diagram of a mask for an address field.

Fig. 3C is is a field diagram of a mask for an address field.

Fig. 4 is a block diagram of a communications

system having multiple links, in accordance with the invention.

Fig. 5 is a field diagram of an address in accordance with the invention.

Fig. 6A is a field diagram of an address in accordance with a preferred embodiment of the invention.

Fig. 6B is a field diagram of a bridge router box (brox) mask in accordance with a preferred embodiment of the invention.

Fig. 7A is a field diagram of an address in accordance with a preferred embodiment of the invention.

Fig. 7B is a field diagram of an end station mask in accordance with a preferred embodiment of the invention.

Fig. 8 is a block diagram of a communications system in accordance with the invention.

DETAILED DESCRIPTION

FIRST EXEMPLARY EMBODIMENT

Capitalization will be used in this document to highlight names of fields of a packet, in order to improve readability of the document.

Referring now to Fig. 1, there is shown a communications link connection apparatus 100, a "brox", in accordance with the invention. The term "brox" is coined herein, and is defined as a box for connecting communications links in accordance with the present invention. A brox forwards as a router under certain conditions, but under other conditions forwards as a bridge. The word "brox" is an acronym (created from the capitalized letters Bridge Router bOX) for a box that behaves as a bridge or as a router. Also a brox may have behavior modes that are neither those of a standard bridge nor those of a standard router.

For a multiple hop data packet transmission, operation of the invention can be described in simple terms for a network using a Transmission Control Protocol-Internet Protocol (TCP-IP) type protocol as follows. TCP-IP is a well known protocol suite which has been developed in the United States. The present invention works partirularly well with the TCP-IP protocol, but will also work with similar protocols.

But first, a TCP-IP type of protocol will be briefly described. In a TCP-IP type protocol, a destination address in the Network Layer Header of a packet is resolved into a subnet address and a host address by applying a mask to the total address. A mask is assigned to a link. A station is configured with a network layer address and a mask for each link to which the station is attached. The mask has as many bit positions as the address in the packet.

The mask has some bits set equal to "1", and some bits set equal to "0". The bits of the mask that equal "1" correspond to bits of the address that identify the link. The bits of the mask that equal "0" correspond to bits of the address that identify the host, or

3

10

15

20

25

30

35

40

45

50

end station, on that link.

For example: in the event that the network layer address is 32 bits (or 4 octets), then the mask is also 32 bits; in the further event that the mask has 16 bits set =1, and 16 bits set =0, then the station interprets the bits in the address corresponding to the bits =1 of the mask as identifying the link. The bits in the address corresponding to "0s" in the mask identify the host, or end station, on that link.

5

As further example, if the first two octets of the mask contain 8 bits =1 each, and the second two octets of the mask contain all bits =0, then the address of the link is contained in the two octets of the address corresponding to the bits =1 of the mask. Also, the host, or station, address on that link is contained in the address bits corresponding to the bits =0 of the mask.

Terminology used in the art of computer communications will now be addressed. The terms "link" and "subnet" are substantially synonyms. Also, the terms "host" and "end station" are substantially synonyms. The terms "link" and "end station" are frequently used in discussions of OSI standard type computer communications systems. The terms "subnet" and "host" are frequently used in discussions of TCP-IP type computer communications systems. A link or a subnet may be a local area network, or may be another type of system for computer communications. A host or end station is the computer attached to the link or the subnet.

A further standard feature of a TCP-IP type protocol is that when an initiating station initiates a transmission to an intended receiving station, the initiating station "knows" only the Network Layer address of the intended receiving station. In order to "learn" the Data Link Layer address of the intended receiving station, the initiating station transmits an Address Request Protocol (ARP) message. A bridge forwards the ARP message, but a router ignores the ARP message. In the event that the intended receiving station receives the ARP message, either by being on the same link as the station or by having the ARP request bridged to the link containing the intended receiving station, then the intended receiving station sends to the initiating station an ARP response containing the Data Link Layer address of the intended receiving station. Upon receipt of the ARP response, the initiating station sends data packets to the intended receiving station by placing the Data Link Layer address learned from the ARP response into the Data Link Header of the data packets.

Also, as a standard practice in a TCP-IP type protocol, an initiating station first tests the Network Layer address of the intended receiving station against its own Network Layer address. Each station on the communications link of the initiating station has the same subnet address, and so the initiating station tests the subnet address of the intended receiving station against the subnet address its own subnet address. In the event that the two subnet addresses are equal, the initiating station transmits an ARP message.

In the event that the two subnet addresses are different, then the initiating station transmits a data packet to a router connected to the communications link of the initiating station. The router maintains a forwarding table, and so "knows" the communications link containing the intended receiving station. The router then forwards the data packet to the proper link, where a further router places the Data Link Layer address of the intended receiving station into the Data Link Layer Header of the data packet, and forwards the data packet onto the proper link for receipt by the intended receiving station. The originating station does not learn the data link address of the receiving station.

Turning now to a simple discussion of the invention, both the router and the bridge are replaced with the "brox" of the invention. Also, in the invention, the network layer addresses of the end stations on the various links are carefully chosen so that all end stations on all links connected by the invention have in their network layer address: firstly, a sequence of bits that are identical for all end stations attached to any of the links connected by broxs; secondly, a sequence of bits that are identical for stations on a single link, but different for stations on other links; and, thirdly, a sequence of bits that are unique among stations on any one link.

The forwarding apparatus of the invention is the brox. A brox has assigned a mask that exposes both the sequence of identical bits and the sequence of unique bits. In contrast, the end stations have a shorter mask that exposes only the sequence of identical bits.

All end stations linked by the invention have the same sequence of identical bits. Accordingly, when an initiating station tests the network layer address of the intended receiving station against its own network layer address in order to determine if the initiating station has permission to send a local ARP message, then permission to send a local ARP message will be granted for an intended end station linked by the invention, whether the intended end station is on the same link as the initiating station or whether it is on a different link.

Also in the invention it is important to distinguish four (4) different types of ARP messages. These four different types of ARP messages are:

1. a local ARP request. A local ARP request is transmitted by an end station onto a link connected to the end station. A local AR request asks for a data link address of an intended destination station. A local ARP request is identical to the standard TCP-IP compatible ARP request discussed hereinabove.

2. a local ARP response. A local ARP response

10

15

20

25

30

35

40

45

50

is received by an end station, and the local ARP response delivers a data link address to the end station. A local ARP response is identical to the standard TCP-IP ARP response discussed here-inabove.

3. a remote ARP request. A remote ARP request is created by a brox on the link of an originating end station, and is created by the brox in response to receipt by the brox of a local ARP request. The remote ARP request is transmitted to a remote brox on the link of a remote intended destination station.

4. a remote ARP response. A remote ARP response is created by a remote brox on the link of a remote intended destination station, and is created in response to the remote brox receiving a local ARP response. The remote ARP response is transmitted to a brox on the link of the originating end station, and in response to receiving the remote ARP request, the brox creates and transmits a local ARP response to the originating end station.

By carefully choosing the addresses of all end stations linked by the invention, by using broxs for forwarding between the various links, and by using short masks for stations and long masks for broxs, useful results flow from the invention. The first useful result is that data packets are forwarded at bridge speed between end stations linked by the invention. A second useful result is that local ARP traffic on one link is confined to that link and is not forwarded as it would be if the links were joined by a conventional bridge. A third useful result is that all links joined by the invention may be reached by remote ARP messages generated in response to any end station on any of the links, without flooding every link with unnecessary local ARP messages.

Forwarding rules followed by a brox may be summarized as follows:

1. in the event that the brox recognizes the address found by parsing the Data Link Destination Address field of a packet as an address used by that brox, then the brox receives the packet and functions as a router.

2. in the event that the brox does not recognize the destination address found by parsing the Data Link header as an address of the brox, then the brox bridges the packet.

3. in the event that the brox recognizes the packet as a local ARP request, and the intended destination end station is on a remote link as determined by the brox using its long mask, then the brox creates a remote ARP request and sends it to a brox on the link of the intended destination end station.

4. later the brox receives a remote ARP response from a brox attached to the link of the intended destination end station. The brox then creates a local ARP response in response to the original local ARP request. The local ARP response contains the data link layer address of the intended receiving end station. The brox then transmits the local ARP response onto the link having the originating end station. The local ARP response is received by the originating end station, and so the originating end station learns the data link address of the intended destination station.

A significant benefit of the invention is that, once the originating end station learns the data link address of the intended destination end station, forwarding of later sent data packets is at bridge speed, rather than router speed. The forwarding delay at each brox, in some designs, may be as much as 200 times less when the brox functions as a bridge rather than as a router. Accordingly, the invention greatly speeds forwarding of data packets.

Referring now to Fig. 2, there is shown a typical field structure for a data packet used by an end station of LAN 110, 112 shown in Fig. 1. Data packet 120 is shown having a Data Link Header 122 and a Network Layer Header 124. When data packet 120 is created and transmitted onto a LAN, the network layer attaches Network Header 124 to the packet, and then the packet is handed down to the data link layer. The data link layer then attaches the Data Link Header 122 to the packet. Upon transmission, data packet 120 may have additional fields preceding the Data Link Header 122 such as, for example, preamble fields, and the precise structure of such preamble fields will depend upon the standard to which LAN 110 is designed. Such preamble fields are not shown in Fig. 2, as Fig. 2 focuses on those fields used by the invention.

Data Link Header 122 contains Data Link Destination Address field 126, and Data Link Source Address field 128. Other Data Link Header fields 130 are also shown in Fig. 2, but are not further described herein in that the invention focuses on the Data Link Destination Address field 126 and the Data Link Source Address field 128 of the Data Link Header 122. Data Link Destination Address field 126 is abbreviated DL D. Data Link Source Address field 128 is abbreviated DL S.

Network Layer Header 124, as shown in Fig. 2, has: Network Layer Destination address field 140, NL D field 140; Network Layer Source address field 142 NL S; and other fields 144. Also, data fields 146 follows the Network Layer Header 124. The Network Layer Destination Address field 140 is abbreviated NL D. The Network Layer Source address field 142 is abbreviated NL S.

In exemplary network designs, the Network Layer Destination address field 140 and the Network Source Layer field 142 may each be assigned a fixed length. The length is often expressed in terms of octets. An octet is a data structure that is ordinarily 8 bits long. For example, in a TCP-IP compatible network both

5

10

15

20

25

30

35

40

45

50

the Network Layer Destination Address field 140 and the Network Layer Source Address field 142 are assigned a length of 32 bits, or 4 octets each.

Turning now to Fig. 1A, there is shown a flow chart of the logic of an exemplary brox 100. At block 1000 the packet arrives at the brox. Control passes to decision block 1010 where the packet data link destination address contained in the Data Link Destination Address field 126 of the packet is determined. Then, the packet data link destination address is tested in order to determine if it is either a router address or a broadcast address used by a router. In the event that decision block 1010 answers "yes", the packet data link destination address is either a router address or a broadcast address, then control passes to line 1012 for router type processing.

In the event that decision block 1010 answers "no", then control passes to block 1014 where the packet is further processed by normal bridge forwarding.

Router processing proceeds along line 1012 to a series of decision blocks, block 1020, block 1030, block 1040, and block 1050. At these decision blocks the type of packet is determined.

At block 1020 the packet is tested in order to determine if it is a local ARP request, and in the event that it is, decision block 1020 answers "yes", and control passes to decision block 1022 for handling as a local ARP request. In the event that decision block 1020 answers "no", then control passes to decision block 1030.

At decision block 1030 the packet is tested in order to determine if it is a local ARP response, and if it is decision block 1030 answers "yes", then control passes to block 1032 for further processing as a local ARP response. In the event that decision block 1030 answers "no", then control passes to decision block 1040.

At decision block 1040 the packet is tested in order to determine if it is a remote ARP request, and if it is decision block 1040 answers "yes", then control passes to block 1042 for processing as a remote ARP request. In the event that decision block 1040 answers "no", then control passes to decision block 1050.

At decision block 1050 the packet is tested in order to determine if it is a remote ARP response, and if it is decision block 1050 answers "yes", then control passes to block 1052 for further processing as a remote ARP response. In the event that decision block 1050 answers "no", then control passes to block 1060.

At block 1060 the packet is forwarded to the proper link in accordance with normal routing processing.

We return to discuss the processing in the event that the packet tested with a "yes" at decision blocks 1020, 1030, 1040, and 1050.

First we discuss processing in the event that de-

cision block 1020 answers "yes", the packet is a local ARP request, and control passes to decision block 1022. A branch to decision block 1022 means that a host on a link connected to the brox issued a local ARP request. At decision block 1022 the packet is tested in order to determine if the network layer address of the intended destination host is on the originating link, and if it is decision block 1022 answers "yes", then processing branches to block 1024. At block 1024 the packet is treated as a normal local ARP request.

In the event that decision block 1022 answers "no", the packet network layer destination address is not on the originating link, then control passes to block 1026. At block 1026 the brox sends a remote ARP request to a brox or router on the destination LAN.

Next we discuss processing in the event that the packet is a remote ARP request as determined by a "yes" response at decision block 1040, where control passed to block 1042. At block 1042 a cache entry is made to record that a pending remote ARP request has been received. Control then passes to block 1044 where a local ARP request is generated on the relevant link, where the link is connected to a port of the brox. Processing in blocks 1042 and 1044 means that the brox is the remote brox in a remote ARP request.

Next we discuss processing in the event that the packet is a local ARP response, that is that decision block 1030 answered "yes", and processing passed to block 1032. At block 1032 an entry is made into the cache of pending remote ARP requests, and control passes to decision block 1034. At decision block 1034 the question, "Is there a pending remote ARP request that matches this local ARP response ?" is asked, and in the event that the answer is "no", then control passes to block 1036 where processing of this packet stops because processing is done.

In the event that decision block 1034 answers "yes", there is a matching pending remote ARP request, then control passes to block 1038. At block 1038 the brox generates a remote ARP response message and sends the response to the originating brox.

Next we discuss processing in the event that decision block 1050 answered "yes", the packet is a remote ARP response, and control passes to block 1052. At block 1052 the brox generates a local ARP response and transmits it onto the relevant link connected to the brox. Processing at block 1052 means that the brox originally generated a remote ARP request, now the remote ARP response has arrived, and the remote ARP response is used to create a local ARP response directed to the originating host.

Normal operation of a bridge and normal operation of a router will now be described.

6

10

15

20

25

30

35

40

45

50

Bridges

The Data Link Header 122 contains a number of fields, and the fields principally used by the bridge are: the Data Link Destination Address field 126; and, the Data Link Source Address field 128 (Fig. 2).

The bridge compares the address found in the Data Link Destination Address field with a forwarding table maintained in a database contained in the bridge, and also compares the contents of the Data Link Source Address field of the packet with a list of source addresses maintained for each link connected to the bridge. The bridge then, typically makes forwarding decisions based upon the contents of these fields.

Typical design rules for operation of a bridge are as follows, and include both rules for receipt of a packet and rules for forwarding a packet.

For receipt of a packet, a bridge tests the contents of the Data Link Destination Address field of the packet against internally maintained forwarding tables.

For forwarding, the bridge decides what to do with the packet, for example, as follows. Typically, for a bridge that uses the flooding and backward learning algorithm, the bridge makes the following decisions, based upon the contents of the Data Link Destination Address field of the packet: if the packet Data Link Destination Address is in the forwarding table of a link attached to the bridge, then forward the packet to the proper link, except, if the packet destination is on the link from which the packet originated, then disregard the packet; and, if the destination address is not in the forwarding table, then flood the packet to all of the links connected to the bridge, but not the link from which the packet originated. Also, typically, a bridge forwards packets having certain multicast or broadcast addresses in their Data Link Destination Address field, such as end station hello messages. A bridge attempts to make the links that it joins together operate as an extended LAN.

Also, If the content of the Data Link Source Address field of the packet is absent from the bridge forwarding tables, then the bridge adds to its appropriate forwarding table a correlation between the address contained in the Data Link Source Address field of the packet and the link from which the packet arrived. Any subsequent packets addressed to that address are then forwarded onto the correlated link. By updating its forwarding table using the arrival link of unknown packets, a bridge learns the correlation between arrival links and the source address of end stations either on those links or connected to those links from other links, and thereby builds up entries into its forwarding tables. Further, for example, there are many other ways that entries in in a bridge forwarding table may be compiled.

Routers

A router receives a packet in the event that the Data Link Destination Address field DL D 126 of the packet contains the data link address of the router or a special multicast address used by routers, otherwise the router ignores the packet.

In the event that a router receives a packet, the router uses its mask to analyze the network layer destination address carried in the Network Layer Destination Address field NL D 140 of the packet. By using its mask, the router breaks the packet network layer destination address into a subnet, or link, part and into a host address part.

The router "knows" a route to the destination link as a result of a forwarding table maintained by the router. The forwarding table is built up by the router participating in router protocol algorithms. The router forwards the packet by placing an appropriate data link destination address in the Data Link Destination Address field DL D of the packet, and by transmitting the packet onto the proper link.

Routers perform other functions not directly related to the present invention, such as: running routing protocols in order to decide on routes to maintain between links when there are choices of multiple routes, that is, participating in routing algorithms; isolating links, by, for example, preventing certain management traffic such as end station hello messages on one link from being forwarded to another link; fragmentation and reassembly of packets because of different protocols employed by different links; performing explicit handshaking protocols with end stations connected to links connected to the router; and other functions.

Referring now to Fig. 3A, there is shown the structure of a Network Layer Address. Fig. 3A may refer to the address of a station on a link. Alternatively, Fig. 3A may refer to a Network Layer Destination Address field of a message packet. As a further alternative, Fig. 3A may refer to a Network Layer Source Address field of a message packet. For convenience, the field structure of Fig. 3A may be referred to as the structure of a Network Layer Destination (often abbreviated as NL D) address field of a message packet, although, as will be apparent to those skilled in the art, the discussion could equally well apply to the Network Layer Source Address field (often abbreviated as NL S address field) 142 of a message packet. Also, Fig. 3A will be used to describe a Network Layer Address assigned to a station.

As shown in Fig. 3A, NL D address field 140 contains 4 bytes, byte 150, byte 152, byte 154, and byte 156. Each byte 150 152 154 156 is an octet, and thereby contains 8 bits.

Referring now to Fig. 3B, there is shown mask 158. Mask 158 has 4 bytes, byte 160, byte 162, byte 164, and byte 166. A mask is assigned to a station,

10

15

20

25

30

35

40

45

50

for example the mask is assigned to end station A 111A, or, for example, B 111B, or, for example, end station C 113C, or to brox 100. In the event that a station detects a message packet, the station applies mask 158 to NL D address field 140 in order to determine the address represented by the NL D address field 140. For example, in the example shown in Fig. 3A and Fig. 3B, the mask 158 is shown having all ones in byte 160, byte 162, and byte 164. In contrast, byte 166 contains all zeros. Accordingly, the corresponding bytes of NL D address field 140, that is byte 150 corresponding to byte 160 of the mask, byte 152 corresponding to byte 162 of the mask, and byte 154 corresponding to the mask byte 164 represent the subnet address. The term "subnet" is synonymous with "link", and may accordingly stand for a local area network LAN, or any other type of link. Byte 156 of NL D address field 140 corresponds to the zeros of mask byte 166, and accordingly represents the address of a "host". The term "host" is synonymous with "station", and so may stand for an "end station", a "brox", or any other type of station. Mask 158 indicates, by the zeros in byte 166, that the host address represented by NL D address field 140 is contained in byte 156.

Accordingly, mask 158 interprets NL D address field 140 so that bytes 150, 152, 154 represent a subnet address. And also mask 158 indicates that byte 156 represents a host address.

As shown in Fig. 3B, mask 158 has byte 160 indicated as byte B1. Byte 162 is indicated as byte B2. Byte 164 is indicated byte as B3. Byte 166 is indicated as byte B4. The labels B1, B2, B3, and B4 indicate the position of the byte within mask 158.

SECOND EXEMPLARY EMBODIMENT

Operation of communications system 101, as shown in Fig. 1, will now be discussed. In the event that end station A 111A decides to send a message packet to end station C 113, then the following events occur:

1. End station A 111A first attempts to learn the data link layer address of end station C 113. In the first step to learn the data link layer address of end station C 113, end station A 111A tests its network layer address against the network layer address of end station C 113 in order to determine if the two end stations are on the same link. And if the two end stations are on the same link, then end station A 111A has permission to transmit an Address Request Protocol message (a local ARP request message transmitted by an end station will be hereinafter referred to as a local ARP request.

End station A 111A uses a short mask, as shown in Fig. 3C, in making the determination as to whether or not end station C 113 is on the same link as end station A 111A, and because of the careful choice of end station network layer addresses, concludes that end station C 113 is on the same link as end station A 111A. As shown in Fig. 3C, the short mask used by end station A 111A has byte 161 and byte 163 both contain eight ones, and byte 165 and byte 167 both contain eight zeros. Accordingly, end station A 111A "sees" only byte 150 and byte 152 of the address fields shown in Fig. 3A, as the subnet address of itself and of end station C 113. By careful choice of the end station addresses, both end station A 111A and end station C 113 have the same value of bytes 150 152 in their network layer addresses. Accordingly, end station A 111A concludes that it and end station C 113 are on the same link.

Physically, as is shown in Fig. 1, end station A 111A is on link 110 and end station C 113 is on link 112. However, because of the careful choice of end station network layer addresses, and by end station A 111A using a short mask, end station A 111A concludes that it and end station C 113 are on the same link.

2. In response to its conclusion that end station C 113 is on the same link, end station A 111A transmits a local ARP Request onto link 110.

3. The local ARP Request is detected by brox 100. Logic unit 115 detects that the packet is a local ARP request. In response to receiving the local ARP request, brox 100 creates a new local ARP request. Brox 100 sends the new local ARP request onto link 112 with the data link layer address of end station C 113 in the data link destination address field 126. By using the long mask of Fig. 3B, where byte 164 contains eight ones, brox 100 can determine the link to which end station C 113 is connected. And by using the portion of the mask containing "0s", brox 100 can determine the network layer address of intended destination end station C 113.

End station C 113 receives the second local ARP Request message from LAN 112, and responds by creating a local ARP response message, and then transmitting the local ARP Response message onto link 112. The local ARP Response message contains the data link layer address of end station C 113.

5. Brox 100 detects the local ARP response message and processes it by logic 117. Brox 100 then determines that this local ARP response is in completion of a pending ARP request. Brox 100 then creates a second local ARP response message, and transmits the second local ARP response message onto link 110.

6. End station A 111A receives the second local ARP response message on LAN 110, and extracts from it the data link layer address of end station C 113.

7. End station A 111A transmits a message pack-

10

15

20

25

30

35

40

45

50

et to end station C 113 by placing the data link layer address of end station C 113 into the Data Link Destination Address field 126 of the message packet.

8. Brox 100 detects the message packet addressed to end station C 113, concludes that the data link destination address field 126 of the packet does not contain a data link destination address of brox 100, and therefor forwards the message packet as a bridge, and the message packet is thereby forwarded onto link 112. This bridge type forwarding operation is fast, as brox 100 made the decision by parsing only the Data Link Header field 122 of the message packet.

9. End station C 113 then detects the message packet by recognizing its data link destination address in the data link destination address field 126 of the message packet, and receives the message packet.

10. End station A 111A then may transmit a sequence of message packets to end station C 113 by: inserting the data link address of end station C 113 into the data link destination address field 126 of the message packet; and then brox 100 forwards the message packets as a bridge.

Advantages of the invention may be seen as follows. Brox 100 blocked the local ARP request message transmitted by end station 111A from being forwarded onto link 112, and in that respect functioned as a router. Brox 100 forwards the message packets transmitted by end station A 111A onto link 110, where the message packet contains the data link layer address of end station C 113 in the data link destination address field 126. Brox 100 thus rapidly forwards message packets, and also isolates local ARP traffic onto a single link.

A benefit of the invention is that local ARP request and local ARP response messages on one link, for example link 110, are blocked from the other link, in this example link 112, by brox 100. A further benefit of the invention is that in the event that an end station on one link, say link 112, sends a sequence of data packets to an end station on the other link, then all packets after the first packet are forwarded at bridge speed.

THIRD EXEMPLARY EMBODIMENT

A multiple hop embodiment of the invention will now be discussed. Referring now to Fig. 4, there is shown a more complex communications system 170. Communications system 170 has link 172, link 174, link 176, and link 178. Link 172 has end stations 172A, 172B, and 172C. Additionally, link 172 may have a further plurality of end stations, and may, for example, support up to several hundred end stations.

Link 174 has end stations 174A, 174B, 174C, and 174D. Also, Link 174 may support a further plurality of end stations. Link 176 has end station 176A, end station 176B, and end stations 176C. Further, Link 178 has end station 178A, end station 178B, and end station 178C. Also, Link 176 and 178 may each support a further plurality of end stations.

Although links 172 174 176 178 are shown in Fig. 4 as straight lines, each link may, for example, be a token ring communications system such as an IEEE 802.5 token ring or an ANSI/IEEE FDDI token ring.

Brox 180 has a connection 182 to link 172, and also has a connection 184 to link 174. Brox 190 has connection 192 to link 174, and also has a connection 194 to link 176. Additionally, brox 190 has a connection 196 to link 178. Brox 200 has a connection 202 to link 174, and a connection 204 to a wide area network through a communications link, as indicated by jagged arrows 206.

The addresses of stations on links 172 174 176 178 are given by the address field of Fig. 3A. Bytes 150 and byte 152 of the addresses are the same for all stations on all links 172 174 176 178. Bytes 154 and byte 156 are different for the various links and stations as described hereinbelow.

Referring to Fig. 4, address 210 shows fields 154 and 156 of the address fields of Fig. 3A as assigned to stations on link 172. Field 154 contains; 11111000. Byte 156 may contain any combination of ones and zeros. The value of byte 156 is assigned to give a unique value for each end station 172A, 172B, 172C, and so forth. Only one byte 156 is reserved for the host address for end stations connected to link 172, and so the number of stations that may be individually addressed are 2**8, or 256 stations.

Address 212 show bytes 154 and 156 of addresses of Fig. 3A as assigned to stations on link 174. Byte 154 contains: 11110000. Byte 156 contains any value, and a unique value of byte 156 is assigned to each station connected to link 174. For example, end stations 174A, 174B, 174C, 174D, and connection 184 to brox 180, and connection 192 to brox 190 are each assigned a unique value of byte 156. Again, byte 156 may refer to as many as 256 stations.

Address 214 shows bytes 154 and 156 of addresses of Fig. 3A as assigned to stations on link 176. Byte 154 of address 214 contains: 11100000. Byte 156 contains any value, and a unique value of byte 156 is assigned to each station on link 176. For example, end station 176A, 176B, 176C, and connection 194 to brox 190, each have assigned a unique value of byte 156.

Address 216 shows bytes 154 and 156 of addresses of Fig. 3A as assigned to stations on link 178. Byte 154 of address of 216 contains; 11000000. Byte 156 has assigned any value, and has a unique value assigned for each station connected to link 178, for example, end stations 178A, 178B, 178C, and connection 196 to brox 190.

Each end station in communications system 170

9

10

15

20

25

30

35

40

45

50

uses mask 221 as shown in Fig. 7B. Mask 221 has all ones in byte B1 160, all ones in byte in B2 162, all zeros in byte B3 164, and all zeros in byte B4 166. Accordingly, whenever any end station in system 170 applies mask 221 to an address of an intended receiving station lying within system 170, the intended receiving station will appear to the transmitting end station to lie on the same link as the transmitting end station. This result arises from the following application of mask 221 to the address of any end station on system 170:

AND (A_my, mask)

AND (A_receive, mask),

where A_my is the network layer address of the end station,

and

where A_receive is the network layer address of the intended receiving end station.

The AND operations are followed by a test of the equality of the two AND operations.

In the event that the two AND operations are equal, then the transmitting end station concludes that it is on the same link as the intended receiving end station. Accordingly, in the event that the two AND operations are equal, the transmitting end station has permission to transmit a local ARP request message in order to inquire: "What is the data link address of the intended receiving end station?".

Referring now to Fig. 6A and Fig. 6B, there is shown an address in Fig. 6A. Part of the address of Fig. 6A is a subnet address, and part of the address is a host address, as determined by the appropriate mask.

There is shown a mask for a brox in Fig. 6B. The mask of Fig. 6B is assigned to broxs 180 190 200. Byte B1 160, and byte B2 162, both contain 8 ones, as shown in Fig. 6B. Byte B3 164 contains: 11111000. Byte B4 166 contains all zeros. When mask 220, Fig. 6B, is applied to the address 210 of link 172, or to address 212 of link 174, or to address 214 of link 176, or to address 216 of link 178, then the arrangement of ones in byte 164 of mask 220 allows the various links to be distinguished. That is, the longest address in byte 154 is in address 210 of link 172, and consists of five (5) ones. These five ones are masked for incorporation in the subnet address by the arrangement of five ones in byte 164 of mask 220, as shown in Fig. 6B. Accordingly, by making use of mask 220 assigned to brox 180, 190, or 200, a determination may be made as to which link a particular station address is located.

By making use of the 0s in mask 220 of Fig. 6B, an identification may be made of the host address 224 as shown in Fig. 6B. The host address, as shown in Fig. 6B, will comprise the last three bits of byte 154 and all eight bits of byte 156. Accordingly, byte 156 of address 210 will uniquely identify any of the stations connected to link 172. Alternatively, address 212, at byte 156, will identify any station connected to link 174, through a masking of the 0s of the mask 220 of Fig. 6b. Additionally, the end stations of link 176 and link 178 may likewise be identified by the 0s of mask 220 taken with the address 214 for link 176, and address 216 taken for link 178.

Since the host address of brox mask 220 of Fig. 6B uses eleven (11) bits, each link may have as many as 2**11 or two thousand forty eight (2,048) unique station addresses.

Referring now to Fig. 7A and Fig. 7B there is shown in Fig. 7B an end station mask 221. End station mask 221 has byte B1 160 contain: eight ones, byte B2 162 also contains eight ones. However, bytes B3 164 and byte B4 166 contain all zeros. Accordingly, an end station using mask 221, when applied to any address shown as address 210, 212, 214, 216 will determine that the addresses is given by bytes 150 and byte 152. Bytes 150 and 152 were chosen to be the same for all stations in communications system 170. Accordingly, by use of mask 221, all end stations of communications systems 170 will determine the same subnet address 222. A consequence of all end stations on communications system 170 determining the same subnet address through use of end station mask 221 is that, in accordance with the ordinary rules of operation for a TCP-IP communications type system, the end stations will have permission to transmit a local ARP request message.

Turning now to Fig. 5, there is shown the full address for addresses 210, 212, 214 and 216. As shown in Fig. 5, bytes 150 and 152 contain the same value for each of addresses 210, 212, 214 and 216. The addresses 210, 212, 214, and 216 differ only in the different values contained in byte 154 and byte 156.

Operation of the Multiple Hop System

In the event that end station 172A desires to transmit a data message to end station 178C, the following events occur:

1. End station 172A does an AND operation between its address and the address of end station 178C. End station 172A uses the end station mask 221 of Fig. 7B. End station 172A then concludes that the subnet address 222 of itself and the subnet address 222 of end station 172A are equal, and so concludes that it may transmit a local ARP request message to end station 178C in order to learn the data link address of end station 178C.

2. Brox 180 parses the data lint. address of the local ARP request message, concludes that the local ARP request message is not addressed to brox 180, and accordingly receives the local ARP request message. Brox 180 recognizes the data packet as a local ARP request message, recognizes that the network layer address contained in

10

15

20

25

30

35

40

45

50

the local ARP request message is the network layer address of end station 178C, and then creates a remote ARP request message and sends the remote ARP request message to brox 190. Brox 180 knows to send the remote ARP request message to brox 190 because brox 180 maintains a forwarding table showing the end stations attached to various broxs. This forwarding table is built up by inter-brox traffic, analogous to the inter-router traffic used by routers to build up forwarding tables.

3. Brox 190 receives the remote ARP request message, and transmits on connection 196 to link 178 a standard local ARP request message containing the data link address of end station 178C. 4. End station 178C responds to the local ARP request message by transmitting a local ARP response message containing the data link layer address of end station 178C onto link 178.

5. Brox 190 receives the local ARP response message from end station 178C, and brox 190 creates a remote ARP response message, and sends it to brox 180.

6. Brox 180 then creates a standard local ARP response message and transmits it through connection 182 to link 172, with the data link layer address of end station 172A in the Data Link Destination Address field 126 of the local ARP response message.

7. End station 172A then interprets the local ARP response message and extracts from it the data link layer address of end station 178C.

8. End station 172A then transmits a message packet directed to end station 178C, where the message packet contains the data link layer address of end station 178C in the Data Link Destination Address field 126.

9. Brox 180 parses the data link header 122 of the message packet, discovers the Data Link Destination address field 126 does not contain the address of connection 182, and therefor forwards the message packet as a bridge.

10. The message packet is forwarded through connection 184 to link 174 where brox 190 detects the message packet at connection 192.

11. Brox 190 parses the data link header 122 of the message packet, concludes that the data link destination address field 126 does not contain the data link address of connection 192, and accordingly forwards the message packet as a bridge. Brox 190 bridges the message packet through connection 196 onto link 178 on the basis of a forwarding table maintained within brox 190.

12. The message packet is detected by end station 178C detecting its own data link address address in the Data Link Destination Address field 126 of the message packet. Accordingly, the intended receiving station 178C receives the message packet.

Each station in communication system 170 as shown in Fig. 4 uses end station mask 221 as shown in Fig. 7B, that is: on link 172 end stations 172A, 172B, 172C; on link 174 end stations 174A, 174B, 174C 174D; on link 176 end stations 176A, 176B, 176C; and on link 178 end stations 178A, 178B, 178C. The short mask 221 of Fig. 7B, when used by the end stations of communication system 170, causes all of the end stations of communication system 170 to conclude that they are on the same link. By coming to this conclusion, the end stations are permitted to transmit a local ARP request message for the data link address of an intended receiving station.

Each of the broxs, 180, 200, 190 use the longer brox mask 220, as shown in Fig. 6b. This longer brox mask 220 has ones in the first five (5) positions of byte 164, and these ones permit the broxs to distinguish the subnet addresses of links 172, 174, 176, 178.

In the event that an end station on communication system 170 prepares to transmit a message packet to an end station connected to communication system 170 through brox 200 by wide area network communication link 204, then the address in bytes 150 and 152 of the proposed Network Layer Destination Address field 140 of the message packet will differ from bytes 150, 152 of an address of links 172, 174, 176, 178. Accordingly, a brox receiving a local ARP request message for such a distant end station will forward, in performing as a router, and forward the message packet to brox 200 which then sends it on the wide area network link 204 to an appropriate brox having a link to the intended receiving end station.

As can be seen from Fig. 6B and Fig. 7B, a brox sees a longer subnet address then does an end station. As shown at byte 164 in Fig. 6B, the subnet address seen by a brox is 5 bits longer than a subnet address seen by an end station using mask 221 from Fig. 7B. The shorter end station mask causes end station to see all of the end stations on communications network 170 as being on the same link. The longer brox mask 220, as shown in Fig. 6B, permits a brox to distinguish the intended receiving end station and also the link to which the intended receiving end station is attached to.

Further, the assignment of the addresses of the end station is carefully done in order for the end stations to be distinguishable in accordance with the above discussion of the brox mask and the end station mask as shown in Fig. 6B and Fig. 7B. That is, each end station on communications system 170 was assigned a value of byte 154 as follows: link 172 was assigned a value of byte 154 of 11110000; link 174 was assigned a value of byte 154 of 11110000; link 176 was assigned a value of byte 154 of 11100000; link 178 was assigned a value of byte 154 of 111000000. This careful selection of addresses is the key to distinguishing end stations on different links by use of a

11

10

15

20

25

30

35

40

short end station mask 221 and long brox mask 220.

FOURTH EXEMPLARY EMBODIMENT

Referring now to Fig. 8, communications system 300 is shown. Network layer addresses for the end stations of communications system 300 will now be discussed. The network layer address are used in the Network Layer Destination Address field 140 of Fig. 2. The network layer address may, for example, have 4 bytes, 150, 152, 154, 156 as set out in address field 140 in Fig. 3A. The value of byte 150 may be represented by the numeral N1. The value of byte 152 may be represented as numeral N2. The value of byte 154 may be represented as numeral N3. The value of byte of 156 may be represented as numeral N4. The four byte address may then he represented as follows:

N1.N2.N3.N4

In the above symbolic representation of the network layer address, the numbers N1, N2, N3, N4, refer to the bytes of address 140, that is bytes 150, 152, 154, 156, respectively.

Careful selection of the values of the bytes N1, N2, N3, N4 permit the invention to utilize a short end station mask for an end station to gain permission to send a local ARP request, and a long brox mask to enable a brox to distinguish end stations on different links.

As a further example of representation of a network layer address, a mask may be, for example 12 bits long, that is the mask boundaries may not coincide with octet boundaries. For example, the mask shown in Fig. 6B uses 5 bits from octet 164. Still, a symbolic representation of the network layer address may be given as:

A1.A2.A3

where A1, A2, and A3 are numbers used to refer to parts of the network layer address. For example, A1 may represent a group of related LANs, A2 may represent a particular LAN of the group, and A3 may represent the host address.

An exemplary assignment of end station address follows.

Referring now to communications system 300 as shown in Fig. 8, LAN 302 is connected by brox BR4 45 304 to LAN 306. LAN 308 is connected brox BR6 310 to LAN 306. LAN 306 is connected by brox BR3 312 to LAN 314. LAN 314 is connected by brox BR1 316 to LAN 320. LAN 320 is connected by brox 322 to LAN 324. LAN 320 is connected by brox BR5 326 to LAN 50 328.

Each LAN, 302, 306, 308, 314, 320, 324, 328 has connected in communications connection, a plurality of end stations. For simplicity, only particular end stations will be directly discussed. LAN 302 is shown with end station A 340. LAN 328 is shown with end station B 342.

Addresses are assigned to the end stations on

each LAN in accordance with the present invention. For example, addresses may be assigned to the LANs as follows. Each LAN is assigned an address 140 comprising 4 bytes, bytes 150, 152, 154, 156. As a simplification, only three of the bytes will be discussed herein, bytes 152, 154, 156. The highest byte 150 may be assigned an arbitrary number, however each link has the same value of byte 150.

For example, in communication system 300 byte 152 is assigned the value "19". Accordingly, all stations on LAN 302 are assigned the address 19.3.*. The "*" means any unique number to distinguish the stations. All stations connected to LAN 306 are assigned the address 19.4.*. All stations connected to LAN 308 are assigned the address 19.8.*. All stations connected to LAN 314 are assigned the address 19.5.*. All stations attached to LAN 320 are assigned the address 19.5.*. All stations connected to LAN 324 are assigned the address 19.6.*. All stations attached to LAN 328 are assigned the address 19.7.*. The stations on each link include the plurality of end stations, as well as the connections to the respective broxs.

We now consider the event wherein end station A 340 on LAN 302, having a network layer address of 19.3.8 decides to send a message packet to end station B on LAN 328, having a network layer address of 19.7.5. The following events occur:

1. End station A 340 tests the network layer address of the intended receiving station B 342 in order to determine if end station 340 has permission to transmit a local ARP request message in order to learn the data link layer address of end station B 342. Addresses other than a TCP-IP 32 bit address may be used with the invention. For example, in the event thai a three octet address is used, the end station A 340 may use a mask having the values:

11111111.0000000.0000000

and each brox in communication system 300 utilizes a mask having the values:

11111111.111111111.11111111

in making forwarding decisions. Accordingly, end station A 340 utilizes its end station mask and concludes that the link where end station B 342 resides is "19.*.*", the same as the link where end station A 340 resides. Accordingly, end station A transmits a local ARP request message on LAN 302.

2. Brox BR4 304 detects the local ARP request message, interprets the local ARP request message, and creates a remote ARP request message directed to brox BR5 326. Brox BR4 304 knows to send the remote ARP request message to brox BR5 326 as a result of the broxs participating in a routing algorithms, as is well known in those skilled in the art of computer communications. Accordingly, brox BR4 304 transmits the remote ARP request message to brox BR5 326.

12

10

15

20

25

30

35

40

45

50

Brox BR5 326 receives the remote ARP request message, and in response thereto transmits a standard local ARP request message onto LAN 328.

3. End station B 342 receives the local ARP request transmitted onto LAN 328, and generates a local ARP response message containing the data link address of end station B 342, where the data link address corresponds to the station having network layer address 19.7.5.

4. Brox BR5 326 detects the local ARP response message transmitted by end station B 342, recognizes it as a completion of a pending remote ARP request message, and creates a remote ARP response message. Brox BR5 326 then sends the remote ARP response message to brox BR4 304. Brox BR4 304 receives the remote ARP response message, and in response thereto creates a local ARP response message. Brox BR4 304 then transmits the local ARP response message onto LAN 302.

5. End station A 340 receives the local ARP response message from LAN 302, and interprets the local ARP response message, and stores the data link layer address of end station B 342.

6. End station A 340 then constructs a data packet containing the data link layer address of end station B 342 in Data Link Destination Address field 126 of a message packet 120.

7. Brox BR4 304 detects the data packet, parses the Data Link Header 122 and finds that the contents of the Data Link Destination Address field 126 are not an address used by brox BR4 304, and so concludes to forward the message packet as a bridge.

The data packet transmitted by end station A 340 is forward by all of the intermediate broxs behaving as bridges, brox BR4 304, brox BR3 312, brox BR1 316, and brox BR5 326. The data packet is thus forwarded at each hop, in some designs, in less than 1/200th of the time that would be required if a brox operated as a router.

The local ARP Request transmitted by end station A 340 onto LAN 302 is blocked by brox BR4 304. That is, the local ARP Request is not forwarded to LAN 306 as it would be if brox BR4 304 acted as a standard bridge. That is, brox BR4 304 acts as a standard router and isolates LAN 302 from LAN 306, in that it does not forward ARP messages between the LANs. Likewise, all local ARP requests and local ARP responses are isolated to the LAN on which they were created by the broxs functioning as routers.

Accordingly, data traffic may be forwarded between any end station on any link in communications network 300 by each of the broxs forwarding rapidly as a bridge. Also, the local ARP traffic generated on each LAN is isolated from each of the other links by each brox functioning as a router. The invention, in all embodiments, has the beneficial effect that it speeds forwarding of data packets and so improves throughput in the data communications system.

A further benefit of the invention is that, in the event that an intermediate forwarding station is an old style router that does not change into a bridge in accordance with the Rules of the invention hereinabove, the invention will work perfectly well with all of the intermediate broxs functioning in accordance with the invention. Any intermediate "old style" routers already installed in an old system will not interfere with the improvements gained from new broxs added to the system.

Accordingly, the invention greatly improves the speed at which a message is forwarded over multiple links of a complex communications system.

Claims

 In a communications system having a first communications link and a second communications link, at least one end station capable of communicating on each said communications link, an apparatus for forwarding a packet from said first link to said second link, said apparatus being capable of detecting a network layer header on a data packet, said network layer header having a destination address, said apparatus comprising:

means for assigning an apparatus mask having a forwarding mask length to said apparatus for distinguishing said destination address into a subnet address part and into a host address part;

means for assigning an end station mask having an end station mask length to said at least one end station for distinguishing said destination address into a subnet address part and into a host address part;

means for assigning a greater length to said forwarding mask length than to said end station mask length, to enable said end station in using said end station mask to identify all end stations on said first link and said second link as being on a single link, and to enable said apparatus in using said forwarding mask to distinguish on which of said first link or said second link an end station addressed by said network layer address is located.

 The apparatus as in claim 1 further comprising: means for a selected end station to transmit a local Address Request Protocol (hereinafter ARP) request message onto said first communications link, said local ARP request message requesting a data link address of a receiving end station;

15

20

means, in response to said local ARP request message, for said apparatus to create a remote ARP request message and to send said remote ARP request message to a second forwarding apparatus connected to said second link hav-5

ing said receiving end station connected thereto; means for said apparatus to receive a remote ARP response message containing said data link address of said receiving end station from said second forwarding apparatus;

means, responsive to said remote ARP request message, for said apparatus to create a local ARP response message and to send said local ARP response message to said selected end station.

- The apparatus as in claim 1 further comprising: means associated with said forwarding apparatus to forward a data packet as a bridge in the event that a data link address in a message packet is not a data link address of said apparatus.
- The apparatus as in claim 1 further comprising: means associated with said apparatus to forward a message packet as a router in the event 25 that a data link address in said message packet is a data link address of said apparatus.
- A communications system having a plurality of communications links, a forwarding apparatus for 30 forwarding a message packet from a first link to a second link, said first link and said second link selected from said plurality of links, said apparatus being capable of detecting a network layer header on a data packet, said network layer header having a destination address, said system comprising:

means for assigning an apparatus mask having a forwarding mask length to said apparatus for distinguishing said destination address into a subnet address part and into a host address part;

means for assigning an end station mask having an end station mask length to said said at least one end station for distinguishing said destination address into a subnet address part and into a host address part;

means for assigning a greater length to said forwarding mask length than to said end station mask length, to enable said end station in using said end station mask to identify all end stations on said plurality of links as being on a single link, and to enable said apparatus in using said forwarding mask to distinguish which of said plurality of links an end station addressed by said network layer address is located;

means, responsive to said greater length of said forwarding mask than said end station

mask, for a selected end station to transmit a local ARP request message onto an attached link, said local ARP request message requesting a data link address of a receiving end station, said receiving end station connected to a second link that is not said attached link;

means, responsive to said local ARP request message, for said apparatus to send a remote ARP request message to a second forwarding apparatus attached to said second link;

means, responsive to said remote ARP request message, for said second forwarding apparatus to send a second local ARP request message to said intended receiving end station;

means, responsive to said second local ARP request message, for said intended end station to send a local ARP response message to said second forwarding apparatus, said second local ARP response message containing said data link address of said intended end station;

means, responsive to said local ARP response message, for said second forwarding apparatus to send a remote ARP response message to said apparatus;

means, responsive to said remote ARP response message, for said apparatus to send a second local ARP response message to said selected end station;

means, responsive to said second local ARP response message, for said selected end station to receive a data link address of said intended receiving end station, and for said selected end station to transmit a message packet containing said data link address of said selected receiving end station, and for said apparatus to forward said message packet as a bridge in response to said data link address of said intended receiving end station being contained in said message packet.

6. A communications system having a plurality of communications links, a forwarding apparatus for forwarding a message packet from a first link to a second link, said first link and said second link selected from said plurality of links, said apparatus being capable of detecting a network layer header on a data packet, said network layer header having a destination address, comprising:

means for assigning an apparatus mask having a forwarding mask length to said apparatus for distinguishing said destination address into a subnet address part and into a host address part;

means for assigning an end station mask having an end station mask length to said said at least one end station for distinguishing said destination address into a subnet address part and into a host address part;

40

45

50

55

means for assigning a greater length to said forwarding mask length than to said end station mask length, to enable said end station in using said end station mask to identify all end stations on said plurality of links as being on a single link, and to enable said apparatus in using said forwarding mask to distinguish which of said plurality of links an end station addressed by said network layer address is located.

10

5

15

20

25

30

35

40

45

50

.

.

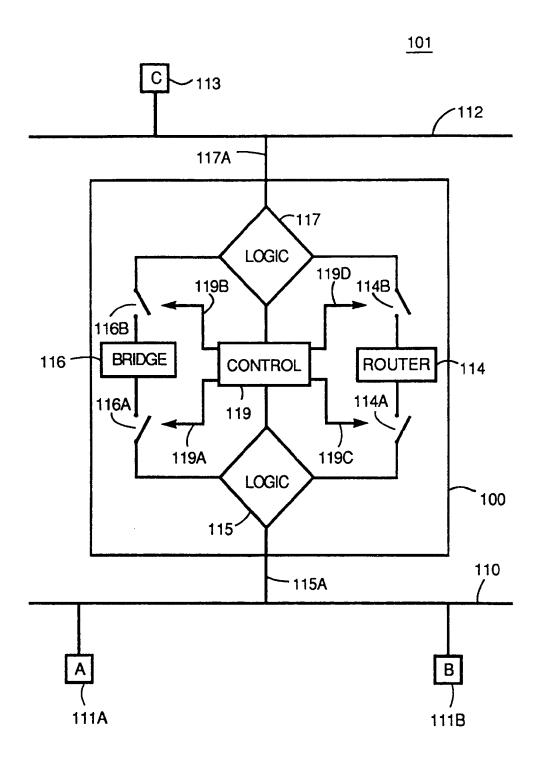
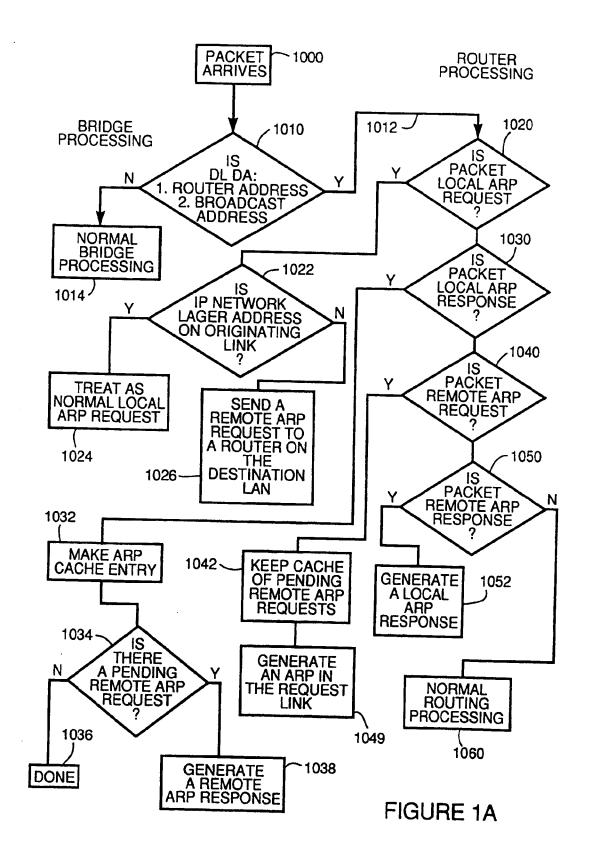
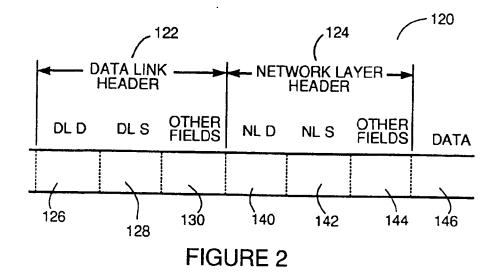


FIGURE 1





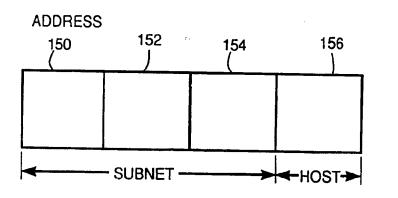
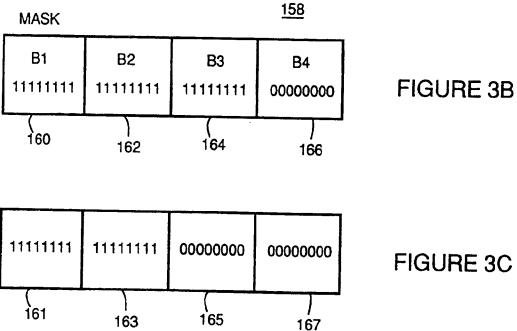


FIGURE 3A



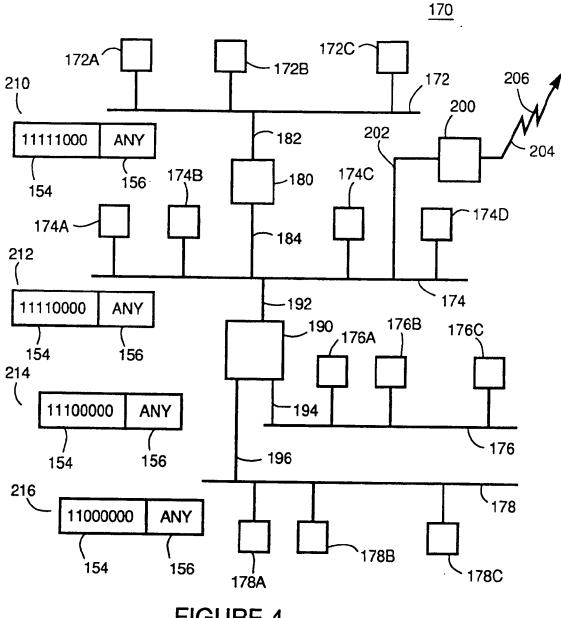


FIGURE 4

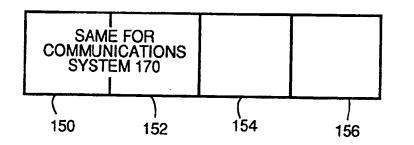
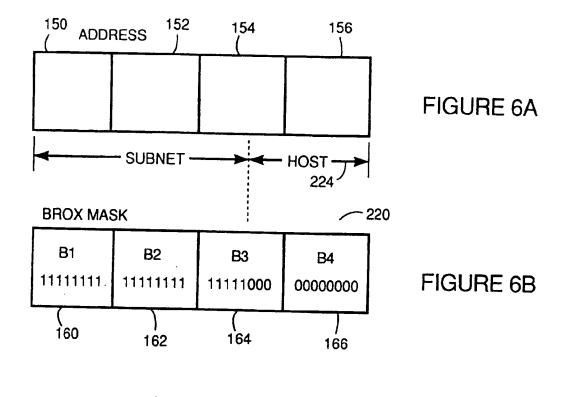


FIGURE 5




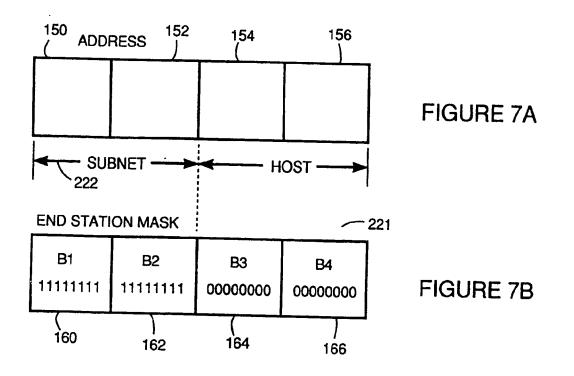


FIGURE 8

21

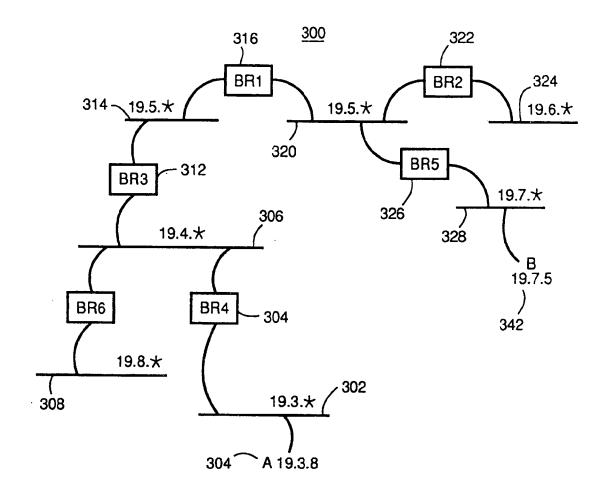

•

r



European Patent Office

EUROPEAN SEARCH REPORT

Application Number

EP 92 30 5234

	DOCUMENTS CONSI				
Category	Citation of document with indication, where appropriate, of relevant passages		Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)	
A	EP-A-0 357 136 (PHI * column 2, line 15	LIPS) - column 3, line 32 *	1,5,6	H04L12/46	
A	EP-A-0 255 767 (AT& * column 2, line 34	T) - column 3, line 50 *	1,5,6		
*	pages 49 - 56 L. BOSACK ET AL. 'B Observations Compar Problems in Large L * page 52, left col *	ary 1988, NEW YORK US ridges and Routers, isons and Choosing.	1		
P, A	EP-A-0 465 201 (DEC * the whole documen		2	TECHNICAL FIELDS SEARCHED (Int. CL.5) H04L	
X : pai Y : pai doc	The present search report has I Place of search THE HAGUE CATEGORY OF CITED DOCUME ticularly relevant if taken alone ticularly relevant if combined with an ament of the same category honoracies the here round	Date of completies of the search 22 SEPTEMBER 1992 NTS T : theory or prin- E : earlier patent after the filling other D : document die L : document die	ciple underlying th document, but pul g date d in the applicatio d for other reasons	Nished oa, or Na S	
oa : O	hnological background n-written disclosure armediate document			ily, corresponding	





1) Publication number:



(12)

۱

EUROPEAN PATENT APPLICATION

(2) Application number: 93102782.5


(s) Int. Cl.⁵: H04M 1/66

- 2 Date of filing: 23.02.93
- Priority: 02.03.92 US 844268
- Date of publication of application:
 08.09.93 Bulletin 93/36
- Designated Contracting States:
 AT BE DE ES FR GB IT NL PT
- Applicant: ROLM COMPANY 4900 Old Ironside Drive P.O. Box 58075 Santa Clara, CA 95052(US)
 Inventor: Iglehart, David 2006 Westridge Drive Austin, TX 78704(US) Inventor: Ford, Gordon 1004 Lime Rock Drive Round Rock, TX 78681(US)
 Representative: Fuchs, Franz-Josef, Dr.-Ing. Postfach 22 13 17

D-80503 München (DE)

(54) Future blocking of incoming telephone calls.

Method and apparatus for screening telephone calls for use in conjunction with a telephone set as, opposed to a switch, which provides a capability of storing a telephone number for use in blocking calls from the telephone number, without the need for reentering the telephone number.

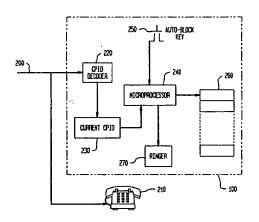

EP 0 559 047 A1

Rank Xerox (UK) Business Services (3. 10/3.6/3.3. 1)

10

15

20

25

30

35

40

45

50

55

Technical Field of the Invention

The present invention pertains to method and apparatus for screening telephone calls for use in conjunction with a telephone set, as opposed to a switch, which provides a capability of storing a telephone number for use in blocking calls from the telephone number, without the need for re-entering the telephone number.

1

Background of the Invention

Several methods exist in the prior art for providing screening of incoming telephone calls. In a first prior method, a called party utilizes a display telephone to visually identify a caller's telephone number and then chooses whether or not to answer. In a second prior art method, a secretary manually screens calls and chooses whether or not to transfer the caller to the called party. In a third prior art method, the called party blocks all incoming calls by placing his/her telephone off hook or by activating a Do Not Disturb feature. In a fourth prior art method, the called party can screen incoming calls utilizing an audio-monitoring capability which is associated with most answering machines. In a fifth prior art method, the called party can order a service from a telephone company that enables him/her to key in an access code after receiving an incoming telephone call to cause the telephone company to block future calls from the telephone number. In a sixth prior art method, the called party may enter a telephone number into a data base of telephone numbers to be blocked by centralized switching equipment.

In general, the above-described prior methods suffer from several disadvantages. Namely, they: (a) do not provide immediate control to the called party; (b) do not permit him/her to identify the telephone number of the incoming call; (c) do not automate the process of identifying and listing telephone phone numbers to be blocked; and (d) can only be used to block calls from telephone numbers that are known in advance.

In particular, the first prior method has the disadvantages that: (a) not all telephones have displays; (b) the called party may not know the telephone numbers of callers he/she wishes to block; and (c) the called party has to utilize a more complicated, manual method to identify and list the telephone number he/she wishes to block.

In particular, the second prior art method has the disadvantages that it is complicated and does not provide called party control. Specifically, the called party has to rely on a secretary who knows in advance which callers should be blocked. If a called party determines during a call that he/she does not wish to receive further calls from the caller, he/she would have to communicate with the secretary to block future calls from that caller.

In particular, the third prior art method has the disadvantages that it is impractical and unspecific. The called party can block all calls or no calls, with no ability to identify and list telephone numbers.

In particular, the fourth prior art method has the disadvantages that it requires the called party has to listen to part of an incoming call to determine if he/she wants to receive it. Moreover, it requires him/her to be rude to callers he/she does not want to receive, making them talk into his/her answering machine before he/she answers. Also, some callers that he/she does not want to speak to may simply hang up rather than leave a message.

In particular, the fifth prior art method has the disadvantages that it relies on a capability of a central switching unit and that the user would have to pay a monthly service fee for blocking.

In particular, the sixth prior art method has the disadvantages that the called party would have to know in advance the telephone numbers he/she wishes to block and the called party lacks an automatic way to identify and list, during a call, the caller's telephone number, so that it can be blocked in the future. Furthermore, such a method relies on a central switching data base to store the list of numbers to be blocked, to which not all users have access.

As a result, there is a need in the art for a method and apparatus for screening telephone calls for use in conjunction with a telephone set, as opposed to a switch, which provides a capability of storing a telephone number for use in blocking calls from the telephone number, without the need for re-entering the telephone number.

Summary of the Invention

Embodiments of the present invention advantageously satisfy the above-described need in the prior art by providing method and apparatus for screening telephone calls for use in conjunction with a telephone set, as opposed to a switch, which provides a capability of storing a telephone number for use in blocking calls from the telephone number, without the need for re-entering the telephone number.

In particular, embodiments of the present invention provide method and apparatus which enable a called party to specify, preferably with a single key stroke, during a call, that further calls from the caller's telephone number be blocked, i.e., will not ring the called party's telephone. It is important to note that method and apparatus is provided by the capabilities of the telephone and not by those of a central switching unit. Further, the inventive apparatus can either be contained in the

10

15

20

25

30

35

40

45

50

telephone or be arranged separate from the telephone. As those of ordinary skill in the art will readily appreciate, in utilizing embodiments of the present invention, the called party does not have to rely on support by others, does not have to have a display, can have the caller's telephone number identified and listed immediately, can store a large number of extensions for blocking, and does not have to have central switching support or pay a monthly fee for a blocking service.

3

Specifically, an embodiment of the present invention comprises: (a) means for determining the telephone number of an incoming call; (b) indication means for receiving an indication that future calls from the telephone number of the incoming call are to be blocked; (c) means, responsive to the indication means, for storing the telephone number in a data base; and (d) means, responsive to the incoming call, for determining whether the telephone number is stored in the data base and, if so, blocking the incoming call.

As an example of the advantageous use of the present invention, consider the following scenario. John, a hard-working businessman, sits down with his wife and family for dinner. As on most nights, the telephone starts ringing promptly at six from sales calls, and John finds himself listening to a computer trying to sell him smoked cheese. A smile crosses John's face as he presses an "Autoblock" key on his telephone and hangs up, secure in the knowledge that he will never be bothered by calls from that telephone number again.

The invention will be better understood from the following more detailed description taken with the accompanying drawings and claims.

Brief Description of the Drawings

FIG. 1 shows a block diagram of an embodiment of the present invention for use in blocking incoming telephone calls.

Corresponding elements in each of the drawings have the same reference numbers.

Detailed Description

FIG. 1 shows a block diagram of apparatus 100 which is an embodiment the present invention for use in blocking incoming telephone calls. As shown in FIG. 1, telephone line 200 supplies input to apparatus 100 and to telephone 210. In the embodiment shown in FIG. 1, the ringer in telephone 210 is turned off.

Telephone line 200 provides calling party identification (CPID), commonly referred to as Automatic Number Identification (ANI), which is available with telephone services such as Integrated Services Digital Network (ISDN) or Customized Local Area Signalling Services (CLASS), all of which is well known to those of ordinary skill in the art.

As shown in FIG. 1, output from telephone line 200 is applied as input to CPID decoder 220. CPID decoder 220 is apparatus which is well known to those of ordinary skill in the art for decoding the telephone number of incoming a call on telephone line 200 into a static digital format which can be utilized by other elements in apparatus 100. Output from CPID decoder 220 is applied as input to current CPID 230. Current CPID 230 is memory storage means which is well known to those of ordinary skill in the art such as solid state random access memory which stores information produced by CPID decoder.

Output from current CPID 230 is applied as input to microprocessor 240. Microprocessor 240 is any appropriate general purpose microprocessor of a type which is well known to those of ordinary skill in the art which is capable of monitoring a number of stimuli and making decisions on the basis of those stimuli to provide predetermined responses.

Auto-block key 250 is means of providing stimuli which is well known to those of ordinary skill in the art to microprocessor 240 for use in indicating that a called party has decided to block future calls from the telephone number contained in current CPID 230. Thus, whenever the called party depresses auto-block key 250, microprocessor 240 retrieves the telephone number stored in current CPID 230 and transfers it to data base 260.

Data base 260 is means of memory storage which is well known to those of ordinary skill in the art such as, for example, random access memory, for retaining a list of telephone numbers to be blocked. Finally, ringer 270 is a device which is well known to those of ordinary skill in the art for alerting a called party that an incoming call is being received. As will be explained below, ringer 270 will not be activated for blocked calls.

The following describes the operation of apparatus 100 shown in FIG. 1. When an incoming call is being received by apparatus 100, CPID decoder decodes the CPID and stores it in current CPID 230. Microprocessor 240 retrieves the CPID stored in current CPID 230 and compares it with the telephone numbers stored in data base 260. The comparison of the CPID of the incoming calls with the telephone numbers in the data base may be performed in any one a multiplicity of methods which are well known to those of ordinary skill in the art. If there is a match, i.e., the incoming call is to be blocked, ringer 270 is not activated and the called party does not answer the call and, advantageously, is not even made aware of its existence. However, if there is a match, microprocessor 240 causes ringer 270 to be activated to alert the called party of the incoming call.

30

35

40

45

Later, at any time during the call, or at any time while the telephone number is stored in current CPID 230, if the called party desires to block future calls from the telephone number he/she depresses auto-block key 250. In response, by generation of a signal or by polling, microprocessor 240 retrieves the telephone number from current CPID 230 and stores it in data base 260.

As those of ordinary skill in the art readily appreciate, embodiments of the present invention 10 may either be contained in telephone 210 or may be separate from telephone 210. Further, if apparatus 100 or telephone set 210 has a display, the number to be blocked may be displayed thereby. Still further, apparatus 100 may further comprise a 15 keypad for use in interacting with microprocessor 240 or the keypad of telephone 210 may be used to interact with microprocessor 240 for use in deleting telephone numbers from the data base. Lastly, although embodiments of the present invention 20 have been described which utilize an auto-block key, it should be understood that this is not a limitation on the scope of the present invention. Specifically, in an embodiment which utilizes a keypad or the keypad of telephone 210, the no-25 tification of the desire to block future calls from a telephone number may be indicated by a predetermined one or more keypad presses.

It is to be appreciated and understood that the specific embodiments of the invention described hereinbefore are merely illustrative of the general principles of the invention. Various modifications may be made by those skilled in the art consistent with the principles set forth hereinbefore.

Claims

- Apparatus for use in conjunction with a telephone set for blocking future incoming telephone calls which comprises:
 - means for determining the telephone number of an incoming call;

indication means for receiving an indication that future calls from the telephone number of the incoming call are to be blocked;

means, responsive to the indication means, for storing the telephone number in a data base; and

means, responsive to the incoming call, for determining whether the telephone number is 50 stored in the data base and, if so, blocking the incoming call.

- 2. The apparatus of claim 1 further comprising means for generating the indication.
- 3. The apparatus of claim 2 wherein said means for generating the indication comprises a key.

- 4. A telephone set for blocking future incoming telephone calls which comprises:
 - means for determining the telephone number of an incoming call;

indication means for receiving an indication that future calls from the telephone number of the incoming call are to be blocked;

means, responsive to the indication means, for storing the telephone number in a data base; and


means, responsive to the incoming call, for determining whether the telephone number is stored in the data base and, if so, blocking the incoming call.

- 5. The telephone set of claim 4 further comprising means for generating the indication.
- 6. The apparatus of claim 5 wherein said means for generating the indication comprises a key on the telephone set.
- The telephone set of claim 4 wherein the indication is provided by a predetermined sequence of one or more keys on the telephone set.

EP 0 559 047 A1

•

J

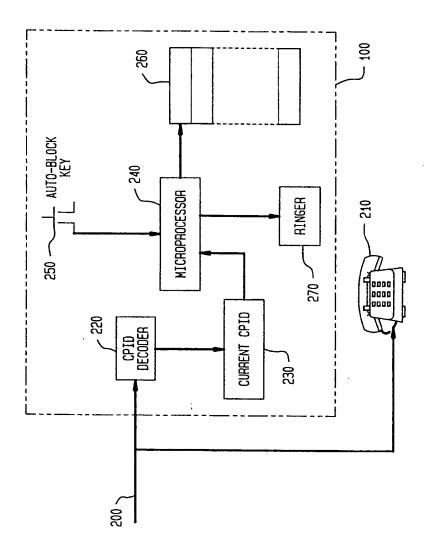



European Patent

Office

4

¢,

EUROPEAN SEARCH REPORT

Application Number

EP 93 10 2782

	DOCUMENTS CONSI	· · · · · · · · · · · · · · · · · · ·	<u> </u>	
Category	Citation of document with is of relevant pa	dication, where appropriate, stages	Relevant to claim	CLASSIFICATION OF TH APPLICATION (Int. Cl.5)
X	DE-A-3 234 093 (SIE * page 6, line 32 - figures 1,2 *		1,2	HD4M1/66
x	PATENT ABSTRACTS OF vol. 14, no. 371 (E & JP-A-21 34 950 (* abstract *	-963)10 August 1990	1-7	
x	PATENT ABSTRACTS OF vol. 14, no. 187 (E & JP-A-20 36 657 (* abstract *	-917)16 April 1990	1-7	
x	PATENT ABSTRACTS OF vol. 14, no. 328 (E & JP-A-21 11 146 () * abstract *		1-7 In	
Х,Р	PATENT ABSTRACTS OF vol. 16, no. 150 (E & JP-A-40 04 647 (-1189)14 April 1992	1-7	TECHNICAL FIELDS SEARCHED (Int. Cl.5)
	& GP-A-40 04 047 (CORP.) * abstract *			H04M
	The present search report has b	een drawn up for all claims		
-	Place of search	Date of completion of the search	<u> </u>	Examiner
-	THE HAGUE	02 APRIL 1993		DELANGUE P.C.J.
X:par Y:par	CATEGORY OF CITED DOCUME ticularly relevant if taken alone ticularly relevant if consbined with an ument of the same category	E : earlier pate after the fil ther D : document of	rinciple underlying th nt document, but pul ing date ited in the applicatio ited for other reason:	n or
A:tec O:nor	n-written disclosure r-written disclosure ermediate document			





(1) Publication number : 0 597 691 A1

(51) Int. Cl.⁵: G06F 13/12


EUROPEAN PATENT APPLICATION

- (21) Application number : 93308975.7
- (22) Date of filing : 10.11.93
- (30) Priority : 12.11.92 US 975037
- (43) Date of publication of application : 18.05.94 Bulletin 94/20
- (84) Designated Contracting States : DE FR GB
- Applicant : International Business Machines Corporation
 Old Orchard Road
 Armonk, N.Y. 10504 (US)

(54) Queuing system and method of operation.

A queuing system and method of operation (57) are provided that reduces latency and increases efficiency in a general purpose queuing system. The technique of the present invention is applied in an intermediate node that receives an entity, such as information, from a first node, and transfers that entity to a second node. The technique comprises the steps of (a) receiving at the intermediate node (B) a first block of the entity sent by the first node (A); (b) upon receipt of the block, initiating the sending of a subsequent block of the entity to the intermediate node; (c) concurrently with step (b), transferring the first block of the entity to the second node (C); (d) upon receipt of an acknowledgement from the second node (C), causing the intermediate node to transfer a portion of the entity to the second node (C), the portion transferred being all of the entity that has at the time of the transferral been received by the intermediate node (B) from the first node (A) since the previous transfer was made ; and (e) repeating steps (b) and (d) until all of the entity has been transferred.

The above technique is adaptive to many environments and will optimize throughput for systems that need to transfer entities such as information. This system and method can handle mismatched flow problems from diverse environments and provides optimal flow for solutions that require guaranteed transfers. This algorithm can change and adapt to varying circumstances. It can be altered in real-time for communication systems. If the block size changes the modification does not alter the smooth flow of the algorithm.

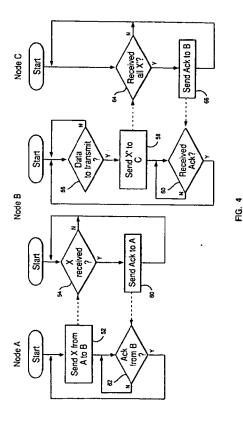

Jouve, 18, rue Saint-Denis, 75001 PARIS

۲

Cisco - Exhibit 1003 - Page 477

10402-A Golden Meadow Austin, Texas 78758 (US) Inventor : Smith, Brian Rutledge 2303 Falcon Drive Round Rock, Texas 78681 (US) (1) Representative : Bailey, Geoffrey Alan

(72) Inventor : Chamberlain, Paul Clement

(4) Representative : Balley, Geoffrey Alan IBM United Kingdom Limited Intellectual Property Department Hursley Park Winchester Hampshire SO21 2JN (GB)

This invention relates to queuing systems and more particularly to transporting of entities, such as items or information, from one location to another using an intermediate queue.

As computer manufacturers develop faster and more efficient computer communication networks, increasingly there are cases of mismatched bus and communication media speeds. One example is the IBM

5 Microchannel and an IBM Fiber Channel (FCS) Microchannel adapter. The IBM Microchannel is capable of sustaining approximately 50 megabytes/sec, whereas the IBM FCS adapter can support either 25 megabytes/sec or 100 megabytes/sec. This mismatch also occurs with the Microchannel and an IBM Token Ring adapter. Because of these mismatches, data transfers can often be very inefficient with respect to the given communication media speed. They can also be very efficient, but have a long delay in starting transmission. This delay

10 is often referred to as latency. These two problems, latency and efficiency, are classic in the field of communications.

There are numerous applications which require optimization of either latency or throughput. There are also those that require optimization of both. Customers are increasingly interested in low latency and very efficient use of the communication media. The present state of the art fails to provide an adaptive yet simple throughput mechanism between systems when trying to minimize latency and maximize efficiency.

It is therefore an object of the present invention to provide an improved queuing technique for an entity being transferred from a first node to a second node via an intermediate node.

Accordingly the present invention provides a method of operating an intermediate node to receive an entity from a first node and to transfer the entity to a second node, the first and second nodes being connected to the intermediate node by transmission links, the method comprising the steps of:

(a) receiving at the intermediate node a first block of the entity sent by the first node;

(b) upon receipt of the block, initiating the sending of a subsequent block of the entity to the intermediate node;

(c) concurrently with step (b), transferring the first block of the entity to the second node;

(d) upon receipt of an acknowledgement from the second node, causing the intermediate node to transfer a portion of the entity to the second node, the portion transferred being all of the entity that has at the time of the transferral been received by the intermediate node from the first node since the previous transfer was made; and

(e) repeating steps (b) and (d) until all of the entity has been transferred.

15

20

50

- 30 Viewed from a second aspect the present invention provides a queuing system in an intermediate node for receiving an entity from a first node and transferring the entity to a second node, the first and second nodes being connected to the intermediate node by transmission links, the system comprising: reception means in the intermediate node for receiving a first block of the entity sent by the first node; initiation means, responsive to the reception means indicating receipt of the block, for initiating the sending of a subsequent block of the
- entity to the intermediate node; a transfer means, operating concurrently with the initiation means, to transfer the first block of the entity to the second node; the transfer means further, upon receipt by the intermediate node of an acknowledgement from the second node, transferring a portion of the entity to the second node, the portion transferred being all of the entity that has at the time of the transferral been received by the intermediate node from the first node since the previous transfer was made; the initiation means and transfer
 means repeating their functions until all of the entity has been transferred.

The present invention reduces latency and increases efficiency in a general purpose queuing system. The present invention is adaptive to many environments and will optimize throughput for systems that need to transfer information or other types of entities from point A to point C through intermediate point B. Example environments for utilizing the invention described herein include transfer of data via a communication channel,

45 movement of people/equipment/goods via a transportation system, mail delivery scheduling, telephonic switching, etc.

An intermediate node of a multi-node system controls information flowing through it by queuing received information and transferring the received information to a subsequent node independent of the block size of the information being transferred. Subsequent blocks of information are transferred upon completion of a previous transferred block, rather than upon completion of an incoming block being received.

This procedure can handle mismatched flow problems from diverse environments and provides optimal flow for solutions that require guaranteed transfers. Better performing algorithms exist, but they cannot guarantee that the element being transferred will get from system A to C.

This procedure can change and adapt to varying circumstances. It can be altered in real-time for communication systems. If the block size changes the modification does not alter the smooth flow of the algorithmic procedure. The block size could be changed by a customer desiring to have real-time control over latency and throughput. In the case of IBM's FCS adapter, it may be desirable to expedite certain services and not others. It provides fine-tuned control over the data flowing through the system. When the setup time is very small,

one could use a standard communication meter and small block size to get good results. However, if the setup time were sizable, the incurred overhead with a small block size would be very high. The invention disclosed herein is better in both cases, especially the latter.

It can be seen that the present invention provides an adaptive flow control system. In preferred embodiments the technique provides an efficient yet adaptive communication system, being able to match dissimilar

5 ments the technique provides an efficient yet adaptive communication system path speeds used for transporting information.

The present invention will be described further, by way of example only, with reference to an embodiment thereof as illustrated in the accompanying drawings, in which:

Figure 1 is a block diagram of a system in accordance with the preferred embodiment of the invention, including a sending, intermediate, and receiving node;

Figure 2 is a flow diagram of a simple algorithm used to transfer information between nodes;

Figure 3 is a flow diagram of a standard algorithm used to transfer information between nodes;

Figure 4 is a flow diagram of an adaptive flow algorithm used to transfer information between nodes in accordance with the preferred embodiment of the invention;

15 Figure 5 is a block diagram of a multi-node environment, such as used in a switched telecommunication system;

Figure 6 is a typical data processing system, which can provide the functionality of a sending and intermediate node; and

Figure 7 is a block diagram of a communications adapter.

- 20 Referring initially to Figure 1, there are several parameters that should be defined before describing the preferred system and method.
 - Systems A (10) and B (20) communicate over link AB (12) with link speed M.
 - Block moves between A and B are of size < = x.
 - Systems B (20) and C (30) communicate over link BC (14) with link speed N.
 - Block moves between B and C are of any size. Blocks can be any quantity of items/people/information being conveyed or transferred between points.
 - There exists a setup time for transfers between B and C of Ts.
 - M and N are not necessarily equal.
 - Y is the size of data transferred.
- 30 Ttotal is the total time required in the transfer.

Simple Algorithm

Referring to Figure 2, the simplest technique for transferring data from A (10) to C (30) is to:

- 35 Transfer x from A to B (at 22)
 - When x arrives at B (24), transfer x to C (at 26) and send acknowledgement to A (at 28)
 - If done (32), exit (34); else go to the beginning (22)
 - The equation for Ttotal = Y/M + Y/N + Y*Ts/x

40 Standard Algorithm

Referring to Figure 3, a technique at the next level of complexity would be:

- Transfer x from A to B (at 36)
- Dual transfer
- When x arrives at B (38), send acknowledgement to A (40); when link BC clear (42), transfer x to C (44)
 - and, when acknowledgement received from B (46), transfer another x from A to B (36)
- If done(48), exit; else go to the dual transfer (36)
- The equation for Ttotal = x/M + Y/N + Y*Ts/x
- 50

45

25

Adaptive Flow Algorithm

The adaptive algorithm employed in the preferred embodiment of the present invention uses the ratio of M to N, and a value p, where p = ceil(log(Y/x)/log(M/N))-1 and ceil() is the ceiling function. sigma-i(n) is the sum from j=0 to j=i of n raised to the jth power.

p + 2 is the total number of transfers for the adaptive algorithm. Referring to Figure 4, the adaptive algorithm flows as follows:

- Transfer x from A to B (52)

- First dual transfer

- When x arrives at B (56); transfer x to C (58)
- When x at B (54), send acknowledgement to A (60) to initiate (62) another transfer of x from A to B (52)
- Second through (p + 2)th dual transfer
 - Upon receipt of an acknowledgment from C (60), whatever is at B (designated by x' as determined at 56; where x' is larger or smaller than x, due to differing link speeds M and N), transfer that to C (58).
 - When x at B (54), send acknowledgement to A (60) to initiate (62) another transfer of x from A to B (52)
 - If done, exit; else go do the lth transfer
 - Node C, upon receipt of block x' (64), sends an acknowledgment to B (66). The determination as to whether the block x' has been received is made using any conventional technique known in the communication art for conveying a length of data being sent within the data packet, such as in a packet header file.
 - The equation for Ttotal using the adaptive algorithm is:

Ttotal = x/M + Y/N + ceil(log(Y/x)/log(M/N) + 1) * Ts

20 Formula Derivation

	Ttotal = x/M + Ts + x/N	lst transfer
	+ (M/N) * x/N + Ts	2nd transfer
	+	
25	+ $(M/N)^{i} * x/N + Ts$	ith transfer
	+	
	+ $(M/N)^{p} * x/N + Ts$	p+1st transfer
	+ (Y - x * sigma-p(H/N))/N + Ts	p+2nd transfer

30

10

15

Solving for Ttotal:

35 When M/N != 1: Ttotal = x/M + (p+2)*Ts + Y/N and p = ceil(log(Y/x)/log(M/N)) - 1 When M/N = 1:

The adaptive flow algorithm reduces to the standard algorithm.

40

45

Tables 1-4 demonstrate transfer times for various communication channel scenarios using the above described algorithms. Table 1 shows Ttotal for a 1 Megabyte file transferred using 1K blocks, where the channel speed between A and B is 50 Megabytes/second and the channel speed between B and C is 25 Megabytes/second. This table also shows two set-up time (Ts) examples (10 and 100 microseconds). Not only is the total transfer time less using the adaptive algorithm, but overhead is minimized. The overhead % Δ (1 - (Ttotal / min(M,N) / Y))* 100, where Y is the file size. The overhead ratio Δ (overhead %)/(adaptive overhead %).

50

Table 1. Comparison of Algorithms: 1k blocks, 1M file, M=50MB/s, N=25MB/s

Algorithm	Ts, us	Total time,s	Overhead, 🎗	Overhead Ratio
Simple	10	0.07	75%	230.8
Standard	10	0.05002	25%	
Adaptive	10	0.04013	0.33%]
Simple	100	0.16	300%	107.1
Standard	100	0.1401	250%	89.4
Adaptive	100	0.04112	2.8%	1

15

20

25

30

5

10

Table 2. Comparison of Algorithms: 4k blocks, 1M file, M=50MB/s, N=25MB/s

Algorithm	Ts, us	Total time,s	Overhead, %	Overhead Ratio
Sinple	10	0.0625	60%	132.4
Standard	10	0.04258	6.5%	15.2
Adaptive	10	0.04017	0.425%	1
Simple	100	0.085	112.5%	45.9
Standard	100	0.0654	63.5%	25.9
Adaptive	100	0.04098	2.45%	 l

Table 3. Comparison of Algorithms: 1k blocks, 100M file, M=50NB/s, N=25NB/s

Algorithm	Ts, us	Total time,s	Overhead, 🗶	Overhead Ratio	
Simple	10	7.0	75%	15000	
Standard	10	5.00002	25%	5000	
Adaptive	10	4.0002	0.005%	1	
Simple	100	16	4007	6593	
Standard	100	14.0001	250%	5495	
Adaptive	100	4.00182	0.045%		

40

55

35

Table 4. Comparison of Algorithms: 4k blocks, 100M file, M=50MB/s, N=25MB/s

	Algorithm	Ts. us	Total time,s	Overhead, %	Overhead Ratio
45	Simple	10	6.25	60%	8654
	Standard	10	4.25008	6.25%	962
	Adaptive	10	4.00026	0.0065%	1
	Simple	100	8.5	112.5%	2394
50	Standard	100	6.5004	62.5%	1330
	Adaptive	100	4.00188	0.047%	1

Tables 2-4 similarly show various results when using the above described algorithms, for various file and block sizes.

The adaptive algorithm can be implemented using standard programming techniques as follows. One need only count the amount of data that has come from A to B (keep total at system/node B) while the transfer from B to C is occurring. Once the B to C transfer is complete, send the total accounted for data at B (the portion

received and counted) on to C. Thus, only node B is concerned with the possibly dissimilar data rates of link AB and link BC. Further, the block size can be dynamically changed at A without disrupting the adaptive algorithm, as the actual block size being used in the transfer of information is not used by B when determining whether to send information to C. This greatly simplifies system design by consolidating the transfer decision

5 at a single node independent of the actual block size being used. The block could be changed to allow greater control over the latency and throughput of a particular flow of information, or to expedite a particular item through the system. The block size would be changed at the sending node, either manually by a user or automatically by the sending node's controller or computer. As the other system node(s) queue and transfer information irrespective of the block size, this size can be dynamically changed by the sender.

10 As shown in Figure 5, the technique of the preferred embodiment of this invention could similarly be extended to a system having multiple intermediate nodes 80, such as in a switched point-to-point communication system, with the adaptive algorithm running in each intermediate node (a node other than the originating 78 or final 82 node). Thus, each intermediate node handles the data flow mismatch for its respective sending and receiving nodes.

Figure 6 shows the preferred embodiment data processing system 84, which comprises a CPU 90, read only memory 96, random access memory 94, I/O adapter 98, user interface adapter 102, communication adapter 114, and display adapter 116 all interconnected via a common data path, or bus, 92. Each of the above components accesses the common bus using conventional techniques known to those of ordinary skill in the art, and include such methods as dedicating particular address ranges to each component in the system, with

20 the CPU being the bus master. Other conventional techniques known to those of ordinary skill in the art include direct memory access, or DMA, used to transfer data at high speed from external devices such as DASD 100 or network 110 to the data processing system's random access memory (RAM) at 94. As is further shown in Figure 6, these external devices 100 and 110 interface to the common bus 92 through respective adapters 98 and 114. Other external devices such as the display 118 similarly use an adapter 116 to provide data flow

25 between the bus 92 and the display 118. User interface means are provided by adapter 102, which has attached thereto such items as a joystick 112, mouse 106, keyboard 104, and speaker 108. Each of these units is well known as such and so will not be described in detail herein.

Figure 6 corresponds to the logical functions of Figure 1 in the following manner. Link 12 between system A 10 and system B 20 corresponds to bus 92 of Figure 6. System A of Figure 1 is the sender of data, and could
 be any of CPU 90, RAM 94, or I/O adapter 98 of Figure 6. In the preferred embodiment, data is provided to the communications adapter 114 from RAM 94 using conventional DMA techniques across bus 92. Link 14 of Figure 1 corresponds to network 110 of Figure 6. System C 30 of Figure 1 corresponds to a similar communications adapter 114 in a similar data processing system 84 also residing on network 110. Other embodiments of this invention could similarly use entire data processing systems 84 at each of System A, B, and C of Figure 35 1, and interconnected using traditional communication techniques.

Figure 7 shows in greater detail the communication adapter 114, which enables the essential features of System B (Figure 1) in the preferred embodiment. The adapter 114 is comprised of a microcontroller 122 coupled to a buffer 124, a transceiver 120 and a transceiver 126. Microcontrollers are commonly known in the art, and comprise a CPU 121, read only memory 123 and random access memory 125. Transceivers are used

40 to interface to bus or network protocols by inserting/extracting the actual data to be transferred, as well as handling status signalling, within the particular bus or network protocol, as is commonly known in the art. The transceiver 120 receives data at 12 from the bus 92 of Figure 6. The transceiver 126 is an optical transceiver, and link 14 is an optical fiber, although it is apparent that the system of the invention could employ any type of transport mechanism. When data arrives at transceiver 120, it is buffered at 124, and the CPU is notified

45 at 128. The CPU 122 maintains a count of the number of bytes received across link 12. The CPU 122, upon receipt of an acknowledgment at 130 which arrived across link 14 from System C (Figure 1), can initiate at 132 a transmittal of buffered information 124 across link 14 using transceiver 126.

The adaptive flow algorithm can be generalized to solve problems outside of the communications environment. It can handle parts inventory/shipping problems, military troop movement, mail delivery scheduling,

50 and many other real world mismatched flow problems. In each case, the user defines the given parameter x to yield an acceptable latency at the beginning, and then follows the algorithm to determine total flow time. The simple and standard algorithms each are O(n) overhead algorithms, whereas the adaptive flow algorithm is O(log(n)). Therefore, as n grows, the adaptive flow algorithm overhead time will grow as log(n) and the others will grown as n. For large n, the first two algorithms require considerable processing and overhead com-

55 pared to the adaptive flow algorithm.

Claims

- A method of operating an intermediate node (B) to receive an entity from a first node (A) and to transfer the entity to a second node (C), the first and second nodes being connected to the intermediate node by transmission links, the method comprising the steps of:
 - (a) receiving at the intermediate node (B) a first block of the entity sent by the first node (A);
 (b) upon receipt of the block, initiating the sending of a subsequent block of the entity to the intermediate node;
 - (c) concurrently with step (b), transferring the first block of the entity to the second node (C);
- (d) upon receipt of an acknowledgement from the second node (C), causing the intermediate node to transfer a portion of the entity to the second node (C), the portion transferred being all of the entity that has at the time of the transferral been received by the intermediate node (B) from the first node (A) since the previous transfer was made; and
 - (e) repeating steps (b) and (d) until all of the entity has been transferred.
- 15

5

- 2. A method as claimed in Claim 1, wherein the entity is information.
- 3. A method as claimed in Claim 2 wherein said information is of total length Y and comprises a plurality of blocks having a block length "x".
- 4. A method as claimed in Claim 3 wherein the block length "x" comprises a plurality of data bytes, and a count of the data bytes received at the intermediate node (B) is maintained in order to determine the length of the portion to be transferred at step (d).
- A method as claimed in any preceding claim wherein the transmission link between the first (A) and intermediate (B) nodes operates at a different data rate to the transmission link between the intermediate (B) and second (C) nodes.
 - 6. A method as claimed in Claim 5, wherein the portion transferred at step (d) has a length different to the block length of the blocks sent by the first node (A).
- 30

- 7. A method as claimed in any preceding claims wherein the initiating step (b) is carried out by sending an acknowledgement of receipt of each block to the first node (A).
- A queuing system in an intermediate node (B) for receiving an entity from a first node (A) and transferring
 the entity to a second node (C), the first and second nodes being connected to the intermediate node
 by transmission links, the system comprising:
 reception means in the intermediate node (B) for receiving a first block of the entity sent by the first node
 - (A);
 - initiation means, responsive to the reception means indicating receipt of the block, for initiating the sending of a subsequent block of the entity to the intermediate node;
 - a transfer means, operating concurrently with the initiation means, to transfer the first block of the entity to the second node (C);
 - the transfer means further, upon receipt by the intermediate node (B) of an acknowledgement from the second node (C), transferring a portion of the entity to the second node (C), the portion transferred being (C) the portion transferred being (C) and (C) the portion transferred being (C) to be a second node (C) and (C) the portion transferred being (C) to be a second node (C) the portion transferred being (C) the portion transferred being (C) to be a second node (C) to be a second node (C).
- all of the entity that has at the time of the transferral been received by the intermediate node (B) from the first node (A) since the previous transfer was made;
 the initiation means and transfer means repeating their functions until all of the entity has been transferred.
- 50 9. A system as claimed in Claim 8, wherein the entity is information.
 - 10. A system as claimed in Claim 9 wherein said information is of total length Y and comprises a plurality of blocks having a block length "x".
- A system as claimed in Claim 10 wherein the block length "x" comprises a plurality of data bytes, and a count of the data bytes received at the intermediate node (B) is maintained in order to determine the length of the portion to be transferred by the transfer means.

- A system as claimed in any of claims 8 to 11, wherein the transmission link between the first (A) and intermediate (B) nodes operates at a different data rate to the transmission link between the intermediate (B) and second (C) nodes, and the portion transferred by the transfer means has a length different to the block length of the blocks sent by the first node (A).

.

- 13. A system as claimed in any of claims 8 to 12, wherein the initiation means initiates the sending of the subsequent block by sending an acknowledgement of receipt of each block to the first node (A).

Cisco - Exhibit 1003 - Page 484

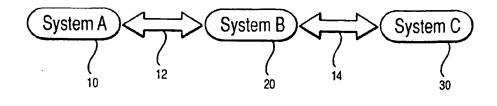


FIG. 1

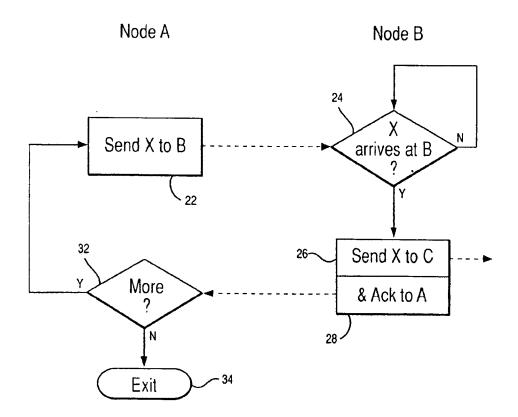


FIG. 2

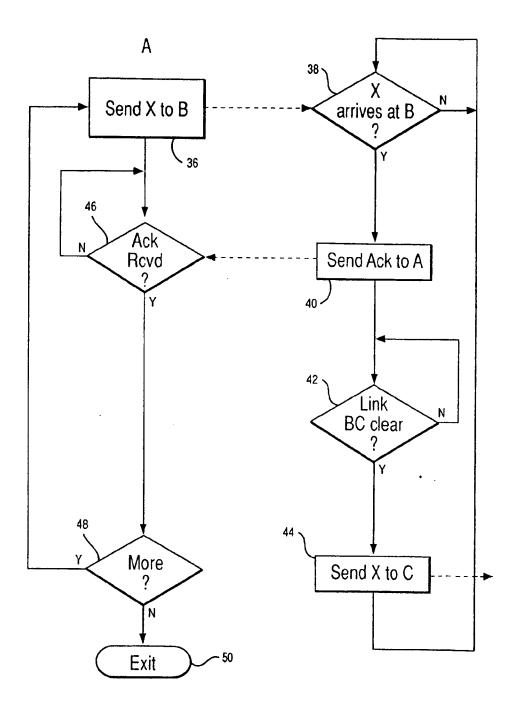


FIG. 3



•

.


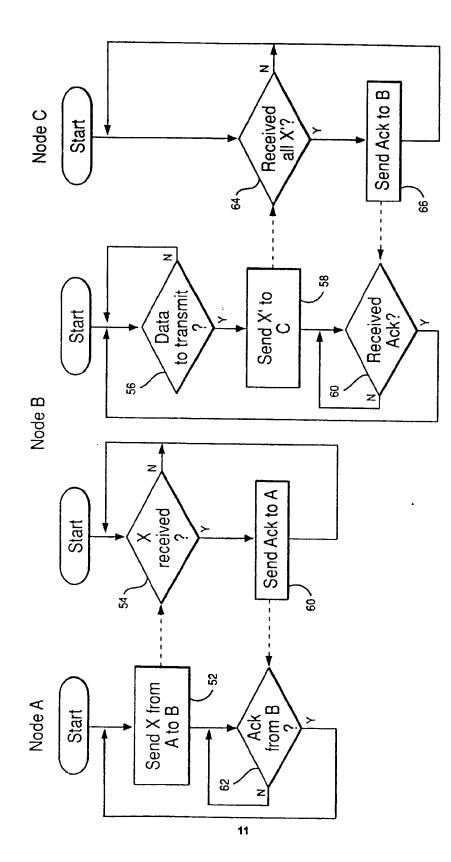


FIG. 4


•

.

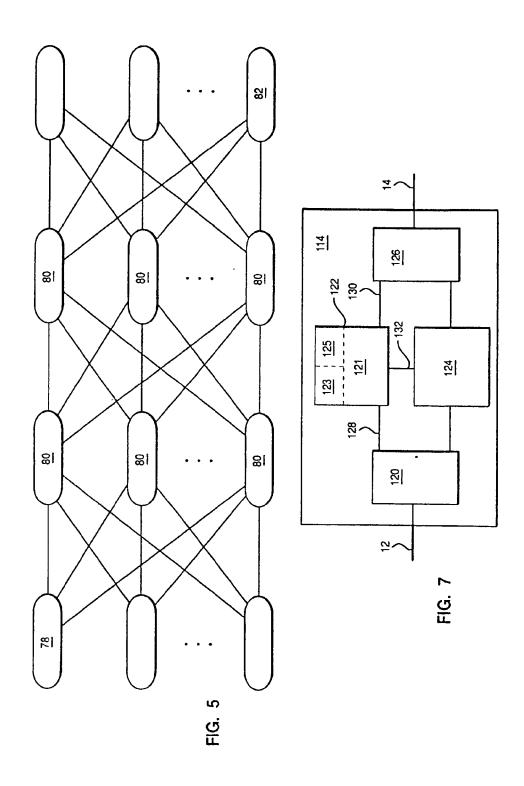

•

د

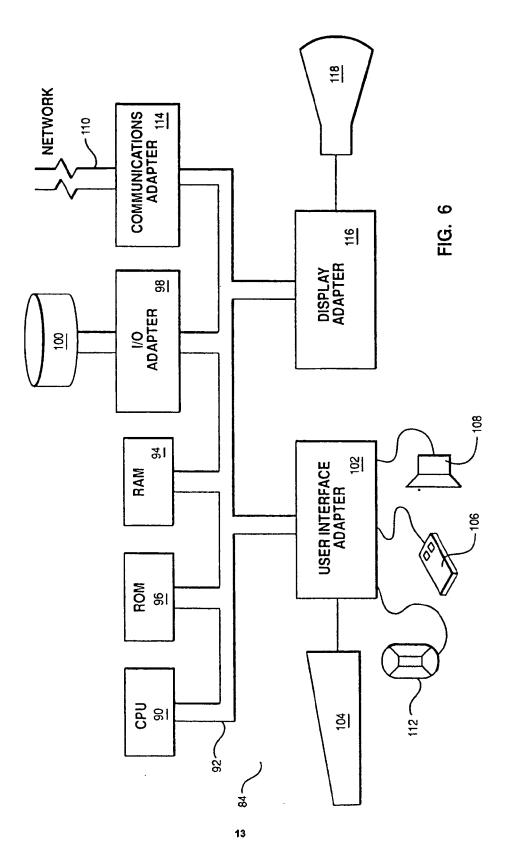



.

.

EUROPEAN SEARCH REPORT

Application Number EP 93 30 8975

	DOCUMENTS CONSI			
Category	Citation of document with in of relevant part		Relevant to claim	CLASSIFICATION OF THE APPLICATION (DetCLS)
A	WO-A-84 03192 (AMER TELEGRAPH COMPANY) * page 32, line 8 - * figures 1,6 *		1,2,8,9	G06F13/12
•	COMPUTER COMMUNICAT vol.21, no.4, Septe pages 307 - 315 B. S. DAVIE 'A host architecture for AT * the whole documen	mber 1991, NEW YORK US -network interface M'	1,2,8,9	
				TECHNICAL PIELDS SEARCHED (M.C.S) GOGF HO4L
	The present search report has i	een drawn up for all claims	4	
	Place of search	Date of completion of the search	4. J	Examinar
	BERLIN	3 March 1994	Ma	sche, C
Y:pec do A:tec O:se	CATEGORY OF CITED DOCUME ricularly relevant if combined with an cussest of the same category chaological lackground o-writtem disclosure compediate document	E : earlier paient de after the filing o	in the application for other reasons	





(1) Publication number: 0 632 672 A2

EUROPEAN PATENT APPLICATION

- (21) Application number : 94304718.3
- (22) Date of filing : 28.06.94

12

- (30) Priority : 29.06.93 US 85264
- (43) Date of publication of application : 04.01.95 Bulletin 95/01
- Besignated Contracting States : DE FR GB
- Applicant : International Business Machines Corporation
 Old Orchard Road
 Armonk, N.Y. 10504 (US)

- 51 Int. Cl.⁶: H04Q 11/04
- Inventor : Baugher, Mark John 4613 Ramsey Avenue Austin, Texas 78756 (US) Inventor : Van Horn, Isabel Berdeen 12701 Marimba Trail Austin, Texas 78729 (US)
- Representative : Moss, Robert Douglas IBM United Kingdom Limited Intellectual Property Department Hursley Park Winchester Hampshire SO21 2JN (GB)
- (54) System and method for bandwidth reservation for different traffic classes.
- A system and method ensure transmission of (57) data elements between computers at a preselected quality of service. A computer in a layered reference model communication network requests a preselected quality of service for selected transmissions. An existing session is employed whereby transmissions having a variety of preselected of service guarantees are multiplexed onto the existing session. Data elements having the preselected qualities of service are transferred from service channels of another such layer. In one embodiment a system and method are provided for use between layer N+1 and layer N, wherein elements from two or more service channels from N+1 are transferred to one or more service channels in layer N such that a preselected quality of service is provided for the elements being transferred. Elements from a service channel having a higher priority, deadline, or period are transferred from the layer N=1 service channel to the layer N service channel before elements from a service channel having a lower priority, deadline, or period. In yet another embodiment, the number of elements are constrained whereby no more than a fixed number of such elements will receive service in a layer N service channel at a given point in time.

Jouve, 18, rue Saint-Denis, 75001 PARIS

10

15

20

25

30

35

40

45

50

Technical Field

The present invention relates to data processing systems and, more particularly, to such systems providing for multimedia connections or sessions.

1

Background of the Invention

It has long been known to provide computer workstations interconnected by digital communication networks whereby users of the individual workstations may communicate with one another over the network, previously common, for example, by means of a typed note, data or program file transmitted to another user. More recently, users have increasingly requested desktop conferencing, remote presentations, and other multimedia applications between network users. However, such multimedia applications, having associated therewith data-intensive sound, voice, and video flows. This requires concomitant high bandwidth communication links between distributed computing systems with minimal communication delay, maximum throughput, and instantaneous burst communication capability. The requirements of such multimedia applications accordingly make scheduling appropriate resources to provide for necessary quality of service very difficult.

Prior art has recognized that certain data in a network, such as that associated with multimedia, may require priority handling. Thus, for example, a "quality of service" (QOS) has been defined in the literature, hereinafter described in more detail. This seeks to describe various parameters which may be specified in an attempt to define certain minimum requirements which must be met for transmission of given data types over the network. See, for example, quality of service standards set forth in the Open System Interconnect Standard X.214 of the International Standards Organization interface and the quality of service standards defined in CCITTQ.931 (ISDN), Q.933 (frame relay), and Q.93B (B-ISDN ATM) drafts.

As yet another example there is an architected priority mechanism in the IEEE 802.5 Token Ring. A station on the ring with a high priority frame to send may indicate this in an access control field of a passing frame. When a station sending the frame releases the token, it releases the token at the priority of the AC field, and eventually sets it back to its original priority as specified in an IEEE 802.5 medium access control protocol. The IEEE standard and implementations thereof merely specify a protocol for increasing and decreasing priority, but each station is unconstrained in its use of priority beyond this protocol.

This in turn gives rise to a serious problem associated with the prior art. In seeking to accommodate situations in which a high priority channel is required to guarantee real time service for multimedia traffic, one approach, since each station is unconstrained, has been for users to indiscriminately increase the priority of their flows. Such increases often result in no guarantees for multimedia quality of service in that no discrimination is provided, e.g. all users simply increase their priorities.

As yet another example of this, unconstrained use of priorities has resulted in bridges and routers loading so much high priority data as to flood the token rings and the like with this priority traffic such that multimedia traffic obtains no guaranteed priority. Again, this results from no discrimination between differing connections, sessions, and transmit operations.

Clearly other instances in the communication art have recognized the notion of a need for differing priority of data types, whether in the form of multiple channels with different priorities (such as the IBM LAN Streamer Token Ring Adapter Card with two transmit channels, and the 100 Mbps Ethernet System with priority channels) and the synchronous/asynchronous approach of, for example, the FDDI standards, a representative example of which is the FDDI SMT 7.X.

Moreover, it is clear in the literature that the notion of scheduling data in differing priorities is well known. See for example Liu and Layland, <u>Scheduling</u> <u>Algorithms For Multiprogramming in a Hard-Real-Time Environment</u>, Journal of the Association for Computing Machinery, Vol. 20, #1, January, 1973, where "rate-monotonic priority assignment" is discussed, page 50. Also see, for example, Dominico Ferrari, <u>A Scheme for Real Time Channel Establishment in Wide Area Networks</u>, IEEE Journal of Selected Areas in Communications, Vol. 8, #3, April, 1990, page 368. In this reference modification of an earliest due date (EDD) policy is presented which governs differing levels of priority assigned to tasks.

Similarly, the notion of specifying performance requirements in real time communication services is further addressed in another reference to Dominico Ferrari, <u>Client Requirements for Real-Time Communication Services</u>, IEEE Communications Magazine, Nov. 1990, page 65, wherein it is noted that a client and server will negotiate a specification for their respective requirements for services including delay bounds, throughput bounds, and the like.

From the foregoing it is clear that notions in the art have developed of varying degrees of priority service (based upon deadlines variously computer as burst/throughput or as a specified delay bound) being required in communication networks. However, several problems have remained in implementing a successful system which addresses the needs for guaranteeing real time service for multimedia traffic. First there is the aforementioned problem of lack of discrimination amongst the traffic whereupon users indiscriminately simply designate all their traffic to a higher priority, thereby "congesting" the network.

10

15

20

25

30

35

40

45

50

55

Yet another problem not effectively addressed by the prior art relates to the emergence of heterogeneous networks from differing vendor implementations of multimedia sessions. Their equipment has differing capabilities e.g. speed and capacity, and make quality of service guarantees problematic since overreservation (or overcommitment) of resources can result in long-term throughput or short-term delays to violate pre-specified QOS. To be practical, this requires that in providing for reserved bandwidth connections, a solution must be provided which minimizes changes to application program interfaces and underlying client implementations. Yet another problem relates to failure to provide for multiple priority queues or channels extending through multiple layers since end-toend delivery among digital computing devices requires services of multiple layers of the OSI model. The link layer guarantees service between two ends of a digital communication link and network over multiple links. Transport services at the endpoint must all provide QOS guarantees using priority service to meet deadlines.

3

Thus, particularly with the proliferation of multimedia data content, the industry was in need of a communication system providing for multimedia flows with quality of service guarantees at the transport and network layers utilizing reserved bandwidth networks whereby the session might be controlled to ensure that traffic from the session remains within traffic descriptors.

Summary of the Invention

According to the present invention there is provided a system and method for effecting multimedia quality of service sessions in a communication network.

Accordingly, there is provided a method for transmitting data elements between computers of a multilayered computer communication network at least at one predetermined assured quality of service, comprising:

generating a request at one of said computers for transmission of data elements; and

responsive to said request including specification of a predetermined quality of service for transmission, either refusing said quality of service if resources to provide said quality of service are not available or transmitting said data elements according to said quality of service wherein the transmission of said data elements includes transferring said data elements having said quality of service requirements through at least one service channel of a first layer of said network to at least one service channel of a second lower layer of said network which provides said predetermined quality of service.

In a second aspect of the invention there is provided apparatus for use in transmitting data elements between computers of a multilayered computer communication network at least at one predetermined assured quality of service, comprising:

4

means for generating a request at one of said computers for transmission of data elements; and

means responsive to said request including specification of a predetermined quality of service for transmission, for transmitting said data elements according to said quality of service wherein the means for transmitting said data elements includes means for transferring said data elements having said quality of service requirement through at least one service channel of a first layer of said network to at least one service channel of a second lower layer of said network which provides said predetermined quality of service.

The invention is embodied in computerized system components implementable in hardware or software or in combination. In a preferred embodiment the components regulate access to priority queues or transmission channels which are attached to the shared medium local area network or any point-topoint digital communications link over copper, fibre, radio or satellite transponders.

In one embodiment, a system and method are provided for use in an OSI layered reference model computer communication network for ensuring that transmissions of data elements between computers obtain a preselected quality of service. A computer in the network requests from another such digital service a preselected quality of service for selected transmissions. A determination is made if resource is available within the computers and network to meet the preselected quality of service. An existing session or connection between the computers is then employed such that transmissions having a variety of preselected quality of service guarantees, even commingled with such transmissions having no quality of service guarantees, are multiplexed onto the existing session or connection. In one implementation of the invention, the quality of service is altered in the session or connected by means of a session-modify command.

The priority, deadline, or period of each particular transmission on the session or connection is identified prior to transferring data elements having the preselected qualities of service on the session or connection. In one embodiment, the priority, deadline, or period is a computed function of a ratio of the burst and throughput quality of service parameters, and the session or connection transmission is effected by a reserved-send command. The data elements having the preselected qualities of service are thence transferred from service channels at one layer of the OSI layered reference model to one or more service channels of another such layer. The lower layer service channels are selected from a group comprising priority token ring service channels, B-ISDN ATM service

10

15

20

25

30

35

40

45

50

channels (corresponding to services in the ASM adaptation layers), 100 Mbps Ethernet high and low priority channels, and synchronous/asynchronous FDDI service channels.

5

In another embodiment of the invention, wherein a pre-established session has been transferring data elements without a quality of service requirement, upon occurrence of the need for a quality of service guarantee, a new session or connection is established, in one form employing a call-modify command. Data elements belonging to this next session or connection having the preselected quality of service requirement are thence transferred from one or more service channels at one layer of the OSI layered reference model to one or more service channels of another such layer.

In both embodiments, a system and method are provided for use between a layer N+1 and layer N in an OSI layered reference model implementation, wherein elements from two or more service channels from layer N+1 are transferred to one or more service channels in layer N, such that a preselected quality of service is provided for the elements being transferred. A reserved-send-with-specified-priority operation is provided in which the reserved-send is augmented with a parameter that describes the urgency, deadline or period of the transmission, e.g. throughput/burst.

More particularly, elements from a service channel having a higher priority, deadline, or period are transferred from the layer N+1 service channel to the layer N service channel before elements from a service channel having a lower priority, deadline, or period.

In yet another embodiment, the number of elements from a service channel having a layer priority, deadline, or period transferred from the layer N+1 service channel to a layer N service channel are constrained whereby no more than a fixed number of such elements will receive service in a layer N service channel at a given point in time.

Brief Description of the Drawings

Fig. 1 is a block diagram showing the configuration of a typical workstation in accordance with the subject invention;

Fig. 2 is an illustration of a data processing system including three workstations interconnected by a network in accordance with the subject invention;

Fig. 3 is a representation of a layered open systems interconnection model showing the relationship of components of the subject invention to the layers:

Fig. 4 is a simplified illustration of a workstation network interconnection in one embodiment of the invention providing for separate sessions having differing priorities;

Fig. 5 is another simplified illustration of a workstation network interconnection in another embodiment of the invention providing for multiplexed multimedia flows on a single session having differing priorities;

6

Fig. 6 is a simplified illustration of a portion of the open system interconnection layered reference model for Fig. 3 depicting the abstraction of multiple layers with corresponding service access points.

Fig. 7 is a simplified illustration of a layered service channel model portion of the open system interconnection model of Fig. 3.

Fig. 8 is a flowchart detailing the program logic in accordance with one embodiment of the invention;

Figs. 9A and 9B is a flowchart detailing the program logic of another embodiment of the subject invention;

Detailed Description of the Preferred Embodiment

Referring now to Fig. 1, there is illustrated a typical hardware configuration of a workstation with a central processing unit 10, and a number of other units interconnected via a system bus 12. The workstation shown in Fig. 1 includes a random access memory (RAM) 14, read only memory (ROM) 16, and I/O adapter 18 for connecting peripheral devices such as disk units 20 to the bus, a user interface adapter 22 for connecting a keyboard 24, mouse 26, loudspeaker 28, microphone 32, and/or other user interface devices to the bus, a communication adapter 34, for connecting the workstation to a data processing network, and a display adapter 36 for connecting the bus to a display device 38.

Fig. 1 depicts a typical "intelligent" workstation, however, the workstation may in fact be a "dumb" terminal with only a limited processing capability under control of a host processor. Alternatively, the workstation may be a simple digital device for presenting audio or video streams. This is made clear in connection with Fig. 2.

Fig. 2 illustrates a data processing system comprising a number of workstations (here, three workstations 200, 220, and 230) interconnected by a pair of data networks 210 and 240, so as to permit communication between the workstations. It is assumed that the data processing system shown in Fig. 2 is of a type which permits concurrent real-time communication between the users. The network operates according to a conventional network protocol, such as the token ring protocol described in Token Ring Network Architecture reference, SC30-3374, IBM, 1989.

Fig. 2 depicts only one possible hardware configuration for a data processing network. Other configurations are possible. For example, the data process-

10

15

35

40

ing system could be based upon a star network, or a host processor connected to a plurality of dumb terminals, or could further be based upon a plurality of remote processors connected by a communication network. The networks could also be based upon a telephone network, an ISDN network, or any other "dial up" networks. Moreover, the workstations could be located within the single workspace or within a local area, or could be remote from one another. A source for detailing technical planning information for configuring a network of workstations in accordance with the invention, is the IBM Extended Services for OS/2 Example Scenarios Manual, 1991.

7

Multimedia computing is the processing of various media, such as video, waveform audio, musical instrument digital interface (MIDI) streams, animation, graphics, and text. Such processing includes the capture, authoring (editing) and playback of media streams as well as other data processing applications. Multimedia documents which are stored on some non-volatile medium, such as a disk, are referred to as recorded multimedia applications. There are also live multimedia applications in which two or more people communicate with each other at the same time using a computer. Live multimedia applications are normally conducted across space and time indicating that live multimedia is inherently distributed. Even recorded multimedia applications require distributed file system services to share large volumes of stored media, such as video disk, audio information, or computer-generated images. Thus, it is critical that a prioritizing scheme in accordance with the invention for multimedia applications includes support for a distributed environment.

To reduce design complexity, most networks are organized as a series of layers, each one built upon its predecessor as described in Computer Networks, Tannenbaum, Andrew S., Prentice Hall (1988) and OSI, A Model for Computer Communications Standards, Black, Ulyess, Prentice Hall, 1991. The number of layers, the name of each layer, contents, and function of each layer differ from network to network. However, in each network, the purpose of the layers is to offer certain services to the higher layers, shielding those layers from the details of how the offered services are actually implemented. The purpose, function, and details of each of the layers and their interaction is set forth in the previously noted references and is familiar to communication programmers ordinarily skilled in the art.

The transport layer accepts data from the session layer, splits it up into smaller units and passes the units to the network layer to ensure that the pieces all arrive at the other end. Details of the transport layer and how it fits into the OSI architecture are shown in Fig. 18 of the Tannenbaum book and described in the related pages. A representative of network architecture that provide technical standards documents for the networking framework are <u>ISO/IEC</u> JTC 1/SC 21 Information Retrieval, Transfer and Management for OSI Secretariat: USA (ANSI) (3294) Basic Reference Model Management Framework (7498-4), and <u>Management Information Model</u> (3324) ISO, 1989.

One way of looking at the transport layer is to regard its primary function as enhancing the Quality of Service (QOS) provided by the network layer. QOS can be characterized by a number of specific parameters. The OSI transport service allows a user to specify preferred, acceptable, and unacceptable values for these parameters when a connection is made. Some of these parameters also apply to connectionless transports. The transport layer examines the parameters, and depending upon the kind of network services available to it, determines whether the transport layer can provide the necessary service. Representative QOS parameters are:

- 20 Connection Delay, which is the amount of elapsed time between a transport connection being requested and confirmation being received by the user, which, as with all parameters dealing with delay, the shorter the delay the better;
- 25 Connection Establishment Failure Probability is the probability of a connection not being established within the maximum establishment delay time. Network congestion, lack of table space, and other internal problems affect this value;
- 30 Throughput measures the number of bytes of user data transferred per second as measured over a recent time interval, and is measured separately for each direction;
 - Transit Delay measures the time between a message being sent by the transport user on the source machine and its being received by the transport user on the destination machine;
 - Residual Error Rate measures the number of lost or garbled messages as a fraction of the total sent in the sampling period. In theory, the residual error rate should be equal to zero since it is the job of the transport layer to hide all network layer errors. Yet additional QOS parameters includes;
- Transfer Failure Probability which measures how
 45 well the transport service is living up to its assigned tasks. When a transport connection is established, a given level of throughput, transit delay, and residual error are agreed upon. The transfer failure probability gives the fraction of times that these agreed upon 50 goals were not met during some time period;
 - Connection Release Delay is the amount of time elapsing between a transport user initiating a release of a connection and the actual release occurring at the end;
- 55 Connection Release Failure Probability (CRFP) is the fraction of a connection release attempts which did not complete within the agreed-upon connection release delay interval;

10

15

20

25

30

35

40

45

50

55

Protection provides a way for the transport user to specify interest in having the transport layer provide protection against unauthorized third parties reading or changing reading or changing transmitted information;

9

Resilience yields the probability of the transport layer spontaneously terminating a connection due to internal problems or congestion.

The hereinbefore-noted QOS parameters are specified by a transport application when a connection is requested. Both the desired, minimum, and maximum acceptable values are given. In some cases, the transport layer immediately recognizes that the values are not achievable. When this occurs, the communication attempt fails, and an appropriate exception is noted. In other cases the transport layer knows that it cannot achieve the desired goal, but can achieve a lower, but still acceptable rate. The lower rate, minimum acceptable rate, and maximum acceptable rate are sent to the remote machine requesting the established of a connection. If the remote machine cannot handle the proposed value, but can handle a value above the minimum or below the maximum, then it may lower the parameter to its value. If it cannot handle any value above a minimum, then it rejects the connection attempt. Then, the originating transport application is informed of whether the connection was established or rejected.

This process is called open negotiation. Once the options have been negotiated, they remain that way through the life of the connection. The OSI Transport Service Definition, (ISO 8072) does not specify the QOS parameters. These are normally agreed upon by a carrier and customer. A T-connect request is employed to initialize communication, and the QOS is specified as part of this transactions. Details on the transport primitives are found in the aforementioned reference. Below the transport and network layers are the link or MAC layers in the OSI and IEEE 802 reference models to be hereinafter described. Some MAC protocols, such as synchronous FDDI, provide guarantees for throughput, delay, and delay variation to applications. Other MACs such as the Token Ring and Token Bus have architected priority mechanisms which can support quality of service guarantees (throughput, delay, etc.) when the subject invention is employed.

Priority assurance is an important factor in ensuring QOS, and is enabled by operation of a component which may be implemented in hardware logic or software. The component regulates access to the priority queues or transmit channels that are attached to the shared medium local area network section. Access to the priority queue or transmit channels will pass through this component, thus subjecting all communication transactions to rejection or tracking by the component. A more detailed discussion of this component and the related station's bandwidth manager component are described in <u>Network Priority Man-agement</u>, U.S. Patent Application, (AT9-92-089) S/N 07/930,587, filed August 17, 1992.

Turning now to Fig. 3, depicted there is a schematic representation of several forms of a multilayered computer communication network model based upon the OSI layered reference model. Further detail of this OSI and related IEEE models may be found in OSI, A Model for Computer Communications <u>Standards</u>, infra. The first five layers of the OSI model are shown in Fig. 3 as reference numerals 40-56. The lowest layer is the physical layer OSI 1, 56, which is responsible for implementing a physical circuit between data terminal equipment and data circuit terminating equipment.

The data link or second layer, OSI 2, 54, is responsible for transfer of data across the link. The third or network layer, OSI 3, 52, specifies the interface of the user into a network and also defines network switching/routing and communications between networks. The fourth or transport layer, OSI 4, 50, provides an interface between the data communications network and the upper three layers. This layer is of particular interest inasmuch as it provides the user options in obtaining certain levels of quality, and is designed to keep the user isolated from some of the physical and functional aspects of the network.

The fifth or session layer, OSI 5, 48, serves as a user interface into the transport layer below, providing a means for exchange of data between users such as simultaneous transmission, alternate transmission, checkpoint procedures and the like. The remaining two layers, the presentation layer and application layer (not depicted), ensure that user applications can communicate with each other and further concern the support of the end-user application process.

It will be noted from Fig. 3 that there are other implementations in the art of such an OSI reference model bearing varying degrees of similarity thereto, a portion of one being depicted in the left part of Fig. 3 as the IEEE model. A physical layer 46 may be seen corresponding to the first layer 56 of the OSI model. The IEEE recognized the need to divide the data link layer OSI 2, 54, into two sublayers in order to handle different link configurations and thus a medium access control (MAC), 44, and logical link control (LLC), 42, were provided for. The IEEE model is specialized to links which are shared media, e.g. having more than two connected stations. The MAC sublayer is protocol-specific (such as to a LAN such as Ethernet) whereas the LLC, 42, serves as an interface to an upper layer protocol, typically the network layer (and isolates the network layer from the specific actions of the MAC sublayer). One purpose of depicting varying forms of a multilayered computer communication network in Fig. 3 is to illustrate that the invention admits to implementations in any number of such multilayered models, and is thereby not intended to be lim-

10

15

20

25

30

35

40

45

50

55

Still referring to Fig. 3, a more practical implementation of the invention is shown in the righthand portion thereof as it relates to the theoretical reference models just described. More particularly, there is first shown an adapter card 62, implementing the physical layer and part of the MAC of the reference model. In a preferred form, this adapter card will provide for a plurality of priority channels, services or queues, as illustrated by the PO and P5 channels. The figure is further intended to indicate that the adapter card 62 will be for at least two channels through which data elements may flow, each such channel having a differing priority. Although a PO and P5 have been shown, the invention admits to implementations with more priority channels as required (with, conventionally, the right or higher numbered channels such as P5 indicating higher priority whereby data elements transferred through this channel will be transmitted in preference over those at a lower priority. A media access control software driver 60 is also shown implementing the MAC sublayer 44 in the IEEE model, for example, and finally a netbios or functionally equivalent form of LAN software, 58, is shown implementing the session layer 5 of the OSI reference model.

It is important to note that the invention contemplates implementation of multiple service channels in the lower layers of the architecture in a number of forms and is not intended to be limited to any particular such implementation. Thus the channels depicted with associated priorities P0 and P5 may be implemented as priority token ring service channels, B-ISDN ATM service channels, 100 Mbps Ethernet high and low priority channels, and even as lower layer service channels in the synchronous and asynchronous FDDI form of priority channels or queues.

Still referring to Fig. 3, as will be described hereinafter in greater detail, yet an additional feature of the invention is shown depicted therein. In a preferred embodiment, once a session has been established, shown at reference numeral 64, data elements having a preselected QOS belonging to the session or connection from one or more such just described service channels at one layer of the OSI layered reference model (such as the netbios layer 58), will be transferred to one or more service channels of yet another layer such as that of the MAC driver 60 or physical layer 62. This is schematically depicted by the line 64 splitting into two parallel downward arrows culminating in the two channels P0 and P5 having differing priorities, shown as arrows 66 and 68.

In another form of the invention, a pre-existing session shown as arrow 70 may have been established which may not have required a quality of service. Such a session may have been established by a call command. When a determination is made by the system that a multimedia transmission requiring a guaranteed quality of service is required, a new session may be established by a call modify, shown by the arrow 72 extending downwards through the various reference model layers and terminating in the P5 channel. This is intended to indicate that when such multimedia data transmissions are required, in implementations allowing for only one session per file or connection, this form of the invention will provide for a next session operating at higher priority to effect the desired quality of service guarantee at, for example, the higher P5 priority.

12

This latter form of the invention may be seen more clearly depicted in Fig. 4. In this embodiment there may be various forms of data in need of transfer shown generically as file 1, 84, and a second device 2, 86, each form of data having associated therewith either no quality of service requirement or some form of quality of service guarantee dependent upon the data type. For example, device 2 might be a real time video capture card having a relatively high throughput requirement of perhaps 150 KBS, whereas the data associated with file 1 may be digitized audio requiring a lesser QOS or perhaps even a binary executable file or text file with no particular required QOS.

As previously described, a first session 88 may have previously been established between two computers 80 and 82 on the network for transmission of non-QOS data such as that from file 1. Upon determination of the capability of the network to transfer QOS data, in one embodiment, a next session (shown schematically at reference numeral 90) may thereafter be established between the computers 80-82 wherein a QOS is bound to this next session 90 to carry the multimedia data associated with device 2, 86, at a guaranteed QOS.

Turning now to Fig. 5, this figure is intended to more practically represent the multiplexed flows of data at varying qualities of service at a single session, as briefly hereinbefore with reference to the rightmost portion of Fig. 3. In this implementation, again data having differing quality of service requirements (or none) may be seen graphically illustrated as file 1, 104, and device 2, 106. In this preferred embodiment, however, a session may have been established between computers 100 and 102 shown by line 108. It is contemplated that data elements corresponding to differing QOS needs may nevertheless be transmitted or multiplexed on the same single session 108. In this manner, the aforementioned real-time video captured by device 2, 106, may be given a high priority and transmitted on the session 108 in preference to but nevertheless multiplexed with lower priority data associated with file 1, 104.

Turning now to Figs. 6 and 7, it is an important feature of the invention that data elements belonging to sessions or connections having a preselected quality of service from one or more service channels at

10

15

20

25

30

35

40

45

50

55

one layer of a layered reference model may be transferred to one or more service channels of another layer.

Thus, turning now to Figs. 6 and 7, they are intended to represent a more generalized case than that of Fig. 3, and represent the notion that multiple channels or priority queues may be provided at a plurality of layers providing quality of service guarantees.

Fig. 6 is an OSI depiction of a service access point (SAP) which is an addressable unit by which layer N provides service access to a layer N+1 user. The invention extends or replaces this abstraction by which a layer N service offers a multiplicity of service priorities that correspond to the deadline, period or quality of service to be provided to a layer N+1 user.

Turning now to Fig. 8, a flow diagram is provided which may be implemented in software for use by the network system in effecting one embodiment of the invention. First, a request for a quality of service transfer 130, is placed on the network 210 or 240 by one of the workstations 220 which may be a client or an application program. The QOS request is received, 132, by the host or server 220 or communications transport product, which then determines whether sufficient QOS resources are available in the network to service the request 134. If not, as indicated as block 136, the QOS session or connection is refused. If, on the other hand, sufficient resource is available, the QOS connection is established, 138, and transfer of data commences utilizing the aforementioned plurality of QOS service channels extending through the multiple layers of the reference model 140, in accordance with the invention.

Turning now to Figs. 9A and 9B, a more detailed flow diagram for an alternate embodiment of the invention is provided wherein elements from a service channel having a higher priority, deadline or period are transferred from a layer N+1 service channel to layer N service channel before elements from a service channel having a lower priority, deadline, or period are transferred. First, as in the case of the prior embodiment, one of the network computers may generate a QOS request 142, which is then received by the host or server 144. Again, the server or host determines whether QOS resources are available, 146, to service the request. If this is not the case, QOS guarantees are not provided. Upon a subsequent data transfer request 150, the server or host determines whether QOS service channels are empty, 152, and if not, a polling procedure is entered looping back on the block 152 for the channel to empty so that lower priority data may be transferred. Upon the QOS service channel's emptying, data is then transferred over non-QOS service channels 160.

If a QOS request has been received, 144, and QOS resources are available, 146, one or more priority channels will be reserved such that a QOS guarantee may be made, 154. Upon a subsequent data transfer request 156, the server or host will determine whether QOS data is involved, 158. If not, the hereinbefore described process relative to blocks 152 and 160 will be repeated. If, on the other hand, QOS data is involved in the data transfer request 158, the host or server will thereafter identify the period, priority, or deadline associated with the desires QOS transfer and thereafter will identify an appropriate service channel 164. The host or server thereafter will determine whether service channel constraints exist, 166. If so, the system next determines whether the service channel is at the predetermined limit 168, in which case again a polling loop is entered, looping back on the block 168 determination. When the service channel is detected as not being at a limit, the system then detects whether higher priority QOS service channels are empty, 170. If not, again a polling routine is entered looping back on the block 170 determination until higher priority traffic is handled whereupon flow exits to the right of block 170 and data is transferred in the desired manner on the service channels 172.

Referring back to block 166, if there were no service channel constraints 166, the logic flow exits from the right of block 166 to the subsequent determination of whether a higher QOS service channel or channels are empty, 170, and the process thence continues in the manner previously described.

From the foregoing relative to Figs. 9A and 9B, it is apparent that no attempt is made to put lower priority traffic in a higher priority channel. Rather, when two channels from layer N+1 to a single channel at layer N exist, in a preferred embodiment the number of lower priority requests will be constrained which go into the layer N channel from the layer N+1 lower priority service channel. In this manner, the system may determine how long a higher priority service channel request will have to wait, at maximum, to obtain access to the layer N service channel. The system moreover avoids putting lower priority requests into the service channel when there are higher priority requests waiting to go to the same channel.

While the invention has been shown and described with reference to particular embodiments thereof, it will be understood by those skilled in the art that the foregoing and other changes in form and detail may be made therein without departing from the spirit and scope of the invention.

Claims

 A method for transmitting data elements between computers of a multilayered computer communication network at least at one predetermined assured quality of service, comprising: generating a request at one of said computers for transmission of data elements; and responsive to said request including spec-

10

15

20

25

30

35

40

ification of a predetermined quality of service for transmission, either refusing said quality of service if resources to provide said quality of service are not available or transmitting said data elements according to said quality of service wherein the transmission of said data elements includes transferring said data elements having said quality of service requirements through at least one service channel of a first layer of said network to at least one service channel of a second lower layer of said network which provides said predetermined quality of service.

15

- A method according to claim 1 including, responsive to said specified quality of service being provided by pre-existing data transmission session, multiplexing said data transmission at said quality of service on said pre-existing session.
- A method according to claim 2, wherein said data transmission is multiplexed with other data transmissions which either also have quality of service guarantees supported by said service channel of said second layer or have no predetermined quality of service.
- 4. A method according to claim 2 or claim 3, wherein said pre-existing session includes a preselected quality of service transmission, and wherein said method includes the further step of altering said quality of service for a next transmission within the session.
- 5. A method according to any one of the preceding cliams, including establishing a data transmission session providing said at least one quality of service when said specified quality of service is not provided by any pre-existing data transmission sessions.
- A method according to any one of the preceding claims, wherein said at least one service channel of said second layer is comprised of synchronous and asynchronous channels.
- A method according to any one of the preceding claims, wherein said at least one channel of said first and second layers comprises multiple priority channels.
- 8. A method according to claim 7, wherein said step of transferring said data elements includes transferring said data elements through a plurality of service channels each having a different priority associated therewith and receiving a plurality of subgroups of said data elements having corresponding different qualities of service and priorities associated therewith through corresponding

ones of said channels.

 A method according to any one of the preceding claims wherein said at least one service channel of said second layer is taken from the group comprising:

priority token-ring channels, B-ISDN ATM channels, Ethernet high and low priority channels, and synchronous/asynchronous FDDI channels.

- 10. A method according to any one of the preceding claims, wherein a quality of service associated with each data transmission of a particular group of data elements is identified by identifying a priority, deadline, or period associated with said particular group of dat elements, or by determining burst and throughput quality of service parameters.
- 11. A method according to any one of the preceding claims, wherein the multilayer network includes at least an N+1 layer and an N layer for assured transmission of data elements, including the steps of:

establishing two or more service channels in said N+1 layer;

establishing one or more service channels in said N layer; and transferring said data elements from said two or more channels in said N+1 layer to said one or more channels in said N layer at said predetermined quality of service.

12. A method according to claim 11, wherein selected groups of said data elements from said two or more channels have a higher and a lower priority, deadline, or period respectively; and

wherein said selected groups having said higher priority are transferred from said N+1 layer through said two or more channels to said one or more channels of said N layer before said selected groups having said lower priority are transferred.

45 **13.** A method according to claim 12 including:

preselecting a fixed number of data elements to be received in said one or more channels at said lower priority in said transfer from said N+1 layer to said N layer;

servicing up to said fixed number of data elements in said one or more service channels in said N layer at said lower priority; and

discontinuing said transfer of said data elements at said lower priority when said fixed number of data elements per unit of time is reached.

14. Apparatus for use in transmitting data elements

55

25

30

35

40

45

50

55

10

between computers of a multilayered computer communication network at least at one predetermined assured quality of service, comprising:


means for generating a request at one of said computers for transmission of data elements; and

means responsive to said request including specification of a predetermined quality of service for transmission, for transmitting said data elements according to said quality of service 10 wherein the means for transmitting said data elements includes means for transferring said data elements having said quality of service requirement through at least one service channel of a first layer of said network to at least one service 15 channel of a second lower layer of said network which provides said predetermined quality of service.

15. Apparatus according to claim 14, wherein said 20 multilayered network is an open systems interconnection network.

,

•

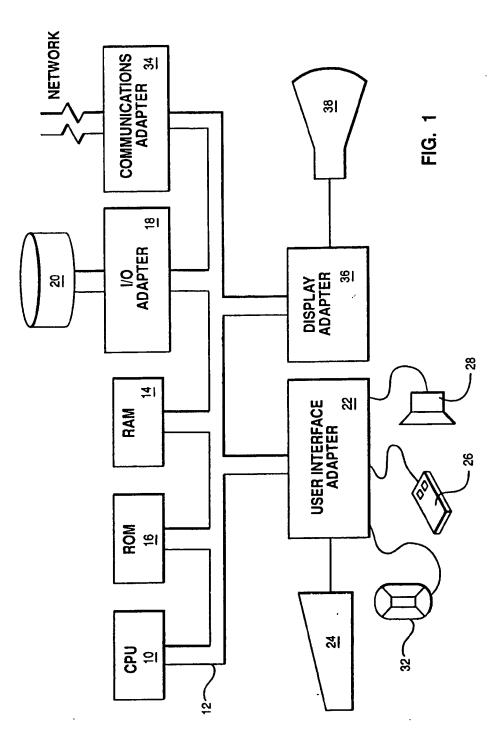

EP 0 632 672 A2

•

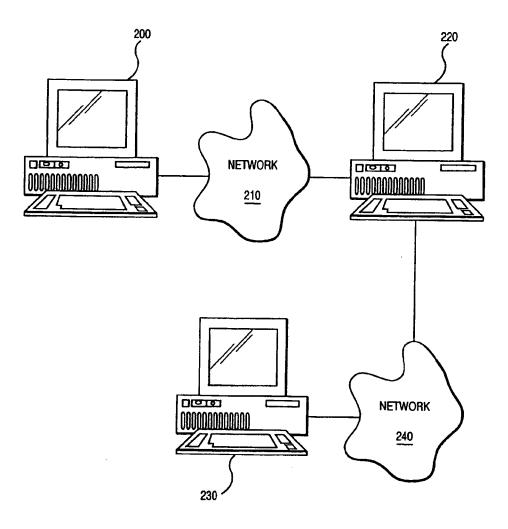


FIG. 2

EP 0 632 672 A2

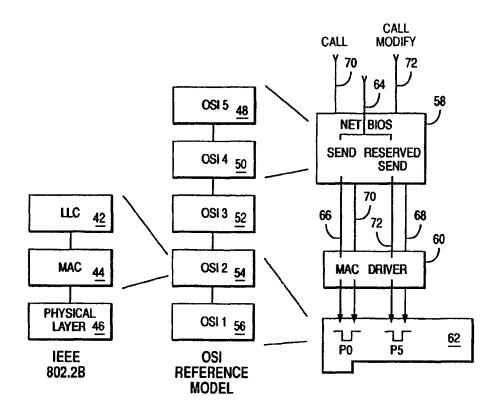
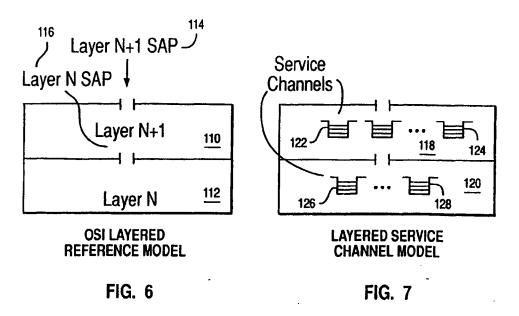


FIG. 3



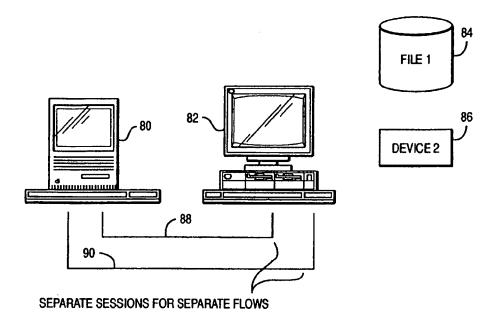


FIG. 4

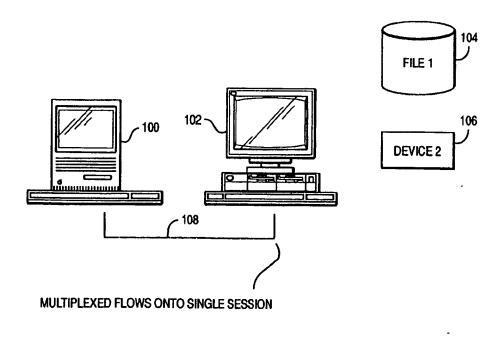


FIG. 5

.

EP 0 632 672 A2

.

.

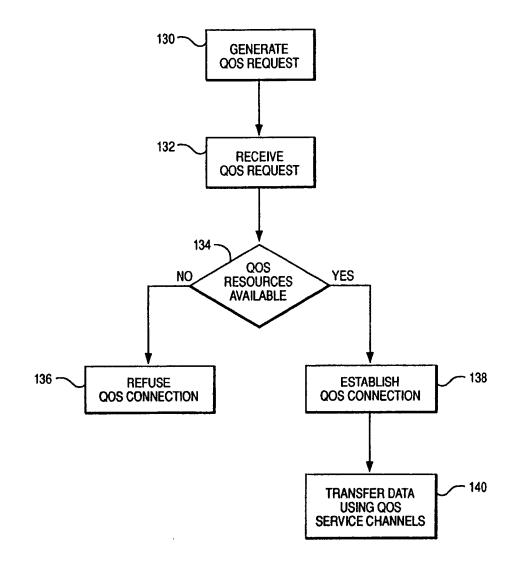


FIG. 8

.

EP 0 632 672 A2

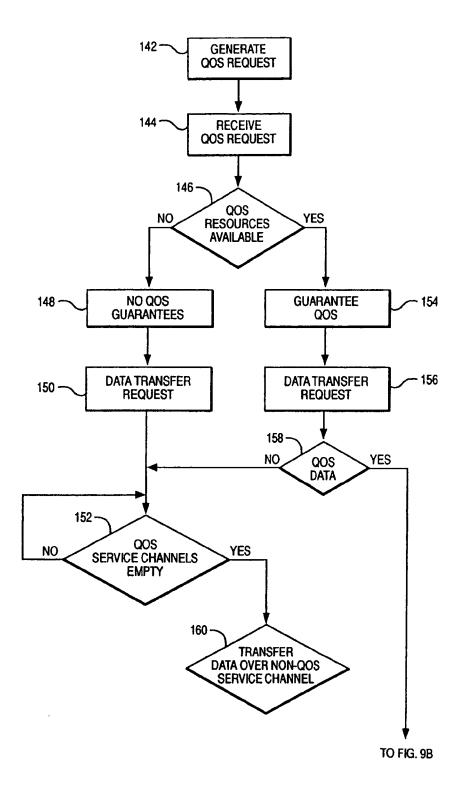


FIG. 9A

EP 0 632 672 A2

•

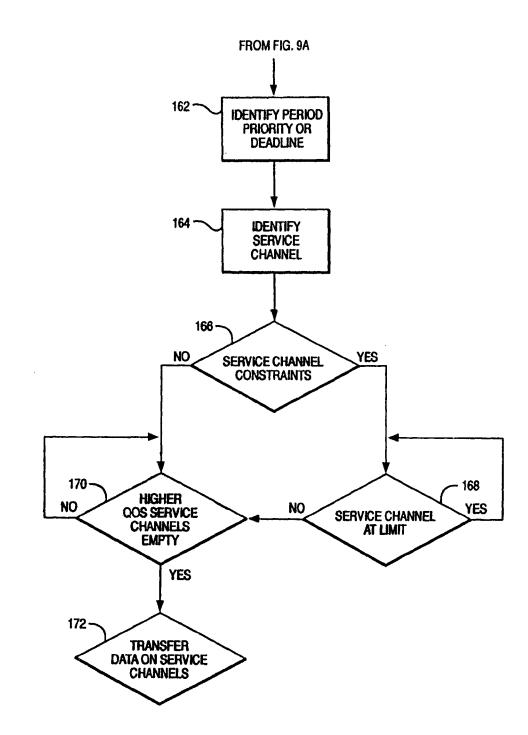


FIG. 9B





(1) Publication number : 0 648 038 A2

EUROPEAN PATENT APPLICATION

- (21) Application number : 94306326.3
- (22) Date of filing : 26.08.94

(12)

8

038


648

0

Ъ

- (5) Int. CI.⁶: H04L 29/06
- (30) Priority : 11.09.93 GB 9318877 Inventor : Taylor, Michael George St. Elmo, (43) Date of publication of application : Duncan Road. 12.04.95 Bulletin 95/15 Park Gate Southampton, Hampshire, S03 7BD (GB) (84) Designated Contracting States : Inventor : Platt, Michael Avoca, Chidden Holt, DE FR GB Hambledon (71) Applicant : International Business Machines Hampshire, P07 6TG (GB) Inventor : Stanford-Clark, Andrew James Corporation **Old Orchard Road** 68 Allbrook Knoll, Armonk, N.Y. 10504 (US) Alibrook Eastleigh, Hampshire, S03 4RY (GB) (72) Inventor : Wallis, Graham Derek (74) Representative : Burt, Roger James, Dr. 75 Raley Road Locks Heath, Hampshire, S03 6PB (GB) **IBM United Kingdom Limited** Intellectual Property Department **Hursley Park** Winchester Hampshire SO21 2JN (GB)
- (54) A data processing system for providing user load levelling in a network.
- (57) The present invention provides a data processing system, and method of operating such a system, for facilitating a connection of a program on a client computer to a server, the server consisting of a plurality of server computers with shared resources. The data processing system, the client computer, and the server computers all reside in a logical network. The data processing system has an input means for receiving a request from the client computer for a machine address of a server computer identified by a server computer name sent with the request, such a machine address enabling a connection to be made from the client computer to that server computer via the network. A storage device is provided by the system for storing a list identifying server computer names with machine addresses of the server computers. A conversion means in the system uses the list to convert the server computer name received by the input means into the machine address of the server computer, and then an output means sends the machine address from the conversion means to the client computer. The system is characterised by decision logic for studying the server computers at predetermined intervals having regard to a predetermined test criteria, in order to select one of the server computers; and writing means for updating the list by associating the machine address for the server computer selected by the decision logic with a particular server computer name contained as a generic server computer

name in the list. Using this technique, when a client computer specifies the generic server computer name, it receives the machine address of the server computer identified by the decision logic.

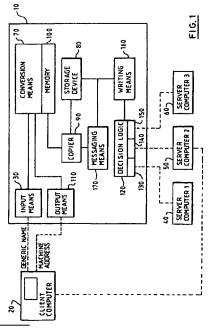

10

15

20

25

30

35

40

45

50

The present invention relates to a data processing system for facilitating the connection of a program on a client computer to a server, the server consisting of a plurality of server computers with shared resources.

1

The data processing system, the client computer, and the server computers are all resident on a network. This network need not be one physical network such as a Local Area Network (LAN); for instance it may consist of a number of LANS or WANS (wide area networks) connected together (eg. via 'bridges') to form a single logical network. However the same network protocol will be employed throughout the network, a typical example of such a protocol being TCP/IP which will be familiar to those skilled in the art.

In many environments it is increasingly found that a number of server computers are connected together using some form of network, eg. a LAN. It is often the case that several users of client computers will be connected to one such server computer, whilst other server computers stand idle. An example of this is when such computers are situated in workers' offices, connected by, for example, a token ring LAN using the standard TCP/IP network protocol. When workers are away from their offices, their computers will usually stand idle.

In such situations it is commonly the case that a few of the computers in the network are heavily loaded, whilst other computers in the network are very lightly loaded, giving poor response and performance for the client computers using the heavily loaded server computers. Hence there is a problem of how to enable the client user load to be spread more evenly across the available computing resources of the server in a manner which is transparent to the client computer and its programs. If transparency is to be achieved, standard protocols need to be observed in order that client computers can use a variety of connection methods without modification of any programs being required.

A prior art technique which has been developed to provide some sort of load spreading is called "Static load levelling". With this technique each application on each client computer has a designated server to which it always connects. Hence, for example, if there are 200 potential clients of a server having five server computers, a pre-specified group of, say, 40 of the clients will be told (or configured) to always connect to machine 1, etc. On average it may be argued that this will give a reasonably even load across all of the server computers. However in practice it is often the case that, using this technique, a large number of users of client computers are connected to one server computer, while an adjacent server computer stands completely idle (eg. given the above example there could easily be 40 users on one server computer whilst the other 4 server computers stand idle). Hence in situations where the user loading changes

from time to time, the prior art static load levelling technique is not particularly satisfactory. What is required in such instances is a more 'dynamic' technique which can respond to changing user loads, and thus direct new users to the most suitable (eg. least heavily loaded) server computers in the server.

Other prior art techniques can be found in other environments, such as those where job allocation is an issue. For instance in "batch processing", a client computer submits an encapsulated task to a central server, which determines which one of several possible servers is quiet enough to be able to handle the task. The task is sent to that server, is processed, and the results are then sent back to the client (e.g. as a results file, or by electronic mail). With a batch processing system, there is a brief connection to the central server while the job is transferred from the client to the server allocated by the central server. After this brief connection the client disconnects, and has no more interaction with the submitted task until it has been completed, and the results have been passed back to the client by some means.

However in the situation with which we are currently concerned, the dynamic load levelling technique that is required must be able to deal with "interactive" sessions. Rather like a phone conversation, the connection between the program on the client computer and a particular server computer will persist for the duration of the "conversation" session. Hence the batch processing concept is inappropriate in the present situation.

It is possible to write some specific code within a program on a client computer which contains internal message-passing systems to route work from that client program to a corresponding server program. Such systems are dedicated only to that particular client program, and the connection and load-levelling methods are not accessible to other client-server applications. Often, such systems operate by the client connecting to a specific "host" server computer, and from there the work will be sent to another server for processing. Clearly this technique can result in large bottlenecks arising at the "host" server computer.

Hence such a technique is not suitable in the present situation since it only supports one very specific type of client-server connection, whereas we need a technique that will allow any client-server connection method using the network protocol to be connected to a quiet server in a way that is completely transparent to the client program. Further the above technique relies on an initial connection to the 'central' host server computer, which then passes the request on to another server computer; as described above this can potentially create a serious bottleneck.

It is an object of the present invention to provide a technique which facilitates a connection between a client program and a server computer on a server in

10

15

20

25

30

35

40

45

50

a way that takes into account the current status of the server computers forming the server. This technique must observe standard network protocols and should operate in a manner which is transparent to the client program requesting access.

3

Accordingly the present invention provides a data processing system for facilitating a connection of a program on a client computer to a server, the server consisting of a plurality of server computers with shared resources, the data processing system, the client computer, and the server computers residing in a network, the system comprising: input means for receiving a request from the client computer for a machine address of a server computer identified by a server computer name sent with the request, such a machine address enabling a connection to be made from the client computer to that server computer via the network; a storage device for storing a list identifying server computer names with machine addresses of the server computers; conversion means for using the list to convert the server computer name received by the input means into the machine address of the server computer; output means for sending the machine address from the conversion means to the client computer; the system being characterised by: decision logic for studying the server computers at predetermined intervals having regard to predetermined test criteria, in order to select one of the server computers; and writing means for updating the list by associating the machine address for the server computer selected by the decision logic with a particular server computer name contained as a generic server computer name in the list; whereby when a client computer specifies the generic server computer name, it receives the machine address of the server computer identified by the decision logic.

Typically the conversion means will access the list from a local piece of storage, the data processing system having a copier to copy the list from the storage device to that piece of memory. In preferred embodiments the data processing system further comprises a messaging means, responsive to the updating of the list by the writing means, for sending a message to the copier requesting the copier to copy the updated list into the piece of local memory.

Any manner of predetermined test criteria can be used in the data processing system of the invention, for example the amount of idle processor time, the number of processes running, the amount of free memory, the "load average", etc. However in preferred embodiments the predetermined test criteria are such that the decision logic identifies the server computer having the least number of client programs logged on to it.

In preferred embodiments the predetermined intervals are variable and will either be set by a user of the system, eg. the system administrator, or will be adjusted dynamically. The user will also set the predetermined test criteria to be used by the decision logic.

Further in preferred embodiments the user can limit the number of server computers which the decision logic studies. This may be useful if, for instance, some of the server computers have not got access to all of the resources that other server computers have access to, and so would not be suitable as server computers to be associated with the generic server computer name.

In some embodiments it may be advantageous to use a plurality of generic names. Each server name would then have a number of server computers whose machine addresses are associated with that generic name, the decision logic employing different sets of predetermined test criteria for each generic name. In such embodiments one or more of the server computers can be associated with a plurality of the generic names.

Viewed from a second aspect the present invention provides a method of operating a data processing system to facilitate a connection of a program on a client computer to a server, the server consisting of a plurality of server computers with shared resources, the data processing system, the client computer, and the server computers residing in a network, the method comprising the steps of: (a) receiving a request from the client computer for a machine address of a server computer identified by a server computer name sent with the request, such a machine address enabling a connection to be made from the client computer to that server computer via the network; (b) storing a list identifying server computer names with machine addresses of the server computers in a storage device; (c) converting, with reference to the list, the server computer name received at step (a) into the machine address of the server computer; (d) sending the machine address identified at step (c) to the client computer, the method being characterised by the steps of: (e) employing decision logic to study the server computers at predetermined intervals having regard to predetermined test criteria, in order to select one of the server computers; and (f) updating the list by associating the machine address for the server computer selected by the decision logic with a particular server computer name contained as a generic server computer name in the list; whereby when a client computer specifies the generic server computer name at step (a), it receives the machine address of the server computer identified by the decision logic.

The present invention will be described further, by way of example only, with reference to an embodiment therof as illustrated in the accompanying drawings, in which:

Figure 1 is a block diagram illustrating the data processing system of the preferred embodiment; Figure 2 is a flow diagram illustrating how the de-

3

10

15

20

25

30

35

40

45

50

cision logic in the data processing system of the preferred embodiment operates; and

5

Figure 3 illustrates a particular embodiment where two generic computer names are used.

In the preferred embodiment we will consider the situation where the server in question is a high performance database server which has its data distributed across a network of server computers, this server network hereafter being referred to as a cluster. Database applications being run by users on client computers are required to connect to one of the server computers in the cluster to enable them to access the data in the database server. By the nature of the database system, it does not matter which server computer the client connects to - all of the data is accessible from any server computer in the cluster. In the preferred embodiment the server computers and the client computers are all interconnected using TCP/IP on a token ring Local Area Network.

For a large number of users, it is highly desirable to have a number of users on each of the server computers in the server cluster, rather than all users connecting to (and hence overloading) just one or a few of the server computers. With a widely varying user workload profile for the database server, this problem can only be solved by providing some form of "load levelling" process, which will allocate new client application instances to server computers in the cluster that are most suitable for the client connection (eg. because they are more lightly loaded than other server computers). Clearly this process must be dynamic, able to respond to changing load conditions over time. Since the database applications on the client computers are typically complex and often are supplied only in object code form, it would be very difficult (or impossible) for the system administrator to alter them, and so it is essential that this allocation is done in a manner which is entirely transparent to the client application.

The manner in which the data processing system of the preferred embodiment solves the above problems will now be described with reference to Figure 1.

Each client computer in a network using the TCP/IP protocol (there will typically be many such client computers) will have been informed by the network administrator that it is to communicate with a particular computer when it wishes to convert a computer name of another computer in the network into a machine address. When utilising the present invention that computer will be the data processing system of the preferred embodiment.

Hence when a program running on a client computer 20 (for clarity, only one client computer is illustrated) wishes to obtain access to a server computer (40, 50, 60) in the cluster it will communicate with the data processing system 10 in order to obtain a full Internet machine address for the desired server (Internet addressing is part of the TCP/IP protocol). With the prior art technique the client computer would specify a server computer name in this communication that was specific to one particular server computer in the cluster. The input means 30 of the data processing system 10 would receive this server computer name and pass it to the conversion means 70.

6

In a storage device 80 of the data processing system a list is maintained which identifies server computer names with particular Internet addresses. When the conversion means is initiated the copier 90 copies this list from the storage device 80 into a piece of local memory 100 accessible by the conversion means 70. Hence the conversion means will access the list in memory 100 to find the Internet address of the computer associated with the server computer name passed to it by the input means 30. This Internet address will then be provided by the conversion means to the output means 110 for transmission back to the client computer 20.

Once the client computer has the Internet address it can then make direct contact with the server computer residing at the Internet address provided; in Figure 1 this is server computer 2. Since the TCP/IP protocol is used any of the access methods that use this protocol can be used to access the server computer.

When using the data processing system of the preferred embodiment the program running on the client computer 20 will not use the server computer name that it previously used. Instead a generic server computer name will be used. This generic server name will either have been placed in the program's configuration file, or alternatively the user of the program will specify the generic name when running the program.

Within the data processing system, decision logic 120 is provided which periodically studies the server computers in the cluster having regard to some predetermined test criteria, hereafter called the metric string. In the preferred embodiment the metric string is a list of questions which when answered by the various server computers will enable the decision logic to decide which server computer is most suitable for a client connection (the most suitable perhaps being the least heavily loaded server computer). The metric string can be altered as the system administrator deems appropriate, depending on what criteria the administrator wishes to be used to select a server computer.

In the preferred embodiment the decision logic actually sets up a number of child processes, each one being responsible for sending the metric string to a particular server computer and receiving the response from the server computer.

Once the responses have been received the decision logic will collate the responses, decide which server computer is most suitable, and then request the writing means 160 to pass the Internet address of

4

10

15

20

25

30

35

40

45

50

55

that server computer to the storage device for association with the generic server computer name. If however the most suitable server computer is the same server computer as that identified in the last iteration of the process then there is no need to update the storage device and the writing means will not be activated.

7

Once any necessary update to the storage device 80 has been made the messaging means 170 will notify the copier 90 so that the copier updates the local memory 100 with the new list as stored in the storage device 80.

Hence when the client computer requests a machine address for the generic server computer name the conversion means 70 accesses the list in memory 100 and identifies a machine address just as it would if any other server computer name had been given. However in this instance the machine address actually relates to the server computer in the cluster which has been identified by the decision logic as the most suitable (eg. least heavily loaded). When this machine address is passed back to the client computer 20 via the output means 110, the client computer will proceed to automatically access the server which is most suitable.

By this approach it will be seen that a dynamic load levelling facility is provided which is completely transparent to the client program. As far as the program is concerned it is requesting a machine address as normal and is using one of the normal TCP/IP access methods to gain access to the server computer allocated to it.

In many of todays computing environments (eg Unix, AIX (Unix is a Trade Mark of Unix Systems Laboratories Inc)) an application is provided to perform the standard name resolution service (ie receipt of a computer name and conversion of that computer name into a full Internet address). This application is commonly known as a "nameserver" application, and is installed on one or more computers in the logical network. Every other computer in the network is told to communicate with a specified one of these 'nameserver' computers when it wishes to determine an Internet address for any other computer in the network. Hence a nameserver computer provides a resolution service to client computers by receiving from them a convenient name given to a particular computer (eg. abc.def.ghi.com), and converting it into a full Internet address (eg. 29.1.19.66). This Internet address is then used by the routing subsystem (TCP/IP) to allow a client user or application access to the physical computer (eg "abc" in this example).

In the above example of a computer name, "abc" is the physical machine, "def" is typically the site location, "ghi" the organisation, and "com" one of the Internet classes (three such classes are (com)mercial, (edu)cation, (mil)itary). Domains and sub-domains can also be added as part of this computer name. Basically the name takes a hierarchical form, with the finest resolution at the beginning and the coarsest resolution at the end; this type of naming structure will of course be well known to those skilled in the art.

All TCP/IP-based applications, including remotelogin, remote-shell, telnet, ftp, and also dient-server applications (such as database applications), are aware of the nameserver facility, and will automatically go to the designated nameserver computer to ask for resolution of a computer name into an Internet address before attempting to make a connection to another computer in the network.

If we consider Figure 1 again, the standard nameserver facility will include the following elements: the input means 30, the conversion means 70 with associated memory 100, the output means 110, the list stored in the storage device 80, and the copier 90.

The nameserver application is a "daemon" (background) process which runs on the data processing system; this data processing system may (but need not) be one of the server computers forming part of the cluster over which users are to be distributed. In Unix-type operating systems (eg. AIX by IBM Corporation, Ultrix by Digital Equipment Corporation, OSF/1 by the Open Software Foundation, and HP-UX by Hewlett Packard, etc) this daemon process is called "named" (name-daemon), and when it is initialised, it reads a special database file (named.data) stored on the storage device 80 to obtain details of the computer names about which it is expected to know (over which it has "authority"), and the corresponding Internet addresses ("dotted decimal", e.g. 29.1.19.66) for each computer name. Whilst the name daemon is operating, it can be forced to re-read the information from the named.data database file by the sending of an inter-process signal to the name daemon process telling it to update its internal tables 100 from the database file (named.data).

In the preferred embodiment of the present invention we provide a further facility which runs on the same computer as the nameserver application ("named"), and interfaces with it. A 'generic' computer name is introduced into the database file (named.data), which refers not to one specific computer, but to any one of a number of computers offering equivalent functionality. For example, the generic name might be "server.cluster.def.ghi.com"; a client program requesting a connection to 'server.cluster' is requesting connection to any one of the computers in the server cluster.

The further facility provided by the preferred embodiment will be referred to hereafter as the "User Load Leveller" (ULL) application. This application is responsible for deciding which server computer in the cluster is currently the least heavily loaded, according to some appropriate metric, and for conveying this information to the nameserver application. Then subsequent requests for resolution of the generic server

10

15

20

25

30

35

40

45

50

computer name to an Internet address result in the nameserver application sending back to the client computer the Internet address of the server computer which has been deemed to be the most appropriate server computer for connection at that point in time.

9

The ULL application consists of the following elements from figure 1: the decision logic 120 with child processes 130, 140, 150; the writing means 160; and the messaging means 170. As described earlier with reference to Figure 1 the ULL application periodically (at a frequency which can varied (eg. tuned by a system administrator or dynamically adjusted)) polls the server computers in the cluster to determine how "busy" in some sense they are. The metric used may vary, depending on the type of work which is being handled by the cluster, but may for example include the number of login sessions, number of application instances running, number of idle cpu cycles since the last poll, etc. The metric can be altered to ensure that it is appropriate to a specific situation.

Based on the results of this polling, and taking into account the situation where a server computer in the cluster is too busy to respond to the status request within a certain number of seconds, the ULL application decides which machine is currently the least heavily loaded. The ULL application then modifies the database file (named.data) to associate the generic cluster machine name with the Internet address of this least heavily loaded machine, and sends the special inter-process signal via the messaging means 170 which tells the nameserver application to re-read its database file. The nameserver application will then, in response to a name resolution request from a client program, resolve the generic server computer name into the Internet address of the most appropriate server computer in the cluster for the client program to connect to.

The process carried out by the decision logic 120 of the preferred embodiment will now be described in more detail with reference to Figure 2. At step 200 the ULL application is initialised. A number of steps are carried out at initialisation. For example the application: checks for multiple copies of the ULL application in memory; cleans up from a previous run of the application (by freeing up system resources such as memory, locks and semaphores still held in the name of the previous instance of the ULL application); and locates the nameserver application (named) and its data file (named.data). The ULL application then parses its configuration file to read information defined by the system administrator, such as the metric strings, poll periods, identities of server computers in the cluster, etc. Further the ULL application generates a number of "child" processes - one per server computer - which are each responsible for polling the activity of one designated server.

Once the initialisation has been completed the process enters a main loop which executes until the

ULL application is terminated. At steps 210, 220, 230 and 240 the child processes send a metric string (as defined by the system administrator) to each server computer in the cluster, await responses from those computers, and then wait for a trigger signal from the main ULL application.

Once the trigger signal has been sent by the main application the responses are sent by the child processes to the main application. The main application then collates the activity results received from the child processes (step 250), and based on predetermined test criteria identifies the most appropriate server computer (the "least busy" server computer) at step 260. At step 270 it is determined whether the server computer identified at step 260 differs from the current nominated server computer. If it does then the process advances to step 290, at which point the nameserver's data file (named.data) is modified. Further at step 300 a notification signal is sent to the nameserver application (named) to tell it to update its internal information from the data file.

The process then proceeds to step 280. If at step 270 it is determined that the server computer identified at step 260 is the same as the current nominated server computer then the process moves straight to step 280 without steps 290 and 300 being carried out. Writing to and reading from the data file are time consuming activities and so steps 290 and 300 should only be performed when necessary (ie when the "least busy" server computer changes).

At step 280 the process waits until the end of the "poll period". This period is the predetermined interval (as defined by the system administrator) between successive studies of the server computers by the ULL application. Once the poll period has expired the process loops back to steps 210-240 and the main loop is repeated.

Having discussed the preferred embodiment a few possible alterations will now be discussed. Firstly more than one generic server computer name can be added to the list in storage device 80 (the named.data file). Each generic name could be associated with a particular group of server computers, these groups being either completely separate or having a few server computers common to a plurality of the groups. Indeed one group may be a subset of another group. As an example consider Figure 3. A server cluster 410 comprises eight server computers 400. All eight server computers have access to a main body of data, but only four of them have access to some further (possibly more confidential) data.

In this situation two generic names could be generated, eg. "general.cluster" and "specific.cluster". Any one of the eight computers (enclosed by ring 430) can be associated with the former generic name, but only the four enclosed by ring 420 can be associated with the latter generic name, since only those four have access to the further (confidential) data.

6

10

15

20

25

30

35

40

45

50

55

The system administrator can then set up the metric string to be used when studying all eight server computers, or when studying only the four in ring 420; the metric string could be the same in both instances but need not be. If a client application needs access to the confidential information then it would request access to "specific.cluster", but if an application only needed access to the general information then it would request access to "general.cluster".

11

By this approach an application which only needs access to the general information will always be connected to the least busy server computer, whilst an application which needs access to the further (confidential) information will be given the machine address of the least busy server computer that can actually provide the necessary service; this may or may not be the least busy server computer in the network.

In preferred embodiments a further feature is provided to enable the decision logic to temporarily implement a "round-robin" metric instead of the above described 'studying' process. The round-robin principle will be familiar to those skilled in the art; basically when a client application requests access to a server computer it is assigned a particular server computer, and when the next request is received then that application is assigned the next server computer in the cluster, and so on. In this way the server computers are rotated so that each successive server access is made on a different server computer to the previous server access. Alternatively the server computers can be rotated at fixed time intervals rather than after each access request.

Although the round-robin technique does not have regard to the loading on any of the server computers, and so there is no determination of the least busy server computer, there are certain situations (eg. where there are lots of client applications which only take a short amount of database connection time) where a round-robin approach is acceptable. To implement the round robin approach the decision logic 120 would ask the writing means 160 to update the storage device 80 after each access request has been handled (or at fixed time intervals if the alternative approach is used), so that the generic name is always associated with successive server computers in the cluster in turn.

From the above description it will be clear that the system of the preferred embodiment has a number of advantages. Firstly the technique dynamically allocates new client users and applications to the server computer which is least heavily loaded at the time they make the connection, thus ensuring an even distribution of users and applications across all of the available server computers. The client computer only briefly contacts the data processing system of the preferred embodiment to resolve the generic computer name into a machine address. Completely standard access methods (eg. as provided by TCP/IP) are

then used to make the connection, thus avoiding any proprietary protocols or any need to modify access methods or applications, and so providing fully transparent user load levelling.

Secondly the technique of the preferred embodiment does not involve any modification to the nameserver code - the User Load Leveller application interfaces with the standard code (eg. "named" as shipped with the unix/AIX operating system). It would be possible to provide similar functionality to that described here by producing a modified version of the nameserver code. However, avoiding this brings major advantages from both marketing and maintenance points of view.

Further the technique can be operated without requiring any modification to the server computers. They are accessed in a standard way after the generic server computer name has been used to provide the client computer with a machine address.

Another advantage is that the key parameters, such as the time interval between polls of the server computers in the cluster and the metric used to determine which server computer is least heavily loaded, can be altered and tuned by a local system administrator, allowing the system to be optimised for a particular situation.

The above described ULL application could be supplied as a separate tool to enhance the useability of parallel and distributed systems, or could be shipped with the nameserver application.

Claims

A data processing system for facilitating a connection of a program on a client computer to a server, the server consisting of a plurality of server computers with shared resources, the data processing system, the client computer, and the server computers residing in a network, the system comprising:

input means for receiving a request from the client computer for a machine address of a server computer identified by a server computer name sent with the request, such a machine address enabling a connection to be made from the client computer to that server computer via the network:

a storage device for storing a list identifying server computer names with machine addresses of the server computers;

conversion means for using the list to convert the server computer name received by the input means into the machine address of the server computer:

output means for sending the machine address from the conversion means to the client computer;

10

15

20

25

30

35

40

45

50

55

the system being characterised by:

decision logic for studying the server computers at predetermined intervals having regard to predetermined test criteria, in order to select one of the server computers; and writing means for updating the list by associating the machine address for the server computer selected by the decision logic with a particular server computer name contained as a generic server computer name in the list;

whereby when a client computer specifies the generic server computer name, it receives the machine address of the server computer identified by the decision logic.

2. A system as claimed in Claim 1 further comprising:

a copier to copy the list from the storage device to a piece of memory accessible by the conversion means;

a messaging means, responsive to the updating of the list by the writing means, for sending a message to the copier requesting the copier to copy the updated list into the piece of local memory.

- 3. A system as claimed in Claim 1 or Claim 2, wherein the predetermined test criteria are such that the decision logic identifies the server computer having the least number of client programs logged on to it.
- 4. A system as claimed in any of claims 1 to 3, wherein the predetermined intervals are variable.
- A system as claimed in any preceding claim, wherein the predetermined test criteria are set by a user of the system.
- A system as claimed in any preceding claim, wherein the user can limit the number of server computers which the decision logic studies.
- 7. A system as claimed in any preceding claim wherein a plurality of generic names are used, each one having a number of server computers whose machine addresses are associated with that generic name, the decision logic employing different sets of predetermined test criteria for each generic name.
- A system as claimed in Claim 7, wherein one or more of the server computers are associated with a plurality of the generic names.
- A method of operating a data processing system to facilitate a connection of a program on a client computer to a server, the server consisting of a

plurality of server computers with shared resources, the data processing system, the client computer, and the server computers residing in a network, the method comprising the steps of:

(a) receiving a request from the client computer for a machine address of a server computer identified by a server computer name sent with the request, such a machine address enabling a connection to be made from the client computer to that server computer via the network;

(b) storing a list identifying server computer names with machine addresses of the server computers in a storage device;

(c) converting, with reference to the list, the server computer name received at step (a) into the machine address of the server computer;

(d) sending the machine address identified at step (c) to the client computer;

the method being characterised by the steps of:

 (e) employing decision logic to study the server computers at predetermined intervals having regard to predetermined test criteria, in order to select one of the server computers; and

(f) updating the list by associating the machine address for the server computer selected by the decision logic with a particular server computer name contained as a generic server computer name in the list;

whereby when a client computer specifies the generic server computer name at step (a), it receives the machine address of the server computer identified by the decision logic.

 A method as claimed in Claim 9 further comprising the steps of:

copying the list from the storage device to a piece of memory accessible at the conversion step (c);

repeating, in response to the updating of the list at step (f), the copying step to ensure that the updated list is copied into the piece of local memory.

- A method as as claimed in claim 9 or claim 10, wherein the predetermined intervals are set by a user of the system.
- 12. A method as claimed in any of claims 9 to 11, wherein the predetermined test criteria are set by a user of the system.
- 13. A method as claimed in any of claims 9 to 12, wherein the user can limit the number of server computers which the decision logic studies.