

**PLASMA AND HIGH FREQUENCY PROCESSES
FOR OBTAINING AND PROCESSING MATERIALS
IN THE NUCLEAR FUEL CYCLE**

I.N. Toumanov

Nova Science Publishers, Inc.
New York

Senior Editors: Susan Boriotti and Donna Dennis
Coordinating Editor: Tatiana Shohov
Office Manager: Annette Hellinger
Graphics: Wanda Serrano
Editorial Production: Vladimir Klestov, Matthew Kozlowski and Maya Columbus
Circulation: Ave Maria Gonzalez, Vera Popovic, Luis Aviles, Raymond Davis, Melissa Diaz and Jeannie Pappas
Communications and Acquisitions: Serge P. Shohov
Marketing: Cathy DeGregory

*Library of Congress Cataloging-in-Publication Data
Available Upon Request*

ISBN 1-59033-009-9

Copyright © 2003 by Nova Science Publishers, Inc.
400 Oser Ave, Suite 1600
Hauppauge, New York 11788-3619
Tele.: 631-231-7269 Fax: 631-231-8175
e-mail: Novascience@earthlink.net
Web Site: <http://www.novapublishers.com>

All rights reserved. No part of this book may be reproduced, stored in a retrieval system or transmitted in any form or by any means: electronic, electrostatic, magnetic, tape, mechanical photocopying, recording or otherwise without permission from the publishers.

The authors and publisher have taken care in preparation of this book, but make no expressed or implied warranty of any kind and assume no responsibility for any errors or omissions. No liability is assumed for incidental or consequential damages in connection with or arising out of information contained in this book.

This publication is designed to provide accurate and authoritative information with regard to the subject matter covered herein. It is sold with the clear understanding that the publisher is not engaged in rendering legal or any other professional services. If legal or any other expert assistance is required, the services of a competent person should be sought. FROM A DECLARATION OF PARTICIPANTS JOINTLY ADOPTED BY A COMMITTEE OF THE AMERICAN BAR ASSOCIATION AND A COMMITTEE OF PUBLISHERS.

Printed in the United States of America

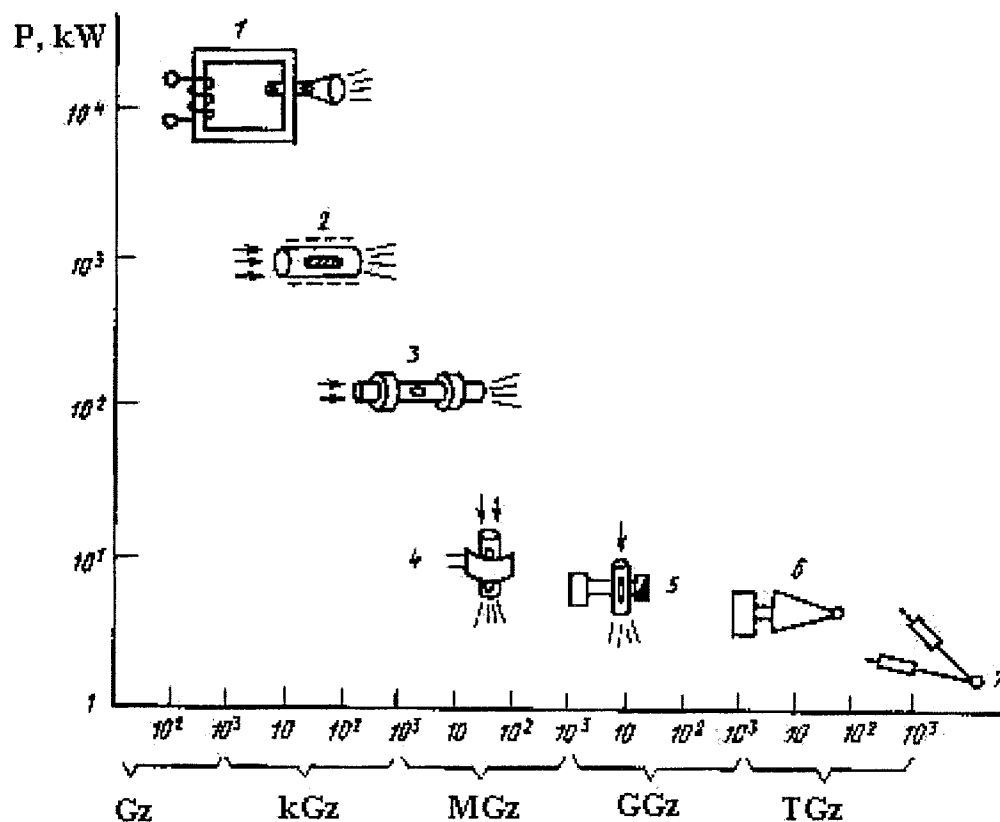


Fig. 2.38. Distribution of the frequency discharges in the frequency ranges of the electromagnetic spectra and the power levels to be specific for various discharges: 1 – transformer; 2 – high frequency inductive (HFI); 3 – high frequency capacitive (HFC); 4 – ultra short – wave (USW); 5 – microwave (MW); 6 – spatial microwave (SMW); 7 – laser.

2.12. OPTICAL DISCHARGES.

For generation of the optical discharges energy is fed into the plasma with the use of a laser beam concentrated at any location of the volume isolated from the environment by the appropriate casing or without it [16]. The scheme of the experiment for excitation of an optical discharge is shown in Fig. 2.39. The discharge burns in the focal point or close to it if the energy flux is enough for it. As the energy source, a CO_2 - laser was used generating radiation in the infrared range of the electromagnetic spectra. The absorption coefficient of the light radiation in plasma falls abruptly with raising frequency. Therefore the generation of the optical discharge in the visible light frequency range would require a power greater than that of CO_2 lasers by a factor of $10^2 - 10^3$.

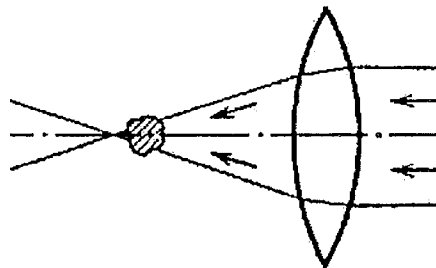


Fig. 2.39. Scheme of the experiment for sustaining continuous optical discharge: the plasma cluster is shifted somewhat from the focal point towards the laser beam source.