




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>6</sup> : <b>H04Q 7/22, G08C 17/02, H04M 11/00</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 99/49680</b> (43) International Publication Date: 30 September 1999 (30.09.99)</p>
<p>(21) International Application Number: PCT/US99/06429 (22) International Filing Date: 24 March 1999 (24.03.99) (30) Priority Data: 60/079,215 24 March 1998 (24.03.98) US (63) Related by Continuation (CON) or Continuation-in-Part (CIP) to Earlier Application US 60/079,215 (CIP) Filed on 24 March 1998 (24.03.98) (71) Applicant (for all designated States except US): BELLSOUTH INTELLECTUAL PROPERTY CORPORATION [US/US]; Suite 510, 824 Market Street, Wilmington, DE 19801 (US). (72) Inventors; and (75) Inventors/Applicants (for US only): WHITLEY, Kevin, T. [US/US]; 5030 Oak Hollow Drive, Acworth, GA 30102 (US). WARFEL, Karl, B. [US/US]; 1296 Pinehurst Road, Greyson, GA 30017 (US). SHAND, Arthur, M. [US/US]; 10881 Big Canoe, Big Canoe, GA 30143 (US). (74) Agents: PRATT, John, S. et al.; Kilpatrick Stockton LLP, Suite 2800, 1100 Peachtree Street, Atlanta, GA 30309-4530 (US).</p>		<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</p>

(54) Title: WIRELESS TELEMETRY METHODS AND SYSTEMS FOR COMMUNICATING WITH OR CONTROLLING INTELLIGENT DEVICES

(57) Abstract

Methods and apparatus are disclosed for remotely monitoring and controlling via a wireless network various devices deployed in homes and businesses. The present invention allows for monitoring and control of various gateways distributed to remotely located facilities to be monitored and the devices coupled to those gateways to be controlled via a wireless communications network. Preferably, the network is a GSM network adapted to provide short messaging services or any type of wireless network adapted to operate a General Packet Radio System for delivering data over the network. Messages are packaged at each gateway for delivery via the network to a destination terminal, whether a fixed terminal or a mobile station. Likewise, customers may forward data and commands to a particular gateway either from a mobile station or by accessing a fixed terminal, such as through an Internet connection. Transporting messages or commands via the short messaging service of the GSM network or via the GPRS protocol avoids the prohibitive cost of setting up a call for each message and avoids the significant capital costs needed to set up a separate communication network for data delivery.

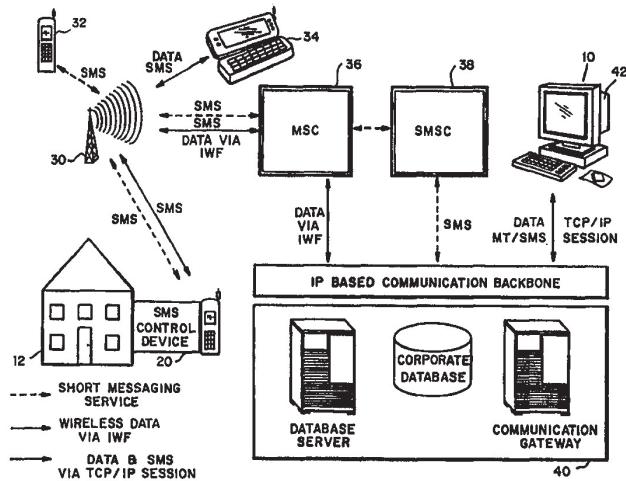

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

**WIRELESS TELEMETRY METHODS AND SYSTEMS FOR  
COMMUNICATING WITH OR CONTROLLING INTELLIGENT DEVICES**

The present invention relates to methods and apparatus for remotely monitoring  
5 and controlling via a wireless network various devices deployed in homes and businesses.

**RELATED APPLICATIONS**

This application claims priority under U.S. law to United States provisional patent  
application 60/079,215, filed March 24, 1998, which application is hereby incorporated in  
10 its entirety by this reference.

**BACKGROUND OF THE INVENTION**

Numerous systems exist for automated, remote monitoring of various appliances,  
including electric utility meters and the like. For instance, systems exist that couple  
15 utility meters to remotely located databases via the wired Public Switched Telephone  
Network ("PSTN") so that the meters can be more efficiently and cheaply read remotely.  
Typically, such meter reading systems couple a database to a gateway that interfaces with  
the meter and, in many cases, other devices in a particular facility or portion thereof.  
These systems, however, are generally one way, sending data from the meter to the  
20 central processor.

Moreover, even when the system provides for two-way or duplex data  
communication that allows commands and other data to be down or up loaded to or from  
the gateway, a complete call must be made between the central processor and the  
gateway. Such calls are expensive, since they involve the full architecture of the PSTN in  
25 delivering the data, even when the amount of data delivered is relatively small. Also, the  
data or commands must be sent to or from a relatively intelligent central processor to  
which few persons will have access. This means, for instance, that customers at whose  
premises gateways are located cannot themselves send data (including commands for  
devices within the premises) to the gateway via the PSTN.

Systems exist that use short bursts of radio transmission to control and receive data from remote power distribution control terminals. For instance, a company called ITRON owns a U.S. Patent No. 5,475,867 to Blum on such a system, albeit a system that uses supplemental controllers for expanding the fairly limited geographical range of the basic system. This system, however, would be expensive to deploy and operate since an essentially new architecture would need to be deployed.

Several companies, such as CellNet Data, Greenland and possibly ITRON, are trialing meter reading systems that use two-way paging, which provides broader geographic coverage. While such a system eliminates the trouble and expense of setting up a separate call each time data must be up or downloaded, paging messages provide limited payload for data, thereby limiting the potential for controlling and updating the gateway. Also, it is unclear whether such systems will allow users to send data and commands to or receive data from the gateway directly and without the need to go through a central processor or control center, which limits the flexibility of the system for users wishing to receive data about their facilities and remotely control various devices at the facility.

### SUMMARY OF THE INVENTION

The present invention overcomes the above problems by providing a system and method for gathering and sending data over an existing wireless network remotely control and monitor various gateways and the devices coupled to those gateways. A system according to the present invention uses multiple gateways that communicate over a wireless communications network capable of carrying digital data. The wireless communications network allows the gateway to send data and receive commands directly from the customer, which could own or manage the facility in which the gateway is located. The customer can send and receive such data via a mobile station or a fixed terminal. Simultaneously or independently, data and commands may be up and down loaded to or from a control center coupled to the wireless network. Thus, the present invention provides a system and methods for providing customers a virtual direct

connection for routing messages to a gateway from a mobile station or fixed terminal, or vice versa.

The present invention uses multiple control and reporting gateways that are deployed in homes, businesses and other facilities. These gateways are configured to collect data, such as data describing use of electric power or other utilities by the particular facility at which they are located or data describing the status of various sensors after arming of a security system. Also, gateways may be coupled to various devices within the facility in order to control the devices. For instance, gateways may control the lights within a facility according to a pre-programmed pattern that the user may change by communicating new commands via the present invention. Or, gateways may be configured remotely to receive commands and data, which allows remote control over the devices (e.g., home appliances or electronics) with which the gateway may communicate. Each uniquely addressable gateway includes a transceiver capable of communicating over a wireless network.

In one embodiment of the present invention, a monitoring and control system may be provided that receives data from gateways on an essentially real time basis and can send data (including commands) to such gateways at any time over a wireless network. This allows for essentially real time monitoring of the facility at which the gateway is located. Preferably, the wireless network will be a GSM ("Global System for Mobile") communications network capable of providing Short Messaging Services ("SMS"). SMS messages allow users of the network and the gateways to send and receive packets of data (about 160 characters) without setting up an actual call connection. Receiving terminals, whether mobile stations, such as handsets or pagers, or fixed terminals, like computer workstations, reassemble one or multiple related SMS message packets into readable messages, such as an e-mail or page.

In another embodiment, the present invention provides a method for uploading a large data file via the wireless network. For such larger files, an actual circuit-switched call is made from the gateway to a central processor coupled to the wireless network's switch or MSC. The central processor includes a controller with a communications

processor and database server. The communications processor sets up a session with the gateway during which the gateway can upload the file via the wireless network. In a wireless network, large files of digital data from the gateway may be moved from the MSC to a destination via the Inter-Working Function ("IWF"). The central processor can  
5 be co-resident with the MSC or coupled to it via another network connection, such as the PSTN or a wireless connection.

An example use for this embodiment involves a program by which the gateway periodically polls the devices it connects to for energy usage rates. Each poll generates a message that is about 100 bytes long. Rather than forwarding each message via the  
10 wireless network to the customer or a database, the gateway aggregates all reads for a particular time period and then uploads the entire file to the central processor via the IWF.

A customer may access the central database in order to determine energy or device utilization at the customer's facility. The database can be coupled to a control system that regularly downloads data and commands to the gateways. In that event, the customer can  
15 also pass instructions to the control system to forward desired commands or new data to the gateway in order to control the devices coupled to it.

An alternative embodiment of the invention takes advantage of the architecture and protocols of the GPRS or General Packet Radio System to deliver data from and commands to gateways. The GPRS protocol provides an architecture and various  
20 interface layers (both hardware and software) for implementing a packet data system across existing wireless networks, regardless of the type of wireless protocol (e.g., TDMA, CDMA, GSM) used by those networks. Certain GPRS protocols for implementing this architecture are described in the following documents, each of which is incorporated in its entirety by this reference: (1) GPRS MS-SGSN LLC, GSM 04.64  
25 (ETSI No. TS 101 351); (2) GPRS MS-SGSN SNDCP, GSM 04.65 (ETSI No. TS 101 297); (3) IW PLMN GPRS-PDN GSM 09.60 (ETSI No. EN 301 347); (4) GPRS PDN, GSM 09.61 (ETSI No. TS 101 348); and (5) Digital Cellular Telecommunications System (Phase 2+): GPRS Project scheduling and open issues, GSM 10.60.

The present invention implements a GPRS over a wireless network, such as a GSM network. Such a network uses base station controllers to route voice communications to the existing wireless system infrastructure, such as MSCs, HLRs and the like. In a GPRS capable network, however, the handshakes generated by wireless devices inform the base stations that a particular transaction is a packet data transaction; in turn, the base stations so inform their base station controller, which can then route the packet data to a support node rather than an MSC and its supporting infrastructure. The support node may communicate with other public wireless or wired networks or with an IP (internet protocol) network. By, for instance, repackaging the wireless data message into an internet packet, the support node interfaces more easily between the base stations and the IP network than existing wireless systems. This protocol may result in not only higher data transmission rates (i.e, larger data payloads than the limited SMS packets), but also in faster data delivery since data transfer does not require signalling to set up connections among network elements.

Whether using GSM short messaging services or GPRS messages to deliver data to and from multiple gateways located throughout a particular region, the present invention performs the following processes:

- Formatting messages for wireless delivery to and from particular or groups of gateways. In an SMS implementation, this may be accomplished at the gateway, which formulates messages to other terminals into a short message format, or, if the message is destined to a particular gateway, at the originating terminal. In a GPRS implementation, the support node places messages in varying formats depending on which network over which they will be transmitted and appropriate to that network. Additionally, as packet data messages are transferred among network elements in the GPRS, information is added or subtracted from the message header depending on the particular stage of intra-network transfer.
- Transmitting the message from the gateway to a network element or vice versa. The Short Messaging Service Control center handles this functionality, since it

is programmed to identify and route SMS messages to their appropriate destination. In the GPRS implementation, transmission is accomplished by first having the base station controllers forward packet data messages to a support node router, which routes the messages to their desired destination.

- 5
- Delivering messages to the user directly or to a central processor for storing and processing. In either implementation, messages may be delivered via an IP network or other public or private communications network.
  - Routing commands or data to one or groups of gateways. The commands or data can be formulated at and sent out by the central processor over either the
- 10
- GPRS or SMS implementation. However, because each gateway is uniquely addressable through, for instance, a phone number, IP address, or similar identifier, the customer can formulate messages or commands that will be routed directly from the customer's mobile station or fixed terminal to the gateway.

15 The present invention accordingly aims to achieve at least one, multiple or all of the following objectives:

To provide a system and method for monitoring in real time and for controlling remotely located gateways;

20 To provide a method for allowing customers to remotely monitor and control devices located in the customer's facility that communicate with a gateway;

To provide a method for allowing customers to receive monitoring information about activities at their facility via a mobile station or a fixed terminal;

25 To additionally provide a method that allows customers to control the gateway and devices coupled to the gateway from their mobile station or a fixed terminal communicating over the wireless network;

To provide a method for customers to forward commands and data to a central processor for delivery to the gateway;



To take advantage of the short messaging service capability of a deployed GSM network to more efficiently provide remote monitoring and control of multiple distributed gateways;

To provide a central processor for receiving monitoring messages from remotely located gateways and aggregating those messages to track activities at the facility associated with a particular gateway; and

To provide methods for customers to access data stored at the central processor.

Other objects, features and advantages of the present invention will become apparent upon reading the rest of this document.

### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows a block diagram of a system according to the present invention that implements various methods for receiving and sending data from and to a selected gateway.

Figure 2 shows a simplified block diagram of the system shown in Figure 1, with labels indicating the functionality of various system components.

Figure 3 shows a block diagram of one embodiment of the system shown in Figure 1 detailing the method and system components used to route SMS messages.

Figure 4 shows a block diagram of an alternative embodiment of a wireless GSM system using the GPRS format and architecture to route data and commands to and from a gateway.

### DETAILED DESCRIPTION OF THE DRAWINGS

#### System Overview: SMS Application

Figure 1 shows a system 10 for implementing the methods of the present invention. System 10 monitors and controls various devices deployed in multiple facilities 12, which could be a home, office building or industrial complex. Each facility 12, or portion thereof, has a gateway 20 that acts as a data collection and control device, as defined

below. Data received from various devices within and associated with facility 12 is packaged by gateway 20 for forwarding via a wireless digital communications network, which may be either a cellular network or a Personal Communication System (“PCS”) network. The system 10 of the present invention aims to route messages from various gateways 20 to terminals. A terminal may be a fixed terminal, such as central processor 40, an ISDN terminal or a workstation 35 (shown in Figure 3), as well as a mobile station.

The phrase “mobile station” means a device for sending and receiving data over a wireless network and includes, for instance, a pager 31, a handset 32 or an internet communicator 34 that may be a Nokia 9000 GSM communicator capable of accessing the internet via a GSM wireless network.

Such a network may have a number of cellular sites, each served by a tower 30 holding a base station and appropriate equipment for receiving and transmitting wireless voice and data messages. Those messages are routed to the appropriate terminal, such as a pager 31, cellular handset 32, cellular internet communicator 34, or workstation 35, by the mobile switching center (“MSC”) 36 that may be a switch provided by Nortel, Lucent, Ericsson or other switch makers. If the messages are Short Messaging Service (“SMS”) messages, MSC 36 receives each SMS message, determines it is an SMS and switches the SMS message to a SMSC (“Short Message Service Center”) 38, which may be a platform, such as one provided by Logica-Aldiscon, Inc., of Lexington Massachusetts, either co-located with the MSC 36 or coupled to it via a communication link. SMSC 38 listens on a socket for SMS messages in order to route received SMS messages to the appropriate destination. Additionally, SMSC 38 receives outgoing SMS messages and reformats those messages for transmission through the MSC 36. Typically, for instance, SMSC 38 may link to MSC 36 via a SS7 data communication link (as shown in Figure 3); SMSC 38 can then route SMS messages to subscribers roaming in other wireless networks via Signal Transfer Points within the SS7 network.

The term “gateway” includes any device that (a) provides a physical interface between internal devices associated with a particular facility 12 and external networks and, optionally, (b) may provide a platform for delivering various services to the facility

12. Thus, gateways 20 may couple to a remote facility 12 and may monitor, control or both monitor and control various devices within the facility 12, such as lights, security sensors, an answering machine, a home computer, etc. For instance, gateway 20 may be a set-top box, personal computer or other device provided with a processor, such as an Intel  
5 386 or 486 processor, and communicates with various, optionally addressable, devices located throughout the facility. Gateway 20, which may be uniquely addressable, also has a wireless transceiver for sending and receiving communications via a digital wireless network.

Additionally, for the embodiment of the present invention that uses a GSM  
10 network, gateway 20 is an integrated GSM enabled communications device programmed to format and manage data packets sent and received via the short messaging service provided by a GSM network, as described further below. Gateway 20 sends and receives SMS messages via and as part of the architecture of a GSM network. For instance, gateway 20 may be a GSM device that allows transfer of data, facsimile or e-mail  
15 messages, but which does not have voice capability. These messages can be formulated and read by a SIM or "Subscriber Identity Module" card that can be plugged in or otherwise incorporated into gateway 20. Gateway 20 is programmed to generate text for an outgoing SMS message, place it in the SIM card of the gateway 20 and initiate the data transfer over the GSM network. Thus, gateway 20 may use bi-directional host computer  
20 to SMSC programming code to control the SIM card interface and the automatic SMS message routing application. The GSM network also delivers messages to the correct location and gateway 20 confirms the accuracy of any received message to the sender. When an SMS message is received at the gateway 20, the gateway 20 reads the SMS message from the SIM card and processes the contents of the SMS message as though it  
25 was entered directly from a command console.

Figure 3 shows the methods and components of system 10 used for formulating and reading SMS messages sent and received by and from SMSC 38 to and from a selected gateway 20. SMSC 38 may be provided with a SMS Application that facilitates sending and monitoring of short messages between an end user and the SMSC 38. The

messages can be generated by using a GUI based front end application or by delivering a message in a pre-defined format to the relational database tables used to store outgoing messages. The SMS Application queues outgoing messages and sends them one at a time to the SMSC 38 for distribution on the GSM network. In turn, the SMSC 38 returns a message indicating the delivery status of the outgoing message. SMSC 38 may communicate over an internet network with e-mail users or over a TNPP network with pagers; likewise, through those networks or the PSTN, users may communicate with the SMSC 38 to formulate and send messages for subscribers. Finally, Figure 3 shows the OSS/LAN support structure for supporting operations of an SMSC 38.

The SMS Application can be configured to receive an SMS message from the SMSC 38. In this configuration, the SMSC 38 will receive a message from the GSM network and forward it via a direct connection to the SMS Application rather than initiating a message transfer to another mobile station or terminal via the GSM network. Through the incorporation of a fully bi-directional message transfer system, a wireless end user may (a) receive messages and initiate responses via the GSM network to control devices attached to gateway 20 or (b) update the application database directly. Thus, as Figure 2 indicates, DCS Messaging software, developed by BellSouth Mobility, and deployed on the central processor 40 may be programmed to perform at least the following tasks:

- **Front End Client Application** - This task enables end users to input a text message, up to 190 bytes, and send the message directly to the SMSC 38 for distribution across the GSM network. A graphical user interface or GUI allows for flexible, intuitive input and output. After entry of messages, this application updates the Database (such as databases provided by the Oracle Corporation) Tables with the message data.
- **Database Tables** - This task stores outgoing text messages, message status for inquiry and resolution and routing information for the

message. The database tables can be populated by the front end client application or directly from another server process.

- **Message Server** - This task mediates between various Database Tables and the socket used for communicating with the SMSC 38. It will query Database Tables for new outgoing messages and query the SMSC 38 to check the status of existing messages, which are routed to central processor 40 for storage in the Database Tables.
- **Socket Layer** - This task performs the bi-directional communication between the Message Server and the SMSC.

10 An API on workstation 42 accesses the DCS Messaging software, which acts as a server to provide the GUI that allows input of new messages into the central processor 40.

Alternatively, by reconfiguring MSC 36 to route SMS messages and reconfiguring gateway 20 to listen for such messages, the system 10 could be configured so that SMS messages go directly to the gateway 20 without passing through a SMSC 38. Such distributed message delivery eliminates possible routing errors at SMSC 38. A central processor 40 may also receive or be copied on the messages from gateway 20 to handset 32 or communicator 34. On the other hand, this distributed architecture would be substantially more expensive and complex, requiring dedicated SS7 links between MSC 36 and each of gateways 20, which also would have to be provided with software to enable SMS routing throughout the network.

#### Methods for Delivering SMS Messages

In one embodiment of this invention, the wireless network is a GSM network represented by tower 30, pager 31, handset 32, communicator 34, and MSC 36, which may be a Nortel switch running GSM. This network provides integrated voice and enhanced digital services, including e-mail or SMS to the user's mobile station, which may also have integrated voice mail, caller ID functions, a fax mailbox, etc. The GSM standard defines a short messaging service, which allows users of the network to send and receive short data messages, usually in the form of alphanumeric text. Such messages can be sent and received even during an on-going communication session. SMS messages

may be configured for delivery to a particular identified terminal, such as handset 32, or they may be broadcast throughout a specific geographical area by using the SMS cell broadcast feature. This broadcasting function, described in the GSM 03.41 and GSM 04.11 that are incorporated herein by this reference, is useful for reprogramming multiple gateways 20 simultaneously or warning customers at various facilities 12 of particular events in their geographic area (e.g., a weather warning or the like).

A system 10 using a GSM network allows SMS messages with a payload of about 160 bytes or characters to be sent at 9600 Baud from a gateway 20 to a terminal via a GSM network and supporting sub-components. A GSM network supports multiple points of origin or destination of the SMS messages, allowing for two-way communication among terminals and gateways 20, each of which are provided with a unique identifier, such as a phone number or an IP address. Significantly, this architecture allows data communications among gateways 20 and mobile stations, like pager 31, handsets 32 and communicator 34, or fixed terminals, through virtual direct connections among all of those devices using the GSM network and supporting sub-components for transport. This provides a virtual point-to-point connection via the GSM network, and the SMS messages may or may not be sent to or through the central processor 40. By taking advantage of the SMS services provided in a GSM network, the network functionality required for forwarding short data messages to and from gateways 20 need not be developed from scratch.

By way of example, assume that gateway 20 monitors facility 12 for energy usage data or alarms indicating a security breach as well as communicates with various electronic devices, such as an electronic thermostat or lights. The digital GSM network allows gateway 20 to periodically upload a SMS message, providing essentially real time monitoring of energy usage at the particular facility 12. For instance, the GSM network may allow message uploading as frequently as every 5 minutes. Gateway 20 could be programmed to provide periodic (e.g., hourly) reports on energy usage. If a security sensor coupled to gateway 20 triggers, gateway 20 could be configured to package and transmit, usually on a priority basis, a SMS message indicating a breach in security, as

well as other data including the date and time, the location of the facilities, or the location of the sensor.

In another embodiment of this invention, a microcell may be provided for very large facilities 12, such as industrial complexes, manufacturing facilities, distribution facilities or the like. A microcell allows persons within a large facility 12 to communicate with one another and the gateway 20 for that facility 12 via handsets 32. Such communications may be routed via MSC 36. For instance, such a microcell would provide the facility 12 with a wireless PBX, wireless data connectivity to corporate databases or wireless internet access.

#### 10 Methods for Delivering Data via the IWF

An alternative embodiment of the invention allows gateway 20 efficiently to upload a large file of information to the central processor 40. By way of example, gateway 20 could have been instructed to poll devices coupled to it throughout the day to determine their energy usage. Then, instead of immediately reporting the results of each poll, gateway 20 buffers the information within memory for uploading to central processor 40 on command or at a preselected time. If the file is fairly large, rather than forwarding the file by sending one or multiple SMS messages that would need to be reassembled, gateway 20 has the capability to upload the file via an Inter Working Function (IWF) protocol. To do so, gateway 20 sets up a call to central processor 40, during which call gateway 20 packages and forwards the file via the IWF protocol. Although uploading data via the IWF transfer process uses a more expensive voice channel rather than a data channel, it allows faster upload of large files.

#### Delivery of Data via GPRS

Figure 4 shows a wireless network 100 provided with GPRS functionality. Network 100 is a GSM network, but could utilize other protocols, including TDMA, CDMA or the like so long as those networks operate the General Packet Radio System ("GPRS") protocols. Network 100 has multiple towers 30 coupled to multiple base stations ("BTS") 52, each controlled by a base station controller ("BSC") 50. BSC 50 has been modified to route calls to MSC 36, communicating with a conventional HLR