



US008544136B2

(12) **United States Patent**  
**Kraemer et al.**

(10) **Patent No.:** **US 8,544,136 B2**  
(45) **Date of Patent:** **\*Oct. 1, 2013**

(54) **AUTOMOBILE WINDSHIELD WIPER BLADE**  
(75) Inventors: **Godelieve Kraemer**, Huegelsheim (DE);  
**Juergen Mayer**, Gaggenau (DE)  
(73) Assignee: **Robert Bosch GmbH**, Stuttgart (DE)  
(\* ) Notice: Subject to any disclaimer, the term of this  
patent is extended or adjusted under 35  
U.S.C. 154(b) by 0 days.  
  
This patent is subject to a terminal dis-  
claimer.

(21) Appl. No.: **13/553,094**  
(22) Filed: **Jul. 19, 2012**

(65) **Prior Publication Data**  
US 2012/0284949 A1 Nov. 15, 2012

**Related U.S. Application Data**  
(60) Continuation of application No. 13/179,132, filed on  
Jul. 8, 2011, and a continuation of application No.  
12/364,092, filed on Feb. 2, 2009, now Pat. No.  
8,099,823, which is a division of application No.  
11/760,394, filed on Jun. 8, 2007, now Pat. No.  
7,484,264, which is a division of application No.  
10/312,279, filed as application No. PCT/DE02/01336  
on Apr. 11, 2002, now Pat. No. 7,228,588.

(30) **Foreign Application Priority Data**  
Apr. 26, 2001 (DE) ..... 101 20 467

(51) **Int. Cl.**  
**B60S 1/38** (2006.01)  
(52) **U.S. Cl.**  
USPC ..... **15/250.201**; 15/250.43  
(58) **Field of Classification Search**  
USPC ..... 15/250.43, 250.44, 250.451-250.454,  
15/250.201, 250.361  
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS  
2,687,544 A 8/1954 Scinta  
2,814,820 A 12/1957 Elliott et al.

(Continued)

FOREIGN PATENT DOCUMENTS  
DE 1028896 4/1958  
DE 1077540 3/1960

(Continued)

**OTHER PUBLICATIONS**

International Search Report dated Aug. 19, 2002, European Patent  
Office, International Application No. PCT/DE02/01336 published  
Jul. 11, 2002.



*Primary Examiner* — Gary Graham

(74) *Attorney, Agent, or Firm* — Michael Best & Friedrich  
LLP

(57) **ABSTRACT**

An automobile windshield wiper blade has an elongated belt-  
shaped, flexible resilient support element, on the lower belt  
surface which faces the windshield and has an elastic rubber  
wiper strip extending along the windshield parallel to the  
longitudinal axis. A wind deflection strip on the upper belt  
surface has an incident surface facing the direction of driving  
wind. The deflection strip extends longitudinally, and has two  
sides that diverge from a common base point as seen in cross  
section, such that the incident surface is located at one exte-  
rior side and the wind deflection strip has a constant cross  
section along its entire length. The support element has outer  
edges, and the sides of the wind deflection strip have respec-  
tive free ends that have respective claw-like extensions that  
grip the outer edges of the support element, wherein the wind  
deflection strip can be snapped or slid longitudinally onto the  
outer edges.

**21 Claims, 2 Drawing Sheets**

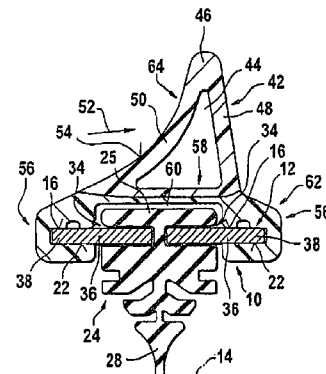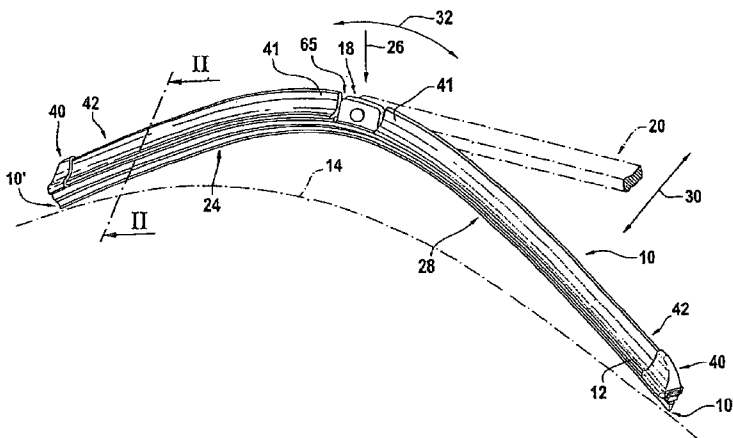

(56)

References Cited

FOREIGN PATENT DOCUMENTS

U.S. PATENT DOCUMENTS					
2,983,945	A	5/1961 DePew	DE	1247161	8/1967
3,084,372	A	4/1963 Krohm	DE	1505357	5/1969
3,088,155	A	5/1963 Smithers	DE	2336271	7/1973
3,107,384	A	10/1963 Wise	DE	2344876	3/1974
3,116,507	A	1/1964 Scinta	DE	2440179	8/1974
3,116,509	A	1/1964 Contant et al.	DE	2311293	9/1974
3,121,133	A	2/1964 Mathues	DE	2839587	3/1980
3,317,945	A	5/1967 Ludwig	DE	29611722	11/1997
3,386,123	A *	6/1968 Oishei et al. .... 15/250.452	DE	19627114	1/1998
3,418,679	A	12/1968 Barth et al.	DE	19627115	1/1998
3,427,637	A	2/1969 Quinlan et al.	DE	19650159	6/1998
3,626,544	A	12/1971 Lopez et al.	DE	19734843	2/1999
3,636,583	A	1/1972 Rosen	DE	19736368	2/1999
3,673,631	A *	7/1972 Yamadai et al. .... 15/250.201	DE	19802451	7/1999
3,785,002	A	1/1974 Quinlan et al.	DE	19856300	6/2000
3,818,536	A *	6/1974 Plisky ..... 15/250.453	DE	10000373	8/2001
3,879,793	A	4/1975 Schlegel et al.	EP	0316114	5/1989
3,881,214	A	5/1975 Palu	EP	0624133	2/1993
3,925,844	A *	12/1975 Cone ..... 15/250.44	EP	0646507	4/1995
3,958,295	A	5/1976 Green et al.	EP	0930990	7/1999
4,360,943	A	11/1982 Thompson et al.	FR	2199302	4/1974
4,683,606	A	8/1987 Sharp	FR	2679185	1/1993
5,052,072	A	10/1991 Chen	GB	1222648	2/1971
5,493,750	A	2/1996 Bollen et al.	GB	1269993	4/1972
5,546,627	A	8/1996 Chen	GB	1429820	3/1976
5,933,910	A	8/1999 Buechele et al.	GB	2036547	7/1980
6,192,546	B1	2/2001 Kotlarski	GB	2106775	4/1983
6,279,191	B1	8/2001 Kotlarski et al.	GB	2336293	10/1999
6,292,974	B1	9/2001 Merkel et al.	GB	2346318	8/2000
6,588,048	B2	7/2003 Ohyama	JP	6219467	2/1987
6,675,434	B1	1/2004 Wilhelm et al.	JP	6222172	2/1987
6,944,905	B2	9/2005 De Block et al.	JP	2001502638	2/2001
6,978,512	B2	12/2005 Dietrich et al.	WO	WO 9850261	11/1998
7,228,588	B2	6/2007 Kraemer et al.	WO	WO 9902383	1/1999
7,484,264	B2	2/2009 Kraemer et al.	WO	WO 99/12784	3/1999
8,099,823	B2	1/2012 Kraemer et al.	WO	WO 0034090	6/2000
2001/0008034	A1	7/2001 Merkel et al.	WO	WO 0149537	7/2001
2003/0014828	A1	1/2003 Edner-Walter et al.	WO	WO 0192073	12/2001

\* cited by examiner


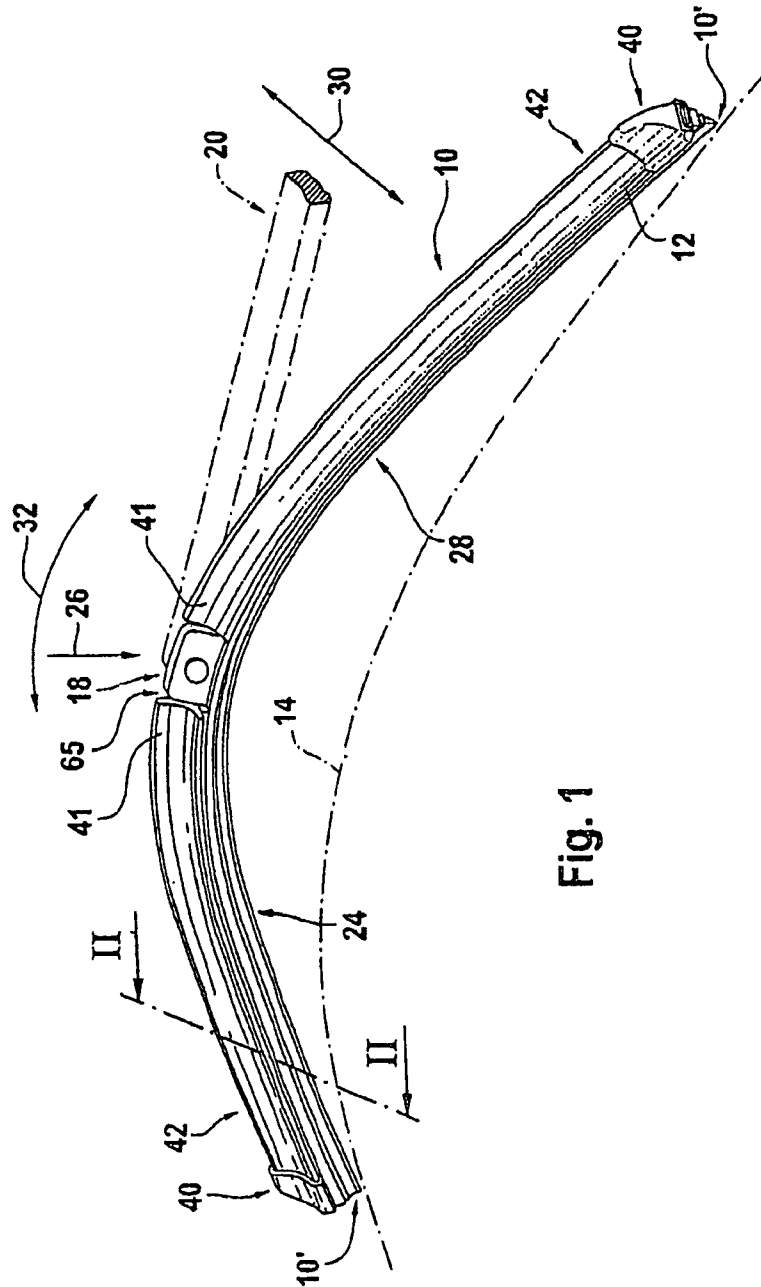


Fig. 1

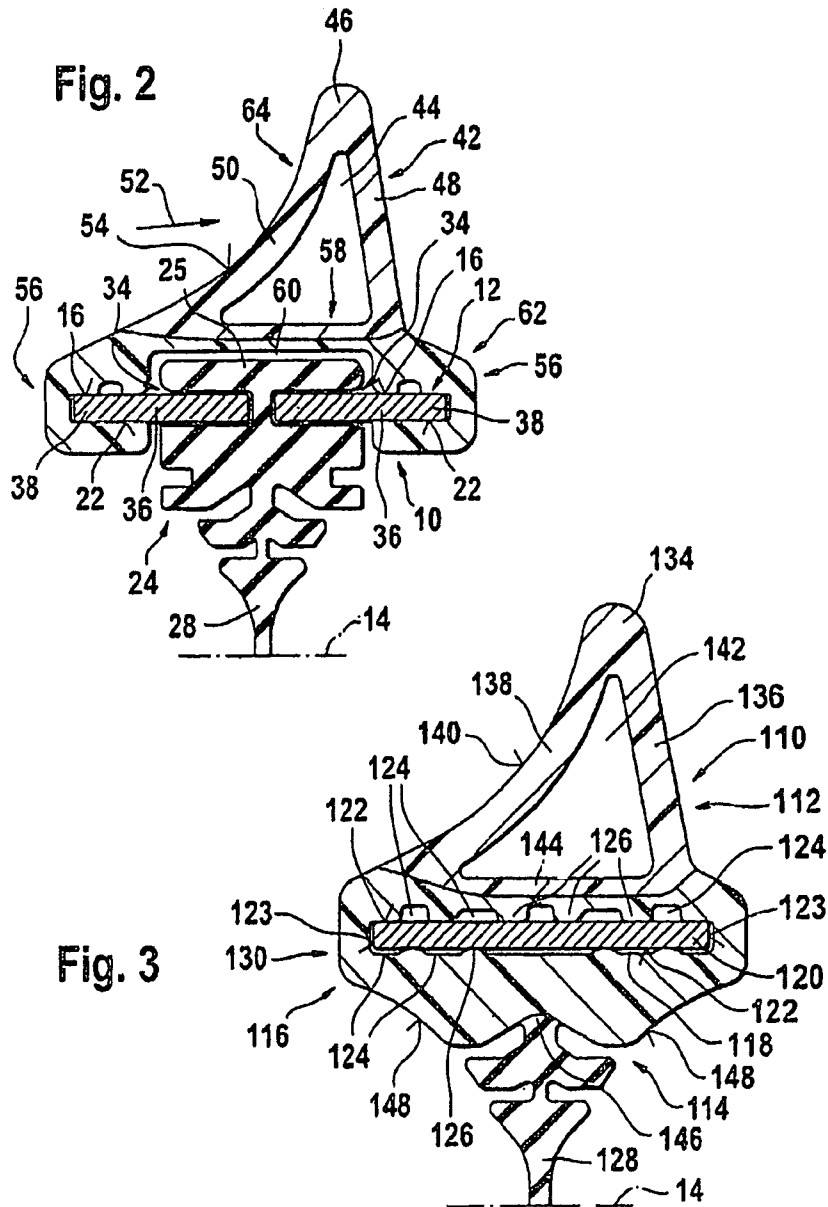

## AUTOMOBILE WINDSHIELD WIPER BLADE

## RELATED APPLICATION

This application is a continuation of co-pending U.S. application Ser. No. 13/179,132, filed Jul. 8, 2011, which is a continuation of U.S. application Ser. No. 12/364,092, filed Feb. 2, 2009, now U.S. Pat. No. 8,099,823, which is a divisional of U.S. application Ser. No. 11/760,394, filed Jun. 8, 2007, now U.S. Pat. No. 7,484,264, which is a divisional of U.S. application Ser. No. 10/312,279, filed Jul. 29, 2003, now U.S. Pat. No. 7,228,588, which is a national stage filing under 35 U.S.C. 371 of International Application No. PCT/DE2002/001336, filed Apr. 11, 2002, which claims foreign priority to German Patent Application No. 10120467.1, filed Apr. 26, 2001, the entire disclosure of each of which are hereby incorporated by reference.

## BACKGROUND

In wiper blades with a spring-action support element, the support element is intended to guarantee as even a distribution of wiper blade pressure onto the windshield issued from the wiper arm as possible, and over the entire wipe field swept by the wiper blade. By appropriately bending the unloaded support element into shape—the unloaded state being when only the two ends of the wiper blade sit against the windshield—the ends of the wiper strip, which sits completely against the windshield when the wiper blade is in operation, are pushed toward the windshield by the loaded support element, even if the radii of curvature of spherically curved vehicle windshields change with the wiper blade position. The curvature of the wiper blade must therefore be somewhat greater than the maximum curvature measured within the wipe field on the windshield to be wiped. This is because during wiping, the wiper strip, or its wiping lip that sits against the windshield, must be continuously pressed against the windshield with a specific force. The support element thus replaces the expensive stirrup design with two flexible rails located in the wiper strip, as is practiced in conventional wiper blades (DE-OS 15 05 257) since the support element provides the necessary cross-stiffening of the elastic rubber wiper strip in addition to providing a distribution of pressure. Specifically, in the known wiper blade the contact force directed toward the windshield that is exerted by a wiper arm onto a main stirrup is conveyed to two claw-like stirrups and distributed from these onto the elastic rubber wiper strip via four claws. The two flexible rails of this wiper blade mainly provide a cross-stiffening of the wiper strip between the claws when the wiper blade is pushed across the windshield perpendicular to its longitudinal length.

## SUMMARY OF THE INVENTION

In a prior art wiper blade of this type (DE 197 36 368.7), the wiper blade is provided with a so-called wind deflection strip in order to produce a force component directed toward the windshield to counteract the tendency of the wiper blade to lift off of the windshield due to the airflow at high vehicle speeds. To this end, the wind deflection strip has a leading edge during the pendulum wiping motion that is mainly impacted by the driving wind, said leading edge being designed as an incident surface. The cross section of the wind deflection strip has approximately the shape of a right triangle, one leg of which directly opposite the support element

motion of the wiper blade and with the surface of the windshield. The triangle profile used requires a relatively large amount of material to manufacture the wind deflection strip, which is reflected in the costs of the wiper blade. Moreover, the weight of the wiper blade becomes undesirably high. Specifically, the increased mass to be accelerated in the pendulum wiping motion requires a more powerful drive system as well as a more expensive design of pendulum gear attached to it. Furthermore, the action of the support element and of the wiper blade can be adversely affected by the bending stiffness, which depends on its profile, of a wind deflection strip thus formed.

In the wiper blade according to the invention, the weight of the wind deflection strip is considerably reduced due to the cross sectional structure of an angular profile. Moreover, in addition to the material savings, there is a reduction in the moving mass along with the advantages with respect to the design of the drive system and the pendulum gear as a result. Also, the bending stiffness of the wind deflection strip is reduced, thus considerably reducing its influence on the bending and spring behavior of the wiper blade support element. For more detailed shapes, this wind deflection strip can be manufactured both as an injection molded part as well as using the simple, and thus cost effective, extrusion process.

In a further development of the invention, at least one support means is placed between the two sides of the wind deflection strip at a distance from their common base point, said support means stabilizing the sides. This provides a certain degree of stiffening even when using a relatively soft material for the manufacture of the wind deflection strip, which provides the necessary form stability of the wind deflection strip even at a high wind loads.

What is helpful here is that the support means is made up of a wall that extends in the longitudinal direction of the wind deflection strip that is connected to both sides, said wall extending along the entire length of the wind deflection strip, if necessary.

If the support element is made up of two flexible rails, each of which sits in a longitudinal notch associated with it, respectively, said longitudinal notches being open toward the opposite lateral sides of the wiper strip, and if the outer strip edges of each of said flexible rails extend out of these notches, the support means are positioned at a distance from the support element. This results in a space between the wiper strip and the support means into which the area of the wiper strip located above the support element can extend. By correspondingly dimensioning this space, undesired friction between the wiper strip and the wind deflection strip is prevented.

In another embodiment of the concept of the invention, the free ends of the sides of the wind deflection strip are provided, respectively, with claw-like extensions that grip tightly around these exterior strip edges of the support element at least in sections. This provides the ability to snap the wind deflection strip onto the exterior edge or to push it onto this edge in the longitudinal direction. This makes it possible to do away with a glued connection between the wind deflection strip and the support element. A glued connection of this type can limit the flexibility of the support element needed to attain a satisfactory wipe result due to its stiffness.

In the process, it can be advantageous if the wind deflection strip is designed as a binary component whose longitudinal area provided with the claw-like extensions is made of a harder material than the longitudinal area lying closer to the base. In this way, the longitudinal area of the wind deflection

# Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

## Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

## Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

## Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

## API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

## LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

## FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

## E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.