



US006529634B1

(12) **United States Patent**
Thyagarajan et al.

(10) **Patent No.:** **US 6,529,634 B1**
(45) **Date of Patent:** ***Mar. 4, 2003**

(54) **CONTRAST SENSITIVE VARIANCE BASED
ADAPTIVE BLOCK SIZE DCT IMAGE
COMPRESSION**

OTHER PUBLICATIONS

- (75) Inventors: **Kadayam Thyagarajan**, San Diego, CA (US); **Michael J. Merritt**, San Diego, CA (US)
- (73) Assignee: **Qualcomm, Inc.**, San Diego, CA (US)
- (*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

“A fully adaptive DCT based color image sequence coder”, Chen, Rong-Jian et al., Signal Processing Image Communication, vol. 6, No. 4, Aug. 1, 1994, pp. 289–301.*

“Adaptive block-size transform coding for image compression,” Javier Bracamonte et al., 1997 IEEE International Conference on Acoustics, Speech, and Signal Processing, 1997, ICASSP-97, vol. 4, 1997, pp. 2721–2724.*

Vaisey J. et al.; “image Compression With Variable Block Size Segmentation”; IEEE Transactions on Signal Processing, US, IEEE, Inc. NY vol. 40, No. 8, pp. 2041, 2044, 2047, and 2048; Aug. 1, 1992.

This patent is subject to a terminal disclaimer.

- (21) Appl. No.: **09/436,085**
- (22) Filed: **Nov. 8, 1999**

* cited by examiner

(51) **Int. Cl.**⁷ **G06K 9/36; H04N 1/415**

Primary Examiner—Wenpeng Chen

(52) **U.S. Cl.** **382/239; 382/240; 358/433**

(74) *Attorney, Agent, or Firm*—Philip Wadsworth; Gregory D. Ogrod; Sandip S. Minhas

(58) **Field of Search** **382/239, 240, 382/248, 232, 253; 358/433, 261.2, 426.14; 375/240.02, 240.11, 240.2, 240.24**

(57) **ABSTRACT**

(56) **References Cited**

A system and method for image compression utilizing adaptively sized blocks and sub-blocks of discrete cosine transform coefficient data is presented. A block size assignment element in the encoder selects the block or sub-block of an input block of pixels to be processed. The selection is based on the variance of pixel values. Blocks with variances larger than a threshold are subdivided, while blocks with variances smaller than a threshold are not subdivided. A transform element transforms the pixel values of the selected blocks into the frequency domain. The frequency domain values may then be quantized, serialized, and variable length coded in preparation for transmission.


U.S. PATENT DOCUMENTS

- 5,107,345 A 4/1992 Lee 382/250
- 5,241,395 A * 8/1993 Chen 358/426.14
- 5,452,104 A * 9/1995 Lee 358/433
- 5,455,680 A * 10/1995 Shin 382/239
- 5,471,248 A 11/1995 Bhargava et al. 375/240.24
- 5,585,944 A 12/1996 Rodriguez 358/500
- 5,724,451 A 3/1998 Shin et al. 382/240
- 5,903,669 A * 5/1999 Hirabayashi 382/232

FOREIGN PATENT DOCUMENTS

DE 19503571 A1 * 3/1996 H04N/7/26

35 Claims, 3 Drawing Sheets

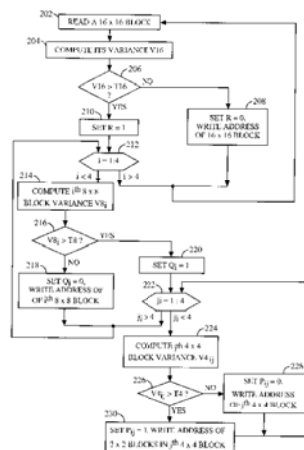

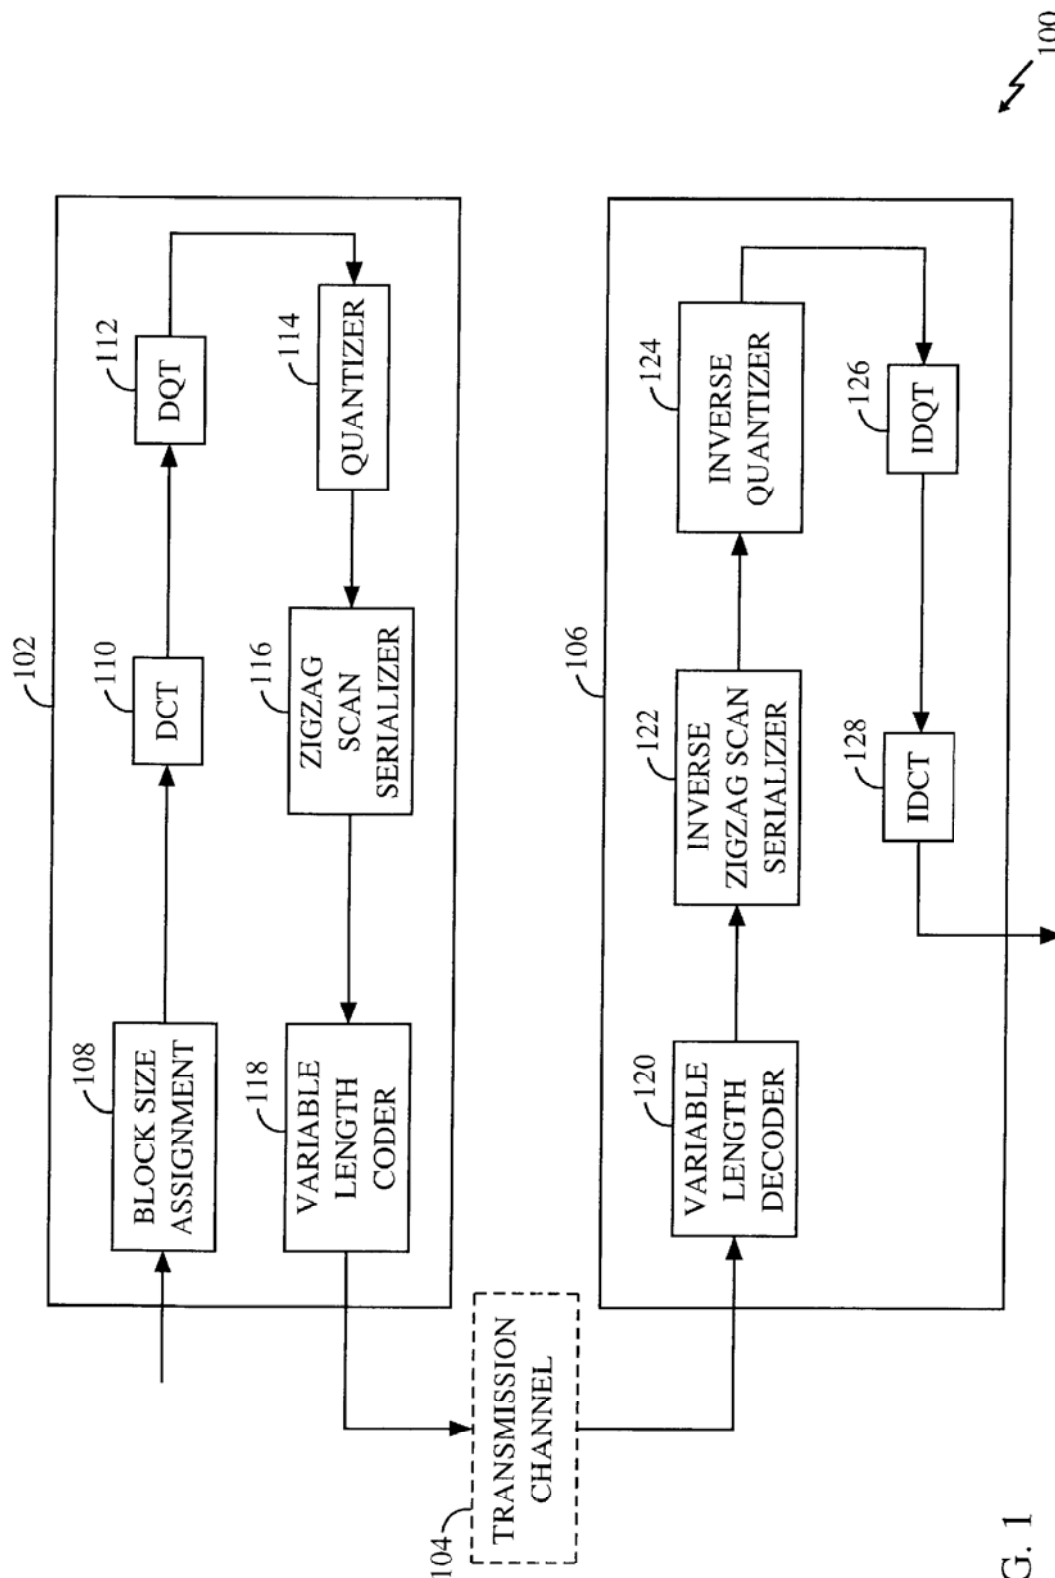


FIG. 1

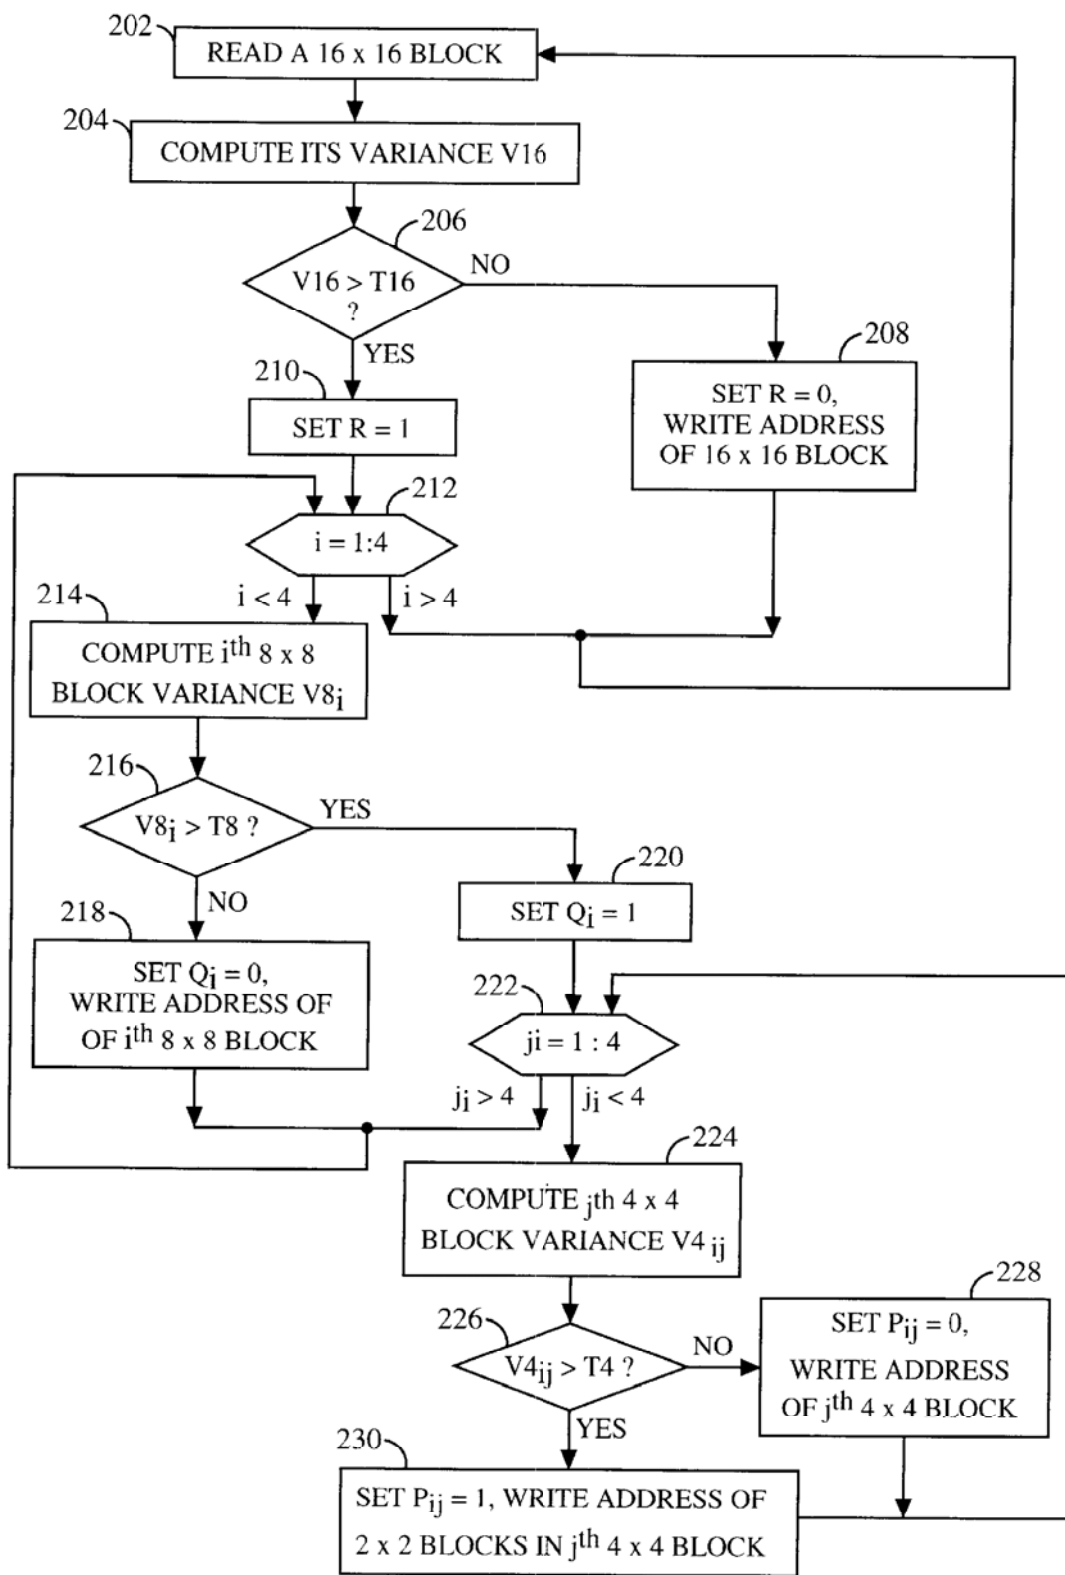


FIG. 2

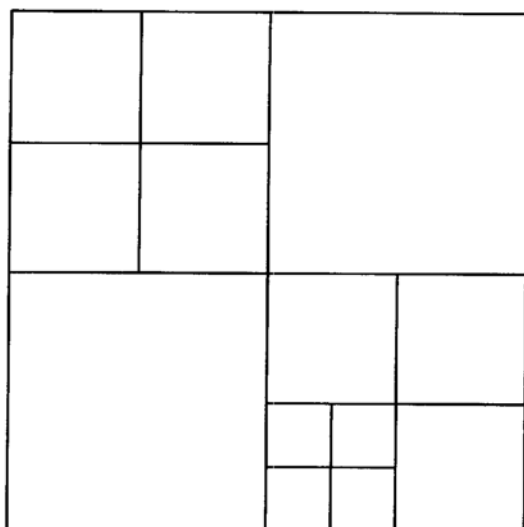


FIG. 3A


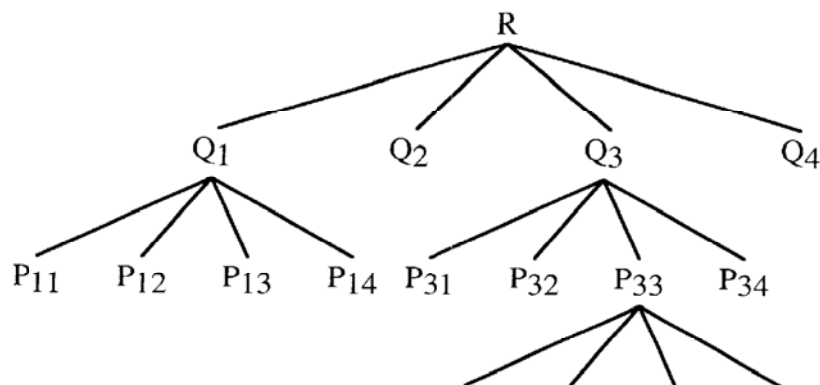


FIG. 3B



PQR DATA

FIG. 3C

**CONTRAST SENSITIVE VARIANCE BASED
ADAPTIVE BLOCK SIZE DCT IMAGE
COMPRESSION**

BACKGROUND OF THE INVENTION

I. Field of the Invention

The present invention relates to image processing. More specifically, the present invention relates to a compression scheme for image signals utilizing adaptively sized blocks and sub-blocks of encoded discrete cosine transform coefficient data.

II. Description of the Related Art

In the field of transmission and reception of video signals such as are used for projecting "films" or "movies", various improvements are being made to image compression techniques. Many of the current and proposed video systems make use of digital encoding techniques. Digital encoding provides a robustness for the communications link which resists impairments such as multipath fading and jamming or signal interference, each of which could otherwise seriously degrade image quality. Furthermore, digital techniques facilitate the use signal encryption techniques, which are found useful or even necessary for governmental and many newly developing commercial broadcast applications.

High definition video is an area which benefits from improved image compression techniques. When first proposed, over-the-air transmission of high definition video (or even over-wire or fiber-optical transmission) seemed impractical due to excessive bandwidth requirements. Typical wireless, or other, transmission systems being designed did not readily accommodate enough bandwidth. However, it has been realized that compression of digital video signals may be achieved to a level that enables transmission using reasonable bandwidths. Such levels of signal compression, coupled with digital transmission of the signal, will enable a video system to transmit with less power with greater immunity to channel impairments while occupying a more desirable and useful bandwidth.

One compression technique capable of offering significant levels of compression while preserving the desired level of quality for video signals utilizes adaptively sized blocks and sub-blocks of encoded Discrete Cosine Transform (DCT) coefficient data. This technique will hereinafter be referred to as the Adaptive Block Size Differential Cosine Transform (ABSDCT) method. This technique is disclosed in U.S. Pat. No. 5,021,891, entitled "Adaptive Block Size Image Compression Method And System," assigned to the assignee of the present invention and incorporated herein by reference. DCT techniques are also disclosed in U.S. Pat. No. 5,107,345, entitled "Adaptive Block Size Image Compression Method And System," assigned to the assignee of the present invention and incorporated herein by reference. Further, the use of the ABSDCT technique in combination with a Differential Quadtree Transform technique is discussed in U.S. Pat. No. 5,452,104, entitled "Adaptive Block Size Image Compression Method And System," also assigned to the assignee of the present invention and incorporated herein by reference. The systems disclosed in these patents utilizes what is referred to as "intra-frame" encoding, where each frame of image data is encoded without regard to the content of any other frame. Using the ABSDCT technique, the achievable data rate may be reduced from around 1.5 billion bits per second to approximately 50 million bits per second without discernible degradation of the image quality.

The ABSDCT technique may be used to compress either a black and white or a color image or signal representing the image. The color input signal may be in a YIQ format, with Y being the luminance, or brightness, sample, and I and Q being the chrominance, or color, samples for each 4x4 block of pixels. Other known formats such as the YUV or RGB formats may also be used. Because of the low spatial sensitivity of the eye to color, most research has shown that a sub-sample of the color components by a factor of four in the horizontal and vertical directions is reasonable. Accordingly, a video signal may be represented by four luminance components and two chrominance components.

Using ABSDCT, a video signal will generally be segmented into blocks of pixels for processing. For each block, the luminance and chrominance components are passed to a block interleaver. For example, a 16x16 (pixel) block may be presented to the block interleaver, which orders or organizes the image samples within each 16x16 block to produce blocks and composite sub-blocks of data for discrete cosine transform (DCT) analysis. The DCT operator is one method of converting a time-sampled signal to a frequency representation of the same signal. By converting to a frequency representation, the DCT techniques have been shown to allow for very high levels of compression, as quantizers can be designed to take advantage of the frequency distribution characteristics of an image. In a preferred embodiment, one 16x16 DCT is applied to a first ordering, four 8x8 DCTs are applied to a second ordering, 16 4x4 DCTs are applied to a third ordering, and 64 2x2 DCTs are applied to a fourth ordering.

The DCT operation reduces the spatial redundancy inherent in the video source. After the DCT is performed, most of the video signal energy tends to be concentrated in a few DCT coefficients. An additional transform, the Differential Quad-Tree Transform (DQT), may be used to reduce the redundancy among the DCT coefficients.

For the 16x16 block and each sub-block, the DCT coefficient values and the DQT value (if the DQT is used) are analyzed to determine the number of bits required to encode the block or sub-block. Then, the block or the combination of sub-blocks that requires the least number of bits to encode is chosen to represent the image segment. For example, two 8x8 sub-blocks, six 4x4 sub-blocks, and eight 2x2 sub-blocks may be chosen to represent the image segment.

The chosen block or combination of sub-blocks is then properly arranged in order into a 16x16 block. The DCT/DQT coefficient values may then undergo frequency weighting, quantization, and coding (such as variable length coding) in preparation for transmission.

Although the ABSDCT technique described above performs remarkably well, it is computationally intensive. Thus, compact hardware implementation of the technique may be difficult. An alternative technique that would make hardware implementation more efficient is desired. An image compression method and system that is more computationally efficient is provided by the present invention in the manner described below.

SUMMARY OF THE INVENTION

The present invention is system and method of image compression that utilizes adaptively sized blocks and sub-blocks of Discrete Cosine Transform coefficient data. In one embodiment, a 16x16 block of pixels is input to an encoder. The encoder comprises a block size assignment element, which segments the input block of pixels for processing. The block size assignment is based on the variances of the input

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.