

Near infrared drying of pharmaceutical thin films: experimental analysis of internal mass transport

S. Le Person^{a,b}, J.R. Puiggali^{a,*}, M. Baron^b, M. Roques^a

^a *Laboratoire de Génie des Procédés de Pau (EAD 1932), ENSGTI, rue Jules Ferry, 64000 Pau, France*

^b *Centre Poudres et Procédés, ENSTIMAC, 81013 Albi Cedex 09, France*

Received 8 December 1997; received in revised form 11 March 1998; accepted 11 March 1998

Abstract

Thin polymer films are produced for pharmaceutical purposes from a solution in water and polar solvent. These coatings contain also a heavy solvent with the active substance as solute. A global analysis is presented here of the drying rate in terms of average content for each component, i.e. water, heavy solvent and active substance. The results are used to better the global drying process. The quality of the final product imposes to know the local distribution of the key products. The use of Laser Scanning Confocal Microscopy (LSCM) on two molecules is proposed here; the active substance and the heavy solvent. Combining the two set of results, one is able to determine the cases of maldistribution of the active substance and of eventual crystallisation which in turn will have consequences on storage and successful transdermal delivery of the drug. © 1998 Elsevier Science S.A. All rights reserved.

Keywords: Drying kinetics; Coating; Selectivity; Laser Scanning Confocal Microscopy

1. Introduction

Modern industries produces more and more thin polymer films and coatings for many purposes, e.g. adhesives, varnishes and paints. In the pharmaceutical industry some films are used in patches for transdermal drug delivery. Drying is the essential unit operation necessary to form the final product. In all cases, mastering of process variable and microscopic aspects of the product quality entails chemical and process engineering and transport phenomena as basic sciences.

After preparation, the coating mixture is spread on a web and submitted to drying in a tunnel or an oven. Frequently, impinging jets and Infra Red Radiation [1] accomplish the work in a short drying time (100 s as an order of magnitude). In the end, one must be sure that the selected process and its conditions is able to ensure the right product quality; a limited remanence of the process solvent (generally a mixture of volatile solvents) and a given quality product [2], i.e. physical and chem-

ical homogeneity and an appropriate distribution of active substance.

The tools to design the correct process are pilot plant experiments, bench scale experiments and modelisation of transfers. In this paper, small scale experiments were opted for and an experimental approach of internal transfers. Evidently, the diffusional approach of complex systems containing two immiscible solvents, a shrinking polymeric macromolecule network and an active substance, cannot be tracked from the basic text-book equations. What is modelisable is already intuitively and/or experimentally known. It would take a lot of basic investigation on simpler systems to make a substantial progress on the only problem of cross diffusivities [3]. For all those reasons it has been suggested, in this paper, to track the internal distribution of some key products by Laser Scanning Confocal Microscopy (LSCM). Adding an integral chemical analysis of the film, one is then able to quantify the absolute distribution for films produced under variable conditions.

After few other investigators [4,5], the use of LSCM for films was advocated because this technique eliminates all informations in the depth but the one from a specific plane. By moving vertically the sample or the

* Corresponding author. Tel.: +33 597 22080; fax: +33 559 722081; e-mail: jean-rodolphe.puiggali@univ-pau.fr

Table 1
Typical wet composition of the coating

	Acrylic polymer (Pol)	Light solvents			Active phase	
		SI ₁	SI ₂	SI ₃	Excipient heavy solvent (E)	Active substance (PA)
Molecular weight		18 (water)	46	76	190	340
Typical composition (100 g)	52	38	3	4	2	1

objective, one gets a resolution of ca. 1 μm . Not all the molecules are susceptible to be excited by laser beam but we were fortunate to have two in our sample and could then reconstruct all interesting distribution.

The release kinetics of a drug by application onto the skin depends on the appropriate distribution of the drug which in turn depends on the drying process. Hence the selection of a process is based upon the thermosensitivity of the active substance and a homogeneous treatment of the film [6]. It appeared that after a rapid screening that SIR plus convection was the best solution. It is proposed in this paper to validate this first guess by an analysis in depth of the product quality.

2. Materials and experiences

2.1. Product composition

The coating mixture is constituted of: (1) an acrylic adhesive polymer (Pol); (2) three light solvents (SI_i); (3) one heavy solvent named hereafter excipient (E); (4) one pharmaceutical active substance (AS) reputedly soluble in E. As excipient is essential to the administration of the drug, the drying process must evacuate the light solvent and preserve a maximum amount of E, hence the selectivity requirement. A typical wet coating composition is given in Table 1 together with the molecular weight of the essential products.

The final composition of the coating for each of the solvents, excipient and active substance is also part of the industrial target, the mass distribution within the thickness of the coating was added to this ordinary constraint; these two pieces of information have to be analysed as selective drying. Moreover during drying process the thermal degradation of the active substance must be avoided.

2.2. Experimental set-up

In order to substantiate the choice of the best heat supply mode with respect to drying time and quality, the coating drying were studied by convection, conduction, medium and short infra-red respectively (MIR and

with convection. Experiments were carried out in a laboratory set-up mainly composed of two parts, the drying cell and the wind tunnel (see Fig. 1):

- the wind tunnel is a conventional drying rig where temperature ($T_{\infty\text{db}}$), velocity (U_{∞}), and humidity (Y_{∞}), of air are controlled,
- in the drying cell the sample weight is continuously recorded; depending on the combined heat supply, a heated slab (T_c), non heated in the case of pure convection, can support the sample (conduction) or an infrared emitter (MIR or SIR) can irradiate (P_{IR}) from a given height (h) the sample.

Operating conditions for the different experiments to qualify quality with respect to heat supply are summarised in Table 2.

2.3. Drying kinetics

During those experiments the mass of the sample is either continuously recorded or acquired at regular intervals. Moreover the average composition is determined on partially dried coatings by means of chromatographic analysis and coulometry. Then, each point of a curve corresponds to a separate drying experiment carried out at least twice. The initial coating thickness for all the tests was 200 μm .

Drying kinetics reported on Fig. 2 show that the initial drying velocity with infrared is about twice the velocity with other heating modes. Source thermal inertia affects greatly the first two points of the MIR drying curve bringing an abnormal delay. Between conduction and SIR the latter one is far more preferable.

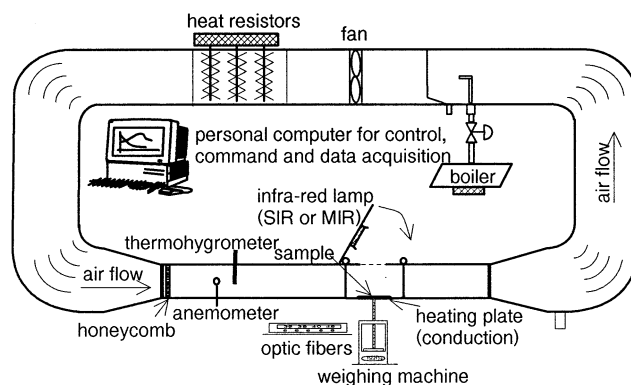


Table 2
Typical wet composition of the coating

Heat supply	Operating conditions
IRC	$P_{IR} = 170 \text{ W}$; $h = 5 \text{ cm}$; $U_{\infty} = 2 \text{ m/s}$; $T_{\infty db} = 30^{\circ}\text{C}$; $T_{\infty wb} = 18^{\circ}\text{C}$
IRM	$P_{IR} = 140 \text{ W}$; $h = 6 \text{ cm}$; $U_{\infty} = 2 \text{ m/s}$; $T_{\infty db} = 30^{\circ}\text{C}$; $T_{\infty wb} = 18^{\circ}\text{C}$
Conduction	$T_c = 60^{\circ}\text{C}$; $U_{\infty} = 4 \text{ m/s}$; $T_{\infty db} = 65^{\circ}\text{C}$; $T_{\infty wb} = 44^{\circ}\text{C}$
Pure convection	$U_{\infty} = 4 \text{ m/s}$; $T_{\infty db} = 75^{\circ}\text{C}$; $T_{\infty wb} = 36^{\circ}\text{C}$

Analytical results on films show that the various heating processes can be classified by the remaining ratio of solvents to dry matter $(Sl_i + E)/Pol$, by the ratio of heavy solvent to water E/SI_1 and by the drying time. In Table 3 it is shown that SIR is vastly preferable in order to keep the heavy solvent inside the product in the minimum drying time. The ratio $(Sl_i + E)/Pol$ is not discriminant.

2.4. Temperature during SIR drying

Although rapid, and quality respectful, the SIR drying might harm the product because of local over heating. In order to evaluate this danger, It was realised that a thermal study of the coating for different infrared powers, for different thickness and coating supports.

Three thermocouples were embedded in a thick coating of 2–15 mm, an extrapolation of the temperature profile towards the irradiated surface permits to evaluate the highest temperature obtained by irradiation for various drying times and constant infrared power (see Fig. 3).

From Fig. 3, one can infer that 65°C is the maximum temperature reached at the end of the drying process and hence nor alteration nor destruction is to be feared


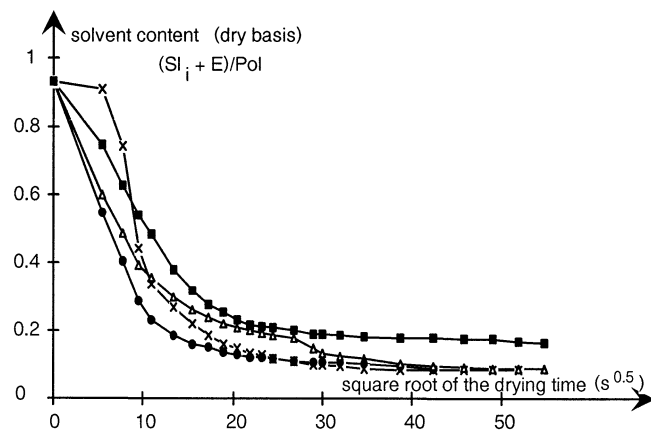


Fig. 2. Drying kinetics of a 200 μm thick coating under four drying different processes: pure convection (\blacksquare), combined process: convec-

Table 3
Final composition indicators for different heating modes

Indicators	SIR	MIR	Conduction	Pure convection
Mass ratio $(Sl_i + E)/Pol$	X	$\approx X$	0.8X	$\approx 0.8X$
Mass ratio E/SI_1	Y	0.9Y	0.5Y	0.6Y
Drying time range				



according to the stability diagram of the active substance. Similar results have been obtained by optic pyrometry on similar coatings (acrylic polymers) by Navarri and Andrieu [7].

It was concluded that SIR drying is the appropriate answer to the drying time and quality constraints.

2.5. Thermodynamic of the active phase

During the drying process the thin layer temperature increases as the solvent contents decrease. At the end of the process the coating is cooled at a given AS mass fraction. All these changes in temperature and composition mass and thermal steps are susceptible to produce active substance crystallisation in the thin film and therefore the final quality of the product might be out of bonds. A good knowledge of solubility behaviour of the active substance in the heavy solvent is necessary to avoid this drawback. An analysis of the solvent mass loss coupled with the coating temperature increase is a good tool to propose drying schedules in relation with dried product quality.

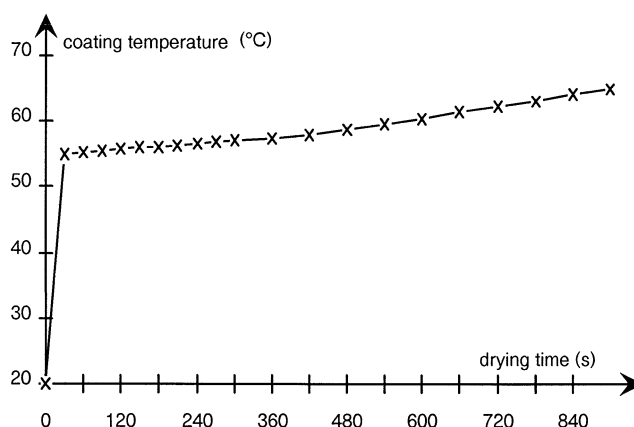


Fig. 3. Averaged temperature of a 100 μm thick coating under Short Infra Red drying (Table 2) obtained by extrapolation of experimental

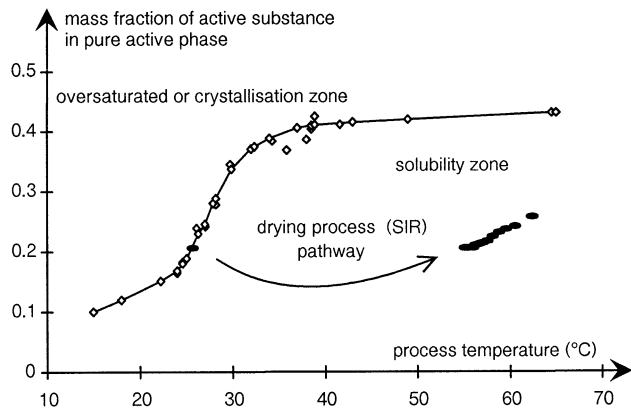


Fig. 4. Active substance solubility curve in the active phase (heavy solvent plus active substance) obtained by cooling of a solution initially at 70°C by air at 15°C.

Solubility of the active substance in the heavy solvent is obtained by cooling (ambient air flow) of the active phase solution at a given mass fraction ($M_{AS}/M_{AS} + M_E$) initially unsaturated and homogenised at 75°C with ultra sounds. A thermocouple placed in the solution allows to follow the temperature evolution and, linked with an observation of active substance crystals through a microscope, the saturation temperature is obtained and the solubility curve plotted (Fig. 4).

On the same graph, the AS mass fraction is plotted versus temperature as the SIR drying process of the heavy phase *E* proceeds. One can notice that no crystallisation problem occurs if the mass fraction is considered in terms of an average value.

In order to show some light on the selective character of the drying operation, purpose of which is not just to remove the moisture, a more accurate study is necessary. Therefore, in relation with the quality and the final product requirements, one has to investigate, more precisely than an average kinetics study, the repartition of the active phase components (heavy solvent and active substance) inside the thin film.

3. Results

3.1. Time evolution of components

In order to follow the evolution in mass of each component during drying, there is only one way; repeat a given experiment as many times as you need an analysis. This regular dosage is carried out by liquid and gas chromatography and also by coulometry, (complete analysis every 30 s); results are given on Fig. 5.

Using the selectivity coefficient S_i of a component *i* in a solution as defined by Riede and Schlünder [8] and

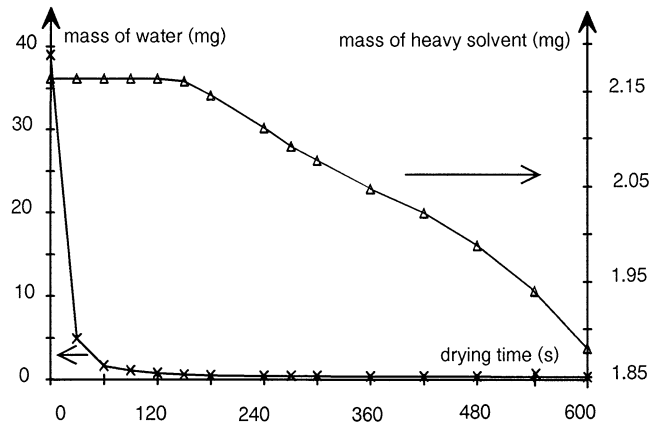


Fig. 5. Mass evolution of each components during drying kinetics of a 100 μm thick coating under Short Infra Red drying process.

$\frac{n_{\text{solvent } i}}{n_{\text{all solvents}}} - x_{\text{solvent } i}$, one can evaluate the drying efficiency with respect to water and heavy solvent. In this last relation, n_i is the evaporative mass flux of solvent *i*, $n_{\text{all solvents}}$ the total evaporative mass flux and x_i the mass fraction of the solvent *i*. As indicated in Fig. 6, where S_{water} and $S_{\text{heavy solvent}}$ are plotted versus drying time, water evaporates preferentially, regarding to the heavy solvent, at the beginning of the drying process. The thin film thickness is also plotted on this figure showing that shrinkage occurs essentially when water (major solvent) intensely evaporates [10,11].

In Fig. 5 the selective character of drying is demonstrated since 99% of the initial water amount is evaporated in 10 min. In the same time only 2.05% of heavy solvent evaporates; this last evaporation is due to the absence of heavy solvent vapour in the drying air. An important practical consequence of this heavy solvent evaporation is that one must shorten the drying time to maintain most of this solvent inside the product.

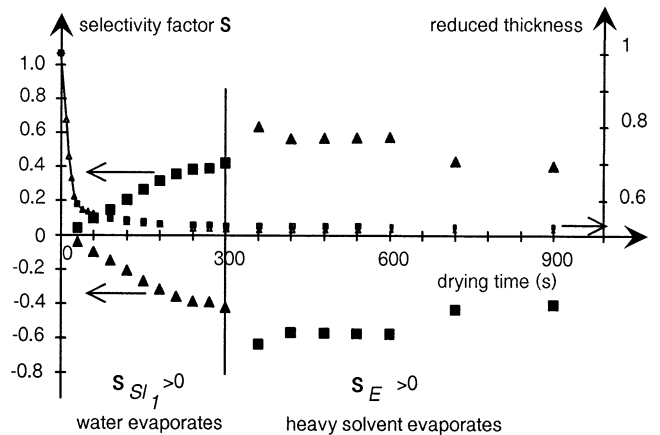


Fig. 6. Selectivity factors for the two major solvents, i.e. water (S_{I_1} ■) and heavy solvent (*E* ▲) during drying of a 100 μm thick coating under Short Infra Red drying process. Indication of the shrinkage in

So far there are only global results that is to say drying curves for each component of the coating. The results are valuable for a good management of the drying operation but failed to give detailed informations on the quality of the product. Again, precise knowledge of the spatial repartition component in the volume is completely necessary to assess the functionality of the final product.

A new non destructive exploration method has been used, tested and validated in order to follow the spatial distribution of the components of the active phase. Laser Scanning Confocal Microscopy (LSCM) can provide this type of informations in as much as the probe molecule is fluorescent under laser beam radiation.

3.2. Spatial evolution of the components

The LSCM allows, without sample preparation, the observation of a given surface called focal surface inside the thickness of the sample, avoiding the destructive slicing, with a much better resolution. Precisely, with a micronic resolution one is able to obtain accurate data on very thin sub-millimetric films.

The principle feature of confocal imaging is that detection is strictly limited to what is in focus; LSCM avoids out-of-focus informations from neighbouring planes.

The substance is irradiated by a laser beam. An intensity of fluorescence, proportional to the quantity of excited substance in the focus plane, is the information in return. Only aromatic molecules and/or elements with double conjugated links are excited by laser beam UV (364) or Visible (633, 543, 488). A map of the average fluorescence relative to the studied component can be obtained on the focus plane. By displacement of the focus plane, one can follow the fluorescence intensity of the component in the thickness of the sample [12].

Studies were carried out, with the help of Dr Catherine Garnier, at the Macromolecule Physico-Chemistry Laboratory (LPCM-INRA) at Nantes (F). All fluorescence measurements were performed using a microscope Axiovert 135M-Zeiss, an UV 364-Microsysteme laser as the excitation source and a SLM-Zeiss as spectrofluorimeter.

A miniature drying ring obviously had to be brought consisting of the infrared lamp and a blower in the vicinity of the LSCM microscope. Each sample was dried, on a glass plate, for a given length of time (5, 10, 15 min) then sealed over by a plastic film, brought to the microscope and analysed for 120 s during which the relaxation processes are unavailable but limited.

In parallel a chemical dosage allows the determination of the total mass of the fluorescent element in the

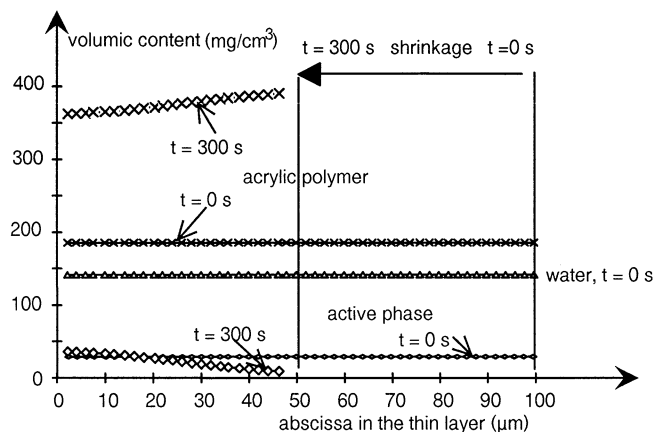


Fig. 7. Volumic contents of the water, active phase and polymer during drying of a 100 μm thick coating under Short Infra Red drying process. Indication of the shrinkage in terms of coating thickness before drying and after 5 min of drying.

fluorescence informations to quantitative data.

Amongst the constitutive elements of the enduction, only the active substance and the heavy solvent can be excited by a UV364 laser beam.

After the disappearance of water from the thin layer, no further shrinkage occurs and the film consists of polymer and active phase (heavy solvent and active component) the volume of which are simply additive.

It is obvious then to calculate the spatial distribution of the polymer, knowing that of the others components.

4. Discussion

Because of the fluorescence of the two constituents of the active phase, an analysis of many preparations, with different concentrations, is necessary before studying the real enduction in order to differentiate the respective impact both of the active substance and of the heavy solvent.

Observations were carried out on enductions after 5, 10 and 15 min of drying. Before drying an observation is made in order to assess the degree of homogeneity of the constituents inside the thin layer.

After a 5 min drying analytical dosages (Fig. 5) show that only three components remain in the layer: (1) acrylic polymer; (2) active substance; and (3) heavy solvent. As the thin layer shrinkage is known (Fig. 6), one can transpose the LCSM data in terms of volumic content fields (Fig. 7). The intense moisture removal, through the exposed surface of the layer to the radiation, during the first 3 min of drying (Fig. 7) produces a stress on the polymer skeleton. This stress increases in the water flow direction and as a result the acrylic polymer becomes more and more dense in the upper part of the layer (exposed surface). This intense shrinkage coupled with the polymer compaction causes a displacement of the active phase towards the bottom of

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.