

Network Working Group  
Request for Comments: 2719  
Category: Informational

L. Ong  
Nortel Networks  
I. Rytina  
M. Garcia  
Ericsson  
H. Schwarzbauer  
L. Coene  
Siemens  
H. Lin  
Telcordia  
I. Juhasz  
Telia  
M. Holdrege  
Lucent  
C. Sharp  
Cisco Systems  
October 1999

## Framework Architecture for Signaling Transport

### Status of this Memo

This memo provides information for the Internet community. It does not specify an Internet standard of any kind. Distribution of this memo is unlimited.

### Copyright Notice

Copyright (C) The Internet Society (1999). All Rights Reserved.

### Abstract

This document defines an architecture framework and functional requirements for transport of signaling information over IP. The framework describes relationships between functional and physical entities exchanging signaling information, such as Signaling Gateways and Media Gateway Controllers. It identifies interfaces where signaling transport may be used and the functional and performance requirements that apply from existing Switched Circuit Network (SCN) signaling protocols.

## Table of Contents

1. Introduction.....	2
1.1 Overview.....	2
1.2 Terminology.....	3
1.3 Scope.....	5
2. Signaling Transport Architecture.....	5
2.1 Gateway Component Functions.....	5
2.2 SS7 Interworking for Connection Control.....	6
2.3 ISDN Interworking for Connection Control.....	8
2.4 Architecture for Database Access.....	9
3. Protocol Architecture.....	10
3.1 Signaling Transport Components.....	10
3.2 SS7 access for Media Gateway Control.....	11
3.3 Q.931 Access to MGC.....	12
3.4 SS7 Access to IP/SCP.....	12
3.5 SG to SG.....	14
4. Functional Requirements.....	15
4.1 Transport of SCN Signaling Protocols.....	15
4.2 Performance of SCN Signaling Protocols.....	17
4.2.1 SS7 MTP Requirements.....	17
4.2.2 SS7 MTP Level 3 Requirements.....	17
4.2.3 SS7 User Part Requirements.....	18
4.2.4 ISDN Signaling Requirements.....	18
5. Management.....	19
6. Security Considerations.....	19
6.1 Security Requirements.....	19
6.2 Security Mechanisms Currently Available in IP Networks.....	20
7. Abbreviations.....	21
8. Acknowledgements.....	21
9. References.....	21
Authors' Addresses.....	22
Full Copyright Statement.....	24

## 1. Introduction

## 1.1 Overview

This document defines an architecture framework for transport of message-based signaling protocols over IP networks. The scope of this work includes definition of encapsulation methods, end-to-end protocol mechanisms and use of existing IP capabilities to support the functional and performance requirements for signaling transport.

The framework portion describes the relationships between functional and physical entities used in signaling transport, including the framework for control of Media Gateways, and other scenarios where signaling transport may be required.

specific SCN signaling protocols.

## 1.2 Terminology

The following are general terms are used in this document:

### Backhaul:

Backhaul refers to the transport of signaling from the point of interface for the associated data stream (i.e., SG function in the MGU) back to the point of call processing (i.e., the MGCU), if this is not local.

### Signaling Transport (SIG):

SIG refers to a protocol stack for transport of SCN signaling protocols over an IP network. It will support standard primitives to interface with an unmodified SCN signaling application being transported, and supplements a standard IP transport protocol underneath with functions designed to meet transport requirements for SCN signaling.

### Switched Circuit Network (SCN):

The term SCN is used to refer to a network that carries traffic within channelized bearers of pre-defined sizes. Examples include Public Switched Telephone Networks (PSTNs) and Public Land Mobile Networks (PLMNs). Examples of signaling protocols used in SCN include Q.931, SS7 MTP Level 3 and SS7 Application/User parts.

The following are terms for functional entities relating to signaling transport in a distributed gateway model.

### Media Gateway (MG):

A MG terminates SCN media streams, packetizes the media data,, if it is not already packetized, and delivers packetized traffic to the packet network. It performs these functions in reverse order for media streams flowing from the packet network to the SCN.

### Media Gateway Controller (MGC):

An MGC handles the registration and management of resources at the MG. The MGC may have the ability to authorize resource usage based on local policy. For signaling transport purposes, the MGC serves as a possible termination and origination point for SCN application

## Signaling Gateway (SG):

An SG is a signaling agent that receives/sends SCN native signaling at the edge of the IP network. The SG function may relay, translate or terminate SS7 signaling in an SS7-Internet Gateway. The SG function may also be co-resident with the MG function to process SCN signaling associated with line or trunk terminations controlled by the MG (e.g., signaling backhaul).

The following are terms for physical entities relating to signaling transport in a distributed gateway model:

### Media Gateway Unit (MGU)

An MG-Unit is a physical entity that contains the MG function. It may contain other functions, esp. an SG function for handling facility-associated signaling.

### Media Gateway Control Unit (MGCU)

An MGC-Unit is a physical entity containing the MGC function.

### Signaling Gateway Unit (SGU)

An SG-Unit is a physical entity containing the SG function.

### Signaling End Point (SEP):

This is a node in an SS7 network that originates or terminates signaling messages. One example is a central office switch.

### Signal Transfer Point (STP):

This is a node in an SS7 network that routes signaling messages based on their destination point code in the SS7 network.

## 1.3 Scope

Signaling transport provides transparent transport of message-based signaling protocols over IP networks. The scope of this work includes definition of encapsulation methods, end-to-end protocol mechanisms and use of IP capabilities to support the functional and performance requirements for signaling.

Signaling transport shall be used for transporting SCN signaling between a Signaling Gateway Unit and Media Gateway Controller Unit. Signaling transport may also be used for transport of message-based

two Signaling Gateway Units connecting signaling endpoints or signal transfer points in the SCN.

Signaling transport will be defined in such a way as to support encapsulation and carriage of a variety of SCN protocols. It is defined in such a way as to be independent of any SCN protocol translation functions taking place at the endpoints of the signaling transport, since its function is limited to the transport of the SCN protocol.

Since the function being provided is transparent transport, the following areas are considered outside the scope of the signaling transport work:


- definition of the SCN protocols themselves.
- signaling interworking such as conversion from Channel Associated Signaling (CAS) to message signaling protocols.
- specification of the functions taking place within the SGU or MGU
- in particular, this work does not address whether the SGU provides mediation/interworking, as this is transparent to the transport function.
- similarly, some management and addressing functions taking place within the SGU or MGU are also considered out of scope, such as determination of the destination IP address for signaling, or specific procedures for assessing the performance of the transport session (i.e., testing and proving functions).

## 2. Signaling Transport Architecture

### 2.1 Gateway Component Functions

Figure 1 defines a commonly defined functional model that separates out the functions of SG, MGC and MG. This model may be implemented in a number of ways, with functions implemented in separate devices or combined in single physical units.

Where physical separation exists between functional entities, Signaling Transport can be applied to ensure that SCN signaling information is transported between entities with the required functionality and performance.

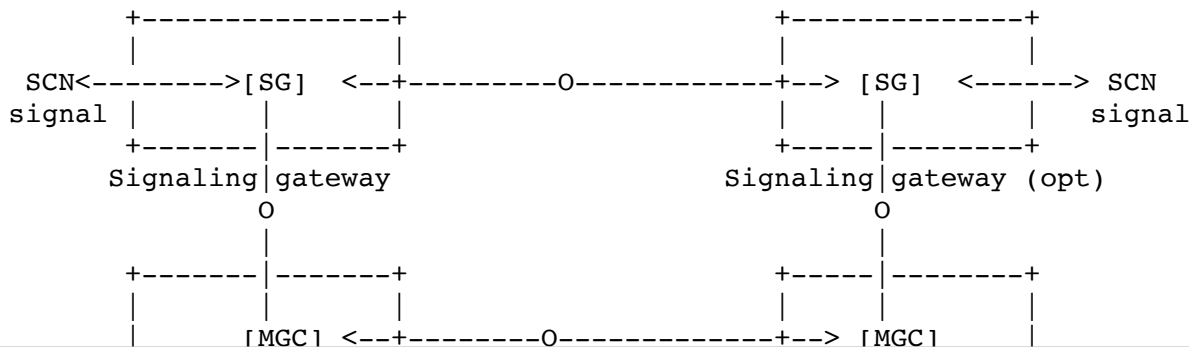

# Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

## Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

## Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

## Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

## API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

## LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

## FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

## E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.