



Openhole Multistage vs Plug-n-Perf Completions

Sleeves vs Shots—The Debate Rages

by Richard G. Ghiselin, P.E.

Sleeves vs Shots—The Debate Rages

Qittitut Consulting conducted extensive research on operator and service company preferences for using the two most popular methods for stimulating horizontal multistage completions. The results and the reasons for these preferences are a study in the economics of expediency versus the economics of a systematic approach.

Although each method has slight technical and procedural variations, the premise of the research was to examine completions categorized as openhole multistage (OHMS) versus those categorized as plug-and-perf (PNP). A broad spectrum of major and independent operators as well as stimulation service providers was polled during Q2 2011 (Table 1).

Table 1. Survey Respondent Demographics

Survey respondent type	Number of respondents
Equipment, service or supply company	2
Independent oil & gas company	47
Major oil & gas company	13
National oil & gas company	1
Other organizations or self-employed	4

Technique fundamentals

In the OHMS technique, the completion string is assembled with sliding sleeve ports and external isolation media in such a way that when the completion string is landed, the ports lie opposite the predetermined depths where formation stimulation will be initiated. The interzone isolation media—either external casing packers or swellable packers—are

placed appropriately in competent strata with good borehole conditions. In the case of swellable packers, an appropriate time interval is allowed for the packers to set. This can take several hours or days and is accomplished before the frac crew is dispatched. Usually the completion rig is demobilized and moved off location during this interval.

After the frac crew arrives, the stimulation takes place as a continuous activity. The sliding sleeve ports are opened sequentially from toe to heel, and the treatment is pumped through the open port into the formation. Fracturing takes place in a typical fashion with the point of least resistance fractured first. If desired, diverters can be pumped to initiate additional fractures in order of next-to-least point of resistance until the entire stage treatment has been pumped.

At this point in the OHMS technique, the next subsequent port is opened while simultaneously closing off the zone just treated, and pumping continues on the second zone. The procedure is repeated until all zones have been treated. It is possible to skip a zone if its treatment is ill advised for any reason; it is not possible, however, to add a zone.

Pumping is only paused shortly between stages to allow time for sleeve shifting.

Recently, the OHMS technique has been used on cemented completions that use special acid-soluble cement. After the port sleeve is opened, acid is used to dissolve the cement opposite the open port, which provides access to the formation behind it so the treatment can be pumped. This modification eliminates the need for external zonal isolation devices and can constrain fracture initiation to the area where the cement sheath has been dissolved.

The OHMS technique has been applied in several plays, most frequently in unconventional horizontal well completions. The most attractive feature of the technique is its speed. Several stages can be stimulated in a single day. Initially, the technique was limited to about six stages, but technical improvements have raised that limit to more than 20 stages per well.

The PNP technique follows traditional completion procedures. A cemented liner can be set through the completion interval, or an uncemented liner can be used. Typically, a plug is attached to the bottom of a perforating gun and conveyed into the well. Any method (pump-down, tubing-conveyed perforating, wireline tractor-assisted conveyance or coiled tubing) can be used to position the plug/gun combination in the lateral. The plug is set at the appropriate depth below the toe zone, and the plug shears off. Then, the gun is pulled uphole and positioned precisely opposite the first zone to be stimulated. The gun is fired and pulled out of the hole. If desired, several intervals of the same

stage can be shot using select-fire guns on the same trip. When the stage has been treated, the next gun/plug combination is deployed, and a composite frac plug is set to protect the zone. The process is repeated for the next stage. Although all stages are preplanned, the operator can change, delete or add a stage if observations indicate such a deviation from plan is advantageous.

Another type of PNP treatment involves ultra-high pressure abrasive jetting that is deployed on coiled tubing to perforate and treat individual intervals. Usually, a sand plug is set to protect previously treated intervals as the process is repeated for subsequent stages. The abrasive jet technique is used mostly on shallower wells, but it has the same flexibility as conventional PNP.

An earlier PNP technique that is rarely used now involves setting an uncemented liner in the lateral and treating the formation through perforations made at selected intervals. The theory behind this is that the formation will always fracture at its point of least resistance. Of course, this could be into an aquifer or an offset well. Most operators are no longer using this technique because of its unpredictability and the introduction of real-time microseismic fracture mapping.

Depending upon the number of stages to be treated, the PNP technique can take several days or more. The big advantage is that since each stage is treated individually, decisions can be made on the fly to change the location of the next stage, add or delete a stage, change the interval perforated, and so on—in other words, PNP affords complete flexibility. The PNP technique also favors the implementation of

advanced treatment techniques such as simul-frac or zipper frac.

Factors influencing the choice of technique

The savings in cost was listed by 66% of the respondents as the primary factor influencing their decision to use one technique over another. Higher well productivity was cited by another 20%. Therefore, the primary drivers are speed for

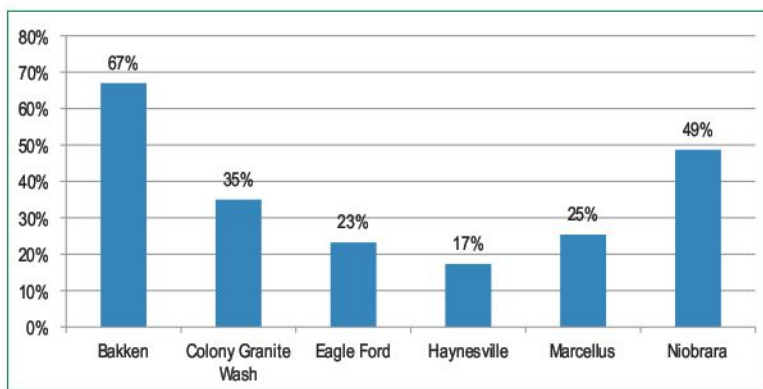


Figure 1. The OHMS technique for frac treatments is used in the Bakken play more than in other plays.

cost savings or flexibility for higher well productivity. The poll also showed that in 80% of cases the operator rather than the service company makes the decision. But the decision is seldom obvious, and operators appear to be stymied in choosing OHMS vs PNP because other factors play into their decision.

There is no question that the OHMS technique is considerably more efficient in terms of field operating time, and the gap grows as the number of stages is increased. Several years ago, conventional wisdom held that a few widely spaced long-length fractures were the best way to fully exploit the reservoir and ensure maximum economic ultimate recovery. Using a popular rule of thumb to double the frac length, one must quadruple the volume of treatment pumped. This increases the possibility of problems as well as adds to the

cost. Recent experience has shown, however, that numerous closely spaced short fractures produce better results over the life of the reservoir. This outcome would seem to tilt the scale in favor of OHMS owing to its superior efficiency, but OHMS is not the predominant technique in many plays.

The survey revealed that while today more than 50% of frac treatments in the Bakken play use the OHMS technique (Figure 1), the use of OHMS is considerably less in other plays. Turns out that many operators believe OHMS carries an unacceptably high element of risk. If the operator cannot get to total depth with the completion, the completion must be laid down so a reamer or cleanout trip can be made. This can be problematic if swellable packers are involved because they can be activated and cause difficulties in round-tripping the completion. The alternative, if the completion is not too far off depth, would be to land the completion where it is and proceed to treat the well at less-than-optimum depths. Another more disturbing risk can crop up during the treatment. If pumping monitors indicate that a change should be made in stage depth, it cannot be made with OHMS. The intervals are preset when the completion string is run. In addition, enlarged boreholes and washouts in the laterals, often caused by drilling methods, increase the risk that the external isolation media will not seal completely.

Another overriding issue that can affect an operator's decision on which technique to choose is the critical shortage of frac crews and equipment, especially in North America. Getting a frac date from a

service company is much easier if the crew is needed for only a few days. It is exceedingly difficult to get a frac crew contracted for a week or more. This problem is likely to lessen in the future, but presently it puts pressure on operators to choose expedience over a systematic approach, even if the systematic approach offers greater flexibility.

Adding to the complexity of either choice is whether water and proppant material are available. Lack of these can bring operations to a halt with disastrous consequences. The service industry is working to mitigate shortages of both, and results vary according to the geographic location of the play. Furthermore, innovative technology solutions have been implemented to alleviate the situation somewhat, but an in-depth discussion of these solutions is beyond the scope of this paper.

The inherent flexibility of PNP would seem to run second to the higher efficiency of OHMS, but tech-

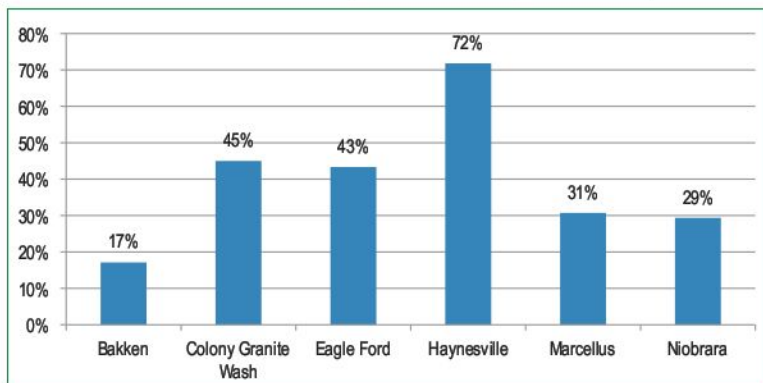


Figure 2. Survey respondents were asked to estimate the fraction of wells in each play that were PNP candidates. Respondents believed the Haynesville play had the technical characteristics that would be most responsive to PNP fracturing treatments.

nology has played a major role in leveling the playing field. The development of microseismic fracture mapping allows operators to monitor fracture propagation in real time, and the introduction of dissolvable diverters allows engineers to steer the fractures away from geohazards and offset wells. The main benefit of

PNP is its ability to use real-time fracture mapping to make changes on the fly and thus place fractures where they are wanted, extend them as deeply as desired and avoid geohazards such as aquifers that can instantly turn a potential oil or gas well into a water well.

In more mature plays, such as the famous Barnett shale of North Texas, refracs have become popular. Some wells are on their fourth frac. This technique, which can restore new life into a declining producer, cannot be implemented with OHMS. The recently introduced simul-frac and zipper frac techniques show great promise and play to the PNP camp. These techniques involve alternating between stages on two or more adjacent wells, holding opposing stages in offset wells under pressure while treating the opposing stage in the well being fractured. Doing this creates a protective stress field around the pressured-up stages and diverts the fracture in the well being treated so the fractures do not intersect. The technique requires good coordination between the pumping crew and perforating crew, but results so far have shown that the practice has merit. It also mitigates some of the inefficiency of the PNP technique because multiple wells can be treated on the same trip to the field.

When asked to estimate the fraction of wells in each play that were PNP candidates for technical reasons (meaning that they cannot be completed using OHMS), respondents had strong opinions (Figure 2). Note the low frequency in Bakken and high frequency in Haynesville.

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.