

(12) **United States Patent**  
**Bruce**

(10) **Patent No.:** **US 6,406,330 B2**  
(45) **Date of Patent:** **Jun. 18, 2002**

(54) **CLIP RING FOR AN ELECTRICAL CONNECTOR**

4,426,127 A 1/1984 Kubota  
5,898,993 A 5/1999 Inaba et al.

(75) Inventor: **Burton B. Bruce**, New Hartford, CT (US)

**FOREIGN PATENT DOCUMENTS**

DE 544104 1/1932  
FR 2667451 4/1992

(73) Assignee: **Northrop Grumman Corporation**, Los Angeles, CA (US)

*Primary Examiner*—Tho D. Ta  
(74) *Attorney, Agent, or Firm*—Lowe Hauptman Gilman & Berner, LLP

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **09/938,487**

(22) Filed: **Aug. 27, 2001**

**Related U.S. Application Data**

(63) Continuation of application No. 09/458,082, filed on Dec. 10, 1999, now Pat. No. 6,332,815.

(51) Int. Cl.<sup>7</sup> ..... **H01R 13/648**

(52) U.S. Cl. .... **439/609**; 439/862; 439/578

(58) Field of Search ..... 439/609, 578,  
439/862, 860, 868, 883

(56) **References Cited**

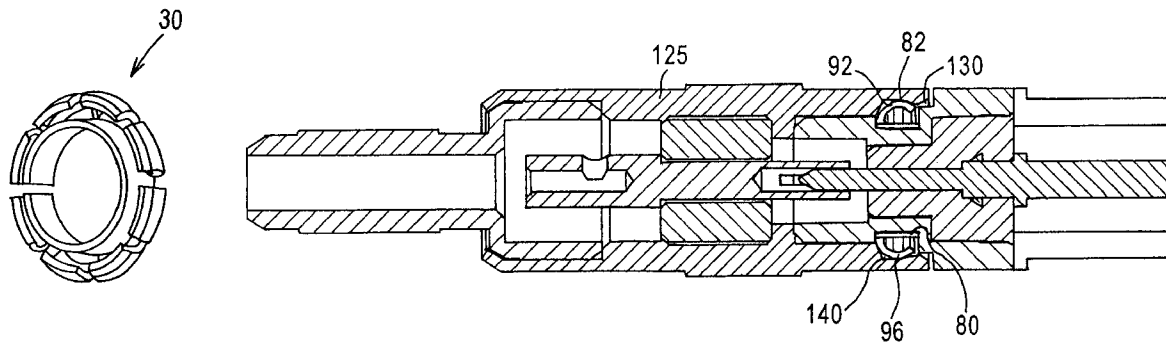
**U.S. PATENT DOCUMENTS**

2,844,644 A 7/1958 Soule, Jr.  
3,678,445 A 7/1972 Brancaleone  
4,106,839 A 8/1978 Cooper  
4,423,919 A 1/1984 Hillis

(57) **ABSTRACT**

The present invention is directed to an integrally formed clip ring made out of a conductive resilient material such as beryllium copper. The clip ring is used for retaining a male member and a female member of an electrical connector and for forming a ground circuit between the male member and the female member of the electrical connector. The clip ring of the present invention fully engages the outside diameter of the male retaining groove and the inside diameter of the female retaining groove simultaneously. Advantageously, this eliminates the potential for discontinuities in a ground circuit in a vibrational environment. The clip ring includes an annular-shaped body having an inner wall and an outer wall where the outer wall has a plurality of circumferentially spaced slots. The outer wall has a first end circumferentially spaced from a second end wherein when the clip ring is compressed a first end and a second end are brought into contact with each other. In this manner, a complete 360° contact is maintained when the male member and the female member are fully engaged.

**24 Claims, 2 Drawing Sheets**



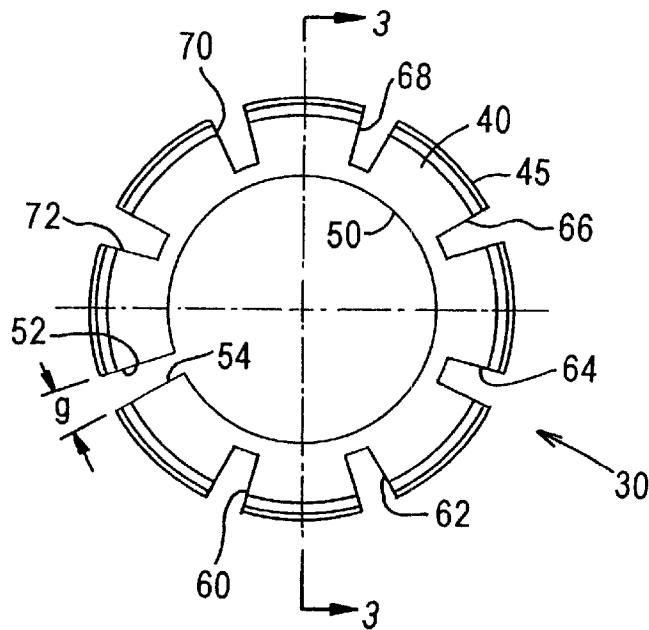


FIG. 2

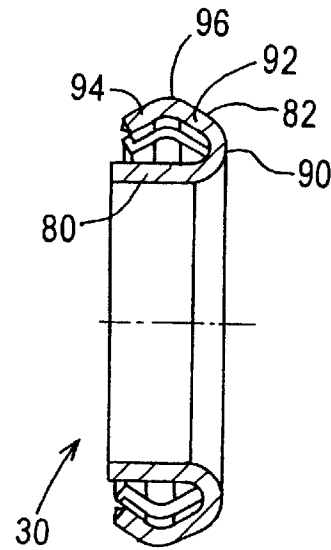


FIG. 3

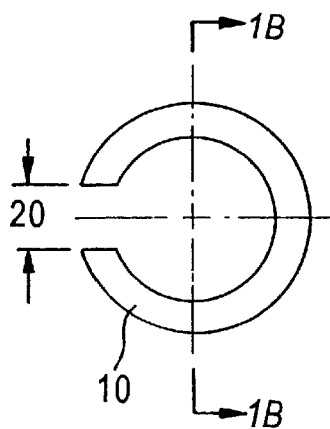
FIG. 1A  
(PRIOR ART)

FIG. 1B

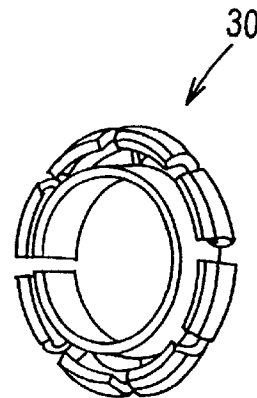


FIG. 4

FIG. 5

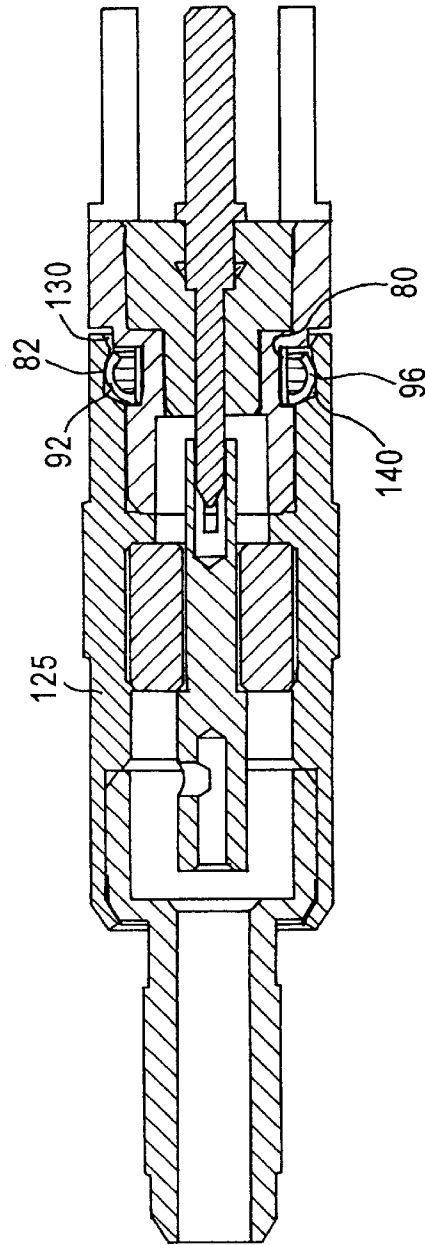
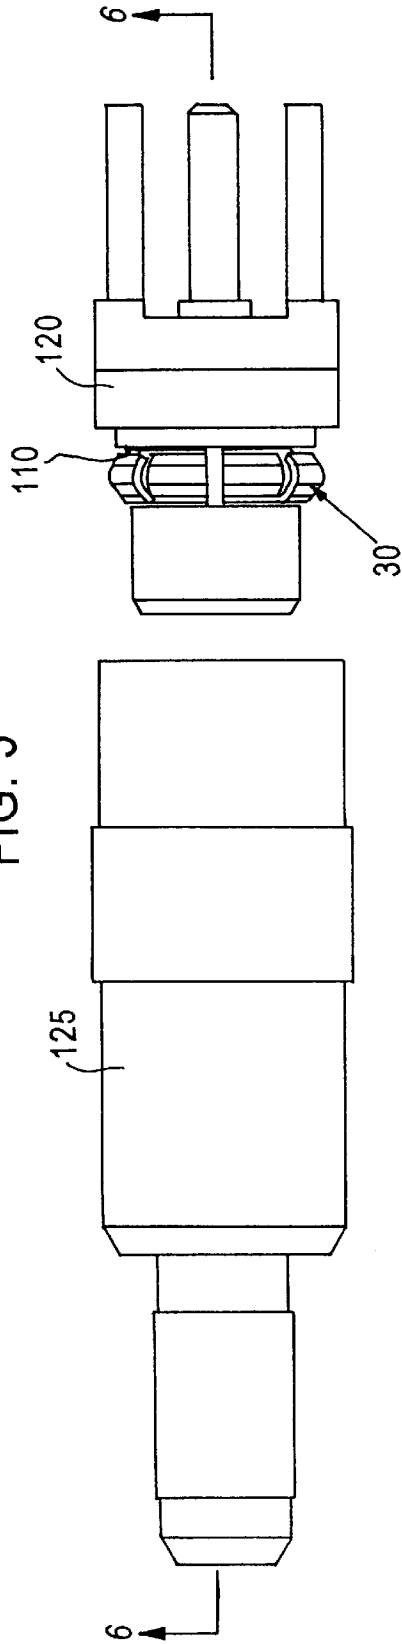


FIG. 6

## CLIP RING FOR AN ELECTRICAL CONNECTOR

This application is a Continuation of application Ser. No. 09/458,082 filed Dec. 10, 1999, U.S. Pat. No. 6,332,815.

### FIELD OF THE INVENTION

The present invention relates generally to clip rings, and more particularly to clip rings for electrical connectors.

### BACKGROUND OF THE INVENTION

Depicted in FIGS. 1A and 1B is a simple "C" ring that fits in a groove on a male member of a mated pair of electrical connectors. When the male member and the female member are being engaged, this "C" ring is compelled to close into the groove on the male member so that the inside diameter of the female member may pass around it. Once the male member and the female member are fully engaged there is a concentric undercut groove in the female member that the "C" ring on the male member engages by springing back and partially engaging the outside diameter of the retaining groove of the male member and the inside diameter of the retaining groove of the female member.

The problem with the "C" ring depicted in FIGS. 1A and 1B is that the "C" ring can only touch a portion of the inside diameter of the female connector and a portion of the male connector simultaneously. The "C" ring can rattle in a vibrational environment causing a discontinuity in the circuit. In addition, the insertion withdrawal forces cannot be accurately tuned to the needs of the user. Accordingly, a need exists for a clip ring in which the insertion forces can be accurately predicted, and in which a complete electrical circuit is completed when the male member and the female member are fully engaged.

### SUMMARY OF THE INVENTION

It, therefore, an object of the present invention to provide a clip ring in which the insertion withdrawal forces can be kept within a narrow band.

Another object of the present invention is to provide a clip ring which provides an excellent grounding path completing a ground circuit between a male and female connector when the male member and the female member are fully engaged.

It is yet another object of the present invention to provide a retaining clip in which the outside diameter and inside diameter of the clip extend for a fully 360° contact with both the female member and the male member when the male member and the female member are fully engaged.

It is yet another object of the present invention to provide a clip ring in which the withdrawal and insertion forces can be tuned to a great degree by varying the material thickness and beam length of the fingers of the clip ring.

The present invention is directed to an integrally formed clip ring made out of a conductive resilient material such as beryllium copper. The clip ring is used for retaining a male member and a female member of an electrical connector and for forming a ground circuit between the male member and the female member of the electrical connector. The clip ring of the present invention fully engages the outside diameter of the male retaining groove and the inside diameter of the female retaining groove simultaneously. Advantageously, this eliminates the potential for discontinuities in a ground circuit in a vibrational environment. The clip ring includes an annular-shaped body having an inner wall and an outer wall where the outer wall has a plurality of circumferentially

spaced slots. The outer wall has a first end circumferentially spaced from a second end wherein when the clip ring is compressed a first end and a second end are brought into contact with each other. In this manner, a complete 360° contact is maintained when the male member and the female member are fully engaged.

These and other objects of the present invention are achieved by a resilient clip ring which includes an annular-shaped body having an inner wall and an outer wall. The outer wall has a plurality of circumferentially spaced slots.

The foregoing and other objects of the present invention are achieved by a resilient clip ring which includes an annular-shaped body having an inner wall and an outer wall. The outer wall has a plurality of circumferentially spaced slots. The body has a first end circumferentially spaced from a second end. The first end and the second edge are brought into contact when the clip ring is inserted into a groove.

Still other objects and advantages of the present invention will become readily apparent to those skilled in the art from the following detailed description, wherein the preferred embodiments of the invention are shown and described, simply by way of illustration of the best mode contemplated of carrying out the invention. As will be realized, the invention is capable of other and different embodiments, and its several details are capable of modifications in various obvious respects, all without departing from the invention. Accordingly, the drawings and description thereof are to be regarded as illustrative in nature, and not as restrictive.

### BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is illustrated by way of example, and not by limitation, in the figures of the accompanying drawings, wherein elements having the same reference numeral designations represent like elements throughout and wherein:

FIG. 1A is a top view of a prior art clip ring;

FIG. 1B is cross-sectional view taken along lines 1B—1B of FIG. 1A depicting a cross-sectional view of the clip ring;

FIG. 2 is a top plan view of a clip ring according to the present invention;

FIG. 3 is a cross-sectional view taken along lines 3—3 in FIG. 2; and

FIG. 4 is a bottom perspective view of the clip ring according to the present invention;

FIG. 5 is a side elevational view of an exemplary electrical connector in an uncoupled condition which is usable with the inventive clip ring of the present invention; and

FIG. 6 is a cross-sectional view taken along lines 6—6 in FIG. 5 within the electrical connector in a coupled condition.

### BEST MODE FOR CARRYING OUT THE INVENTION

Referring first to FIG. 2, a bottom plan view of a clip ring 30 according to the present invention is depicted. The clip ring 30 includes an annular body 40 having an outer surface 45 and an inner surface 50. A first edge 52 and a second edge 54 are circumferentially spaced from each other and form a gap g. As depicted in FIG. 2, seven slots extend from outer wall 45 and are equally circumferentially spaced. The seven slots 60—72 and the gap g essentially form eight weak areas in the body 40 thereby providing flexibility to the clip ring 30. The slots 60—72 and the gap g are equally circumferentially spaced. Slots 60, 62, 64, 66, 68, 70, 72 extend inwardly from the outer wall 45 and terminate before inner wall 50.

3

As depicted in FIG. 3, clip ring 30 has an inner section 80 and outer fingers 82 formed between each of the inwardly extending slots. Although seven slots are depicted, any number of slots can be used. As should be understood, the more slots that are used the lower the insertion forces would be for any given material thickness and the fewer slots that are used for any given material thickness will increase insertion withdrawal forces. Each of the fingers 82 has a first rounded section 90 which connects the finger 82 to the inner wall 80, a front ramp section 92 and a rear ramp section 94.

As depicted in FIG. 4, the rear ramp section 94 is spaced from the inner wall 80. Referring back to FIG. 3, front ramp section 92 and rear ramp section 94 meet at a knuckle portion 96.

As depicted in FIG. 5, the clip ring 30 is positioned in a groove 110 in a male connector 120 for mating with a female connector 125. The components of the male connector 120 and the female connector 125 are not described herein as they form no part of the present invention. It should be appreciated that the clip ring 30 according to the present invention is usable on any type of male/female connector which are mated in a push/pull manner. In operation, when one connector is being inserted into the other, front ramp section 92 will make contact with a lead in ramp 130 on the female connector 125, the outer diameter of the female connector 125, thereby causing the outer section 82 to flex radially inwardly. That is, rear section 94 will be brought nearer to inner wall 80. The knuckle portion 96 will be brought into contact with the inner diameter 140 of the female connector 125. Upon full insertion into the groove, the portion 82 will flex radially outwardly and be in full engagement with the inner diameter 140. Most preferably, the inner diameter 140 will have a curved shape as depicted in FIG. 6. The shape of the curved surface should be such that rear ramp section 94 is in contact with the curved surface when the clip ring 30 is fully inserted into the female connector 125. The shape of the curved surface will help retain the clip ring 30 in the curved surface.

As should be appreciated, the clip ring 30 of the present invention will fully engage the outside diameter of the male retaining groove and the inside diameter of the female retaining groove simultaneously. Further, upon insertion of the clip ring into the groove, the gap will be closed and surfaces 52 and 54 will be brought into contact with each other. This eliminates the potential for discontinuities in the ground circuit in a vibrational environment. In addition, the insertion and withdrawal forces can be tuned to a greater degree by varying the material thickness and the beam length of the fingers 82.

It will be readily seen by one of ordinary skill in the art that the present invention fulfills all of the objects set forth above. After reading the foregoing specification, one of ordinary skill will be able to affect various changes, substitutions of equivalents and various other aspects of the invention as broadly disclosed herein. It is therefore intended that the protection granted hereon be limited only by the definition contained in the appended claims and equivalents thereof.

What is claimed is:

1. A resilient electrically conductive clip ring, comprising:
  - an annular-shaped body having an inner wall and an outer wall;
  - said outer wall having a plurality of circumferentially spaced slots extending substantially through the whole entirety of said outer wall, thereby rendering said outer wall operatively elastically flexible radially inwardly toward said inner wall;

4

said body extending circumferentially for less than 360°, and having first and second ends circumferentially spaced from each other and adapted to be brought into contact;

wherein said outer wall has a first section extending obliquely and away from an edge of said inner wall, and a second section extending obliquely from an edge of the first section and towards said inner wall.

2. The resilient clip ring of claim 1, wherein said body extends circumferentially for a full 360° when said first and second ends are brought into contact.

3. The resilient clip ring of claim 1, wherein said outer wall has a plurality of radially outwardly extending fingers.

4. The resilient clip ring of claim 1, wherein said first section is a ramp extending radially away from said inner wall.

5. The resilient clip ring of claim 1, wherein said second section is a ramp extending radially toward said inner wall.

6. The resilient clip ring of claim 1, wherein said body is made of beryllium copper.

7. The resilient clip ring of claim 1, wherein said clip ring is integrally formed.

8. A resilient electrically conductive clip ring for connecting a male connector with a mating female connector, said clip ring comprising:

an annular-shaped body having an inner wall and an outer wall;

said inner wall forming an electrical contact with an outside diameter of said male connector when said clip ring is positioned on said male connector;

said outer wall having a convex shape including a first section extending from an edge of said inner wall, a knuckle portion extending from an edge of said first section, and a second section extending from an edge of said knuckle portion,

said outer wall being operatively elastically flexible radially inwardly toward said inner wall and said knuckle portion forming an electrical contact with an inner diameter of said female connector when said clip ring is introduced into said female connector; and

said body extending circumferentially for less than 360°, and having first and second ends circumferentially spaced from each other and adapted to be brought into non-overlapping contact.

9. The resilient clip ring of claim 8, wherein said body extends circumferentially for a full 360° when said first and second ends are brought into contact.

10. The resilient clip ring of claim 8, wherein said body is made of beryllium copper.

11. The resilient clip ring of claim 8, wherein said clip ring is integrally formed.

12. The resilient clip ring of claim 8, wherein said first section is angled to form a lead in section when said clip ring is introduced into said female connector.

13. The resilient clip ring of claim 12, wherein said lead in section is a ramp.

14. The resilient clip ring of claim 8, wherein said second section is angled to form a lead out section when said clip ring is withdrawn from said female connector.

15. The resilient clip ring of claim 14, wherein said lead out section is a ramp.

16. The resilient clip ring of claim 8, wherein said outer wall has a plurality of circumferentially spaced slots and a plurality of radially outwardly extending fingers formed therebetween.

17. The resilient clip ring of claim 16, wherein said slots extend substantially through the whole entirety of said outer wall.

# Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

## Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

## Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

## Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

## API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

## LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

## FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

## E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.