Using the Intel MCS®-51 Boolean Processing Capabilities

JOHN WHARTON
MICROCONTROLLER APPLICATIONS

April 1980

Order Number: 203830-001

USING THE INTEL MCS®-51 BOOLEAN PROCESSING CAPABILITIES

CONTENTS

1.0 INTRODUCTION

The Intel microcontroller family now has three new members: the Intel 8031, 8051, and 8751 single-chip microcomputers. These devices, shown in Figure 1, will allow whole new classes of products to benefit from recent advances in Integrated Electronics. Thanks to Intel's new HMOS technology, they provide larger program and data memory spaces, more flexible I/O and peripheral capabilities, greater speed, and lower system cost than any previous-generation single-chip microcomputer.
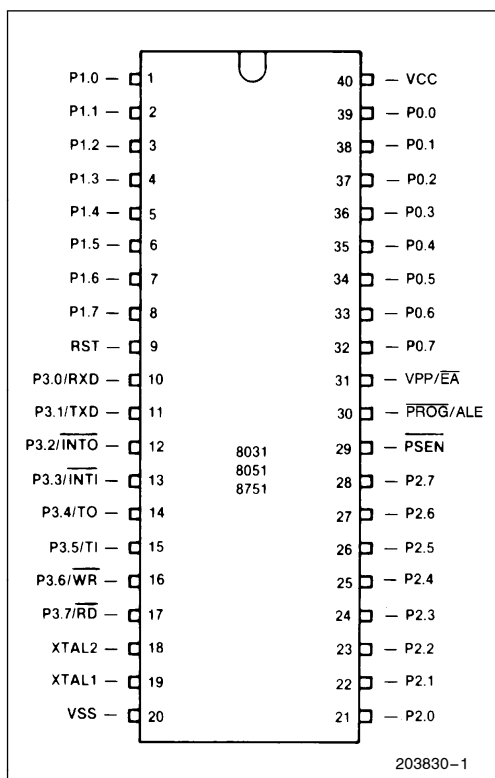
Table 1 summarizes the quantitative differences between the members of the MCS®-48 and 8051 families. The 8751 contains 4K bytes of EPROM program memory fabricated on-chip, while the 8051 replaces the EPROM with 4K bytes of lower-cost mask-programmed ROM. The 8031 has no program memory on-chip; instead, it accesses up to 64K bytes of program memory from external memory. Otherwise, the three new family members are identical. Throughout this Note, the term "8051" will represent all members of the 8051 Family, unless specifically stated otherwise.

The CPU in each microcomputer is one of the industry's fastest and most efficient for numerical calculations on byte operands. But controllers often deal with bits, not bytes: in the real world, switch contacts can only be open or closed, indicators should be either lit or dark, motors are either turned on or off, and so forth. For such control situations the most significant aspect of the MCS®-51 architecture is its complete hardware support for one-bit, or *Boolean* variables (named in honor of Mathematician George Boole) as a separate data type.

The 8051 incorporates a number of special features which support the direct manipulation and testing of individual bits and allow the use of single-bit variables in performing logical operations. Taken together, these features are referred to as the MCS-51 *Boolean Processor*. While the bit-processing capabilities alone would be adequate to solve many control applications, their true power comes when they are used in conjunction with the microcomputer's byte-processing and numerical capabilities.

Many concepts embodied by the Boolean Processor will certainly be new even to experienced microcomputer system designers. The purpose of this Application Note is to explain these concepts and show how they are used.

For detailed information on these parts refer to the **Intel Microcontroller Handbook,** order number 210918. The instruction set, assembly language, and use of the 8051 assembler (ASM51) are further described in the **MCS®-51 Macro Assembler User's Guide for DOS Systems,** order number 122753.


```
        P1.0 — |  1        40 | — VCC
        P1.1 — |  2        39 | — P0.0
        P1.2 — |  3        38 | — P0.1
        P1.3 — |  4        37 | — P0.2
        P1.4 — |  5        36 | — P0.3
        P1.5 — |  6        35 | — P0.4
        P1.6 — |  7        34 | — P0.5
        P1.7 — |  8        33 | — P0.6
         RST — |  9        32 | — P0.7
    P3.0/RXD — | 10        31 | — VPP/EA
    P3.1/TXD — | 11        30 | — PROG/ALE
    P3.2/INTO — | 12   8031  29 | — PSEN
    P3.3/INTI — | 13   8051  28 | — P2.7
     P3.4/TO — | 14   8751  27 | — P2.6
     P3.5/TI — | 15        26 | — P2.5
     P3.6/WR — | 16        25 | — P2.4
     P3.7/RD — | 17        24 | — P2.3
       XTAL2 — | 18        23 | — P2.2
       XTAL1 — | 19        22 | — P2.1
         VSS — | 20        21 | — P2.0

                              203830–1
```

Figure 1. 8051 Family Pinout Diagram

Table 1. Features of Intel's Single-Chip Microcomputers

EPROM Program Memory	ROM Program Memory	External Program Memory	Program Memory (Int/Max)	Data Memory (Bytes)	Instr. Cycle Time	Input/Output Pins	Interrupt Sources	Reg. Banks
8748	8048	8035	1K 4K	64	2.5 μs	27	2	2
—	8049	8039	2K 4K	128	1.36 μs	27	2	2
8751	8051	8031	4K 64K	128	1.0 μs	32	5	4

DOCKET ALARM

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts

Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research

With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips

Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.

fastcase®
Smarter legal research.