



The Ultimate Computer Reference



*The Comprehensive Standard for
Business, School, Library, and Home*



Microsoft Press® **Computer Dictionary** Third Edition

- *Over 300 illustrations and diagrams*
- *Extensive Internet coverage*
- *Featured in Microsoft® Bookshelf®*
- *Covers software, hardware, concepts, and more!*

Microsoft® Press

PUBLISHED BY

Microsoft Press
A Division of Microsoft Corporation
One Microsoft Way
Redmond, Washington 98052-6399

Copyright © 1997 by Microsoft Corporation

All rights reserved. No part of the contents of this book may be reproduced or transmitted in any form or by any means without the written permission of the publisher.

Library of Congress Cataloging-in-Publication Data
Microsoft Press Computer Dictionary. -- 3rd ed.

p. cm.

ISBN 1-57231-446-X

1. Computers--Dictionaries. 2. Microcomputers--Dictionaries.

I. Microsoft Press.

QA76.15.M54 1997

004'.03--dc21

97-15489

CIP

Printed and bound in the United States of America.

3 4 5 6 7 8 9 QMQM 2 1 0 9 8

Distributed to the book trade in Canada by Macmillan of Canada, a division of Canada Publishing Corporation.

A CIP catalogue record for this book is available from the British Library.

Microsoft Press books are available through booksellers and distributors worldwide. For further information about international editions, contact your local Microsoft Corporation office. Or contact Microsoft Press International directly at fax (425) 936-7329.

Macintosh, Power Macintosh, QuickTime, and TrueType are registered trademarks of Apple Computer, Inc. Intel is a registered trademark of Intel Corporation. DirectInput, DirectX, Microsoft, Microsoft Press, MS-DOS, Visual Basic, Visual C++, Win32, Win32s, Windows, Windows NT, and XENIX are registered trademarks and ActiveMovie, ActiveX, and Visual J++ are trademarks of Microsoft Corporation. Java is a trademark of Sun Microsystems, Inc. Other product and company names mentioned herein may be the trademarks of their respective owners.

Acquisitions Editor: Kim Fryer

Project Editor: Maureen Williams Zimmerman, Anne Taussig

Technical Editors: Dail Magee Jr., Gary Nelson, Jean Ross, Jim Fuchs, John Conrow, Kurt Meyer, Robert Lyon, Roslyn Lutsch




Amiga.

amplitude \am`plə-tōd` \ *n.* A measure of the strength of a signal, such as sound or voltage, determined by the distance from the baseline to the peak of the waveform. *See also* waveform.

amplitude modulation \am`plə-tōd` mɔj-ə-lā`shən, mod-yə-lā`shən \ *n.* A method of encoding information in a transmission, such as radio, using a carrier wave of constant frequency but of varying amplitude. *See the illustration. Acronym:* AM (A`M).

AMPS \A`M-P-S` \ *n.* Acronym for **A**dvanced **M**obile **P**hone **S**ervice. One of the original cellular phone services, relying on frequency-division multiplexing.

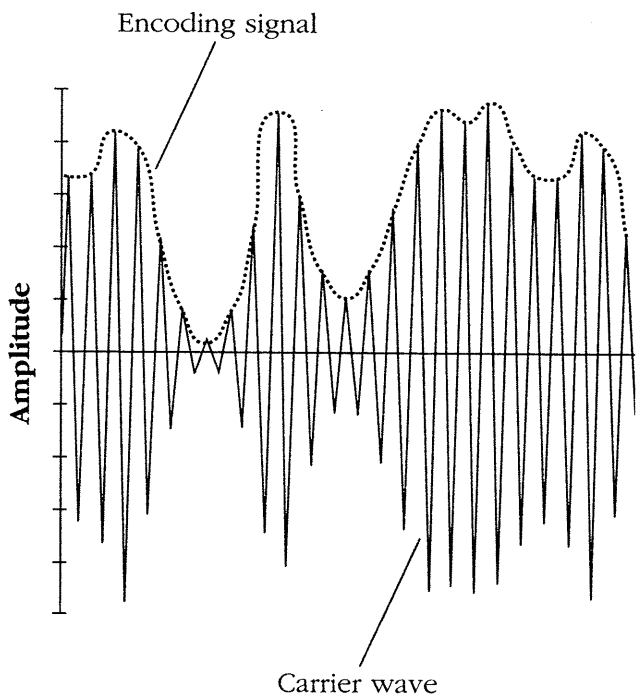

Amplitude modulation.

AMPS/NAMPS \amps`N`amps, A-M-P-S`N`A-M-P-S` \ *n.* *See* AMPS, NAMPS.

AMT \A`M-T` \ *n.* *See* address mapping table.

.an \dot`A-N` \ *n.* On the Internet, the major geographic domain specifying that an address is located in the Netherlands Antilles.

analog \an`ə-log` \ *adj.* Pertaining to or being a device or signal having the property of continuously varying in strength or quantity, such as voltage or audio. *Compare* digital (definition 2).

analog channel \an`ə-log` chan`əl \ *n.* A communications channel, such as a voice-grade telephone line, carrying signals that vary continuously and can assume any value within a specified range.

analog computer \an`ə-log` kəm-pyōō`tər \ *n.* A computer that measures data varying continuously in value, such as speed or temperature.


analog data \an`ə-log` dā`tə, dat`ə \ *n.* Data that is represented by continuous variations in some physical property, such as voltage, frequency, or pressure. *Compare* digital data transmission.

analog display \an`ə-log` dis-plā` \ *n.* A video display capable of depicting a continuous range of colors or shades rather than discrete values. *Compare* digital display.

analog line \an`ə-log` līn` \ *n.* A communications line, such as a standard telephone line, that carries continuously varying signals.

analog signal generator \an`ə-log` sig-nəl` jen`ər-ā-tər \ *n.* A device that generates continuously variable signals and is sometimes used to activate an actuator in a disk drive. *See also* actuator.

analog-to-digital converter \an`ə-log-tə-dij`i-təl` kən-vər`tər \ *n.* A device that converts a continuously varying (analog) signal, such as sound or voltage, from a monitoring instrument to binary code for use by a computer. *See the illustration. Acronym:* ADC (A`D-C`[˘]). *Also called* A-D converter. *See also* modem. *Compare* digital-to-analog converter.

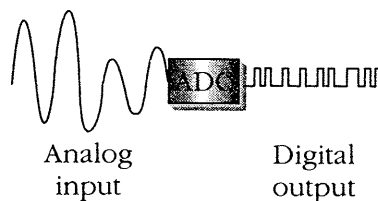

Analog-to-digital converter.

information (such as a memory address, a data type, or an actual value). *See also* binding time, dynamic binding, static binding.

binding time \bīn' dēng tīm\ *n.* The point in a program's use at which binding of information occurs, usually in reference to program elements being bound to their storage locations and values. The most common binding times are during compilation (compile-time binding), during linking (link-time binding), and during program execution (run-time binding). *See also* bind, compile-time binding, link-time binding, run-time binding.

BinHex¹ \bin'heks\ *n.* **1.** A code for converting binary data files into ASCII text so they can be transmitted via e-mail to another computer or in a newsgroup post. This method can be used when standard ASCII characters are needed for transmission, as they are on the Internet. BinHex is used most frequently by Mac users. *See also* MIME. **2.** An Apple Macintosh program for converting binary data files into ASCII text and vice versa using the BinHex code. *Compare* uudecode¹, uuencode¹.

BinHex² \bin'heks\ *vb.* To convert a binary file into printable 7-bit ASCII text or to convert the resulting ASCII text file back to binary format using the BinHex program. *Compare* uudecode², uuencode².

binomial distribution \bī-nō'mē-əl dis-trə-byōō'shən\ *n.* In statistics, a list or a function that describes the probabilities of the possible values of a random variable chosen by means of a Bernoulli sampling process. A Bernoulli process has three characteristics: each trial has only two possible outcomes—success or failure; each trial is independent of all other trials; and the probability of success for each trial is constant. A binomial distribution can be used to calculate the probability of getting a specified number of successes in a Bernoulli process. For example, the binomial distribution can be used to calculate the probability of getting a 7 three times in 20 rolls of a pair of dice. *Also called* Bernoulli distribution.

bionics \bī-on'iks\ *n.* The study of living organisms, their characteristics, and the ways they function, with a view toward creating hardware that can simulate or duplicate the activities of a biological system. *See also* cybernetics.

BIOS \bī'ōs, B'I-O-S\ *n.* Acronym for **basic input/output system**. On PC-compatible computers, the set of essential software routines that test hardware at startup, start the operating system, and support the transfer of data among hardware devices. The BIOS is stored in read-only memory (ROM) so that it can be executed when the computer is turned on. Although critical to performance, the BIOS is usually invisible to computer users. *See also* AMI BIOS, CMOS setup, Phoenix BIOS, ROM BIOS. *Compare* Toolbox.

bipolar \bī'pō'lər\ *adj.* **1.** Having two opposite states, such as positive and negative. **2.** In information transfer and processing, pertaining to or characteristic of a signal in which opposite voltage polarities represent on and off, true and false, or some other pair of values. *See also* non-return to zero. *Compare* unipolar. **3.** In electronics, pertaining to or characteristic of a transistor having two types of charge carriers. *See also* transistor.

BIS \B'I-S\ *n.* *See* business information system.

bistable \bī'stā'bl\ *adj.* Of, pertaining to, or characteristic of a system or device that has two possible states, such as on and off. *See also* flip-flop.

bistable circuit \bī'stā'bl sər'kət\ *n.* Any circuit that has only two stable states. The transition between them must be initiated from outside the circuit. A bistable circuit is capable of storing 1 bit of information.

bistable multivibrator \bī'stā'bl mul-tī-vī'brā-tər, mul-tē-vī'brā-tər\ *n.* *See* flip-flop.

BISYNC \bī'sēnk\ *n.* Short for **binary synchronous communications protocol**. A communications standard developed by IBM. BISYNC transmissions are encoded in either ASCII or EBCDIC. Messages can be of any length and are sent in units called frames, optionally preceded by a message header. BISYNC uses synchronous transmission, in which message elements are separated by a specific time interval, so each frame is preceded and followed by special characters that enable the sending and receiving machines to synchronize their clocks. STX and ETX are control characters that mark the beginning and end of the message text; BCC is a set of characters used to verify the accuracy of transmission. *See the illustration on the next page. Also called* BSC.

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.