



US005189543A

United States Patent [19][11] **Patent Number:** **5,189,543**

Lin et al.

[45] **Date of Patent:** **Feb. 23, 1993**[54] **INFRA-RED WIRELESS KEYBOARD SYSTEM**[75] Inventors: **Steve Lin, Taiepi; Kent Kao, Keelung City; Robert Hsue, Hsing-Chuang City, all of Taiwan**[73] Assignee: **Acer Incorporated, Taiwan**[21] Appl. No.: **615,567**[22] Filed: **Nov. 19, 1990**[51] Int. Cl.⁵ **H04B 10/00**[52] U.S. Cl. **359/142; 359/154**[58] Field of Search **455/603, 606, 617, 619; 359/142, 147, 154, 159, 182, 172**[56] **References Cited****U.S. PATENT DOCUMENTS**

4,628,541	12/1986	Beavers	455/617
4,897,821	1/1990	Thierry et al.	455/603
4,905,279	2/1990	Nishio	455/603
4,914,517	4/1990	Duffield	455/603

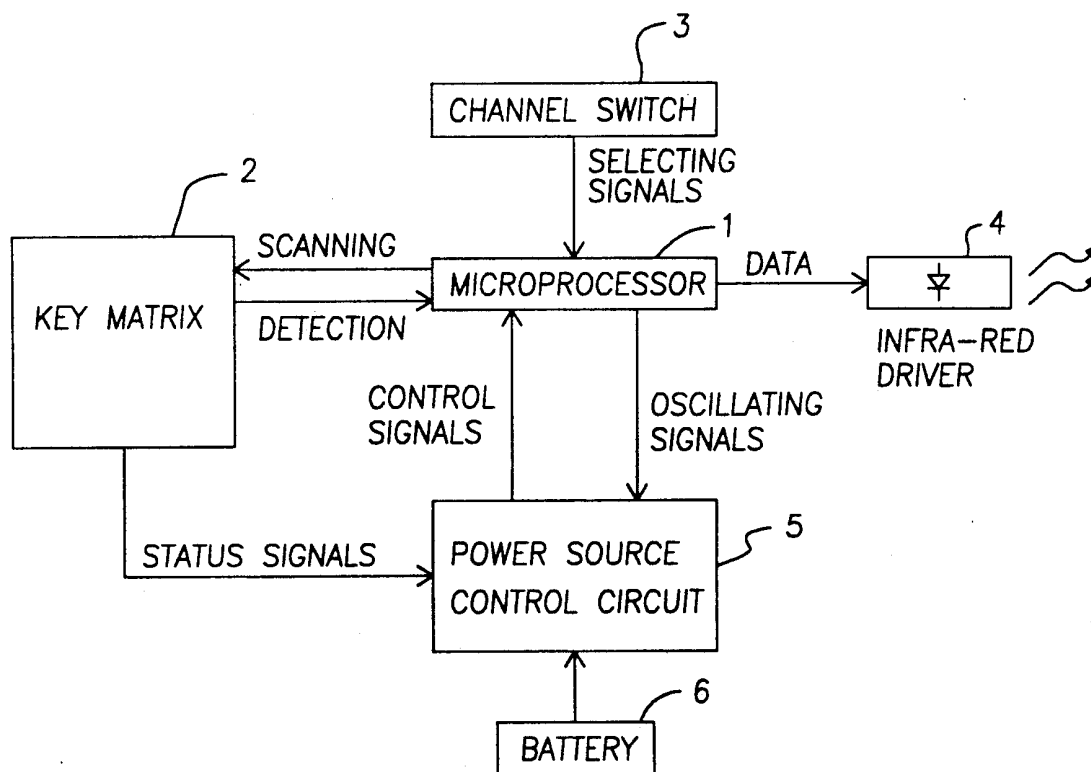
OTHER PUBLICATIONS

Infoworld, Jul. 17, 1989, Darrow, B. (359/172).
 Photolink TM RS-232, Photonics Corporation 1989. (359/172).

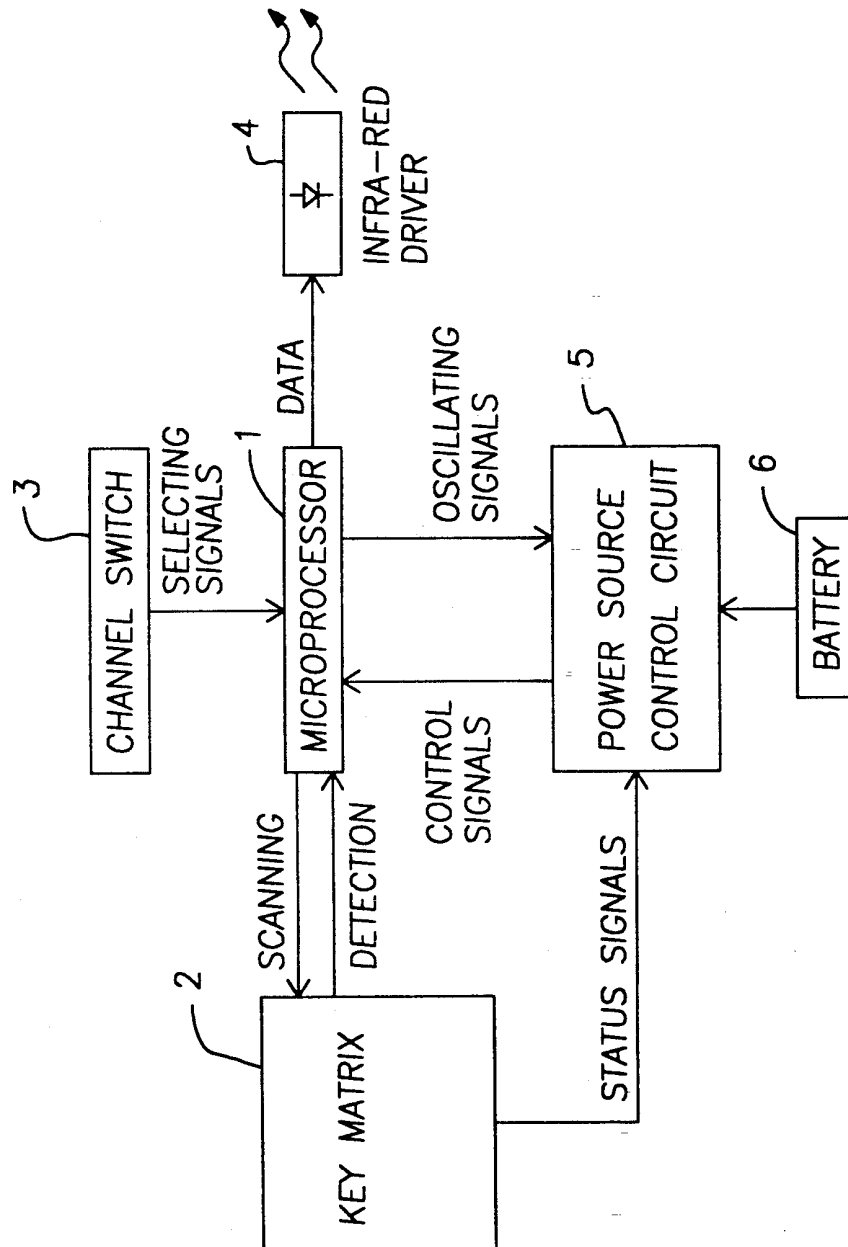
Primary Examiner—Edward L. Coles, Sr.
Assistant Examiner—Kinfe-Michael Negash
Attorney, Agent, or Firm—Greg T. Sueoka

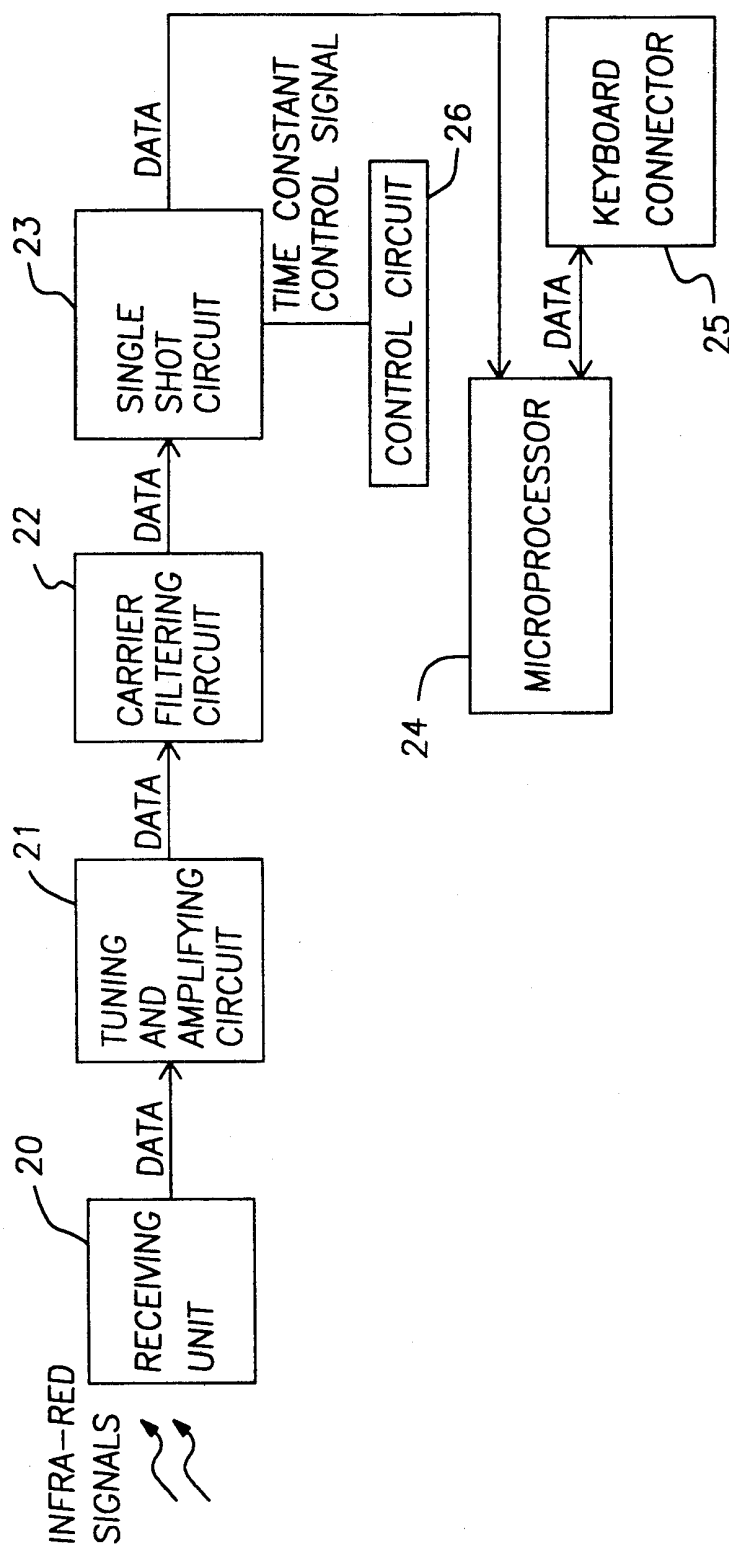
[57] **ABSTRACT**

A communication system comprising a wireless keyboard for emitting infra-red signals, a receiving unit for converting the infra-red signals to an electrical signal, a tuning and amplifying circuit coupled to the receiving unit for tuning and amplifying the electrical signals, a carrier filtering circuit for removing the carrier component of the input signal, a single-shot circuit coupled to the carrier filtering circuit for converting its input signal to a known code wave form, and a microprocessor for receiving the code wave. The invention allows multiple users to operate their wireless keyboards without interference.

3 Claims, 3 Drawing Sheets

RPX Exhibit 1038

**FIG. 1**

**FIG. 2**

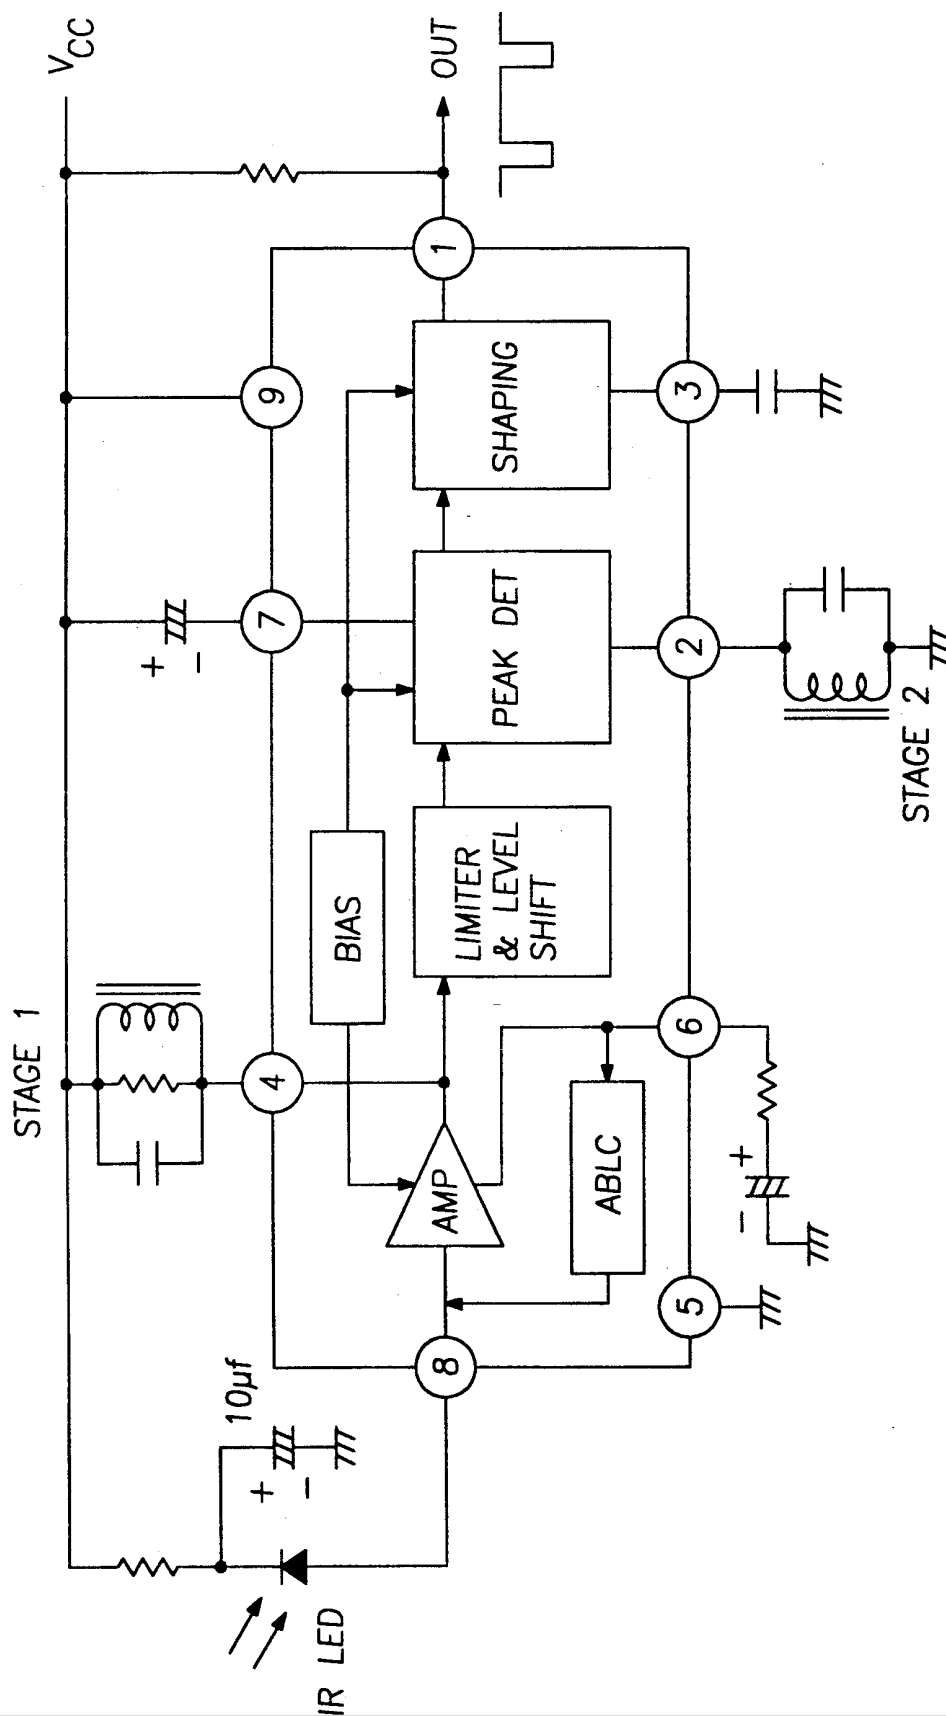


FIG. 3

INFRA-RED WIRELESS KEYBOARD SYSTEM

BACKGROUND OF THE INVENTION

This invention is in the field of infra-red communications. More particularly, it relates to multi-user infra-red communication systems.

Methods and apparatus for emitting infra-red signals for use in wireless communication systems are known. One such system is shown in U.S. Pat. No. 4,628,541, the specification of which is incorporated herein for all purposes. Known infra-red wireless keyboard systems can accommodate multiple users with multiple channels. In operation, an ID code is combined with the signals transmitted by the wireless keyboard. This combined signal is then transmitted at a particular carrier frequency. The receiver, which is coupled to the computer system, can determine from the received ID code which channel the keyboard is using. Although this arrangement allows for multiple users, these multiple users cannot simultaneously access the computer without causing mutual interference. If two users were to attempt to input data simultaneously into their respective computer systems, the fact that the carrier frequencies are the same will result in the loss of the ID code and data to both systems.

As an example of the interference problem, assume two different users are transmitting to two separate computer systems, the first user transmitting on channel 1 and the second user transmitting on channel 2. Using known wireless keyboard systems, the first user can transmit data to the first computer system through channel 1, but if the second user attempts to transmit data simultaneously to the second system, both sets of data will be destroyed due to interference.

Given the limitations of the known wireless keyboard systems, a wireless keyboard that can transmit data simultaneously with other keyboards without interfering with them or being interfered with would be an advance of the known art.

SUMMARY OF THE INVENTION

In a preferred embodiment of the present invention, each channel is programmed with its own ID code and its own designated carrier frequency. Whenever a key is depressed, the key code and the ID code are transmitted according to the known RS 232 format at a designated frequency by an infra-red Light Emitting Diode ('LED'). The receiving unit receives the infra-red signal and outputs a corresponding electrical signal to a tuning and amplifying circuit for further processing. The processed signals are transmitted to a carrier filtering circuit which strips off the carrier and outputs the result to a single-shot circuit. The single-shot circuit converts the signals to a code wave of RS 232 type which is then sent to the microprocessor.

The carrier frequency is designated by the user, within a narrow band of frequencies. The ID codes and the carrier frequency associated with each channel is different. Thus, even if multiple users are transmitting simultaneously, the tuning circuit of the receiver can be set to a particular carrier frequency, rejecting simultaneously received signals having different carrier frequencies.

The invention will now be described in detail with reference to the figures listed and described below.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram of an infra-red wireless keyboard which incorporates the present invention;

FIG. 2 is a block diagram of a receiver for receiving signals from the wireless keyboard, the receiver incorporating the present invention; and

FIG. 3 is a detailed circuit diagram of the tuning, amplifying and carrier-filtering circuits shown in FIG. 2.

DESCRIPTION OF THE SPECIFIC EMBODIMENT(S)

FIG. 1 is a block diagram of an infra-red wireless keyboard/transmitter constructed according to the teaching of the present invention. It comprises microprocessor 1, key matrix 2, channel switch 3, infra-red driver 4, power source control circuit 5 and battery 6. Channel switch 3 allows a user to select and operate on a given channel with a carrier frequency preassigned by microprocessor 1.

In operation, microprocessor 1 sends scanning signals to key matrix 2 in order to detect the depression of one of the keys. If no keys are depressed, power source control circuit 5 places microprocessor 1 into a low-power standby mode. Control circuit 5 also resets microprocessor 1 if power is cut off, ensuring proper microprocessor operation in all cases. If a key has been depressed, control circuit 5 switches microprocessor 1 to a normal operating mode. Microprocessor 1 assigns a key code to the depressed key according to its position in the key matrix. Microprocessor 1 then references channel switch 3 to obtain the proper ID code, each channel having a predefined ID code. The ID code and the key code are then combined into a 2 byte data word by microprocessor 1. Software in microprocessor 1 then generates a carrier frequency preassigned to the selected channel by microprocessor 1. Microprocessor 1 transmits the 2 byte data word according to a known communications format such as RS 232, at the carrier frequency. Infra-red driver 4 emits the data through an infra-red LED.

FIG. 2 shows a receiver of infra-red signals constructed according to the teachings of the present invention. It comprises receiving unit 20, tuning and amplifying circuit 21, carrier filtering circuit 22, single-shot circuit 23, and microprocessor 24.

Receiving unit 20 receives infra-red signals from infra-red driver 4 and outputs a corresponding electrical signal to tuning and amplifying circuit 21. If the carrier frequency of the received signal does not match the user-preset frequency designated by the tuning circuit, the received signal is rejected. If the carrier frequency of the received signal matches the preset frequency designated by the tuning circuit 21, the received signal is amplified by the amplifying circuit 21. The amplified signal is then sent to carrier filtering circuit 22 which strips off the carrier and sends the resulting signal to single-shot circuit 23. Single-shot circuit 23 converts its input into a code wave signal having a wave form of RS 232 type and sends this RS 232 wave to microprocessor 24. The width of the code wave pulse is controlled by the time constant control signals, generated by control circuit 26. Microprocessor 24 receives the ID code and data code outputted by single-shot circuit 23. If the ID code is correct, the data code will be received and sent to a computer system (not shown in FIG. 2) via keyboard connector 25. It should be noted that interference

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.