Paper 18 Entered: May 29, 2015

#### UNITED STATES PATENT AND TRADEMARK OFFICE

#### BEFORE THE PATENT TRIAL AND APPEAL BOARD

<sup>2</sup> 2WIRE, INC., Petitioner,

v.

TQ DELTA, LLC, Patent Owner.

Case IPR2015-00241 Patent 8,073,041 B1

Before KALYAN K. DESHPANDE, JUSTIN T. ARBES, and TREVOR M. JEFFERSON, Administrative Patent Judges.

JEFFERSON, Administrative Patent Judge.

DECISION
Denying Institution of *Inter Partes* Review
37 C.F.R. § 42.108

#### I. INTRODUCTION

Petitioner 2Wire, Inc., Inc. filed a Petition (Paper 2, "Pet.") requesting an *inter partes* review of claims 1 and 14 of U.S. Patent No. 8,073,041 B1 (Ex. 1001, "the '041 patent") pursuant to 35 U.S.C. §§ 311–319. Patent Owner TQ Delta, LLC filed a Preliminary Response (Paper 11, "Prelim. Resp."). We have jurisdiction under 35 U.S.C. § 314(a), which provides that an inter partes review may not be instituted "unless . . . there is a reasonable likelihood that the petitioner would prevail with respect to at least 1 of the claims challenged in the petition." After considering the Petition, and associated evidence, we conclude that Petitioner has not demonstrated a reasonable likelihood that it would prevail in showing unpatentability of all the challenged claims. For the reasons that follow, we deny institution of an *inter partes* review of claims 1 and 14 of the '041 patent.

#### II. BACKGROUND

#### A. Related Proceedings

The parties state that the '041 patent has been asserted in *TQ Delta LLC v. 2Wire Inc.*, Case No. 1:13-cv-01835-RGA (D. Del.); *TQ Delta LLC v. Zhone Technologies, Inc.*, Case No. 1:13-cv-01836-RGA (D. Del.); *TQ Delta LLC v. ZyXEL Communications Inc. et al.*, Case No. 1:13-cv-02013-RGA (D. Del.); *TQ Delta, LLC v. ADTRAN*, Inc., Case No. 1:14-cv-00954-RGA (D. Del.); and *ADTRAN*, *Inc. v. TQ Delta LLC*, Case No. 5:14-cv-01381 (N.D. Ala.). Pet. 1; Paper 13, 2.

#### B. The '041 Patent

The '041 patent pertains to communications systems using multicarrier modulation, such as digital subscriber line (DSL) systems using discrete multitone modulation (DMT), where a transmitter communicates over a communication channel by modulating "[c]arrier signals (carriers) or sub-channels spaced within a usable frequency band of the communication channel." Ex. 1001, col. 1, ll. 29-34. In such a system, the phase and amplitude of the modulated carrier signals typically "can be considered random" because they "result from the modulation of an arbitrary sequence of input data bits comprising the transmitted information." *Id.* at col. 1, 11. 44–48. In some situations, however, the phases of the modulated carriers may combine to produce a spike in the transmitted signal, which increases the peak-to-average power ratio (PAR) of the signal, i.e., the "ratio of the instantaneous peak value (i.e., maximum magnitude) of a signal parameter (e.g., voltage, current, phase, frequency, power) to the time-averaged value of the signal parameter." Id. at col. 1, 1. 55-col. 2, 1. 22. According to the '041 patent, PAR is an important consideration in designing a DMT communication system because an increased PAR can result in high power consumption or clipping of the transmission signal. *Id.* at col. 2, ll. 8–27. Therefore, there was a need in the art for a system that can "effectively scramble the phase of the modulated carrier signals in order to provide a low PAR for the transmission signal." *Id.* at col. 2, ll. 28–30.

Figure 1 of the '041 patent is reproduced below.

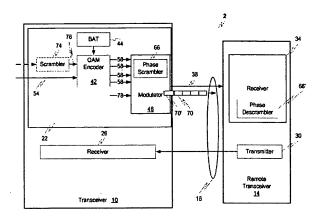


FIG. 1

Figure 1 above depicts transceiver 10 communicating transmission signals 38 over communication channel 18 (e.g., a pair of twisted wires of a telephone line) to remote transceiver 14. *Id.* at col. 3, ll. 25–50. Quadrature amplitude modulation (QAM) encoder 42 maps input serial data bit stream 54 in the time domain into parallel QAM symbols 58 in the frequency domain. *Id.* at col. 3, ll. 62–67. Modulator 46 modulates each carrier signal with a different QAM symbol 58 so that the signals have the phase and amplitude associated with the respective QAM symbol 58 (and input serial bit stream 54). *Id.* at col. 4, ll. 9–21. Phase scrambler 66 in modulator 46 calculates a phase shift for each carrier signal and combines the calculated phase shift with the phase characteristic of the respective carrier signal. *Id.* at col. 4, l. 47–col. 5, l. 3, col. 6, ll. 40–52. Phase scrambler 66 calculates the phase shift for a carrier signal by (1) determining one or more values "independently of the QAM symbols 58, and, therefore, independently of the

bit value(s) modulated onto the carrier signal," and (2) solving a "predetermined equation" using the value associated with the carrier signal. *Id.* at col. 4, ll. 47–52, 63–66. For example, the value for a carrier signal may be "derived from one or more predefined parameters, such as a pseudo random number generator." *Id.* at col. 4, ll. 53–55. According to the '041 patent, the use of a value determined independently of the input bit values results in a lower PAR for the transmission signal. *Id.* at col. 2, l. 31–col. 3, l. 2, col. 6, ll. 46–53. Transceiver 10 combines all of the carrier signals to form the transmission signal that is sent to remote transceiver 14. *Id.* at col. 8, ll. 16–22.

#### C. Challenged Claims of the '041 Patent

Independent claims 1 and 14 of the '041 patent recite:

1. A method, in a first multicarrier transceiver that uses a plurality of carrier signals for receiving a bit stream, wherein each carrier signal has a phase characteristic associated with the bit stream, the method comprising:

receiving the bit stream, wherein:
each carrier signal is associated with a value
determined independently of any bit value of the bit
stream carried by that respective carrier signal, the value
associated with each carrier signal determined by a

pseudo-random number generator,

a phase shift for each carrier signal is based on: the value associated with that carrier signal, and the combining of a phase for each carrier signal with the phase characteristic of that respective carrier signal so as to substantially scramble the phase characteristics of the plurality of carrier signals, and

multiple carrier signals corresponding to the plurality of phase shifted and scrambled carrier signals are used by the first multicarrier transceiver to demodulate a same bit value of the received bit stream.

14. A multicarrier system including a first transceiver that uses a plurality of carrier signals for receiving a bit stream, wherein each carrier signal has a phase characteristic associated with the bit stream, the transceiver capable of receiving the bit stream, wherein:

each carrier signal is associated with a value determined independently of any bit value of the bit stream carried by that respective carrier signal, the value associated with each carrier signal determined by a pseudo-random number generator, a phase shift for each carrier signal is based on:

the value associated with that respective carrier signal, and

the combining of a phase shift for each carrier signal with the phase characteristic of that respective carrier signal so as to substantially scramble the phase characteristics of the plurality of carrier signals,

multiple carrier signals corresponding to the plurality of phase shifted and scrambled carrier signals are used by the first multicarrier transceiver to demodulate a same input bit value of the received bit stream.

Ex. 1001, col. 10, l. 58-col. 11, l. 11; col. 11, l. 42-col. 12, l. 16.

#### D. The Asserted Grounds

Petitioner asserts that the challenged claims of the '041 patent are unpatentable for the following specific grounds (Pet. 14–15):

Reference	Basis	Claims Challenged
Suzuki '614, <sup>1</sup> Suzuki '415, <sup>2</sup> and Admitted Prior Art <sup>3</sup>	35 U.S.C. § 103(a)	1 and 14
Laroia, <sup>4</sup> Suzuki '415, and T1.413 <sup>5</sup>	35 U.S.C. § 103(a)	1 and 14
Fifield, <sup>6</sup> Suzuki '415, and Admitted Prior Art	35 U.S.C. § 103(a)	1 and 14

<sup>&</sup>lt;sup>1</sup> U.S. Patent No. 5,903,614, issued May 11, 1999 (Ex. 1003, "Suzuki '614").

<sup>&</sup>lt;sup>2</sup> U.S. Patent No. 5,694,415, issued Dec. 2, 1997 (Ex. 1009, "Suzuki '415").

<sup>&</sup>lt;sup>3</sup> Alleged admitted prior art in the Specification of the '041 patent at col. 1, ll. 29–43, 49–54, 57–64, col. 3, ll. 24–36, and Fig. 1 (Ex. 1001, "Admitted Prior Art").

<sup>&</sup>lt;sup>4</sup> U.S. Patent No. 6,301,268 B1, filed Mar. 10, 1998, issued Oct. 9, 2001 (Ex. 1004, "Laroia").

<sup>&</sup>lt;sup>5</sup> U.S. Patent No. 6,781,951 B1, filed Oct. 22, 1999, issued Aug. 24, 2004 (Ex. 1008, "Fifield").

<sup>&</sup>lt;sup>6</sup> ANSI T1.413-1998, Draft American National Standard for Telecommunications, Network and Customer Installation Interfaces—Asymmetric Digital Subscriber Line (ADSL) Metallic Interface (John Bingham & Frank Van der Putten, eds., 1998) (Ex. 1006, "T1.413").

#### III. ANALYSIS

#### A. Claim Interpretation

We determine the meaning of the claims as the first step of our analysis. In an *inter partes* review, we interpret claims of an unexpired patent using the broadest reasonable construction. 37 C.F.R. § 42.100(b); see Office Patent Trial Practice Guide, 77 Fed. Reg. 48,756, 48,766 (Aug. 14, 2012); In re Cuozzo Speed Techs., LLC, 778 F.3d 1271, 1278–82 (Fed. Cir. 2015). If an inventor acts as his or her own lexicographer, the definition must be set forth in the specification with reasonable clarity, deliberateness, and precision. Renishaw PLC v. Marposs Societa' per Azioni, 158 F.3d 1243, 1249 (Fed. Cir. 1998). Claim terms generally are given their ordinary and customary meaning, as would be understood by one of ordinary skill in the art in the context of the entire disclosure. See In re Translogic Tech., Inc., 504 F.3d 1249, 1257 (Fed. Cir. 2007).

Petitioner argues that the terms in claims 1 and 14 do not require interpretation. Pet. 15–16. Patent Owner proposes interpretations for two limitations: "a value determined independently of any bit value" and "multiple carrier signals corresponding to the plurality of phase shifted and scrambled carrier signals are used by the first multicarrier transceiver to demodulate a same bit value of the received bit stream." Prelim. Resp. 9–16. After reviewing the parties' papers, we find that no express claim constructions are required for purposes of this Decision.

B. Obviousness based on Suzuki '614, Suzuki '415, and Admitted Prior Art

Petitioner contends that claims 1 and 14 are unpatentable over Suzuki '614, Suzuki '415, and Admitted Prior Art under 35 U.S.C. § 103(a). Pet. 27–38. Petitioner relies on Suzuki '614 and Suzuki '415 for the limitations recited in claims 1 and 14. *Id.* at 33–38. Petitioner provides a claim chart citing various portions of Suzuki '614 and Suzuki '415, and states that the claim chart is supported by the Declaration of Krista S. Jacobsen, Ph.D. *Id.* at 27, 31–35 (citing Ex. 1002 ¶ 158–220, App. A1).

We are not persuaded that Petitioner has established a reasonable likelihood of prevailing on its asserted ground based on Suzuki '614, Suzuki '415, and Admitted Prior Art. "Section 103(a) forbids issuance of a patent when 'the differences between the subject matter sought to be patented and the prior art are such that the subject matter as a whole would have been obvious at the time the invention was made to a person having ordinary skill in the art to which said subject matter pertains." KSR Int'l Co. v. Teleflex Inc., 550 U.S. 398, 405 (2007). A patent claim, however, "is not proved obvious merely by demonstrating that each of its elements was, independently, known in the prior art." Id. at 401. "Rather, obviousness requires the additional showing that a person of ordinary skill at the time of the invention would have selected and combined those prior art elements in the normal course of research and development to yield the claimed invention." Unigene Labs., Inc. v. Apotex, Inc., 655 F.3d 1352, 1360 (Fed. Cir. 2011). For an obviousness analysis, "it can be important to identify a

reason that would have prompted a person of ordinary skill in the relevant field to combine the elements in the way the claimed new invention does." *KSR*, 550 U.S. at 418. Further, an assertion of obviousness "cannot be sustained by mere conclusory statements; instead, there must be some articulated reasoning with some rational underpinning to support the legal conclusion of obviousness." *Id.* (citing *In re Kahn*, 441 F.3d 977, 988 (Fed. Cir. 2006)).

Petitioner argues that the Suzuki '614 with Suzuki '415 references teach various aspects of the challenged claims. Pet. 27–31. For example, with respect to the limitation of "each carrier signal . . . associated with a value determined independently of any bit value of the bit stream carried by that respective carrier signal" in claim 1, Petitioner acknowledges that Suzuki '614 does not "describe the details" of how the reference generates random phase shift data for each subcarrier, arguing that Suzuki '415 teaches the generation of M-bit random numbers, which are "determined independently of any bit value" according to Petitioner because they are random. *Id.* at 29–30 (citing Ex. 1009, col. 1, ll. 52–55, col. 3, ll. 25–30, col. 4, ll. 22–34).

With respect to combining these references, Petitioner argues as follows:

It would have been obvious to combine Suzuki '614 with Suzuki '415 in order to produce the subject matter of Claim 1. For example, it would have been obvious to compute the random phases disclosed in Suzuki '614 in the manner

disclosed in Suzuki '415 in order to produce the random phase shifts used in Suzuki '614.

Id. at 31 (citations omitted).

Petitioner's first statement that it "would have been obvious" to combine Suzuki '614 with Suzuki '415 is conclusory and does not demonstrate a reason to combine. See KSR, 550 U.S. at 417–18; Unigene, 655 F.3d at 1360; In re Chaganti, 554 F. App'x 917, 922 (Fed. Cir. 2014) (stating that "[i]t is not enough to say that there would have been a reason to combine two references because to do so would 'have been obvious to one of ordinary skill.' Such circular reasoning is not sufficient—more is needed to sustain an obviousness rejection.") (citation omitted). Petitioner's second statement also is insufficient, as it merely states the result of the asserted combination, i.e., the basic components of Suzuki '614 performing the random number calculations described in Suzuki '415.

Petitioner has not provided articulated reasoning with some rational underpinning to support its contentions that a person of ordinary skill in the art would have had reason to combine the teachings of Suzuki '614, Suzuki '415, and Admitted Prior Art to achieve the method of claim 1 or system of claim 14. Petitioner does not offer any rationale to combine the basic components of Suzuki '614 to perform the calculations of Suzuki '415. Furthermore, Petitioner does not explain why an ordinarily skilled artisan would have incorporated the phase shift calculations of Suzuki '415 into the system of Suzuki '614. The mere fact that Suzuki '614 does not describe the

"details" of its random phase shift data does not mean that a person of ordinary skill in the art would have looked to the particular calculations of Suzuki '415. See Pet. 28–29. Indeed, as Patent Owner correctly points out, Suzuki '614 only discloses the end result of phase shifts, without any detail as to how the phase shifts are calculated. See Prelim. Resp. 19–20; Ex. 1003, col. 6, l. 36–col. 7, l. 18, Fig. 6. Accordingly, we find that Petitioner has not set forth an articulated rationale for combining the calculations of Suzuki '415 with Suzuki '614 in reaching a conclusion of obviousness.

Petitioner also fails to set forth an articulated rationale for combining the Admitted Prior Art with the teachings of Suzuki '614 and Suzuki '415. See Pet. 27. Petitioner's asserted ground is based on the combination of Suzuki '614, Suzuki '415, and Admitted Prior Art, but Petitioner's claim charts and analysis does not specifically cite the Admitted Prior Art in its analysis, or identify any rationale to combine any Admitted Prior Art teachings with those of the other cited references. See id. at 27–38. Petitioner merely offers conclusory statements on combining the prior art references, stating that: "[t]o the extent that some claimed aspect of the transceiver or multicarrier modulation is considered missing in Suzuki '614 and Suzuki '415, it would have been obvious from the Admitted Prior Art in order to implement the multicarrier modulation and transmission disclosed in Suzuki '614." Pet. 31–32 (citations omitted). Accordingly, Petitioner has not provided, in the Petition, sufficient explanation of an articulated

reason to combine the various teachings of the prior art. See 37 C.F.R. § 2.104(b)(4)–(5); see Prelim. Resp. 23–25.

We recognize that the Declaration of Dr. Jacobsen (Ex. 1002) includes additional discussion regarding the combination of Suzuki '614, Suzuki '415, and Admitted Prior Art. See, e.g., Ex. 1002 ¶¶ 199–203. That analysis, however, is not discussed adequately in the Petition itself, as Petitioner relies on blanket citations to 62 paragraphs and a 27-page appendix of the Declaration. See Pet. 27–30 (citing Ex. 1002 ¶¶ 158–220, Appendix A1). A petition seeking *inter partes* review must identify "[h]ow the construed claim is unpatentable under the statutory grounds identified" and "where each element of the claim is found in the prior art," and must explain the "relevance of the evidence to the challenge raised," because the Board may "give no weight to the evidence where a party has failed to state its relevance or to identify specific portions of the evidence that support the challenge." 37 C.F.R. § 42.104(b)(4)–(5); see also 37 C.F.R. § 42.22(a)(2) (a petition must include a "full statement of the reasons for the relief requested, including a detailed explanation of the significance of the evidence"). Dr. Jacobsen's analysis of the combination of prior art is not reflected in the Petition itself, and cannot be incorporated in the Petition by reference. See 37 C.F.R. § 42.6(a)(3) ("Arguments must not be incorporated by reference from one document into another document."); Cisco Sys., Inc. v. C-Cation Techs., LLC, Case IPR2014-00454, slip op. at 7-10 (PTAB Aug. 29, 2014) (Paper 12) (informative) (noting that "[o]ne purpose of the

prohibition against incorporation by reference is to eliminate abuses" of the page limits established for the parties' substantive papers, and that citing "large portions of another document, without sufficient explanation of those portions, amounts to incorporation by reference"). Consequently, we do not consider information presented in the Declaration but not discussed sufficiently in the Petition.

Petitioner has not demonstrated a reasonable likelihood of prevailing on its assertion that claims 1 and 14 are unpatentable over Suzuki '614, Suzuki '415, and Admitted Prior Art.

C. Obviousness Based on Laroia, Suzuki '415, and T1.413

Petitioner's asserted ground of unpatentability based on Laroia, Suzuki '415, and T1.413 under 35 U.S.C. § 103(a) suffers from the same deficiency as its ground based on Suzuki '614, Suzuki '415, and Admitted Prior Art. *See supra* Section II.A; Prelim. Resp. 31–32. Petitioner relies on Laroia, Suzuki '415, and T1.413 for the limitations recited in claims 1 and 14, specifically relying on Laroia for the multicarrier transceiver as well as the "value associated with [a] carrier signal" and "combining" steps of each claim. Pet. 39–47. Petitioner relies on Laroia in combination with Suzuki '415 for the remaining steps recited in each claim, citing 57 paragraphs and a 19-page appendix of Dr. Jacobsen's Declaration. Pet. 39–47 (citing Ex. 1002 ¶¶ 221–278, App. B1). Again, Petitioner argues that the claims would have been "obvious" in view of the three prior art references, but does not

identify in the Petition any reason why an ordinarily skilled artisan would have combined the teachings of Laroia and Suzuki '415. *See id.* at 36–39.

With respect to T1.413, Petitioner argues that "it would have been obvious to combine the network structures disclosed in T1.413 to implement them with the multicarrier modulation and transmission systems disclosed in Laroia. [Ex. 1002] Jacobsen Decl., ¶¶ 254-257." Pet. 41. As Patent Owner notes, Petitioner fails to offer any rationale for the combination of Suzuki '415 with Laroia and T1.413. Prelim. Resp. 31; Pet. 41. In addition, Petitioner's conclusory statements cannot rely on the more detailed analysis of Dr. Jacobsen, as that analysis is not discussed or reflected in the arguments made in the Petition itself. See Pet. 39-47; KSR, 550 U.S. at 417–18; *Unigene*, 655 F.3d at 1360; *Chaganti*, 554 F. App'x at 922. Further, it is unclear what "network structures" in T1.413 Petitioner is relying on for the asserted combination, as Petitioner cites four figures and four pages of the lengthy standard document without pointing out any specific features. See Pet. 42, 44 (citing Ex. 1006, 10–13, Figs. 2–5). Petitioner has not shown sufficiently an articulated reason with rational underpinnings to support combining the teachings of T1.413 with those of Laroia and Suzuki '415 or explained sufficiently what aspects of the references would be combined.

Accordingly, Petitioner has not demonstrated a reasonable likelihood of prevailing on its assertion that claims 1 and 14 are unpatentable over Laroia, Suzuki '415, and T1.413.

D. Obviousness Based on Fifield, Suzuki '415, and Admitted Prior Art

Petitioner's asserted ground of unpatentability based on Fifield, Suzuki '415, and Admitted Prior Art under 35 U.S.C. § 103(a) suffers from the same deficiencies discussed above. *See* Prelim. Resp. 34–36. Similar to the ground based on Suzuki '614, Suzuki '415, and Admitted Prior Art, Petitioner relies on Fifield for the limitations recited in the preambles of claims 1 and 14 (e.g., transceiver, carrier signals), relies on "Fifield, combined with Suzuki '415," for the remaining limitations recited in the claims, relies on "Fifield alone or in combination with Suzuki '415, T1.413<sup>7</sup> or the Admitted Prior Art," for the limitation of "multiple carrier signals corresponding to the scrambled carrier signals are used by the first multicarrier transceiver to demodulate a same bit value" and cites 52 paragraphs and a 26-page appendix of Dr. Jacobsen's Declaration. Pet. 48–56 (citing Ex. 1002 ¶ 279–331, App. C1).

<sup>&</sup>lt;sup>7</sup> Petitioner also argues that "it would have been obvious for multiple carriers to be used by the DMT transceiver of Fifield combined with Suzuki '415 to demodulate a same bit value of a received bit stream, as T1.413 teaches that such multiple carriers may be used for backup transmissions of a same bitstream," and that claim 14 would have been obvious in view of "Fifield, in combination with Suzuki '415 and the Admitted Prior Art or T1.413." Pet. 48–50. We presume that the citations to T1.413 were typographical errors, as the asserted ground is based only on Fifield, Suzuki '415, and Admitted Prior Art. See id. at 15, 48.

Petitioner fails to demonstrate a rationale to combine Fifield, Suzuki '415, and Admitted Prior Art. Pet. 48–56; Prelim. Resp. 34. Indeed, the word "obvious" is used only in conclusory statements that the claims are "rendered obvious" with citation to the Jacobsen Declaration. Pet. 48, 50. Petitioner cannot rely on the more detailed analysis of Dr. Jacobsen, which is not discussed sufficiently in the Petition. Accordingly, Petitioner has not demonstrated a reasonable likelihood of prevailing on its assertion that claims 1 and 14 are unpatentable over Fifield, Suzuki '415, and Admitted Prior Art.

#### IV. CONCLUSION

For the foregoing reasons, we conclude that Petitioner has not demonstrated a reasonable likelihood that at least one of the challenged claims of the '041 patent is unpatentable based on the asserted grounds. Therefore, we do not institute an *inter partes* review on any of the asserted grounds as to any of the challenged claims.

#### V. ORDER

Accordingly, it is

ORDERED that the Petition is denied as to all challenged claims of the '041 patent.

#### PETITIONER:

Jennifer A. Albert Eleanor M. Yost GOODWIN PROCTER LLP jalbert@goodwinprocter.com eyost@goodwinprocter.com

#### PATENT OWNER:

Peter J. McAndrews
Thomas J. Wimbiscus
Christopher M. Scharff
McANDREWS HELD & MALLOY, LTD.
pmcandrews@mcandrews-ip.com
wimbiscus@mcandrews-ip.com
cscharff@mcandrews-ip.com

#### AO 120 (Rev. 08/10) Mail Stop 8 TO: Director of the U.S. Patent and Trademark Office

### REPORT ON THE FILING OR DETERMINATION OF AN

P.O. Box 1450 Alexandria, VA 22313-1450			ACTION REGARDING TRADEMA		
filed in the U.S. Dist		ransferred t	1116 you are hereby advised that a court o Delaware from Alabama is 35 U.S.C. § 292.):	on the following	
DOCKET NO. 15-cv-121-RGA	OCKET NO.  15-cy-121-RGA  DATE FILED  U.S. DISTRICT COURT  Transferred to Delaware from Alabama				
PLAINTIFF	11112014	1	DEFENDANT	THE TOTAL CONTROL OF THE TOTAL	
ADTRAN, Inc.			TQ Delta, LLC		
PATENT OR TRADEMARK NO.	DATE OF PATENT OR TRADEMARK		HOLDER OF PATENT OR T	RADEMARK	
1 See Attachment #1					
2					
3					
4					
5					
		the following	patent(s)/ trademark(s) have been include	d:	
DATE INCLUDED 3/13/2015	INCLUDED BY ☐ A	Amendment	✓ Answer ☐ Cross Bill	☐ Other Pleading	
PATENT OR TRADEMARK NO.	DATE OF PATENT OR TRADEMARK		HOLDER OF PATENT OR T	RADEMARK	
1 See Attachment #2					
2					
3					
4					
5					
In the above	ve—entitled case, the follow	ing decision h	as been rendered or judgement issued:		
DECISION/JUDGEMENT					
CLERK	(	(BY) DEPUTY	CLERK	DATE	

Case 1:15-cv-00121-RGA Document 42 Filed 03/13/15 Page 2 of 4 PageID #: 1559 Attachment #1

Patent or Trademark No.	Date of Patent or Trademark	Holder of Patent or Trademark
1.U.S. 7,453,881 B2	11/18/2008	TQ Delta, LLC
2.U.S. 7,809,028 B2	10/05/2010	TQ Delta, LLC
3.U.S. 7,978,706 B2	7/12/2011	TQ Delta, LLC
4.U.S. 8,422,511 B2	4/16/2013	TQ Delta, LLC
5.U.S. 6,445,730 B1	9/03/2002	TQ Delta, LLC
6.U.S. 7,292,627 B2	11/6/2007	TQ Delta, LLC
7.U.S. 7,451,379 B2	11/11/2008	TQ Delta, LLC
8.U.S. 7,471,721 B2	12/30/2008	TQ Delta, LLC
9.U.S. 7,570,686 B2	8/4/2009	TQ Delta, LLC
10. U.S. 7,831,890 B2	11/09/2010	TQ Delta, LLC
11. U.S. 7,835,430 B2	11/16/2010	TQ Delta, LLC
12. U.S. 7,836,381 B1	11/16/2010	TQ Delta, LLC
13. U.S. 7,844,882 B2	11/30/2010	TQ Delta, LLC
14. U.S. 7,889,784 B2	2/15/2011	TQ Delta, LLC
15. U.S. 7,925,958 B2	04/12/2011	TQ Delta, LLC
16. U.S. 7,978,753 B2	07/12/2011	TQ Delta, LLC
17. U.S. 7,979,778 B2	07/12/2011	TQ Delta, LLC
18. U.S. 8,073,041 B1	12/6/2011	TQ Delta, LLC
19. U.S. 8,090,008 B2	1/3/2012	TQ Delta, LLC
20. U.S. 8,218,610 B2	7/10/2012	TQ Delta, LLC
21. U.S. 8,238,412 B2	08/07/2012	TQ Delta, LLC
22. U.S. 8,276,048 B2	09/25/2012	TQ Delta, LLC
23. U.S. 8,355,427 B2	1/15/2013	TQ Delta, LLC

### Case 1:15-cv-00121-RGA Document 42 Filed 03/13/15 Page 3 of 4 PageID #: 1560

24. U.S. 8,432,956 B2	4/30/2013	TQ Delta, LLC	
25. U.S. 8,437,382 B2	5/7/2013	TQ Delta, LLC	
26. U.S. 8,462,835 B2	6/11/2013	TQ Delta, LLC	
27. U.S. 8,495,473 B2	7/23/2013	TQ Delta, LLC	
28. U.S. 8,516,337 B2	08/20/2013	TQ Delta, LLC	

Case 1:15-cv-00121-RGA Document 42 Filed 03/13/15 Page 4 of 4 PageID #: 1561 Attachment #2

	PATENT OR TRADEMARK NO.	DATE OF PATENT OR TRADEMARK	HOLDER OF PATENT OR TRADEMARK
1	US 7,796,705 B2	9/14/2010	TQ Delta, LLC
2	US 8,335,956 B2	12/18/2012	TQ Delta, LLC
3	US 8,407,546 B2	3/26/2013	TQ Delta, LLC
4	US 8,468,411 B2	6/18/2013	TQ Delta, LLC
5	US 8,645,784 B2	2/4/2014	TQ Delta, LLC
6	US 8,595,577 B2	11/26/2013	TQ Delta, LLC

#### AO 120 (Rev. 08/10) REPORT ON THE Mail Stop 8 FILING OR DETERMINATION OF AN TO: Director of the U.S. Patent and Trademark Office ACTION REGARDING A PATENT OR P.O. Box 1450 TRADEMARK Alexandria, VA 22313-1450 In Compliance with 35 U.S.C. § 290 and/or 15 U.S.C. § 1116 you are hereby advised that a court action has been on the following District of Delaware filed in the U.S. District Court ☑ Patents. ( ☐ the patent action involves 35 U.S.C. § 292.): □ Trademarks or U.S. DISTRICT COURT DOCKET NO. DATE FILED District of Delaware 7/18/2014 DEFENDANT PLAINTIFF ADTRAN, Inc. TQ Delta, LLC DATE OF PATENT PATENT OR HOLDER OF PATENT OR TRADEMARK TRADEMARK NO. OR TRADEMARK 1 See Attached 32 Ports In the above—entitled case, the following patent(s)/ trademark(s) have been included: INCLUDED BY DATE INCLUDED ☐ Other Pleading ☐ Cross Bill ☐ Answer ☐ Amendment DATE OF PATENT PATENT OR HOLDER OF PATENT OR TRADEMARK OR TRADEMARK TRADEMARK NO. 2 4 In the above—entitled case, the following decision has been rendered or judgement issued: DECISION/JUDGEMENT DATE (BY) DEPUTY CLERK CLERK

Case 1:14-cv-00954-UNA Document 3 Filed 07/17/14 Page 2 of 2 PageID #: 593

PATENT OR	DATE OF PATENT	HOLDER OF PATENT OR TRADEMARK
TRADEMARK NO.	OR TRADEMARK	
1 US 8,090,008 B2	1/3/2012	TQ Delta, LLC
2 US 8,073,041 B1	12/6/2011	TQ Delta, LLC
3 US 7,292,627 B2	11/6/2007	TQ Delta, LLC
4 US 7,471,721 B2	12/30/2008	TQ Delta, LLC
5 US 8,218,610 B2	7/10/2012	TQ Delta, LLC
6 US 8,355,427 B2	1/15/2013	TQ Delta, LLC
7 US 7,453,881 B2	11/18/2008	TQ Delta, LLC
8 US 7,809,028 B2	10/5/2010	TQ Delta, LLC
9 US 7,978,706 B2	7/12/2011	TQ Delta, LLC
10 US 8,422,511 B2	4/16/2013	TQ Delta, LLC
11 US 7,889,784 B2	2/15/2011	TQ Delta, LLC
12 US 7,835,430 B2	11/16/2010	TQ Delta, LLC
13 US 7,570,686 B2	8/4/2009	TQ Delta, LLC
14 US 8,238,412 B2	8/7/2012	TQ Delta, LLC
15 US 8,432,956 B2	4/30/2013	TQ Delta, LLC
16 US 7,451,379 B2	11/11/2008	TQ Delta, LLC
17 US 8,516,337 B2	8/20/2013	TQ Delta, LLC
18 US 7,979,778 B2	7/12/2011	TQ Delta, LLC
19 US 7,925,958 B2	4/12/2011	TQ Delta, LLC
20 US 8,462,835 B2	6/11/2013	TQ Delta, LLC
21 US 8,594,162 B2	11/26/2013	TQ Delta, LLC
22 US 7,978,753 B2	7/12/2011	TQ Delta, LLC
23 US 6,445,730 B1	9/3/2002	TQ Delta, LLC
24 US 8,611,404 B2	12/17/2013	TQ Delta, LLC
25 US 8,437,382 B2	5/7/2013	TQ Delta, LLC
26 US 7,836,381 B1	11/16/2010	TQ Delta, LLC
27 US 7,844,882 B2	11/30/2010	TQ Delta, LLC
28 US 8,276,048 B2	9/25/2012	TQ Delta, LLC
29 US 8,495,473 B2	7/23/2013	TQ Delta, LLC
30 US 8,607,126 B1	12/10/2013	TQ Delta, LLC
31 US 7,831,890 B2	11/9/2010	TQ Delta, LLC
32 US 8,625,660 B2	1/7/2014	TQ Delta, LLC

#### Birch, Melvin (Akima)

From:

ded\_nefreply@ded.uscourts.gov

Sent:

Wednesday, November 20, 2013 4:56 PM

To:

ded\_ecf@ded.uscourts.gov

Subject:

Activity in Case 1:13-cv-01835-RGA TQ Delta LLC v. Pace Americas Inc.

Patent/Trademark Report to Commissioner

This is an automatic e-mail message generated by the CM/ECF system. Please DO NOT RESPOND to this e-mail because the mail box is unattended.

\*\*\*NOTE TO PUBLIC ACCESS USERS\*\*\* Judicial Conference of the United States policy permits attorneys of record and parties in a case (including pro se litigants) to receive one free electronic copy of all documents filed electronically, if receipt is required by law or directed by the filer. PACER access fees apply to all other users. To avoid later charges, download a copy of each document during this first viewing. However, if the referenced document is a transcript, the free copy and 30 page limit do not apply.

#### **U.S. District Court**

#### District of Delaware

#### Notice of Electronic Filing

The following transaction was entered by Farnan, Brian on 11/20/2013 at 4:56 PM EST and filed on 11/20/2013

Case Name:

TO Delta LLC v. Pace Americas Inc.

Case Number:

1:13-cv-01835-RGA

Filer:

Document Number: 7

#### **Docket Text:**

Report to the Commissioner of Patents and Trademarks for Patent/Trademark Number(s) US 8,090,008 B2; US 8,073,041 B1; US 7,292,627 B2; US 7,471,721 B2; US 8,218,610 B2; US 8,355,427 B2; US 7,453,881 B2; US 7,978,706 B2; US 8,422,511 B2; US 7,889,784 B2; US 7,835,430 B2; US 7,570,686 B2; US 8,238,412 B2; US 8,432,956 B2; US 7,451,379 B2; US 8,516,337 B2; US 7,979,778 B2; US 7,925,958 B2; US 8,462,835 B2; US 7,836,381 B1; US 7,844,882 B2; US 8,276,048 B2; US 8,495,473 B2; US 7,831,890 B2; . (Farnan, Brian)

#### 1:13-cv-01835-RGA Notice has been electronically mailed to:

Brian E. Farnan <u>bfarnan@farnanlaw.com</u>, <u>tfarnan@farnanlaw.com</u>

Michael J. Farnan <u>mfarnan@farnanlaw.com</u>, <u>tfarnan@farnanlaw.com</u>

#### 1:13-ev-01835-RGA Filer will deliver document by other means to:

The following document(s) are associated with this transaction:

From:

ded nefreply@ded.uscourts.gov

Sent:

Wednesday, November 20, 2013 5:07 PM

To:

ded ecf@ded.uscourts.gov

Subject:

Activity in Case 1:13-cv-01836-RGA TQ Delta LLC v. Zhone Technologies Inc.

Patent/Trademark Report to Commissioner

This is an automatic e-mail message generated by the CM/ECF system. Please DO NOT RESPOND to this e-mail because the mail box is unattended.

\*\*\*NOTE TO PUBLIC ACCESS USERS\*\*\* Judicial Conference of the United States policy permits attorneys of record and parties in a case (including pro se litigants) to receive one free electronic copy of all documents filed electronically, if receipt is required by law or directed by the filer. PACER access fees apply to all other users. To avoid later charges, download a copy of each document during this first viewing. However, if the referenced document is a transcript, the free copy and 30 page limit do not apply.

#### **U.S. District Court**

#### **District of Delaware**

#### **Notice of Electronic Filing**

The following transaction was entered by Farnan, Brian on 11/20/2013 at 5:07 PM EST and filed on 11/20/2013

Case Name:

TQ Delta LLC v. Zhone Technologies Inc.

Case Number:

1:13-cv-01836-RGA

Filer:

Document Number: 7

#### **Docket Text:**

Report to the Commissioner of Patents and Trademarks for Patent/Trademark Number(s) US 8,090,008 B2; US 8,073,041 B1; US 7,292,627 B2; US 7,471,721 B2; US 8,218,610 B2; US 8,355,427 B2; US 7,453,881 B2; US 7,809,028 B2; US 7,978,706 B2; US 8,422,511 B2; US 7,796,705 B2; US 7,889,784 B2; US 7,835,430 B2; US 7,570,686 B2; US 8,238,412 B2; US 8,432,956 B2; US 7,451,379 B2; US 8,516,337 B2; US 7,979,778 B2; US 7,925,958 B2; US 8,462,835 B2; US 7,978,753 B2; US 6,445,730 B1; US 8,437,382 B2; US 7,836,381 B1; US 7,844,882 B2; US 8,276,048 B2; US 8,495,473 B2; US 7,831,890 B2; US 8,335,956 B2; US

#### 1:13-cv-01836-RGA Notice has been electronically mailed to:

8,468,411 B2; US 8,407,546 B2 . (Farnan, Brian)

Brian E. Farnan <u>bfarnan@farnanlaw.com</u>, <u>tfarnan@farnanlaw.com</u>

Michael J. Farnan <u>mfarnan@farnanlaw.com</u>, <u>tfarnan@farnanlaw.com</u>

#### 1:13-cv-01836-RGA Filer will deliver document by other means to:

1

AO 120 (Rev. 08/10)

TO:

## Mail Stop 8 Director of the U.S. Patent and Trademark Office P.O. Box 1450 Alexandria, VA 22313-1450

## REPORT ON THE FILING OR DETERMINATION OF AN ACTION REGARDING A PATENT OR TRADEMARK

Alexandria, VA 22313-1450			TRADEMARK	
In Complia filed in the U.S. D ☐ Trademarks or		Dis	§ 1116 you are hereby advised that a court action has been strict of Delaware on the following on the following as 35 U.S.C. § 292.):	
DOCKET NO.	DATE FILED 12/9/2013		ISTRICT COURT  District of Delaware	
PLAINTIFF	12/0/2010		DEFENDANT	
TQ Delta, LLC			ZyXEL Communications Corporation and ZyXEL Communications, Inc.	
PATENT OR TRADEMARK NO.	DATE OF PATENT OR TRADEMARK		HOLDER OF PATENT OR TRADEMARK	
I See Attached				
2				
3				
4				
5				
DATE INCLUDED  PATENT OR	INCLUDED BY	nendment	g patent(s)/ trademark(s) have been included:  Answer Cross Bill Other Pleading  HOLDER OF PATENT OR TRADEMARK	
TRADEMARK NO.	OR TRADEMARK	-		
2		_		
3		+		
4				
5		-   -		
		ng decision	has been rendered or judgement issued:	
DECISION/JUDGEMEN	Γ			
		TA DEDIT	TV CLERK DATE	
CLERK	(B	SY) DEPU	TY CLERK DATE	

Case 1:13-cv-02013-UNA Document 3 Filed 12/09/13 Page 2 of 2 PageID #: 505

	DATE OF DATENT	
PATENT OR	DATE OF PATENT	HOLDER OF PATENT OR TRADEMARK
TRADEMARK NO.	OR TRADEMARK	TQ Delta, LLC
1 US 8,090,008 B2	1/3/2012	TO Delta, LLC
2 US 8,073,041 B1	12/6/2011	TQ Delta, LLC
3 US 7,292,627 B2	11/6/2007	TO Delta, LLC
4 US 7,471,721 B2	12/30/2008	TQ Delta, LLC
5 US 8,218,610 B2	7/10/2012	TO Delta, LLC
6. US 8,355,427 B2	1/15/2013	
7 US 7,453,881 B2	11/18/2008	TQ Delta, LLC
8 US 7,809,028 B2	10/5/2010	TQ Delta, LLC
9 US 7,978,706 B2	7/12/2011	TQ Delta, LLC
10 US 8,422,511 B2	4/16/2013	TQ Delta, LLC
11 US 7,796,705 B2	9/14/2010	TQ Delta, LLC
12 US 7,889,784 B2	2/15/2011	TQ Delta, LLC
13 US 7,835,430 B2	11/16/2010	TQ Delta, LLC
14 US 7,570,686 B2	8/4/2009	TQ Delta, LLC
15 US 8,238,412 B2	8/7/2012	TQ Delta, LLC
16 US 8,432,956 B2	4/30/2013	TQ Delta, LLC
17 US 7,451,379 B2	11/11/2008	TQ Delta, LLC
18 US 8,516,337 B2	8/20/2013	TQ Delta, LLC
19 US 7,979,778 B2	7/12/2011	TQ Delta, LLC
20 US 7,925,958 B2	4/12/2011	TQ Delta, LLC
21 US 8,462,835 B2	6/11/2013	TQ Delta, LLC
22 US 7,978,753 B2	7/12/2011	TQ Delta, LLC
23 US 6,445,730 B1	9/3/2002	TQ Delta, LLC
24 US 8,437,382 B2	5/7/2013	TQ Delta, LLC
	11/16/2010	TQ Delta, LLC
	11/30/2010	TQ Delta, LLC
26 US 7,844,882 B2	9/25/2012	TQ Delta, LLC
27 US 8,276,048 B2	7/23/2013	TQ Delta, LLC
28 US 8,495,473 B2	11/9/2010	TO Delta, LLC
29 US 7,831,890 B2	12/18/2012	TQ Delta, LLC
30 US 8,335,956 B2	6/18/2013	TO Delta, LLC
31 US 8,468,411 B2	3/26/2013	TQ Delta, LLC
32 US 8,407,546 B2	3/20/2013	1 Q Dollar, EEG

AO 120 (Rev. 08/10)

## TO: Mail Stop 8 Director of the U.S. Patent and Trademark Office P.O. Box 1450 Alexandria, VA 22313-1450

## REPORT ON THE FILING OR DETERMINATION OF AN ACTION REGARDING A PATENT OR TRADEMARK

filed in the U.S. Distri-	ct Court North	15 U.S.C. § 1116 you are hereby advised that a court action hern District of Texas, Dallas Division tion involves 35 U.S.C. § 292.):	on the following
DOCKET NO. 3:12-cy-1462-L	DATE FILED 5/10/2012	U.S. DISTRICT COURT Northern District of Texas, Dalla:	s Division
PLAINTIFF	0/10/2072	DEFENDANT	
Boulle Ltd		De Boulle Diamond & Jewelry Inc	
PATENT OR TRADEMARK NO.	DATE OF PATENT OR TRADEMARK	HOLDER OF PATENT OR TRAD	DEMARK
1 4,086,050	1/17/2012	Boulle Ltd	
2			
3			
4			
5			
DATE INCLUDED 12/9/2013	INCLUDED BY	the following patent(s)/ trademark(s) have been included:	Other Pleading
	DATE OF PATENT	menament	
PATENT OR TRADEMARK NO.	OR TRADEMARK	HOLDER OF PATENT OR TRA	DEWARK
1 3,078,625	4/11/2006	De Boulle Diamond & Jewelry Inc	
2 3,078,627	4/11/2006	De Boulle Diamond & Jewelry Inc	
3			
4			
5			
In the abo	we—entitled case, the following	ing decision has been rendered or judgement issued:	
DECISION/JUDGEMENT			
	т.	(BY) DEPUTY CLERK	DATE
CLERK Karen Mitchell	ľ	s/A. Lowe-Monserrate	12/10/2013

# TO: Mail Stop 8 Director of the U.S. Patent and Trademark Office P.O. Box 1450 Alexandria, VA 22313-1450

## REPORT ON THE FILING OR DETERMINATION OF AN ACTION REGARDING A PATENT OR TRADEMARK

P.O. Box 1450 Alexandria, VA 22313-1450			ACTION REGARDING A TRADEMAR			
	In Compliance with 35 U.S.C. § 290 and/or 15 U.S.C. § 1116 you are hereby advised that a court action has been filed in the U.S. District Court District of Delaware on the following ☐ Trademarks or					
DOCKET NO.	DOCKET NO.  DATE FILED  11/4/2013  U.S. DISTRICT COURT  District of Delaware					
PLAINTIFF	11/4/2013		DEFENDANT			
TQ Delta, LLC			Pace Americas, Inc.			
PATENT OR TRADEMARK NO.	DATE OF PATENT OR TRADEMARK		HOLDER OF PATENT OR TRA	DEMARK		
I See Attached						
2						
3						
4						
5						
	In the above—entitled case, the	e following	patent(s)/ trademark(s) have been included:			
DATE INCLUDED	INCLUDED BY  ☐ Am	endment	☐ Answer ☐ Cross Bill [	Other Pleading		
PATENT OR TRADEMARK NO.	DATE OF PATENT OR TRADEMARK		HOLDER OF PATENT OR TRA			
1						
2						
3						
4						
5						
In the a	bove—entitled case, the following	decision ha	is been rendered or judgement issued:			
DECISION/JUDGEMENT			, , , , , , , , , , , , , , , , , , ,			
CUEDV.	Lav	A DESTRE	OLEDIA	DATE		
CLERK	(BY	') DEPUTY	CLEKK	DATE		

	PATENT OR	DATE OF PATENT	HOLDER OF PATENT OR TRADEMARK
	TRADEMARK NO.	OR TRADEMARK	HOLDER OF TATENT OR TRADEMARK
1	US 8,090,008 B2	1/3/2012	TQ Delta, LLC
2	US 8,073,041 B1	12/6/2011	TQ Delta, LLC
3	US 7,292,627 B2	11/6/2007	TQ Delta, LLC
4	US 7,471,721 B2	12/30/2008	TQ Delta, LLC
5	US 8,218,610 B2	7/10/2012	TQ Delta, LLC
6.	US 8,355,427 B2	1/15/2013	TQ Delta, LLC
7	US 7,453,881 B2	11/18/2008	TQ Delta, LLC
8	US 7,978,706 B2	7/12/2011	TQ Delta, LLC
9	US 8,422,511 B2	4/16/2013	TQ Delta, LLC
10	US 7,889,784 B2	2/15/2011	TQ Delta, LLC
11	US 7,835,430 B2	11/16/2010	TQ Delta, LLC
12	US 7,570,686 B2	8/4/2009	TQ Delta, LLC
13	US 8,238,412 B2	8/7/2012	TQ Delta, LLC
14	US 8,432,956 B2	4/30/2013	TQ Delta, LLC
15	US 7,451,379 B2	11/11/2008	TQ Delta, LLC
16	US 8,516,337 B2	8/20/2013	TQ Delta, LLC
17	US 7,979,778 B2	7/12/2011	TQ Delta, LLC
18	US 7,925,958 B2	4/12/2011	TQ Delta, LLC
19	US 8,462,835 B2	6/11/2013	TQ Delta, LLC

AO 120 (Rev. 08/10)

#### Mail Stop 8 TO: Director of the U.S. Patent and Trademark Office

### REPORT ON THE FILING OR DETERMINATION OF AN

P.O. Box 1450 Alexandria, VA 22313-1450			ACTION REGARDING A PATENT OR TRADEMARK		
filed in the U.S. Dist		Dis	1116 you are hereby advised that a court a trict of Delaware s 35 U.S.C. § 292.):	on the following	
DOCKET NO.	DATE FILED 11/4/2013	U.S. DI	STRICT COURT  District of Delawar	ro	
PLAINTIFF TQ Delta, LLC	111712515		DEFENDANT  Zhone Technologies, Inc.	<u>e</u>	
PATENT OR TRADEMARK NO.	DATE OF PATENT OR TRADEMARK		HOLDER OF PATENT OR TR	ADEMARK	
□ See Attached					
2					
3				Attachia	
4					
5					
DATE INCLUDED	INCLUDED BY	e following	patent(s)/ trademark(s) have been included  Answer Cross Bill	: Other Pleading	
PATENT OR TRADEMARK NO.	DATE OF PATENT OR TRADEMARK		HOLDER OF PATENT OR TR		
1					
2					
3				Military	
4					
5	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,				
In the above	e—entitled case, the following	decision ha	s been rendered or judgement issued:		
1.55					
CLERK	(BY)	) DEPUTY	CLERK	DATE	

Case 1:13-cv-01836-UNA Document 3 Filed 11/04/13 Page 2 of 2 PageID #: 363

	PATENT OR	DATE OF PATENT	
	TRADEMARK NO.	OR TRADEMARK	HOLDER OF PATENT OR TRADEMARK
1	US 8,090,008 B2	1/3/2012	TQ Delta, LLC
2	US 8,073,041 B1	12/6/2011	TQ Delta, LLC
3	US 7,292,627 B2	11/6/2007	TQ Delta, LLC
4	US 7,471,721 B2	12/30/2008	TQ Delta, LLC
5	US 8,218,610 B2	7/10/2012	TQ Delta, LLC
6.	US 8,355,427 B2	1/15/2013	TQ Delta, LLC
7	US 7,453,881 B2	11/18/2008	TQ Delta, LLC
8	US 7,809,028 B2	10/5/2010	TQ Delta, LLC
9	US 7,978,706 B2	7/12/2011	TQ Delta, LLC
10	US 8,422,511 B2	4/16/2013	TQ Delta, LLC
11	US 7,796,705 B2	9/14/2010	TQ Delta, LLC
12	US 7,889,784 B2	2/15/2011	TQ Delta, LLC
13	US 7,835,430 B2	11/16/2010	TQ Delta, LLC
14	US 7,570,686 B2	8/4/2009	TQ Delta, LLC
15	US 8,238,412 B2	8/7/2012	TQ Delta, LLC
16	US 8,432,956 B2	4/30/2013	TQ Delta, LLC
17	US 7,451,379 B2	11/11/2008	TQ Delta, LLC
18	US 8,516,337 B2	8/20/2013	TQ Delta, LLC
19	US 7,979,778 B2	7/12/2011	TQ Delta, LLC
20	US 7,925,958 B2	4/12/2011	TQ Delta, LLC
21	US 8,462,835 B2	6/11/2013	TQ Delta, LLC
22	US 7,978,753 B2	7/12/2011	TQ Delta, LLC
23	US 6,445,730 B1	9/3/2002	TQ Delta, LLC
24	US 8,437,382 B2	5/7/2013	TQ Delta, LLC

#### POWER OF ATTORNEY TO PROSECUTE APPLICATIONS BEFORE THE USPTO

	oy revoke a 37 CFR 3.7	III previous powers of atto	rney given	in the applic	ation identified in th	e attached statement						
	by appoint:	J(C).										
	Partition of the Land Control of the Land Cont											
	OR		62	62574								
	Practitioner	(s) named below (If more than te	n patent pract	itioners are to b	e named, then a custom	er number must be used):						
ш		Name	Registration		Name	Registration						
			Number	_		Number						
any and	l all patent app	nt(s) to represent the undersigne olications assigned only to the un in accordance with 37 CFR 3,73(	idersigned ac	United States Pacording to the U	atent and Trademark Off ISPTO assignment recor	fice (USPTO) in connection with rds or assignments						
	·····	rrespondence address for the ap		tifled in the atta	ched statement under 37	7 CFR 3,73(c) to:						
			· · ·		· · · · · · · · · · · · · · · · · · ·	1						
	The addres	s associated with Customer Nun	<sup>nber:</sup>  62	574								
OR	irm or											
	ndividual Nam	е										
A	Address											
C	City			State	Zip							
	Country											
Ţ	elephone			Emai								
Assigne	ee Name and	Address: TQ DELTA, LLC 805 Las Cimas Pa Austin, Texas 787		e 240		A 110 A						
A copy of this form, together with a statement under 37 CFR 3.73(c) (Form PTO/AIA/96 or equivalent) is required to be Filed in each application in which this form is used. The statement under 37 CFR 3.73(c) may be completed by one of The practitioners appointed in this form, and must identify the application in which this Power of Attorney is to be filed.												
	The indi	<b>SIGN</b> vidual whose signature and ti		<b>Assignee of</b> led below is au		alf of the assignee						
Signat	ure	march	ane		Date 10/	4/12						
Name	Ma	ark K. Roche			Telephone 512-609-1810							
Title	Ma	anaging Director										

This collection of information is required by 37 CFR 1.31, 1.32 and 1.33. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 3 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will very depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS, SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

Electronic Acknowledgement Receipt								
EFS ID:	14170591							
Application Number:	11860080							
International Application Number:								
Confirmation Number:	5967							
Title of Invention:	SYSTEM AND METHOD FOR DESCRAMBLING THE PHASE OF CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM							
First Named Inventor/Applicant Name:	Marcos C. Tzannes							
Customer Number:	62574							
Filer:	Jason Vick/Joanne Vos							
Filer Authorized By:	Jason Vick							
Attorney Docket Number:	6936-47-CON-DIV							
Receipt Date:	07-NOV-2012							
Filing Date:	24-SEP-2007							
Time Stamp:	14:26:40							
Application Type:	Utility under 35 USC 111(a)							

### Payment information:

Submitted with Payment	no

### File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	* '		
1		EntityStatus 373c w POA.pdf	419012	ves	Δ	
'		EntityStatus_5/3c_w_i O/t.par	64f1b890451f4ec2682e26a525b8d1c5259 91d75	· '	4	

Multipart Description/PDF files in .a	zip description	
Document Description	Start	End
Miscellaneous Incoming Letter	1	1
Assignee showing of ownership per 37 CFR 3.73.	2	3
Power of Attorney	4	4

#### Warnings:

Information:

Total Files Size (in bytes):							419012									

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

#### New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

#### National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

#### New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

#### IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re the Application of: Marcos C. Tzannes	Patent No.: 8,073,041
Application No.: 11/860,080	Issued: December 6, 2011
Filed: September 24, 2007	Examiner: WILLIAMS, Lawrence
Atty. File No.: 6936-47-CON-DIV	Confirmation No.: 5967

For: SYSTEM AND METHOD FOR DESCRAMBLING THE PHASE OF CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM

#### ASSERTION OF ENTITLEMENT TO SMALL ENTITY STATUS

Commissioner for Patents P.O. Box 1450 Alexandria, VA 22313-1450

Madam:

In accordance with MPEP §§ 509.02 and 509.03 and 37 CFR 1.27, this document is being filed to inform the U.S. Patent Office of the change of status for the above-identified patent from large entity status to small entity status. All fees paid to date have been paid as large entity status. No fees have yet been paid as small entity status. Due to the sale of the referenced patent, the Applicant is now entitled to small entity status.

We respectfully request that small entity status be granted for the above-referenced patent.

Please contact the undersigned if there are any questions regarding this notification.

Respectfully submitted,

SHERIDAN ROSS P.C.

Date: By: Jason H. Vick Reg. No. 45,285

1560 Broadway, Suite 1200 Denver, Colorado 80202 Telephone: 303-863-9700 PTO/AIA/96 (08-12)
Approved for use through 01/31/2013. OMB 0651-0031
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

	ENT UNDER 37 CFR 3.73(c)
Applicant/Patent Owner: TQ DELTA, LLC	
Application No./Patent No.: 8,073,041	Filed/Issue Date: December 6, 2011
	THE PHASE OF CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM
TQ DELTA, LLC	a Corporation
(Name of Assignee)	(Type of Assignee, e.g., corporation, partnership, university, government agency, etc.)
states that, for the patent application/patent identified	d above, it is (choose one of options 1, 2, 3 or 4 below):
1. The assignee of the entire right, title, and int	erest.
2. An assignee of less than the entire right, title	e, and interest (check applicable box):
The extent (by percentage) of its ownersh holding the balance of the interest <u>must be s</u>	ip interest is%. Additional Statement(s) by the owners submitted to account for 100% of the ownership interest.
There are unspecified percentages of ow right, title and interest are:	rnership. The other parties, including inventors, who together own the entire
Additional Statement(s) by the owner(s) hright, title, and interest.	olding the balance of the interest must be submitted to account for the entire
3. The assignee of an undivided interest in the The other parties, including inventors, who together	entirety (a complete assignment from one of the joint inventors was made).
	olding the balance of the interest <u>must be submitted</u> to account for the entire
4. The recipient, via a court proceeding or the li	ke (e.g., bankruptcy, probate), of an undivided interest in the entirety (a The certified document(s) showing the transfer is attached.
The interest identified in option 1, 2 or 3 above (not	option 4) is evidenced by either (choose one of options A or B below):
	atent application/patent identified above. The assignment was recorded in ice at Reel, Frame, or for which a copy
B. A chain of title from the inventor(s), of the pa	atent application/patent identified above, to the current assignee as follows:
1. From: Marcos C. Tzannes	To: AWARE, INC.
The document was recorded in the	e United States Patent and Trademark Office at
Reel <u>010877</u> , Frame <u>030</u>	, or for which a copy thereof is attached.
2. From: AWARE, INC.	To: TQ DELTA, LLC
	e United States Patent and Trademark Office at , or for which a copy thereof is attached.

[Page 1 of 2]
This collection of information is required by 37 CFR 3.73(b). The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

PTO/AIA/96 (08-12)
Approved for use through 01/31/2013. OMB 0651-0031
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

		STATEME	NT UNDER 37 CFR 3.73(c	<u>c)</u>
3. From:			To:	
			United States Patent and Traden	
	Reel	, Frame	, or for which a copy the	reof is attached.
4. From:			To:	
	The docume	nt was recorded in the I	United States Patent and Trader	mark Office at
	Reel	, Frame	, or for which a copy the	reof is attached.
5. From:			To:	
	The docume	nt was recorded in the t	United States Patent and Trader	nark Office at
	Reel	, Frame	, or for which a copy the	reof is attached.
6. From:		The state of the s	To:	
	The docume	nt was recorded in the l	United States Patent and Trader	nark Office at
	Reel, Frame, or for which a copy thereof is attached.			
Ad	dditional document	s in the chain of title are	e listed on a supplemental sheet	(s).
✓ As r assi	equired by 37 CFF ignee was, or conc	ł 3.73(c)(1)(i), the docur urrently is being, submit	mentary evidence of the chain of tted for recordation pursuant to 3	title from the original owner to the 37 CFR 3.11.
				t(s)) must be submitted to Assignment cords of the USPTO. See MPEP 302.08]
The undersi	igned (whose title i	s supplied below) is autl	horized to act on behalf of the as	ssignee.
Ola - a true				7 No. 12
Signature  Jason I	⊔ Viok			Date
				45,285
Printed or T	уреа мате			Title or Registration Number

[Page 2 of 2]

# DEPARTMENT OF DEFENSE ACCESS ACKNOWLEDGEMENT / SECRECY ORDER RECOMMENDATION FOR PATENT APPLICATION

Application Serial No: DP11860080 Date Referred: 10/09/2007

I hereby acknowledge that the Department of Defense reviewers have inspected this application in administration of 35 USC 181 on behalf of the Agencies/Commands specified below. DoD reviewers will not divulge any information from this application for any purpose other than administration of 35 USC 181.

Defense Agency	Recommendation	Reviewer Name	Date Reviewed
Апту	Forwarded	Alan Klein	14 Feb 2008
CERDEC	Secrecy Not Recommended	Jeremy Aller	04 Apr 2012

Defense Agency	Reviewer Name	Date Viewed PDF
Army	Angela Brassell	03 May 2010 12:33
ARL (Army)	Antoinnette Morris	12 Sep 2011 12:46

#### Instructions to Reviewers:

- 1. All DoD personnel reviewing this application will be listed on this form regardless of whether they are making a secrecy order recommendation.
- 2. This form will be forwarded to USPTO once all assigned DoD entities have provided their secrecy order recommendation.

DoD Completion of Review: Final Forwarded to USPTO: 04/05/2012



#### UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office Address: COMMISSIONER FOR PATENTS

P.O. Box 1450 Alexandria, Virginia 22313-1450 www.uspto.gov

APPLICATION NO. ISSUE DATE PATENT NO. ATTORNEY DOCKET NO. CONFIRMATION NO. 11/860,080 12/06/2011 8073041 5550-47-CON-DIV 5967

62574

11/16/2011

Jason H. Vick Sheridan Ross, PC Suite # 1200 1560 Broadway Denver, CO 80202

#### **ISSUE NOTIFICATION**

The projected patent number and issue date are specified above.

#### Determination of Patent Term Adjustment under 35 U.S.C. 154 (b)

(application filed on or after May 29, 2000)

The Patent Term Adjustment is 1091 day(s). Any patent to issue from the above-identified application will include an indication of the adjustment on the front page.

If a Continued Prosecution Application (CPA) was filed in the above-identified application, the filing date that determines Patent Term Adjustment is the filing date of the most recent CPA.

Applicant will be able to obtain more detailed information by accessing the Patent Application Information Retrieval (PAIR) WEB site (http://pair.uspto.gov).

Any questions regarding the Patent Term Extension or Adjustment determination should be directed to the Office of Patent Legal Administration at (571)-272-7702. Questions relating to issue and publication fee payments should be directed to the Application Assistance Unit (AAU) of the Office of Data Management (ODM) at (571)-272-4200.

APPLICANT(s) (Please see PAIR WEB site http://pair.uspto.gov for additional applicants):

Marcos C. Tzannes, Orinda, CA;

IR103 (Rev. 10/09)



#### UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address COMMISSIONER FOR PATENTS
PO BOX 1459
Advandria, Voginia 22313-1450
www.uspto.gov

### 

Bib Data Sheet

**CONFIRMATION NO. 5967** 

SERIAL NUMBE 11/860,080	FILING OR 371(c) DATE 09/24/2007 RULE	С	<b>LASS</b> 375	GROL	J <b>P ART</b> 2611	UNIT	D	ATTORNEY OCKET NO. 0-47-CON-DIV
APPLICANTS  Marcos C. Tzannes, Orinda, CA;								
** CONTINUING DATA **********************************								
Foreign Priority claimed 35 USC 119 (a-d) cond met Verified and Acknowledged	fter nitials	STATE OR COUNTRY CA	DRA			AL IMS	INDEPENDENT CLAIMS 1	
ADDRESS 62574								
TITLE SYSTEM AND METHOD FOR DESCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM								
					☐ All	Fees		
					□ 1.1	6 Fees	( Filing	1)
FILING FEE F	EES: Authority has been gloto charge/c	given in P	aper POSIT ACCOU	INT	1.1 time )	7 Fees	(Proc	essing Ext. of
1612 N	lo for following	g:			□ 1.1	8 Fees	( Issue	e)
					Otl	ner		
		☐ Credit						



#### United States Patent and Trademark Office

UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office Address COMMISSIONER FOR PATENTS P.O. Dox 1450 Alexandra, Vinginia 22313-1450 www.uniple.gov

## 

Bib Data Sheet

**CONFIRMATION NO. 5967** 

SERIAL NUMBER 11/860,080	FILING OR 371(c) DATE 09/24/2007 RULE	C	CLASS 375	GROU	JP AR1 2611	UNIT	D	ATTORNEY OCKET NO. 0-47-CON-DIV
APPLICANTS Marcos C. Tza	APPLICANTS  Marcos C. Tzannes, Orinda, CA;							
** CONTINUING DATA **********************************								
Foreign Priority claimed 35 USC 119 (a-d) conditio met Verified and Acknowledged Ex	ter nitials	STATE OR COUNTRY CA	DRA			AL MS	INDEPENDENT CLAIMS 1	
ADDRESS 62574								
TITLE SYSTEM AND METH COMMUNICATIONS	HOD FOR DESCRAMBL	ING THE	E PHASE OF C	CARRIE	RS IN	A MULT	ICARI	RIER
					☐ All	Fees		
					<u> </u>	6 Fees	(Filing	1)
FILING FEE FEE	ES: Authority has been g to charge/cr	iven in P edit DEF	aper POSIT ACCOU	NT	1.1 time )	7 Fees	(Proc	essing Ext. of
1612 No.	for following	:			□ 1.1	8 Fees	( Issue	e)
					Otl	ner		
					☐ Cre	edit		

UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office Address: COMMISSIONER FOR PATENTS P.O. Box 1450 Alexandria, Virginia 22313-1450 www.usplo.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
11/860,080	09/24/2007	Marcos C. Tzannes	5550-47-CON-DIV	5967
62574 Jason H. Vick	7590 11/03/201	1	EXAM	IINER
Sheridan Ross, Suite # 1200	PC		WILLIAMS, I	AWRENCE B
1560 Broadway	7		ART UNIT	PAPER NUMBER
Denver, CO 802	202		2611	
			NOTIFICATION DATE	DELIVERY MODE
			11/03/2011	ELECTRONIC

#### Please find below and/or attached an Office communication concerning this application or proceeding.

The time period for reply, if any, is set in the attached communication.

Notice of the Office communication was sent electronically on above-indicated "Notification Date" to the following e-mail address(es):

jvick@sheridanross.com

	Application No.	Applicant(s)
	11/860,080	TZANNES, MARCOS C.
Response to Rule 312 Communication	Examiner	Art Unit
	LAWRENCE WILLIAMS	2611
The MAILING DATE of this communication ap	pears on the cover sheet with the	correspondence address –
<ol> <li>In the amendment filed on 19 October 2011 under 37 CFR</li> <li>a) In the amendment filed on 19 October 2011 under 37 CFR</li> </ol>	1.312 has been considered, and has	s been:
b)  entered as directed to matters of form not affecting	the scope of the invention.	
c) disapproved because the amendment was filed after	er the payment of the issue fee.	
Any amendment filed after the date the issue fee and the required fee to withdraw the application		petition under 37 CFR 1.313(c)(1)
d) disapproved. See explanation below.		
e)  entered in part. See explanation below.		
	/Tesfaldet Bocure/ Primary Examiner, Art Unit	2611

U.S. Patent and Trademark Office PTOL-271 (Rev. 04-01) OK TO ENTER: /L.W./

10/28/2011

#### **AMENDMENTS TO THE SPECIFICATION**

In the Title:

Please change the title to read as follows:

SYSTEM AND METHOD FOR <u>DESCRAMBLING</u>SCRAMBLING THE PHASE OF THE-CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM

#### PART B - FEE(S) TRANSMITTAL

Complete and send this form, together with applicable fee(s), to: Mail

Mail Stop ISSUE FEE
Commissioner for Patents
P.O. Box 1450
Alexandria, Virginia 22313-1450
(571)-273-2885

INSTRUCTIONS: This form should be used for transmitting the ISSUE FEE and PUBLICATION FEE (if required). Blocks 1 through 5 should be completed where

appropriate. All further of a dicated unless correcte maintenance fee notificat	correspondence includired below or directed other	ng the Patent, advance or nerwise in Block 1, by (a	ders and notification of a) specifying a new corr	maintenance fees vespondence address	vill be ma ; and/or (l	iled to the current o) indicating a sepa	correspondence address as trate "FEE ADDRESS" for
CURRENT CORRESPONDE	No Fe pa ha	ote: A certificate of e(s) Transmittal. The pers. Each additiona ve its own certificate	mailing c is certifica il paper, s e of mailin	an only be used fo tte cannot be used f uch as an assignme g or transmission.	or domestic mailings of the for any other accompanying to or formal drawing, must		
Jason H. Vick Sheridan Ross, P Suite # 1200 1560 Broadway	7590 10/17 PC	/2011		Cer	tificate of	f Mailing or Trans	
Denver, CO 8020	02						(Depositor's name)
						-	(Signature)
							(Date)
APPLICATION NO.	FILING DATE		FIRST NAMED INVENTO	R	ATTORN	EY DOCKET NO.	CONFIRMATION NO.
11/860,080	09/24/2007		Marcos C. Tzannes		5550	-47-CON-DIV	5967
TITLE OF INVENTIONS S		METHOD FOR SCR.	AMBLING THE PHA	ASE OF THE CA	ARRIERS	IN A MULTIC	CARRIER
APPLN. TYPE	SMALL ENTITY	ISSUE FEE DUE	PUBLICATION FEE DUE	PREV. PAID ISSU	E FEE	TOTAL FEE(S) DUE	DATE DUE
nonprovisional	NO	\$1740	\$300	\$0		\$2040	01/17/2012
EXAM	INER	ART UNIT	CLASS-SUBCLASS	7			
WILLIAMS, L.	AWRENCE B	2611	375-260000	<b>-</b>			
CFR 1.363).  Change of corresp Address form PTO/SE  "Fee Address" indi PTO/SB/47; Rev 03-0 Number is required.	ence address or indication ondence address (or Cha 3/122) attached. ication (or "Fee Address 2 or more recent) attach	nge of Correspondence	2. For printing on the (1) the names of up or agents OR, alterna (2) the name of a sin registered attorney or 2 registered patent at listed, no name will be THE PATENT (print or to	to 3 registered pater tively, gle firm (having as a r agent) and the name torneys or agents. If he printed.	nt attorney	a 2 Sheridan	
PLEASE NOTE: Unl recordation as set forth (A) NAME OF ASSIG	h in 37 CFR 3.11. Comj	ified below, no assignee pletion of this form is NO	data will appear on the T a substitute for filing a (B) RESIDENCE: (CIT	n assignment.			ocument has been filed for
AWARE, INC.			Bedford, MA				
Please check the appropri	iate assignee category or	categories (will not be pr	rinted on the patent):	Individual 🗹 C	orporation	or other private gro	oup entity Government
a. The following fee(s) a  ✓ Issue Fee ✓ Publication Fee (N  ✓ Advance Order - #	To small entity discount p		b. Payment of Fee(s): (PI A check is enclosed Payment by credit c The Director is here overpayment, to Dep	ard. Form PTO-2038	8 is attach	ed.	shown above) eficiency, or credit any n extra copy of this form).
_ ~ .	tus (from status indicate s SMALL ENTITY state		b. Applicant is no lo	onger claiming SMA	LL ENTI	ΓY status. See 37 C	FR 1.27(g)(2).
NOTE: The Issue Fee and	d Publication Fee (if req	uired) will not be accepte tes Patent and Trademark	d from anyone other than				ne assignee or other party in
Authorized Signature				Date 19	Oct	′//	
Typed or printed name	Jason H. Vick			Registration 1	No. <u>45,</u> 2	285	
Mexaliulia, Vilgilia 223	15-1450.	FR 1.311. The informatic U.S.C. 122 and 37 CFR USPTO. Time will vary rden, should be sent to the ONOT SEND FEES OR Copersons are required to re-					d by the USPTO to process) ng gathering, preparing, and gathering preparing, and more to complete artment of Commerce, P.O. for Patents, P.O. Box 1450, I number.

PTOL-85 (Rev. 02/11) Approved for use through 08/31/2013.

OMB 0651-0033

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

#### IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re the Application of: Marcos C. Tzannes	) Group Art Unit: 2611
Application No.: 11/860,080	Examiner: WILLIAMS, Lawrence B
Filed: September 24, 2007	) Confirmation No.: 5967
Atty. File No.: 5550-47-CON-DIV	)

For: SYSTEM AND METHOD FOR DESCRAMBLING THE PHASE OF CARRIERS IN A

MULTICARRIER COMMUNICATIONS SYSTEM

#### **COMMENTS ON STATEMENT OF REASONS FOR ALLOWANCE**

Commissioner for Patents P.O. Box 1450 Alexandria, VA 22313

Sir:

Applicant submits this Comments on Statement of Reasons for Allowance to address further the Notice of Allowability ("Notice") having a mailing date of October 17, 2011.

In the Notice, the Examiner's stated reasons for allowance were that:

The following is a statement of reasons for the indication of allowable subject matter:

The instant application discloses a method and system for demodulating a bit stream. A search of prior art records has filed to teach or suggest, alone or in combination:

In a first multicarrier transceiver, having a plurality of carrier signals for receiving a bit stream, each carrier signal having a phase characteristic associated with the bit stream, a method comprising:

demodulating the bit stream, wherein:

"each carrier signal was associated with a value determined independently of any bit value carried by that carrier signal,

1

a phase shift was computed for each carrier signal based on the value associated with that carrier signal,

Attorney Docket No.: 5550-47-CON-DIV

the phase shift computed for each carrier signal was combined with the phase characteristic of that carrier signal so as to substantially scramble the phase characteristics of the plurality of carrier signals,

multiple carrier signals were used to modulate a same input bit value, and a value associated with the carrier signal was determined using a pseudo-random number generator" (Fig(s). 1,2; pg. 7, line 11- pg. 8, line 10) as disclosed in claim 47.

A multicarrier system including a first transceiver having a plurality of carrier signals for receiving a bit stream, each carrier signal having a phase characteristic associated with the bit stream, the transceiver capable of demodulating the bit stream, wherein:

"each carrier signal was associated with a value determined independently of any bit value carried by that carrier signal,

a phase shift was computed for each carrier signal based on the value associated with that carrier signal,

the phase shift computed for each carrier signal was combined with the phase characteristic of that carrier signal so as to substantially scramble the phase characteristics of the plurality of carrier signals,

multiple carrier signals were used to modulate a same input bit value, and a value associated with the carrier signal was determined using a pseudo-random number generator" (Fig(s). 1,2; pg. 7, line 11- pg. 8, line 10) as disclosed in claim 60.

Based on the Notice, the patentability of all other independent and dependent claims is assumed to be based upon the elements as set forth in such claims and that such claims meet all criteria for patentability under §101, §102, §103 and §112.

As is clear from MPEP 1302.14,

"The statement [of reasons for allowance] is not intended to necessarily state all the reasons for allowance or all the details why claims are allowed and should not be written to specifically or impliedly state that all the reasons for allowance are set forth."

While the stated Reasons for Allowance may be a stated reason for allowing some independent claims, Applicant submits that some independent claims have a different reason for allowance and that some independent claims have other reasons for allowance.

Specifically, the prior art fails to teach the specific combination of features as recited in the independent claims 47 and 60.

2

Although the Applicant believes that no fees are due for filing this Comments on Statement of Reasons for Allowance, please charge any fees deemed necessary to Deposit Account No. 19-1970.

Respectfully submitted,

SHERIDAN ROSS P.C.

Date: 11 0 9 1/9

Jason H. Vick

3

Reg. No. 45,285

1560 Broadway, Suite 1200 Denver, Colorado 80202 Telephone: 303-863-9700

#### IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re the Application of: Marcos C. Tzannes	Group Art Unit: 2611
Application No.: 11/860,080	Examiner: WILLIAMS, Lawrence B.
Filed: September 24, 2007	Confirmation No.: 5967
Atty. File No.: 5550-47-CON-DIV	)

For: SYSTEM AND METHOD FOR DESCRAMBLING THE PHASE OF CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM (as amended)

# AMENDMENT AFTER ALLOWANCE UNDER 37 C.F.R. 1.312

Commissioner for Patents P.O. Box 1450 Alexandria, VA 22313-1450

Sir:

Applicants submit this Amendment After Allowance pursuant to 37 C.F.R. 1.312 in response to the Notice of Allowance having a mailing date of October 17, 2011. While Applicants believe that no fees are due with the filing of this response, the undersigned hereby authorizes the charge of any fees deemed necessary to Deposit Account No. 19-1970.

An amendment may be entered after the mailing of a Notice of Allowance but prior to payment of the issue fee upon recommendation of the primary Examiner. Therefore, it is respectfully requested that the above-referenced application be amended as follows:

Amendments to the Specification begin on page 2 of this paper.

Remarks begin on page 3 of this paper.

#### **AMENDMENTS TO THE SPECIFICATION**

In the Title:

Please change the title to read as follows:

SYSTEM AND METHOD FOR <u>DESCRAMBLING</u>SCRAMBLING THE PHASE OF THE-CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM

#### **REMARKS**

The amendment to the specification displayed herein amends the title of the application. No new matter is believed to be introduced by this amendment.

The Commissioner is hereby authorized to charge to deposit account number 19-1970 any fees under 37 CFR § 1.16 and 1.17 that may be required by this paper and to credit any overpayment to that Account. If any extension of time is required in connection with the filing of this paper and has not been separately requested, such extension is hereby petitioned.

Respectfully submitted,

SHERIDAN ROSS P.C.

Date: 19 05 11

Jason H. Vick

Reg. No. 45,285

1560 Broadway, Suite 1200 Denver, Colorado 80202

Telephone: 303-863-9700

#### IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re the Application of: Marcos C. Tzannes	Group Art Unit: 2611
Application No.: 11/860,080	Examiner: WILLIAMS, Lawrence B.
Filed: September 24, 2007	Confirmation No.: 5967
Atty. File No.: 5550-47-CON-DIV	)

For: SYSTEM AND METHOD FOR DESCRAMBLING THE PHASE OF CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM

#### **RESPONSE TO INTERVIEW SUMMARY**

Commissioner for Patents P.O. Box 1450 Alexandria, VA 22313-1450

Sir:

Applicant would like to thank Examiner Williams for the courtesies extended to Applicant's undersigned representative during the September 22, 2011 interview. During the interview claims 47 and 60 were discussed. The undersigned also agreed to a minor change to the abstract to reflect the amended claims and drawings. The changes are accurately reflected in the Examiner's Amendment of 9/22/11.

Respectfully submitted,

SHERIDAN ROSS P.C.

Date: 19 0 5 1/

By: Jason H. Vick

1

Reg. No. 45,285

1560 Broadway, Suite 1200

Denver, Colorado 80202 Telephone: 303-863-9700

Attorney Docket No.: 5550-47-CON-DIV

Exhibit 1005 Page 54

Electronic Patent Application Fee Transmittal						
Application Number:	11860080					
Filing Date:	24-Sep-2007					
Title of Invention:	SYSTEM AND METHOD FOR SCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM					
First Named Inventor/Applicant Name:	Marcos C. Tzannes					
Filer:	Jason Vick/Joanne Vos					
Attorney Docket Number:	555	0-47-CON-DIV				
Filed as Large Entity						
Utility under 35 USC 111(a) Filing Fees						
Description		Fee Code	Quantity	Amount	Sub-Total in USD(\$)	
Basic Filing:						
Pages:						
Claims:						
Miscellaneous-Filing:						
Petition:						
Patent-Appeals-and-Interference:						
Post-Allowance-and-Post-Issuance:						
Utility Appl issue fee 1501 1 1740 1740					1740	
Publ. Fee- early, voluntary, or normal		1504	1	300	300	

Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Extension-of-Time:				
Miscellaneous:				
	Total in USD (\$)			2040

Electronic Acknowledgement Receipt				
EFS ID:	11222024			
Application Number:	11860080			
International Application Number:				
Confirmation Number:	5967			
Title of Invention:	SYSTEM AND METHOD FOR SCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM			
First Named Inventor/Applicant Name:	Marcos C. Tzannes			
Customer Number:	62574			
Filer:	Jason Vick/Joanne Vos			
Filer Authorized By:	Jason Vick			
Attorney Docket Number:	5550-47-CON-DIV			
Receipt Date:	19-OCT-2011			
Filing Date:	24-SEP-2007			
Time Stamp:	16:46:32			
Application Type:	Utility under 35 USC 111(a)			

#### **Payment information:**

Submitted with Payment	yes
Payment Type	Deposit Account
Payment was successfully received in RAM	\$2040
RAM confirmation Number	3320
Deposit Account	191970
Authorized User	

The Director of the USPTO is hereby authorized to charge indicated fees and credit any overpayment as follows:

Charge any Additional Fees required under 37 C.F.R. Section 1.16 (National application filing, search, and examination fees)

Charge any Additional Fees required under 37 C.F.R. Section 1.17 (Patent application and reexamination processing fees)

Charge any Additional Fees required under 37 C.F.R. Section 1.19 (Document supply fees)

Charge any Additional Fees required under 37 C.F.R. Section 1.20 (Post Issuance fees)

Charge any Additional Fees required under 37 C.F.R. Section 1.21 (Miscellaneous fees and charges)

#### File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Issue Fee Payment (PTO-85B)	lssue_fee_Transmittal.pdf	110851	no	1
'	issue ree rayment (1 10 05b)	issue_ree_mansimetan.pui	fd78f3349458342953fe65e51e12a319bda7 75e6	110	'
Warnings:					
Information:					
2	Post Allowance Communication -	Comments_on_Reason_for_All	114720	no	3
	Incoming	owance.pdf	6ad8fa681f297b7908578de619407db5827 888fd	110	
Warnings:					
Information:					
3		Amendment_312.pdf	68537	yes	3
		7e.iae.ii512.pai	881e45a3ef2a74d605ea91f67110d22cea6a 4b03	,	J
	Multip	art Description/PDF files in .	zip description		
	Document Des	scription	Start	E	nd
	Amendment after Notice of	1		1	
	Specificat	2	2		
	Applicant Arguments/Remarks	Made in an Amendment	3		3
Warnings:					
Information:					
4	Applicant summary of interview with	Response_to_Interview_Summ	36981	no	1
·	examiner	ary.pdf	a03e6591f75d1bf7dc6c9203d8e44bd5475 b1903		· 
Warnings:					
Information:					
5	5 Fee Worksheet (SB06) fee-info.pdf		32159	no	2
			a2026b909a0956b3ad42e307a8c3657ebb 3aa601		
Warnings:					
Information:					
		Total Files Size (in bytes)	36	3248	

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

#### New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

#### National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

#### New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office Address: COMMISSIONER FOR PATENTS P.O. Box 1450 Alexandria, Virginia 22313-1450 www.uspto.gov

#### NOTICE OF ALLOWANCE AND FEE(S) DUE

Jason H. Vick Sheridan Ross, PC Suite # 1200 1560 Broadway Denver, CO 80202

10/17/2011

EXAMINER
WILLIAMS, LAWRENCE B

ART UNIT PAPER NUMBER

2611

DATE MAILED: 10/17/2011

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
11/860.080	09/24/2007	Marcos C. Tzannes	5550-47-CON-DIV	5967

TITLE OF INVENTION: SYSTEM AND METHOD FOR SCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM

APPLN. TYPE	SMALL ENTITY	ISSUE FEE DUE	PUBLICATION FEE DUE	PREV. PAID ISSUE FEE	TOTAL FEE(S) DUE	DATE DUE
nonprovisional	NO	\$1740	\$300	\$0	\$2040	01/17/2012

THE APPLICATION IDENTIFIED ABOVE HAS BEEN EXAMINED AND IS ALLOWED FOR ISSUANCE AS A PATENT. PROSECUTION ON THE MERITS IS CLOSED. THIS NOTICE OF ALLOWANCE IS NOT A GRANT OF PATENT RIGHTS. THIS APPLICATION IS SUBJECT TO WITHDRAWAL FROM ISSUE AT THE INITIATIVE OF THE OFFICE OR UPON PETITION BY THE APPLICANT. SEE 37 CFR 1.313 AND MPEP 1308.

THE ISSUE FEE AND PUBLICATION FEE (IF REQUIRED) MUST BE PAID WITHIN THREE MONTHS FROM THE MAILING DATE OF THIS NOTICE OR THIS APPLICATION SHALL BE REGARDED AS ABANDONED. THIS STATUTORY PERIOD CANNOT BE EXTENDED. SEE 35 U.S.C. 151. THE ISSUE FEE DUE INDICATED ABOVE DOES NOT REFLECT A CREDIT FOR ANY PREVIOUSLY PAID ISSUE FEE IN THIS APPLICATION. IF AN ISSUE FEE HAS PREVIOUSLY BEEN PAID IN THIS APPLICATION (AS SHOWN ABOVE), THE RETURN OF PART B OF THIS FORM WILL BE CONSIDERED A REQUEST TO REAPPLY THE PREVIOUSLY PAID ISSUE FEE TOWARD THE ISSUE FEE NOW DUE.

#### HOW TO REPLY TO THIS NOTICE:

I. Review the SMALL ENTITY status shown above.

If the SMALL ENTITY is shown as YES, verify your current SMALL ENTITY status:

A. If the status is the same, pay the TOTAL FEE(S) DUE shown above.

B. If the status above is to be removed, check box 5b on Part B - Fee(s) Transmittal and pay the PUBLICATION FEE (if required) and twice the amount of the ISSUE FEE shown above, or

If the SMALL ENTITY is shown as NO:

A. Pay TOTAL FEE(S) DUE shown above, or

B. If applicant claimed SMALL ENTITY status before, or is now claiming SMALL ENTITY status, check box 5a on Part B - Fee(s) Transmittal and pay the PUBLICATION FEE (if required) and 1/2 the ISSUE FEE shown above.

II. PART B - FEE(S) TRANSMITTAL, or its equivalent, must be completed and returned to the United States Patent and Trademark Office (USPTO) with your ISSUE FEE and PUBLICATION FEE (if required). If you are charging the fee(s) to your deposit account, section "4b" of Part B - Fee(s) Transmittal should be completed and an extra copy of the form should be submitted. If an equivalent of Part B is filed, a request to reapply a previously paid issue fee must be clearly made, and delays in processing may occur due to the difficulty in recognizing the paper as an equivalent of Part B.

III. All communications regarding this application must give the application number. Please direct all communications prior to issuance to Mail Stop ISSUE FEE unless advised to the contrary.

IMPORTANT REMINDER: Utility patents issuing on applications filed on or after Dec. 12, 1980 may require payment of maintenance fees. It is patentee's responsibility to ensure timely payment of maintenance fees when due.

Page 1 of 3

#### PART B - FEE(S) TRANSMITTAL

PTOL-85 (Rev. 02/11) Approved for use through 08/31/2013.

Complete and send this form, together with applicable fee(s), to: Mail

Mail Stop ISSUE FEE
Commissioner for Patents
P.O. Box 1450 Alexandria, Virginia 22313-1450 or <u>Fax</u> (571)-273-2885

INSTRUCTIONS: This form should be used for transmitting the ISSUE FEE and PUBLICATION FEE (if required). Blocks 1 through 5 should be completed where appropriate. All further correspondence including the Patent, advance orders and notification of maintenance fees will be mailed to the current correspondence address as indicated unless corrected below or directed otherwise in Block 1, by (a) specifying a new correspondence address; and/or (b) indicating a separate "FEE ADDRESS" for meintrepress the rediffications.

maintenance fee notificati		ock 1 for any change of address)	N	ote: A certificate of maili	ng can only be used fo	r domestic mailings of the or any other accompanying
62574	<b>75</b> 90 10/17	/2011	p:	ee(s) Transmittal. This cer apers. Each additional pap ave its own certificate of m	er, such as an assignme	or any other accompanying nt or formal drawing, must
Jason H. Vick Sheridan Ross, Po Suite # 1200 1560 Broadway		22011	S	hereby certify that this Fe- tates Postal Service with s	ufficient postage for firs	mission g deposited with the United st class mail in an envelope above, or being facsimile tte indicated below.
Denver, CO 8020	)2					(Depositor's name)
						(Signature)
			L			(Date)
APPLICATION NO.	FILING DATE		FIRST NAMED INVENTO	OR ATT	ORNEY DOCKET NO.	CONFIRMATION NO.
11/860,080	09/24/2007		Marcos C. Tzannes	5	550-47-CON-DIV	5967
TITLE OF INVENTIO COMMUNICATIONS SY		METHOD FOR SCR	AMBLING THE PH.	ASE OF THE CARRI	ERS IN A MULTIC	CARRIER
APPLN. TYPE	SMALL ENTITY	ISSUE FEE DUE	PUBLICATION FEE DU	E PREV. PAID ISSUE FEE	TOTAL FEE(S) DUE	DATE DUE
nonprovisional	NO	\$1740	\$300	\$0	\$2040	01/17/2012
EXAMI	NER	ART UNIT	CLASS-SUBCLASS	7		
WILLIAMS, LA	AWRENCE B	2611	375-260000			
1. Change of correspondence address or indication of "Fee Address" (37 CFR 1.363).  Change of correspondence address (or Change of Correspondence Address form PTO/SB/122) attached.  The Address form PTO/SB/122) attached.  The Address indication (or "Fee Address" Indication form PTO/SB/47; Rev 03-02 or more recent) attached. Use of a Customer Number is required.  2. For printing on the patent front page, list (1) the names of up to 3 registered patent attorneys or agents OR, alternatively, (2) the name of a single firm (having as a member a registered attorney or agent) and the names of up to 2 registered patent attorneys or agents. If no name is listed, no name will be printed.  3. ASSIGNEE NAME AND RESIDENCE DATA TO BE PRINTED ON THE PATENT (print or type)						
recordation as set forth (A) NAME OF ASSIG	in 37 CFR 3.11. Comp	oletion of this form is NO	T a substitute for filing a	un assignment. FY and STATE OR COUN	TTRY)	ocument has been filed for
4a. The following fee(s) a  Issue Fee Publication Fee (No Advance Order - #	o small entity discount p of Copies	permitted)	☐ A check is enclosed☐ Payment by credit o☐ The Director is here	lease first reapply any pr l. :ard. Form PTO-2038 is at by authorized to charge th posit Account Number	ached. e required fee(s), any de	
	SMALL ENTITY statu		☐ b. Applicant is no l	onger claiming SMALL El	NTITY status. See 37 Cl	FR 1.27(g)(2).
NOTE: The Issue Fee and interest as shown by the re	Publication Fee (if requestred Sta	uired) will not be accepted	d from anyone other tha	n the applicant; a registered	d attorney or agent; or th	e assignee or other party in
merest as shown by the re	cords of the office sta	tes I atent and I I atentaria	Comec.			
Authorized Signature _				Date		
Typed or printed name				Registration No		
an application. Confidenti submitting the completed this form and/or suggestic Box 1450, Alexandria, Vi Alexandria, Virginia 2231	ality is governed by 35 application form to the ons for reducing this burginia 22313-1450. DO 3-1450.	U.S.C. 122 and 37 CFR USPTO. Time will vary rden, should be sent to th NOT SEND FEES OR C	1.14. This collection is a depending upon the integration off COMPLETED FORMS	estimated to take 12 minut lividual case. Any comme icer, U.S. Patent and Trad	es to complete, includin nts on the amount of tir emark Office, U.S. Depa ND TO: Commissioner t	by the USPTO to process) g gathering, preparing, and me you require to complete artment of Commerce, P.O. for Patents, P.O. Box 1450, number.

OMB 0651-0033

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE



#### UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office Address: COMMISSIONER FOR PATENTS P.O. Box 1450 Alexandra, Virgina 22313-1450 www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
11/860,080	09/24/2007	Marcos C. Tzannes	5550-47-CON-DIV	5967
62574 75	90 10/17/2011		EXAM	INER
Jason H. Vick			WILLIAMS, L	AWRENCE B
Sheridan Ross, PC				
Suite # 1200			ART UNIT	PAPER NUMBER
1560 Broadway			2611	
Denver, CO 80202			DATE MAILED: 10/17/201	1

#### Determination of Patent Term Adjustment under 35 U.S.C. 154 (b)

(application filed on or after May 29, 2000)

The Patent Term Adjustment to date is 1057 day(s). If the issue fee is paid on the date that is three months after the mailing date of this notice and the patent issues on the Tuesday before the date that is 28 weeks (six and a half months) after the mailing date of this notice, the Patent Term Adjustment will be 1057 day(s).

If a Continued Prosecution Application (CPA) was filed in the above-identified application, the filing date that determines Patent Term Adjustment is the filing date of the most recent CPA.

Applicant will be able to obtain more detailed information by accessing the Patent Application Information Retrieval (PAIR) WEB site (http://pair.uspto.gov).

Any questions regarding the Patent Term Extension or Adjustment determination should be directed to the Office of Patent Legal Administration at (571)-272-7702. Questions relating to issue and publication fee payments should be directed to the Customer Service Center of the Office of Patent Publication at 1-(888)-786-0101 or (571)-272-4200.

#### **Privacy Act Statement**

The Privacy Act of 1974 (P.L. 93-579) requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

- 1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether disclosure of these records is required by the Freedom of Information Act.
- 2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
- 3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
- 4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
- 5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
- 6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
- 7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (i.e., GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
- 8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspection or an issued patent.
- 9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

	Application No.	Applicant(s)			
Examiner-Initiated Interview Summary	11/860,080	TZANNES, MARCOS C.			
znamner miliatea meervien eammary	Examiner	Art Unit			
	LAWRENCE WILLIAMS	2611			
All participants (applicant, applicant's representative, PTO	personnel):				
(1) <u>LAWRENCE WILLIAMS</u> .	(3)				
(2) <u>JASON VICK</u> .	(4)				
Date of Interview: 22 September 2011.					
Type: ⊠ Telephonic □ Video Conference □ Personal [copy given to: □ applicant [	☐ applicant's representative]				
Exhibit shown or demonstration conducted: Yes If Yes, brief description:	□ No.				
Issues Discussed 101 112 102 103 Othe (For each of the checked box(es) above, please describe below the issue and detail					
Claim(s) discussed: <u>47,60</u> .					
Identification of prior art discussed:					
Substance of Interview (For each issue discussed, provide a detailed description and indicate if agreement reference or a portion thereof, claim interpretation, proposed amendments, arguments.		dentification or clarification of a			
Agreed upon changes to independent claims 47 and 60 to upon are reflected in allowed independent claims 47 and 60 invention as disclosed by amended claims and minor change corrections/examiner's amendment of 9/22/2011.	. Agreed upon minor changes	to abstract to reflect			
Applicant recordation instructions: It is not necessary for applicant to provide a separate record of the substance of interview.					
<b>Examiner recordation instructions</b> : Examiners must summarize the substance of any interview of record. A complete and proper recordation of the substance of an interview should include the items listed in MPEP 713.04 for complete and proper recordation including the identification of the general thrust of each argument or issue discussed, a general indication of any other pertinent matters discussed regarding patentability and the general results or outcome of the interview, to include an indication as to whether or not agreement was reached on the issues raised.					
Attachment					
/Lawrence B Williams/ Examiner, Art Unit 2611					

U.S. Patent and Trademark Office PTOL-413B (Rev. 8/11/2010)

Interview Summary

	Application No.	Applicant(s)			
	11/860,080	TZANNES, MARCOS C.			
Notice of Allowability	Examiner	Art Unit			
	LAWRENCE WILLIAMS	2611			
The MAILING DATE of this communication apperature All claims being allowable, PROSECUTION ON THE MERITS IS herewith (or previously mailed), a Notice of Allowance (PTOL-85) NOTICE OF ALLOWABILITY IS NOT A GRANT OF PATENT RIOF the Office or upon petition by the applicant. See 37 CFR 1.313	(OR REMAINS) CLOSED in this apport or other appropriate communication GHTS. This application is subject to and MPEP 1308.	plication. If not included will be mailed in due course. THIS			
1. This communication is responsive to <u>amendments filed on S</u>					
2. $\square$ An election was made by the applicant in response to a rest requirement and election have been incorporated into this action.	riction requirement set forth during t	he interview on; the restriction			
3. The allowed claim(s) is/are 47-72, renumbered as 1-26, res	<u>pectively</u> .				
4. Acknowledgment is made of a claim for foreign priority under 35 U.S.C. § 119(a)-(d) or (f).  a) All b) Some* c) None of the:  1. Certified copies of the priority documents have been received.  2. Certified copies of the priority documents have been received in Application No  3. Copies of the certified copies of the priority documents have been received in this national stage application from the International Bureau (PCT Rule 17.2(a)).  * Certified copies not received:  Applicant has THREE MONTHS FROM THE "MAILING DATE" of this communication to file a reply complying with the requirements noted below. Failure to timely comply will result in ABANDONMENT of this application.  THIS THREE MONTH PERIOD IS NOT EXTENDABLE.  5. A SUBSTITUTE OATH OR DECLARATION must be submitted. Note the attached EXAMINER'S AMENDMENT or NOTICE OF INFORMAL PATENT APPLICATION (PTO-152) which gives reason(s) why the oath or declaration is deficient.  6. CORRECTED DRAWINGS ( as "replacement sheets") must be submitted.  (a) including changes required by the Notice of Draftsperson's Patent Drawing Review (PTO-948) attached  1) hereto or 2) to Paper No./Mail Date  (b) including changes required by the attached Examiner's Amendment / Comment or in the Office action of Paper No./Mail Date  Identifying indicia such as the application number (see 37 CFR 1.84(c)) should be written on the drawings in the front (not the back) of each sheet. Replacement sheet(s) should be labeled as such in the header according to 37 CFR 1.121(d).					
Attachment(s)  1. ☑ Notice of References Cited (PTO-892)  2. ☐ Notice of Draftperson's Patent Drawing Review (PTO-948)  3. ☑ Information Disclosure Statements (PTO/SB/08), Paper No./Mail Date 12/6/07, 4/30/08, 10/17/08, 11/25/08, 01//18/10, 6/21/10, 5/31/11  4. ☐ Examiner's Comment Regarding Requirement for Deposit of Biological Material  /Tesfaldet Bocure/ Primary Examiner, Art Unit 2611	5. ☐ Notice of Informal P 6. ☑ Interview Summary Paper No./Mail Dat 7. ☑ Examiner's Amendr 8. ☑ Examiner's Stateme 9. ☑ Other <i>OA. Appendis</i>	(PTO-413), te <u>9/22/2011</u> . ment/Comment			

U.S. Patent and Trademark Office
PTOL-37 (Rev. 03-11) Notice of Allowability Part of Paper No./Mail Date 3

Art Unit: 2611

EXAMINER'S AMENDMENT

1. An examiner's amendment to the record appears below. Should the changes and/or

additions be unacceptable to applicant, an amendment may be filed as provided by 37 CFR

1.312. To ensure consideration of such an amendment, it MUST be submitted no later than the

payment of the issue fee.

Authorization for this examiner's amendment was given in a telephone interview with

Jason Vick on 22 September 2011.

The application has been amended as follows:

In the abstract:

a.) In line 1 of the abstract, replace the word "scrambles" with "demodulates".

**REMARKS** 

2. The drawings were received on 22 September 2011. These drawings are accepted by the

examiner. The drawing objections are withdrawn.

3. The examiner thanks the applicant for the amendment to the specification. The

specification objections are withdrawn.

Page 2

Art Unit: 2611

REASONS FOR ALLOWANCE

1. The following is a statement of reasons for the indication of allowable subject matter:

The instant application discloses a method and system for demodulating a bit stream. A search of

prior art records has filed to teach or suggest, alone or in combination:

In a first multicarrier transceiver, having a plurality of carrier signals for

receiving a bit stream, each carrier signal having a phase characteristic associated with the bit

stream, a method comprising:

demodulating the bit stream, wherein:

"each carrier signal was associated with a value determined independently of any

bit value carried by that carrier signal,

a phase shift was computed for each carrier signal based on the value associated

with that carrier signal,

the phase shift computed for each carrier signal was combined with the phase

characteristic of that carrier signal so as to substantially scramble the phase characteristics of the

plurality of carrier signals,

multiple carrier signals were used to modulate a same input bit value, and

a value associated with the carrier signal was determined using a pseudo-random

number generator" (Fig(s). 1, 2; pg. 7, line 11- pg. 8, line 10) as disclosed in claim 47.

A multicarrier system including a first transceiver having a plurality of

carrier signals for receiving a bit stream, each carrier signal having a phase characteristic

Page 3

Art Unit: 2611

associated with the bit stream, the transceiver capable of demodulating the bit stream,

wherein:

"each carrier signal was associated with a value determined independently of any

bit value carried by that carrier signal,

a phase shift was computed for each carrier signal based on the value associated

with that carrier signal,

the phase shift computed for each carrier signal was combined with the phase

characteristic of that carrier signal so as to substantially scramble the phase characteristics of the

plurality of carrier signals,

multiple carrier signals were used to modulate a same input bit value, and

a value associated with the carrier signal was determined using a pseudo-random

number generator" (Fig(s). 1, 2; pg. 7, line 11- pg. 8, line 10) as disclosed in claim 60.

Any comments considered necessary by applicant must be submitted no later than the

payment of the issue fee and, to avoid processing delays, should preferably accompany the issue

fee. Such submissions should be clearly labeled "Comments on Statement of Reasons for

Allowance."

**CONCLUSION** 

2. The prior art made of record and not relied upon is considered pertinent to applicant's

disclosure.

Page 4

Art Unit: 2611

Page 5

- a.) Tzannes discloses System And Method For Scrambling The Phase Of The Carriers In
- A Multicarrier Communications System in US Patent 6,961,369 B1.
- b.) Sakoda et al. discloses Receiving Device And Signal Receiving Method in US Patent6,590,860 B1.
- c.) Goldenberg et al. discloses Dual Speed Full Duplex Data Transmission in US Patent 4,069,392.
- d.) Switzer et al. discloses Method And Apparatus For Reducing Distortion In Multicarrier Communication Systems in US Patent 3,898,566.
- e.) Tzannes discloses System And Method For Scrambling The Phase of The Carriers In A Multicarrier Communications System in US 2010/0290507 A1.
- f.) Tzannes discloses System And Method For Scrambling The Phase Of The Carriers In A Multicarrier Communications System in US Patent 7,471,721 B2.
- g.) Tzannes discloses System And Method For Scrambling The Phase Of The Carriers In A Multicarrier Communications System in US Patent 7,292,627 B2.
- 3. Any inquiry concerning this communication or earlier communications from the examiner should be directed to Lawrence B Williams whose telephone number is 571-272-3037. The examiner can normally be reached on Monday-Friday (8:00-6:00).

If attempts to reach the examiner by telephone are unsuccessful, the examiner's supervisor, Khanh Tran can be reached on 571-272-3007. The fax phone number for the organization where this application or proceeding is assigned is 571-273-8300.

Art Unit: 2611

Page 6

Information regarding the status of an application may be obtained from the Patent Application Information Retrieval (PAIR) system. Status information for published applications may be obtained from either Private PAIR or Public PAIR. Status information for unpublished applications is available through Private PAIR only. For more information about the PAIR system, see http://pair-direct.uspto.gov. Should you have questions on access to the Private PAIR

system, contact the Electronic Business Center (EBC) at 866-217-9197 (toll-free).

lbw

October 12, 2011

# Notice of References Cited Application/Control No. 11/860,080 Examiner LAWRENCE WILLIAMS Applicant(s)/Patent Under Reexamination TZANNES, MARCOS C. Art Unit Page 1 of 1 U.S. PATENT DOCUMENTS

*		Document Number Country Code-Number-Kind Code	Date MM-YYYY	Name	Classification
*	Α	US-6,961,369	11-2005	Tzannes, Marcos C.	375/220
*	В	US-6,590,860	07-2003	Sakoda et al.	370/203
*	С	US-4,069,392	01-1978	Goldenberg et al.	370/295
*	D	US-3,898,566	08-1975	Switzer et al.	455/3.03
*	Е	US-2010/0190507	07-2010	Karabinis et al.	455/452.1
*	F	US-7,471,721	12-2008	Tzannes, Marcos C.	375/222
*	G	US-7,292,627	11-2007	Tzannes, Marcos C.	375/222
	Н	US-			
	-	US-			
	J	US-			
	к	US-			
	L	US-			
	М	US-			

#### FOREIGN PATENT DOCUMENTS

*		Document Number Country Code-Number-Kind Code	Date MM-YYYY	Country	Name	Classification
	N					
	0					
	Р					
	α					
	R					
	s					
	Т					

#### NON-PATENT DOCUMENTS


*		Include as applicable: Author, Title Date, Publisher, Edition or Volume, Pertinent Pages)
	J	
	>	
	8	
	х	

\*A copy of this reference is not being furnished with this Office action. (See MPEP § 707.05(a).) Dates in MM-YYYY format are publication dates. Classifications may be US or foreign.

U.S. Patent and Trademark Office PTO-892 (Rev. 01-2001)

Notice of References Cited

Part of Paper No. 3





SEARCH RESHLYS

You searched for Publicarrier AND "phase shift" AND scrambling , "phase characteristics" &
You refined by:
Publication Yest: 1933 - 2008 &
Publication Yest: 1933 - 2008 &
Publication Fig. 25 3.

Unapproved Draft Cable-TV access method and physical layer specification (PAR Withdrawn)

HHH Sko P802-14/D3, A2 Publication Year, 1998 USS SYANDARDS

Reduced complexity peak-to-average power ratio reduction for OFDM by selective time domain filtering

Streng Ott Beamlieu, N.C.; Jinksng Zhu;
Global Telecommunications Cenference, 2005, OLOBECON 105, IHBI
Volume: 5
Digast Object Identifier: 10.3308/SLOCOM,2885.1878278
routication Year: 2005, Pagn(5): 5 nn. - 2806.
XXIII CONFIDENCES

Voice-band data communication modems-a historical review: 1919-1988

Politaria, K. Haltseger, J.L.,
Communications (1554ane, HHH
Volume: 25, Coust: 1
Depth Object Identifies, 10 1109/HL418
Bublication Year: 1988, Page(8): 36 - 27
Card by 2
XHER SOURNEALS

 $\mathcal{O}(L^2)$  and the state of the states of

**ICT** topped

http://ieeexplore.ieee.org/search/searchresult.jsp?queryText=multicarrier\_AND\_.QT.phase s... 8/31/2011



#### United States Patent and Trademark Offici

UNITED STATES BEPARTMENT OF COMMERCE United States Patent and Frademark Office Audies COMMISSIONER FOR PATENTS PARAMETER VIRGING 2213-1400 www.oopte.gov

## **BIB DATA SHEET**

## CONFIRMATION NO. 5967

SERIAL NUMI	BER	FILING			CLASS	GROUP	ART UNIT	ATTO		( DOCKET
11/860,080	0	<b>DAT</b> 09/24/2			375	26	311	555	<b>NC</b> 10-47-0	ON-DIV
		RUL	E							
	APPLICANTS  Mercos C. Tzannes, Orinda, CA:									
** CONTINUING DATA **********************************										
** FOREIGN AF	PLICA	TIONS *****	*****	*****	*					
** IF REQUIRE	D, FOR	•••••	3 LICENS	E GRA	NTED "	·····			<b>,</b>	
Foreign Priority daime 38 USC 119(a-d) cond		☐ Yes <b>Ø</b> No ☐ Yes <b>Ø</b> No	□ Met af Allows	ter	STATE OR COUNTRY	SHEET		TAL IMS		PENDENT LAIMS
Ventied and /i	LAWRENC VILLIAMS, EXHIBINA	8 8	Tellian	,,,,,,	CA	2	26,		2	1
ADDRESS										
Jason H. 1 Sheridan Suite # 12 1560 Bros Denver, C UNITED S	Ross, F 200 adway 30 8020	32								
TITLE			***************************************							
		IETHOD FOR DNS SYSTE		BLING	THE PHASE OF	THE CAR	RIERS IN	A MUL	TICAR	RIER
						U A	ll Fees			
		فيونون				U 1	16 Fees (F		*************	
		Authority has			aper :POSIT ACCOUI	<sub>ur</sub>   U1	17 Fees (F	rocess	ing Ex	t. of time)
		fo					18 Fees (I			
						(Qo	ther		********	
						<u> </u>	redit	************	***********	

6#8 (Rev. 05/07).

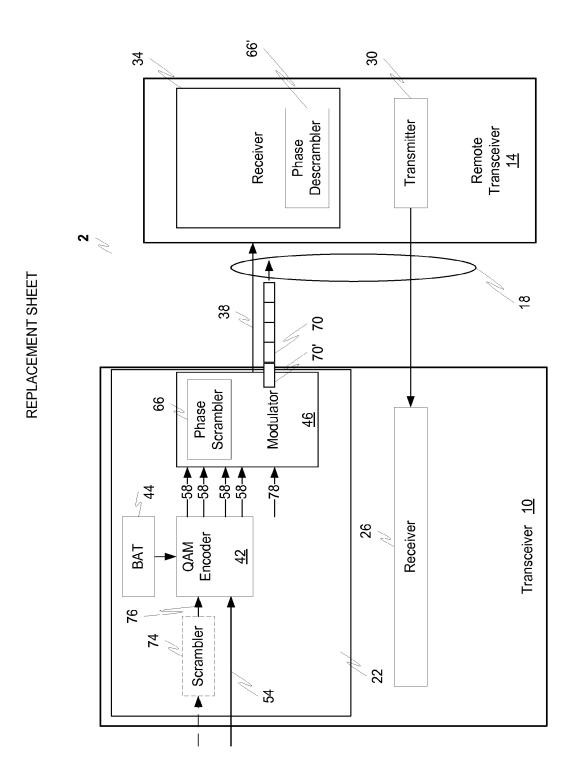


FIG. 1

Subs	Substitute for form 1449A/PTO			Complete if Known		
1811		ION DIO		Application Number	11/860,080	
	INFORMATION DISCLOSURE STATEMENT BY APPLICANT			Filing Date	September 24, 2007	
SI	AIEMEN	NI BY AF	PLICANT	First Named Inventor	Marcos C. Tzannes	
				Art Unit	2611	
				Examiner Name	Not yet assigned	
Sheet	1	of	1	Attorney Docket Number	5550-47-CON-DIV	

U.S. PATENT DOCUMENTS						
Examiner Initials*	Cite No.1	Document Number Number-kind Code <sup>2 (If known)</sup>	Publication Date MM-DD-YYYY	Name of Patentee of Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear	
/L.W./	1	4069392	01/17/78	Goldenberg et al.		
/L.W./	2	6967997	11/22/05	Humphrey		

FOREIGN PATENT DOCUMENTS							
Examiner Initials*	Cite No. <sup>1</sup>	Foreign Patent Document  Country Code <sup>3</sup> ; Number <sup>4</sup> ; Kind  Code <sup>5</sup> (if known)			Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear	T <sup>6</sup>	

OTHER ART (Including Author, Title, Date, Pertinent Pages, etc.)						
Examiner Initials*	Cite No. <sup>1</sup>					
/L.W./	3	Official Action for U.S. Patent Application No. 12/255,713, mailed October 15, 2009 (Attorney's File No. 5550-47-CON-3)				

Examiner /Lawrence Williams/	Date Considered	08/08/2011
------------------------------	--------------------	------------

Substitute for form 1449A/PTO				Complete if Known		
INII		TION DIO	N COLUDE	Application Number	11/860,080	
INFORMATION DISCLOSURE STATEMENT BY APPLICANT				Filing Date	09-24-2007	
51	AIEMEI	MIRAM	PLICANT	First Named Inventor	Tzannes	
				Art Unit	2611	
				Examiner Name	Not yet assigned	
Sheet	1	of	1	Attorney Docket Number	5550-47-CON-DIV	

U.S. PATENT DOCUMENTS						
Examiner Initials*	Cite No. <sup>1</sup>	Document Number Number-kind Code <sup>2 (If known)</sup>	Publication Date MM-DD-YYYY	Name of Patentee of Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear	
/L.W./	1	5,682,376	10/28/97	Hayashino et al.	•	

	FOREIGN PATENT DOCUMENTS							
Examiner Initials*	Cite No. <sup>1</sup>	Foreign Patent Document  Country Code <sup>3</sup> ; Number <sup>4</sup> ; Kind  Code <sup>5</sup> ( <i>if known</i> )	Publication Date MM-DD-YYYY		Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear	T <sup>6</sup>		
/L.W./	2	JP H10(1998)-084329		NIPPON HOSO KYOKAI		(Translated Abstract and partial translation)		
/L.W	/ 3	JP H08(1996)-321820		MATSUSHITA ELECTRIC IND CO LTD		(Translated Abstract)		

OTHER ART (Including Author, Title, Date, Pertinent Pages, etc.)							
Examiner Initials*	Cite No. <sup>1</sup>						
/L.W./	4	Notification of Reasons for Refusal (including translation) for Japanese Patent Application No. 2001-537217, date of dispatch, March 3, 2008 (Attorney's Ref. No. 5550-47-PJP)					
/L.W./	5	Official Action for U.S. Patent Application No. 11/863,581, mailed February 6, 2008 (Attorney's File No. 5550-47-CON-2)					

T		****	***************************************
Examiner	/Lawrence Williams/	Date	
Signature	1	_ ``	08/08/2011
Olgitature		Considered	00/00/2011

<sup>\*</sup>EXAMINER: Initial if reference is considered, whether or not citation is in conformance and not considered. Include copy of this form with next communication to applicant.

Substitute for form 1449A/PTO		Complete if Known		
		Application Number	11/860,080	
INFORMATION DISCLO		Filing Date	September 24, 2007	
STATEMENT BY APPLI	CANT	First Named Inventor	Marcos C, Tzannes	
		Art Unit	2611	
		Examiner Name	Not Yet Assigned	
Sheet 1 of	2	Attorney Docket Number	5550-47-CON-DIV	

			U.S. PATENT DO	CUMENTS	_
Examiner Initials*	Cite No.1	Document Number Number-kind Code <sup>2 (If known)</sup>	Publication Date MM-DD-YYYY	Name of Patentee of Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear
/L.W./	1	5381449	01/10/95	Jasper et al.	
/L.W./	2	5694395	12/02/97	Myer et al.	
/L.W./	3	5870016	02/09/99	Shrestha	
/L.W./	4	5991262	11/23/99	Laird et al.	
/L.W./	5	6128350	10/03/00	Shastri et al.	
/L.W./	6	6366555	04/02/02	Gatherer et al.	
/L.W./	7	6757299	06/29/04	Verma	
/L.W./	8	7610028	10/27/09	Cimini, Jr. et al.	

	FOREIGN PATENT DOCUMENTS					
Examiner Initials*	Cite No. <sup>1</sup>	Foreign Patent Document Country Code <sup>3</sup> ; Number <sup>4</sup> ; Kind Code <sup>5</sup> ( <i>if known</i> )		Name of Patentee or Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear	Τ <sup>6</sup>

		OTHER ART (Including Author, Title, Date, Pertinent Pages, etc.)
Examiner Initials*	Cite No. <sup>1</sup>	
/L.W.	, 9	HENKEL, "Analog Codes for Peak-to-Average Ratio Reduction," in Proceedings 3rd ITG Conf. Source and Channel Coding, Munich, Germany, Jan. 2000, 5 pages
/L.W./	10	NARAHASHI et al., "New phasing scheme of N multiple carriers for reducing peak-to-average power ratio," Electronics Letters, Aug. 1994, Vol. 30(17), pp. 1382-83
/L.W.	, 11	TELLADO et al., "Revisiting DMT's Peak-to-Average Ratio," Antwerp, Apr. 20-24, 1998, pp. 1-14
/L.W.	, 12	TELLAMBURA, "A coding technique for reducing peak-to-average power ratio in OFDM," In the Proceedings of Global Telecommunications Conference, IEEE, Nov. 1998, pp. 2783-2787
/L.W.,	13	TELLAMBURA, "Phase optimisation criterion for reducing peak-to-average power ratio in OFDM," Electronics Letters, Jan. 1998, Vol. 34(2), pp. 169-170

Examiner /Lawrence Williams/	Date Considered	08/08/2011
------------------------------	--------------------	------------

Sub	Substitute for form 1449A/PTO		Complete if Known		
				Application Number	11/860,080
			CLOSURE	Filing Date	September 24, 2007
STATEMENT BY APPLICANT			PLICANT	First Named Inventor	Marcos C. Tzannes
				Art Unit	2611
				Examiner Name	Not Yet Assigned
Sheet	2	of	2	Attorney Docket Number	5550-47-CON-DIV
		l	1		

/L.W./	14	VAN EETVELT et al., "Peak to average power reduction for OFDM schemes by selective scrambling," Electronics Letters, Oct. 1996, Vol. 32(21), pp. 1963-64
/L.W./	15	Written Opinion for International (PCT) Patent Application No. PCT/US00/30958, mailed Dec. 18, 2001 (Attorney Ref. No. 5550-47-PCT)
/L.W./	16	Official Action for U.S. Patent Application No. 09/710,310, mailed May 4, 2004 (Attorney Ref. No. 5550-47)
/L.W.	17 /	Notice of Allowance for U.S. Patent Application No. 09/710,310, mailed Jul 5, 2005 (Attorney Ref. No. 5550-47)
/L.W	18 /	Notice of Allowance for U.S. Patent Application No. 11/211,535, mailed Sep. 6, 2007 (Attorney Ref. No. 5550-47-CON)

Examiner /Lawrence Williams/ Signature	Date Considered	08/08/2011
---	--------------------	------------

Sub	Substitute for form 1449A/PTO			Comp	lete if Known
INI		TION DIOC	N OOUDE	Application Number	11/860,080
			LOSURE	Filing Date	September 24, 2007
5	AILME	NT BY AP	PLICANI	First Named Inventor	Marcos C. Tzannes
				Art Unit	2611
				Examiner Name	Not yet assigned
Sheet	1	of	1	Attorney Docket Number	5550-47-CON-DIV

U.S. PATENT DOCUMENTS					
Examiner Initials*	Cite No.1	Document Number Number-kind Code <sup>2 (if known)</sup>	Publication Date MM-DD-YYYY	Name of Patentee of Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear
/L.W./	1	6519292	02/11/03	Sakoda et al.	
/L.W./	2	6519929	02/18/03	Ahrendt	
/L.W./	3	12/783725		Tzannes (05-20-2010)	

	FOREIGN PATENT DOCUMENTS					
Examiner Initials*	Cite No. <sup>1</sup>	Foreign Patent Document  Country Code <sup>3</sup> ; Number <sup>4</sup> ; Kind  Code <sup>5</sup> (if known)		Name of Patentee or Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear	T <sup>6</sup>

OTHER ART (Including Author, Title, Date, Pertinent Pages, etc.)				
Examiner Initials*	Cite No. <sup>1</sup>			
/L.W	./ 4	Notice of Allowance for U.S. Patent Application No. 12/255,713, mailed May 18, 2010 (Attorney's File No. 5550-47-CON-3)		

Examiner /Lawrence Williams/ Signature	Date 08/08/2011 Considered
---	----------------------------

PTO/SB/08a (09-08)
Approved for use through 10/31/2008. OMB 0651-0031
formation Disclosure Statement (IDS) Filed
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

	Application Number		11860080
	Filing Date		2007-09-24
INFORMATION DISCLOSURE	First Named Inventor	Tzanr	nes
STATEMENT BY APPLICANT (Not for submission under 37 CFR 1.99)	Art Unit		2611
(Not for Submission under or of K 1.55)	Examiner Name	Not ye	et assigned
	Attorney Docket Numb	er	5550-47-CON-DIV

					U.S.F	PATENTS			Remove		
Examiner Initial*	Cite No	Patent Number	Kind Code <sup>1</sup>	Issue D	ate	Name of Pate of cited Docu	entee or Applicant ment	Releva		Lines where	
	1										
If you wis	n to a	⊥ dd additional U.S. Patei	⊥ nt citatio	n informa	ation pl	ease click the	Add button.		<b>Ad</b> d		
			U.S.P	ATENT A	APPLIC	CATION PUBI	LICATIONS		Remove		
Examiner Initial*	Cite No	Publication Number	Kind Code <sup>1</sup>	Publicat Date	tion	Name of Pate of cited Docu	entee or Applicant ment	Releva		Lines where ges or Relev	
	1										
If you wis	n to a	⊥ dd additional U.S. Publi	ished Ap	plication	citation	ı n information p	lease click the Ado	d button	<b>Ad</b> d		
				FOREIG	N PAT	ENT DOCUM	ENTS		Remove		
Examiner Initial*	Cite No	Foreign Document Number <sup>3</sup>	Country Code <sup>2</sup>		Kind Code <sup>4</sup>	Publication Date	Name of Patentee Applicant of cited Document	eor    F	here Rel	or Relevant	T5
	1										
If you wis	n to a	⊥ dd additional Foreign P	atent Do	cument o	citation	information pl	ease click the Add	button	<b>Ad</b> d		1
			NON	I-PATEN	IT LITE	RATURE DO	CUMENTS		Remove		
Examiner Initials*	Cite No	Include name of the a (book, magazine, jour publisher, city and/or	nal, seria	al, sympo	osium,	catalog, etc), o					T5

# Application Number 11860080 Filing Date 2007-09-24 First Named Inventor Tzannes Art Unit 2611 Examiner Name Not yet assigned Attorney Docket Number 5550-47-CON-DIV

/L.W./	1	Notic CON	e of Allowance for U.S. Patent Application No. 11/863,581, mailed -2)	October 8, 2008 (Attor	ney's File <b>No</b> . 5550-47-	
If you wis	h to ac	dd add	ditional non-patent literature document citation information p	lease click the Add b	outton Add	
			EXAMINER SIGNATURE			
Examiner	Signa	ture	/Lawrence Williams/	Date Considered	08/08/2011	
			reference considered, whether or not citation is in conforma rmance and not considered. Include copy of this form with r			
Standard S <sup>-1</sup> Kind of do	T.3). <sup>3</sup> F cument	or Japa by the	O Patent Documents at <a href="https://www.uspto.gov">www.uspto.gov</a> or MPEP 901.04. <sup>2</sup> Enter officanese patent documents, the indication of the year of the reign of the Emperappropriate symbols as indicated on the document under WIPO Standard son is attached.	eror must precede the ser	ial number of the patent doc	ument.

Sub	stitute for form	1449A/PTO		Сотр	lete if Known
18.1		FIGNI DIG	21 221125	Application Number	11/860,080
			CLOSURE	Filing Date	09-24-2007
SI	IAIEME	NI BY AP	PLICANT	First Named Inventor	Tzannes
				Art Unit	2611
				Examiner Name	Not yet assigned
Sheet	1	of	1	Attorney Docket Number	5550-47-CON-DIV

			U.S. PATENT DO	CUMENTS	
Examiner Initials*	Cite No.1	Document Number Number-kind Code <sup>2 (if known)</sup>	Publication Date MM-DD-YYYY	Name of Patentee of Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear
····		12/255713	000000000000000000000000000000000000000	Tzarmes (10-22-2008)	000000000000000000000000000000000000000

	FOREIGN PATENT DOCUMENTS					
Examiner Initials*	Cite No. <sup>1</sup>	Foreign Patent Document  Country Code <sup>3</sup> ; Number <sup>4</sup> ; Kind  Code <sup>5</sup> (if known)		Name of Patentee or Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear	T <sub>e</sub>

		OTHER ART (Including Author, Title, Date, Pertinent Pages, etc.)
Examiner Initials*	Cite No.1	
/L.W./	2	Decision of Refusal (including translation) for Japanese Patent Application No. 2001-537217, date of dispatch, November 4, 2008 (Attorney's Ref. No. 5550-47-PJP) page(s) 1-6

Examiner Signature	/Lawrence Williams/	Date Considered 08/08/2011

ALL REFERENCES CONSIDERED EXCEPT WHERE LINED THROUGH. /L.W./

Sub	stitute for form	1449A/PTO		Сотр	lete if Known
		FIGNI DIGG	N COURT	Application Number	11/860,080
			CLOSURE	Filing Date	09-24-2007
Si	<b>TATEME</b>	NT BY AP	PLICANT	First Named Inventor	Tzannes
				Art Unit	2611
				Examiner Name	Not yet assigned
Sheet	1	of	2	Attorney Docket Number	5550-47-CON-DIV

		*********	U.S. PATENT DO	CUMENTS	
Examiner Initials*	Cite No. <sup>1</sup>	<u>Document Number</u> Number-kind Code <sup>2 (ff known)</sup>	Publication Date MM-DD-YYYY	Name of Patentee of Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear
/L.W./	1	3,955,141	05/01/76	Lyon et al.	
/L.W./	2	4,985,900	01/01/91	Rhind et al.	
/L.W./	3	5,748,677	05/01/98	Kumar	
/L.W./	4	6,256,355	07/03/01	Sakoda et al.	
/L.W./	5	6,507,585	01/01/03	Dobson	
/L.W./	6	6,590,860	07/08/03	Sakoda et al.	
/L W /	7	6,704,317	03/01/04	Dobson	
/L.W./	8	6,961,369	11/01/05	Tzannes	
/L.W./	9	2005/0141410	06/30/05	Zhang et al.	
/L.W./	10	2006/0002454	01/05/06	Tzannes	
/L.W./	11	2006/0092902	05/04/06	Schmidt	
/L.W./	12	2006/0140288	06/29/06	Holden	
/L.W./	13	11/863581		Tzannes (09-28-2007)	

		FOR	EIGN PATEN	T DOCUMENTS			
Examiner Initials*		Foreign Patent Document  Country Code <sup>3</sup> ; Number <sup>4</sup> ; Kind  Code <sup>5</sup> (if known)	Publication Date MM-DD-YYYY	Name of Pater Applicant of Cited I	Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear	. T <sub>e</sub>
/L.W./	14	EP 0584534	03/02/94	ALCATEL ITAL	IA		
/L.W./	15	EP 0719004	06/26/96	MATSUSHITA ELECTRIC IND LTD	СО		
/L.W./	16	GB 2330491	04/21/99	BRITISH BROADCASTIN CORP	1G		
/L.W		WO 98/32065	07/23/98	FORTRESS TECHNOLOGIE	ES INC		
/L.W.	18	WO 99/22463	05/06/99	MOTOROLA IN	С		
Examiner Signature		/Lawrence Williams/			Date Consider	ed 08/08	/2011

Sub	Substitute for form 1449A/PTO			Сотр	olete if Known		
INI		TON DIOC	N COURT	Application Number	11/860,080		
	INFORMATION DISCLOSURE			Filing Date	09-24-2007		
5	ALEME	1T BY AP	PLICANT	First Named Inventor	Tzannes		
				Art Unit	2611		
				Examiner Name	Not yet assigned		
Sheet	2	of	2	Attorney Docket Number	5550-47-CON-DIV		
Sheet	2	of	2				
	19 WO 99/	29078	06/10/99	TELIA AB			

		OTHER ART (Including Author, Title, Date, Pertinent Pages, etc.)
Examiner Initials*	Cite No.1	
/L.W./	20	Bauml R. W. et al.: "Reducing The Peak-To-Average Power Ratio Of Multicarrier Modulation By Selected Mapping" Electronics Letters, GB, IEE Stevenage, vol. 32, No. 22, Oct. 24, 1996, pp. 2056-2057, XP000643915 ISSN: 0013-5194
/L.W./	21	Copy of Annex to Form PCT/ISA/206 for PCT/US00/30958, Mar. 23, 2001 (5550-47-PCT)
/L.W./	22	International Search Report for International (PCT) Patent Application No. PCT/US00/30958, completed June 12, 2001 (5550-47-PCT)
/L.W./	23	International Preliminary Examination Report for International (PCT) Patent Application No. PCT/US00/30958, completed March 4, 2002 (5550-47-PCT)
/L.W./	24	Notice of Preliminary Rejection for Korean Patent Application No. 7005830/2002 dated November 22, 2006 (Attorney's Ref. No. 5550-47-PKR)

Examiner /Lawrence Williams/	Date Considered	08/08/2011
------------------------------	--------------------	------------

# Search Notes 1180 Exa

Application/Control No.	Applicant(s)/Patent Under Reexamination				
11860080	TZANNES, MARCOS C.				
Examiner	Art Unit				
LAWRENCE WILLIAMS	2611				

SEARCHED									
Class	Subclass	Date	Examiner						
375	219, 220, 222,259-261, 267, 298, 299, 316, 320, 324, 340	9/21/2011	LW						
370	281 295, 343, 480, 481								
455	73, 91, 108								

SEARCH NOTES							
Search Notes	Date	Examiner					
EAST, NPL, INVENTOR	9/21/2011	LW					

INTERFERENCE SEARCH							
Class	Subclass	Date	Examiner				
375	222, 261, 298, 316	9/21/2011	LW				

U.S. Patent and Trademark Office Part of Paper No.: 3

	Application/Control No.	Applicant(s)/Patent Under Reexamination
Issue Classification	11860080	TZANNES, MARCOS C.
	Examiner	Art Unit
	9	

ORIGINAL						INTERNATIONAL CLASSIFICATION							ON		
CLASS SUBCLASS								С	LAIMED		NON-CLAIMED				
375			222			Н	0	4	В	1 / 38 (2006.01.01)					
CROSS REFERENCE(S)					Н	0	4	L	5 / 12 (2006.01.01)						
					Н	0	4	L	27 / 36 (2006.01.01)						
CLASS	SU	SUBCLASS (ONE SUBCLASS PER BLOCK)					0	4	L	27 / 06 (2006.01.01)					
375	261	298	316												
	1														
	1														
	1														
	1														

	Claims renumbered in the same order as presented by applicant							СР	A [	] T.D.		R.1.	47		
Final	Original	Final	Original	Final	Original	Final	Original	Final	Original	Final	Original	Final	Original	Final	Original
-	1	-	17	-	33	3	49	19	65						
-	2	-	18	-	34	4	50	20	66						
-	3	-	19	-	35	5	51	21	67						
-	4	-	20	-	36	6	52	22	68						
-	5	-	21	-	37	7	53	23	69						
-	6	-	22	-	38	8	54	24	70						
-	7	-	23	-	39	9	55	25	71						
-	8	-	24	-	40	10	56	26	72						
-	9	-	25	-	41	11	57								
-	10	-	26	-	42	12	58								
-	11	-	27	-	43	13	59								
-	12	-	28	-	44	14	60								
-	13	-	29	-	45	15	61								
-	14	-	30	-	46	16	62								
-	15	-	31	1	47	17	63								
-	16	-	32	2	48	18	64								

/LAWRENCE WILLIAMS/ Examiner.Art Unit 2611	9/22/2011	Total Claims Allowed:			
(Assistant Examiner)	(Date)				
/TESFALDET BOCURE/ Primary Examiner.Art Unit 2611	09/23/2011	O.G. Print Claim(s)	O.G. Print Figure		
(Primary Examiner)	(Date)	47	1		

U.S. Patent and Trademark Office Part of Paper No. 3

	Application/Control No.	Applicant(s)/Patent Under Reexamination
Index of Claims	11860080	TZANNES, MARCOS C.
	Examiner	Art Unit
	LAWRENCE WILLIAMS	2611

✓	Rejected	-	Cancelled	N	Non-Elected	Α	Appeal
=	Allowed	÷	Restricted	I	Interference	0	Objected

☐ Claims	renumbered	in the same o	rder as pre	esented by	applicant		□ СРА	□ т.с	D. 🗆	R.1.47
CL	AIM	DATE								
Final	Original	09/20/2011								
	1	-								
	2	-								
	3	-								
	4	-								
	5	-								
	6	-								
	7	-								
	8	-								
	9	-								
	10	-								
	11	-								
	12	-								
	13	-								
	14	-								
	15	-								
	16	-								
	17	-								
	18	-								
	19	-								
	20	-								
	21	-								
	22	-								
	23	-								
	24	-								
	25	-								
	26	-								
	27	-								
	28	-								
	29	-								
	30	-								
	31	-								
	32	-								
	33	-								
	34	-								
	35	-								
	36	-								

U.S. Patent and Trademark Office Part of Paper No. : 3

	Application/Control No.	Applicant(s)/Patent Under Reexamination
Index of Claims	11860080	TZANNES, MARCOS C.
	Examiner	Art Unit
	LAWRENCE WILLIAMS	2611

✓	Rejected	-	Cancelled	N	Non-Elected	Α	Appeal
=	Allowed	÷	Restricted	I	Interference	0	Objected

☐ Claims r	enumbered	in the same	order as pro	esented by a	applicant		☐ CPA	□ т.с	D. 🗆	R.1.47
CLA	ИM					DATE				
Final	Original	09/20/2011								
	37	-								
	38	-								
	39	-								
	40	-								
	41	-								
	42	-								
	43	-								
	44	-								
	45	-								
	46	-								
1	47	=								
2	48	=								
3	49	=								
4	50	=								
5	51	=								
6	52	=								
7	53	=								
8	54	=								
9	55	=								
10	56	=								
11	57	=								
12	58	=								
13	59	=								
14	60	=								
15	61	=								
16	62	=								
17	63	=								
18	64	=								
19	65	=								
20	66	=								
21	67	=								
22	68	=								
23	69	=								
24	70	=	·							
25	71	=								
26	72	=								

U.S. Patent and Trademark Office Part of Paper No. : 3

A System and Method for Descrambling the Phase of the Carriers in a Multicarrier Communications System

#### Related Application

5

10

15

20

25

This application is a divisional of U.S. Application No. 11/211,535, filed August 26, 2005, now U.S. Patent No. 7,292,627, which is a continuation of U.S. Application No. 09/710,310, filed on November 9, 2000, now U.S. Patent No. 6,961,369, which claims the benefit of the filing date of copending U.S. Provisional Application, Serial No. 60/164,134, filed November 9, 1999, entitled "A Method For Randomizing The Phase Of The Carriers In A Multicarrier Communications System To Reduce The Peak To Average Power Ratio Of The Transmitted Signal," the entirety of which provisional application is incorporated by reference herein.

# Field of the Invention

This invention relates to communications systems using multicarrier modulation. More particularly, the invention relates to multicarrier communications systems that lower the peak-to-average power ratio (PAR) of transmitted signals.

#### Background of the Invention

In a conventional multicarrier communications system, transmitters communicate over a communication channel using multicarrier modulation or Discrete Multitone Modulation (DMT). Carrier signals (carriers) or sub-channels spaced within a usable frequency band of the communication channel are modulated at a symbol (i.e., block) transmission rate of the system. An input signal, which includes input data bits, is sent to a DMT transmitter, such as a DMT modem. The DMT transmitter typically modulates the phase characteristic, or phase, and amplitude of the carrier signals using an Inverse Fast Fourier Transform (IFFT) to generate a time domain signal, or transmission signal, that represents the input signal. The DMT transmitter transmits the transmission signal, which is a linear combination of the multiple carriers, to a DMT receiver over the communication channel.

The phase and amplitude of the carrier signals of DMT transmission signal can be considered random because the phase and amplitude result from the modulation of an arbitrary sequence of input data bits comprising the transmitted information. Therefore, under the condition that the modulated data bit stream is random, the DMT transmission signal can be approximated as having a Gaussian probability distribution. A bit scrambler is often used in the DMT transmitter to scramble the input data bits before the bits are modulated to assure that the transmitted data bits are random and, consequently, that the modulation of those bits produces a DMT transmission signal with a Gaussian probability distribution.

5

10

15

20

25

30

With an appropriate allocation of transmit power levels to the carriers or subchannels, such a system provides a desirable performance. Further, generating a transmission signal with a Gaussian probability distribution is important in order to transmit a transmission signal with a low peak-to-average ratio (PAR), or peak-to-average power ratio. The PAR of a transmission signal is the ratio of the instantaneous peak value (i.e., maximum magnitude) of a signal parameter (e.g., voltage, current, phase, frequency, power) to the time-averaged value of the signal parameter. In DMT systems, the PAR of the transmitted signal is determined by the probability of the random transmission signal reaching a certain peak voltage during the time interval required for a certain number of symbols. An example of the PAR of a transmission signal transmitted from a DMT transmitter is 14.5 dB, which is equivalent to having a 1E-7 probability of clipping. The PAR of a transmission signal transmitted and received in a DMT communication system is an important consideration in the design of the DMT communication system because the PAR of a signal affects the communication system's total power consumption and component linearity requirements of the system.

If the phase of the modulated carriers is not random, then the PAR can increase greatly. Examples of cases where the phases of the modulated carrier signals are not random are when bit scramblers are not used, multiple carrier signals are used to modulate the same input data bits, and the constellation maps, which are mappings of input data bits to the phase of a carrier signal, used for modulation are not random enough (i.e., a zero value for a data bit corresponds to a 90 degree phase characteristic of the DMT carrier signal and a one value

for a data bit corresponds to a -90 degree phase characteristic of the DMT carrier signal). An increased PAR can result in a system with high power consumption and/or with high probability of clipping the transmission signal. Thus, there remains a need for a system and method that can effectively scramble the phase of the modulated carrier signals in order to provide a low PAR for the transmission signal.

#### Summary of the Invention

5

10

15

20

25

30

The present invention features a system and method that scrambles the phase characteristics of the modulated carrier signals in a transmission signal. In one aspect, a value is associated with each carrier signal. A phase shift is computed for each carrier signal based on the value associated with that carrier signal. The value is determined independently of any input bit value carried by that carrier signal. The phase shift computed for each carrier signal is combined with the phase characteristic of that carrier signal to substantially scramble the phase characteristics of the carrier signals.

In one embodiment, the input bit stream is modulated onto the carrier signals having the substantially scrambled phase characteristic to produce a transmission signal with a reduced peak-to-average power ratio (PAR). The value is derived from a predetermined parameter, such as a random number generator, a carrier number, a DMT symbol count, a superframe count, and a hyperframe count. In another embodiment, a predetermined transmission signal is transmitted when the amplitude of the transmission signal exceeds a certain level.

In another aspect, the invention features a method wherein a value is associated with each carrier signal. The value is determined independently of any input bit value carried by that carrier signal. A phase shift for each carrier signal is computed based on the value associated with that carrier signal. The transmission signal is demodulated using the phase shift computed for each carrier signal.

In another aspect, the invention features a system comprising a phase scrambler that computes a phase shift for each carrier signal based on a value associated with that carrier signal. The phase scrambler also combines the phase shift computed for each carrier signal with the phase characteristic of that carrier signal to substantially scramble the phase characteristic of the carrier signals. In one embodiment, a modulator, in communication with

the phase scrambler, modulates bits of an input signal onto the carrier signals having the substantially scrambled phase characteristics to produce a transmission signal with a reduced PAR.

#### Description of the Drawings

The invention is pointed out with particularity in the appended claims. The advantages of the invention described above, as well as further advantages of the invention, may be better understood by reference to the following description taken in conjunction with the accompanying drawings, in which:

5

10

15

20

25

30

FIG. 1 is a block diagram of an embodiment of a digital subscriber line communications system including a DMT (discrete multitone modulation) transceiver, in communication with a remote transceiver, having a phase scrambler for substantially scrambling the phase characteristics of carrier signals; and

FIG. 2 is a flow diagram of an embodiment of a process for scrambling the phase characteristics of the carrier signals in a transmission signal.

# **Detailed Description**

FIG. 1 shows a digital subscriber line (DSL) communication system 2 including a discrete multitone (DMT) transceiver 10 in communication with a remote transceiver 14 over a communication channel 18 using a transmission signal 38 having a plurality of carrier signals. The DMT transceiver 10 includes a DMT transmitter 22 and a DMT receiver 26. The remote transceiver 14 includes a transmitter 30 and a receiver 34. Although described with respect to discrete multitone modulation, the principles of the invention apply also to other types of multicarrier modulation, such as, but not limited to, orthogonally multiplexed quadrature amplitude modulation (OQAM), discrete wavelet multitone (DWMT) modulation, and orthogonal frequency division multiplexing (OFDM).

The communication channel 18 provides a downstream transmission path from the DMT transmitter 22 to the remote receiver 34, and an upstream transmission path from the remote transmitter 30 to the DMT receiver 26. In one embodiment, the communication channel 18 is a pair of twisted wires of a telephone subscriber line. In other embodiments, the communication channel 18 can be a fiber optic wire, a quad cable, consisting of two pairs of twisted wires, or a quad cable that is one of a star quad cable, a Dieselhorst-Martin quad

cable, and the like. In a wireless communication system wherein the transceivers 10, 14 are wireless modems, the communication channel 18 is the air through which the transmission signal 38 travels between the transceivers 10, 14.

By way of example, the DMT transmitter 22 shown in FIG. 1 includes a quadrature amplitude modulation (QAM) encoder 42, a modulator 46, a bit allocation table (BAT) 44, and a phase scrambler 66. The DMT transmitter 22 can also include a bit scrambler 74, as described further below. The remote transmitter 30 of the remote transceiver 14 comprises equivalent components as the DMT transmitter 22. Although this embodiment specifies a detailed description of the DMT transmitter 22, the inventive concepts apply also to the receivers 34, 26 which have similar components to that of the DMT transmitter 22, but perform inverse functions in a reverse order.

5

10

15

20

25

30

The QAM encoder 42 has a single input for receiving an input serial data bit stream 54 and multiple parallel outputs to transmit QAM symbols 58 generated by the QAM encoder 42 from the bit stream 54. In general, the QAM encoder 42 maps the input serial bit-stream 54 in the time domain into parallel QAM symbols 58 in the frequency domain. In particular, the QAM encoder 42 maps the input serial data bit stream 54 into N parallel quadrature amplitude modulation (QAM) constellation points 58, or QAM symbols 58, where N represents the number of carrier signals generated by the modulator 46. The BAT 44 is in communication with the QAM encoder 42 to specify the number of bits carried by each carrier signal. The QAM symbols 58 represent the amplitude and the phase characteristic of each carrier signal.

The modulator 46 provides functionality associated with the DMT modulation and transforms the QAM symbols 58 into DMT symbols 70 each comprised of a plurality of time-domain samples. The modulator 46 modulates each carrier signal with a different QAM symbol 58. As a result of this modulation, carrier signals have phase and amplitude characteristics based on the QAM symbol 58 and therefore based on the input-bit stream 54. In particular, the modulator 46 uses an inverse fast Fourier transform (IFFT) to change the QAM symbols 58 into a transmission signal 38 comprised of a sequence of DMT symbols 70. The modulator 46 changes the QAM symbols 58 into DMT symbols 70 through modulation of the carrier signals. In another embodiment, the modulator 46 uses the inverse

discrete Fourier transform (IDFT) to change the QAM symbols 58 into DMT symbols 70. In one embodiment, a pilot tone is included in the transmission signal 38 to provide a reference signal for coherent demodulation of the carrier signals in the remote receiver 34 during reception of the transmission signal 38.

5

10

15

20

25

30

The modulator 46 also includes a phase scrambler 66 that combines a phase shift computed for each QAM-modulated carrier signal with the phase characteristic of that carrier signal. Combining phase shifts with phase characteristics, in accordance with the principles of the invention, substantially scrambles the phase characteristics of the carrier signals in the transmission signal 38. By scrambling the phase characteristics of the carrier signals, the resulting transmission signal 38 has a substantially minimized peak-to-average (PAR) power ratio. The phase scrambler 66 can be part of or external to the modulator 46. Other embodiments of the phase scrambler 66 include, but are not limited to, a software program that is stored in local memory and is executed on the modulator 46, a digital signal processor (DSP) capable of performing mathematical functions and algorithms, and the like. The remote receiver 34 similarly includes a phase descrambler 66' for use when demodulating carrier signals that have had their phase characteristics adjusted by the phase scrambler 66 of the DMT transceiver 10.

To compute a phase shift for each carrier signal, the phase scrambler 66 associates one or more values with that carrier signal. The phase scrambler 66 determines each value for a carrier signal independently of the QAM symbols 58, and, therefore, independently of the bit value(s) modulated onto the carrier signal. The actual value(s) that the phase scrambler 66 associates with each carrier signal can be derived from one or more predefined parameters, such as a pseudo-random number generator (pseudo-RNG), a DMT carrier number, a DMT symbol count, a DMT superframe count, a DMT hyperframe count, and the like, as described in more detail below. Irrespective of the technique used to produce each value, the same technique is used by the DMT transmitter 22 and the remote receiver 34 so that the value associated with a given carrier signal is known at both ends of the communication channel 18.

The phase scrambler 66 then solves a predetermined equation to compute a phase shift for the carrier signal, using the value(s) associated with that carrier signal as input that

effects the output of the equation. Any equation suitable for computing phase shifts can be used to compute the phase shifts. When the equation is independent of the bit values of the input serial bit stream 54, the computed phase shifts are also independent of such bit values.

In one embodiment (shown in phantom), the DMT transmitter 22 includes a bit scrambler 74, which receives the input serial bit stream 54 and outputs data bits 76 that are substantially scrambled. The substantially scrambled bits 76 are then passed to the QAM encoder 42. When the bit scrambler 74 is included in the DMT transmitter 22, the operation of the phase scrambler 66 further assures that the transmission signal 38 has a Gaussian probability distribution and, therefore, a substantially minimized PAR.

5

10

15

20

25

FIG. 2 shows embodiments of a process used by the DMT transmitter 22 for adjusting the phase characteristic of each carrier signal and combining these carrier signals to produce the transmission signal 38. The DMT transmitter 22 generates (step 100) a value that is associated with a carrier signal. Because the value is being used to alter the phase characteristics of the carrier signal, both the DMT transmitter 22 and the remote receiver 34 must recognize the value as being associated with the carrier signal. Either the DMT transmitter 22 and the remote receiver 34 independently derive the associated value, or one informs the other of the associated value. For example, in one embodiment the DMT transmitter 22 can derive the value from a pseudo-RNG and then transmit the generated value to the remote receiver 34. In another embodiment, the remote receiver 34 similarly derives the value from the same pseudo-RNG and the same seed as used by the transmitter (i.e., the transmitter pseudo-RNG produces the same series of random numbers as the receiver pseudo-RNG).

As another example, the DMT transmitter 22 and the remote receiver 34 can each maintain a symbol counter for counting DMT symbols. The DMT transmitter 22 increments its symbol counter upon transmitting a DMT symbol; the remote receiver 34 upon receipt. Thus, when the DMT transmitter 22 and the remote receiver 34 both use the symbol count as a value for computing phase shifts, both the DMT transmitter 22 and remote receiver 34 "know" that the value is associated with a particular DMT symbol and with each carrier signal of that DMT symbol.

Values can also be derived from other types of predefined parameters. For example, if the predefined parameter is the DMT carrier number, then the value associated with a particular carrier signal is the carrier number of that signal within the DMT symbol. The number of a carrier signal represents the location of the frequency of the carrier signal relative to the frequency of other carrier signals within a DMT symbol. For example, in one embodiment the DSL communication system 2 provides 256 carrier signals, each separated by a frequency of 4.3125 kHz and spanning the frequency bandwidth from 0 kHz to 1104 kHz. The DMT transmitter 22 numbers the carrier signals from 0 to 255. Therefore, "DMT carrier number 50" represents the 51st DMT carrier signal which is located at the frequency of 215.625 kHz (i.e., 51 x 4.3125 kHz).

5

10

15

20

25

30

Again, the DMT transmitter 22 and the remote receiver 34 can know the value that is associated with the carrier signal because both the DMT transmitter 22 and the remote receiver 34 use the same predefined parameter (here, the DMT carrier number) to make the value-carrier signal association. In other embodiments (as exemplified above with the transmitter pseudo-RNG), the DMT transmitter 22 can transmit the value to the remote receiver 34 (or vice versa) over the communication channel 18.

In other embodiments, other predefined parameters can be used in conjunction with the symbol count. One example of such a predefined parameter is the superframe count that increments by one every 69 DMT symbols. One exemplary implementation that achieves the superframe counter is to perform a modulo 68 operation on the symbol count. As another example, the DMT transmitter 22 can maintain a hyperframe counter for counting hyperframes. An exemplary implementation of the hyperframe count is to perform a modulo 255 operation on the superframe count. Thus, the hyperframe count increments by one each time the superframe count reaches 255.

Accordingly, it is seen that some predefined parameters produce values that vary from carrier signal to carrier signal. For example, when the predefined parameter is the DMT carrier number, values vary based on the frequency of the carrier signal. As another example, the pseudo-RNG generates a new random value for each carrier signal.

Other predefined parameters produce values that vary from DMT symbol 70 to DMT symbol 70. For example, when the predefined parameter is the symbol count, the superframe

count, or hyperframe count, values vary based on the numerical position of the DMT symbol 70 within a sequence of symbols, superframes, or hyperframes. Predefined parameters such as the pseudo-RNG, symbol count, superframe count, and superframe can also be understood to be parameters that vary values over time. Any one or combination of the predefined parameters can provide values for input to the equation that computes a phase shift for a given carrier signal.

5

10

15

20

25

In one embodiment, the phase scrambling is used to avoid clipping of the transmission signal 38 on a DMT symbol 70 by DMT symbol 70 basis. In this embodiment, the DMT transmitter 22 uses a value based on a predefined parameter that varies over time, such as the symbol count, to compute the phase shift. It is to be understood that other types of predefined parameters that vary the values associated with carrier signals can be used to practice the principles of the invention. As described above, the transceivers 10, 14 may communicate (step 110) the values to synchronize their use in modulating and demodulating the carrier signals.

The DMT transmitter 22 then computes (step 115) the phase shift that is used to adjust the phase characteristic of each carrier signal. The amount of the phase shift combined with the phase characteristic of each QAM-modulated carrier signal depends upon the equation used and the one or more values associated with that carrier signal.

The DMT transmitter 22 then combines (step 120) the phase shift computed for each carrier signal with the phase characteristic of that carrier signal. By scrambling the phase characteristics of the carrier signals, the phase scrambler 66 reduces (with respect to unscrambled phase characteristics) the combined PAR of the plurality of carrier signals and, consequently, the transmission signal 38. The following three phase shifting examples, PS #1-PS #3, illustrate methods used by the phase scrambler 66 to combine a computed phase shift to the phase characteristic of each carrier signal.

#### Phase Shifting Example #1

Phase shifting example #1 (PS #1) corresponds to adjusting the phase characteristic of the QAM-modulated carrier signal associated with a carrier number N by  $N \times \frac{\pi}{3}$ , modulo (mod)  $2\pi$ . In this example, a carrier signal having a carrier number N equal to 50 has a phase shift added to the phase characteristic of that carrier signal equal to  $50 \times \frac{\pi}{3}$  (mod  $2\pi$ ) =  $\frac{2}{3}\pi$ . The carrier signal with a carrier number N equal to 51 has a phase shift added to the phase characteristic of that carrier signal equal to  $51 \times \frac{\pi}{3}$  (mod  $2\pi$ ) =  $\pi$ . The carrier signal with the carrier number N equal to 0 has no phase shift added to the phase characteristic of that carrier signal.

10

5

## Phase Shifting Example #2

Phase shifting example #2 (PS #2) corresponds to adjusting the phase characteristic of the QAM-modulated carrier signal associated with a carrier number N by  $(N+M)\times\frac{\pi}{4}$ , mod  $2\pi$ , where M is the symbol count. In this example, a carrier signal having a carrier number N equal to 50 on DMT symbol count M equal to 8 has a phase shift added to the phase characteristic of that carrier signal equal to  $(50+8)\times\frac{\pi}{4}$  (mod  $2\pi$ ) =  $\frac{\pi}{2}$ . The carrier signal with the same carrier number N equal to 50 on the next DMT symbol count M equal to 9 has a phase shift added to the phase characteristic of that carrier signal equal to  $(50+9)\times\frac{\pi}{4}$  (mod  $2\pi$ ) =  $\frac{3\pi}{4}$ .

20

15

# Phase Shifting Example #3

Phase shifting example #3 (PS #3) corresponds to adjusting the phase characteristic of the QAM-modulated carrier signal associated with a carrier number N by  $(X_N) \times \frac{\pi}{6}$ , mod  $2\pi$ , where  $X_N$  is an array of N pseudo-random numbers. In this example, a carrier signal having a carrier number N equal to 5 and  $X_N$  equal to [3, 8, 1, 4, 9, 5, . . .] has a phase shift added to the phase characteristic of the carrier signal that is equal to  $(9) \times \frac{\pi}{6} \pmod{2\pi} = \frac{3\pi}{2}$  (Note that 9 is the 5<sup>th</sup> value in  $X_N$ .) The carrier signal with a carrier number N equal to 6 has a phase shift added to the phase characteristic of the carrier signal equal to  $(5) \times \frac{\pi}{6} \pmod{2\pi} = \frac{5\pi}{6}$ .

It is to be understood that additional and/or different phase shifting techniques can be used by the phase scrambler 66, and that PS #1, #2, and #3 are merely illustrative examples of the principles of the invention. The DMT transmitter 22 then combines (step 130) the carrier signals to form the transmission signal 38. If the transmission signal is not clipped, as described below, the DMT transmitter 22 consequently transmits (step 160) the transmission signal 38 to the remote receiver 34.

# **Clipping of Transmission Signals**

5

10

15

20

25

30

A transmission signal 38 that has high peak values of voltage (i.e., a high PAR) can induce non-linear distortion in the DMT transmitter 22 and the communication channel 18. One form of this non-linear distortion of the transmission signal 38 that may occur is the limitation of the amplitude of the transmission signal 38 (i.e., clipping). For example, a particular DMT symbol 70 clips in the time domain when one or more time domain samples in that DMT symbol 70 are larger than the maximum allowed digital value for the DMT symbols 70. In multicarrier communication systems when clipping occurs, the transmission signal 38 does not accurately represent the input serial data bit signal 54.

In one embodiment, the DSL communication system 2 avoids the clipping of the transmission signal 38 on a DMT symbol 70 by DMT symbol 70 basis. The DMT transmitter 22 detects (step 140) the clipping of the transmission signal 38. If a particular DMT symbol 70 clips in the time domain to produce a clipped transmission signal 38, the DMT transmitter 22 substitutes (step 150) a predefined transmission signal 78 for the clipped transmission signal 38.

The predefined transmission signal 78 has the same duration as a DMT symbol 70 (e.g., 250 ms) in order to maintain symbol timing between the DMT transmitter 22 and the remote receiver 34. The predefined transmission signal 78 is not based on (i.e., independent of) the modulated input data bit stream 54; it is a bit value pattern that is recognized by the remote receiver 34 as a substituted signal. In one embodiment, the predefined transmission signal 78 is a known pseudo-random sequence pattern that is easily detected by the remote receiver 34. In another embodiment, the predefined transmission signal 78 is an "all zeros" signal, which is a zero voltage signal produced at the DMT transmitter 22 output (i.e., zero

volts modulated on all the carrier signals). In addition to easy detection by the remote receiver 34, the zero voltage signal reduces the power consumption of the DMT transmitter 22 when delivered by the DMT transmitter 22. Further, a pilot tone is included in the predefined transmission signal 78 to provide a reference signal for coherent demodulation of the carrier signals in the remote receiver 34 during reception of the predefined transmission signal 78.

5

10

15

20

25

30

After the remote receiver 34 receives the transmission signal 38, the remote receiver 34 determines if the transmission signal 38 is equivalent to the predefined transmission signal 78. In one embodiment, when the remote receiver 34 identifies the predefined transmission signal 78, the remote receiver 34 ignores (i.e., discards) the predefined transmission signal 78.

Following the transmission of the predefined transmission signal 78, the phase scrambler 66 shifts (step 120) the phase characteristic of the QAM-modulated carrier signals (based on one of the predefined parameters that varies over time). For example, consider that a set of QAM symbols 58 produces a DMT symbol 70 comprising a plurality of time domain samples, and that one of the time domain samples is larger than the maximum allowed digital value for the DMT symbol 70. Therefore, because the transmission signal 38 would be clipped when sent to the remote receiver 34, the DMT transmitter 22 sends the predefined transmission signal 78 instead.

After transmission of the predefined transmission signal 78, the DMT transmitter 22 again attempts to send the same bit values that produced the clipped transmission signal 38 in a subsequent DMT symbol 70'. Because the generation of phase shifts in this embodiment is based on values that vary over time, the phase shifts computed for the subsequent DMT symbol 70' are different than those that were previously computed for the DMT symbol 70 with the clipped time domain sample. These different phase shifts are combined to the phase characteristics of the modulated carrier signals to produce carrier signals of the subsequent DMT symbol 70' with different phase characteristics than the carrier signals of the DMT symbol 70 with the clipped time domain sample.

DMT communication systems 2 infrequently produce transmission signals 38 that clip (e.g., approximately one clip every 10<sup>7</sup> time domain samples 70). However, if the

subsequent DMT symbol 70' includes a time domain sample that clips, then the predefined transmission signal 78 is again transmitted (step 150) to the remote receiver 34 instead of the clipped transmission signal 38. The clipping time domain sample may be on the same or on a different carrier signal than the previously clipped DMT symbol 70. The DMT transmitter 22 repeats the transmission of the predefined transmission signal 78 until the DMT transmitter 22 produces a subsequent DMT symbol 70' that is not clipped. When the DMT transmitter 22 produces a DMT symbol 70' that is not clipped, the DTM transmitter 22 transmits (step 160) the transmission signal 38 to the remote receiver 34. The probability of a DMT symbol 70 producing a transmission signal 38 that clips in the time domain depends on the PAR of the transmission signal 38.

For example, the following phase shifting example, PST #4, illustrates the method used by the phase scrambler 66 to combine a different phase shift to the phase characteristic of each carrier signal to avoid the clipping of the transmission signal 38.

#### Phase Shifting Example #4

5

10

15

20

25

30

Phase shifting example #4 (PS #4) corresponds to adjusting the phase characteristic of the carrier signal associated with a carrier number N by  $\frac{\pi}{3} \times (M+N)$ , mod  $2\pi$ , where M is the DMT symbol count. In this example, if the DMT symbol 70 clips when the DMT symbol count M equals 5, the predefined transmission signal 78 is transmitted instead of the current clipped transmission signal 38. On the following DMT symbol period, the DMT count M equals 6, thereby causing a different set of time domain samples to be generated for the subsequent DMT symbol 70', although the QAM symbols 58 used to produce both DMT symbols 70, 70' are the same.

If this different set of time domain samples (and consequently the transmission signal 38) is not clipped, the DMT transmitter 22 sends the transmission signal 38. If one of the time domain samples in the different set of time domain samples 70 (and consequently the transmission signal 38) is clipped, then the DMT transmitter 22 sends the predefined transmission signal 78 again. The process continues until a DMT symbol 70 is produced without a time domain sample 70 that is clipped. In one embodiment, the transmitter 22 stops attempting to produce a non-clipped DMT symbol 70' for the particular set of QAM symbols 58 after generating a predetermined number of clipped DMT symbols 70'. At that moment,

the transmitter 22 can transmit the most recently produced clipped DMT symbol 70' or the predetermined transmission signal 78.

5

10

15

20

The PAR of the DSL communication system 2 is reduced because the predefined transmission signal 78 is sent instead of the transmission signal 38 when the DMT symbol 70 clips. For example, a DMT communication system 2 that normally has a clipping probability of 10-7 for the time domain transmission signal 38 can therefore operate with a 10-5 probability of clipping and a lower PAR equal to 12.8 dB (as compared to 14.5 dB). When operating at a 10-5 probability of clipping, assuming a DMT symbol 70 has 512 time-domain samples 70, the DMT transmitter 22 experiences one clipped DMT symbol 70 out of every  $\frac{10^5}{512}$ , or 195 DMT symbols 70. This results in the predefined (non-data carrying) transmission signal 78 being transmitted, on average, once every 195 DMT symbols. Although increasing the probability of clipping to  $10^{-5}$  results in approximately a 0.5% (1/195) decrease in throughput, the PAR of the transmission signal 38 is reduced by 1.7 dB, which reduces transmitter complexity in the form of power consumption and component linearity.

While the invention has been shown and described with reference to specific preferred embodiments, it should be understood by those skilled in the art that various changes in form and detail may be made therein without departing from the spirit and scope of the invention as defined by the following claims. For example, although the specification uses DSL to describe the invention, it is to be understood that various form of DSL can be used, e.g., ADSL, VDSL, SDSL, HDSL, HDSL2, or SHDSL. It is also to be understood that the principles of the invention apply to various types of applications transported over DSL systems (e.g., telecommuting, video conferencing, high speed Internet access, video-on demand).

# **EAST Search History**

# **EAST Search History (Prior Art)**

Ref #	Hits	Search Query	DBs	Default Operator	Plurals	Time Stamp
L1	67	(375/259 375/260 375/261 375/295 375/298 375/316 375/320 375/340).ccls. and (comput\$3 estimat\$3 determin\$3) near4 phase adj shift same (carrier\$3 sub adj carrier\$1 multi adj carrier)	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2011/09/20 21:56
12	9	1 and @ad<="19991109"	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2011/09/20 21:56
L3	75	(375/259 375/260 375/261 375/295 375/298 375/316 375/320 375/340).ccls. and phase near2 scrambl\$3	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2011/09/20 21:57
L4	8	3 and @ad<="19991109"	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2011/09/20 21:57
L5	235	phase near2 scrambl\$3 and @ad<="19991109"	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2011/09/20 21:59
L6	29	5 and phase near2 scrambl\$3 same (carrier\$3 cahnnel\$1)	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2011/09/20 22:00
S1	16	tzannes.in. and scrambling near3 phase	US-PGPUB; USPAT; USOCR; FPRS; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2009/10/02 21:12
82	4	"60164134"	US-PGPUB; USPAT; USOCR; FPRS; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2009/10/02 21:16
83	О	" a method for randomizing the phase of the carriers in a multicarrier"	US-PGPUB; USPAT; USOCR; FPRS; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2009/10/02 21:18
S4	0	"a method for randomizing the phase"	US-PGPUB; USPAT; USOCR; FPRS; EPO;	OR	ON	2009/10/02 21:19

 $file: ///CI/Users/lwilliams 5/Documents/e-Red\% 20 Folder/11860080/EAST Search History. 11860080\_Accessible Version. htm [9/20/2011\ 10:10:14\ PM]$ 

			JPO; DERWENT; IBM_TDB			
S5	4	"7471721".pn. "7292627".pn. "6961369".pn.	US-PGPUB; USPAT; USOCR; FPRS; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2009/10/05 10:18
S6	3	"7471721".pn. "7292627".pn. "6961369".pn.	USPAT	OR	ON	2009/10/05 10:19
S7	15	"3955141".pn. "4985900".pn. "5682376".pn. "5748677".pn. "6256355".pn. "6507585".pn. "6590860".pn. "6704317".pn. "6961369".pn. "7292627".pn. "20050141410" "20060092902" "20060140288" "20080069253"	US-PGPUB; USPAT	OR	ON	2009/10/05 13:54
S8	4	S7 and (comput\$3 estimat\$3 determin\$3) near4 phase adj shift same (carrier\$3 sub adj carrier\$1 multi adj carrier)	US-PGPUB; USPAT	OR	ON	2009/10/05 13:57
S9	23	375/260.ccls. and (comput\$3 estimat\$3 determin\$3) near4 phase adj shift same (carrier\$3 sub adj carrier\$1 multi adj carrier)	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2009/10/05 13:58
S10	1	S9 and @ad<="19991109"	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2009/10/05 13:58
S11	8	(375/219 375/222).ccls. and (comput\$3 estimat\$3 determin\$3) near4 phase adj shift same (carrier\$3 sub adj carrier\$1 multi adj carrier)	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2009/10/05 13:59
S12	0	S11 and @ad<="19991109"	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2009/10/05 14:00
S13	11	375/260.ccls. and (scrambl\$3 randomiz\$3) near4 phase same (carrier\$3 sub adj carrier\$1 multi adj carrier)	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2009/10/05 14:01
S14	1	S13 and @ad<="19991109"	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2009/10/05 14:01
S15	7	(375/219 375/222).ccls. and (scrambl\$3 randomiz\$3) near4 phase same (carrier\$3 sub adj carrier\$1 multi adj carrier)	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2009/10/05 14:03
S16	1	S15 and @ad<="19991109"	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2009/10/05 14:03
S17	5	(370/281 370/295 370/330 370/343 370/436 370/478 370/480 370/481 370/57 370/69.1).ccls. and (scrambl\$3 randomiz\$3) near4 phase same (carrier\$3 sub adj carrier\$1 multi adj carrier)	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2009/10/05 15:45

S18	1	S17 and @ad<="19991109"	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2009/10/05 15:45
S19	10	(370/281 370/295 370/330 370/343 370/436 370/478 370/480 370/481 370/57 370/69.1).ccls. and (comput\$3 estimat\$3 determin\$3) near4 phase adj shift same (carrier\$3 sub adj carrier\$1 multi adj carrier)	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2009/10/05 15:47
S20	4	S19 and @ad<="19991109"	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2009/10/05 15:48
S21	13	(375/260 375/267 375/362).ccls. and (scrambl\$3 randomiz\$3) near4 phase same (carrier\$3 sub adj carrier\$1 multi adj carrier)	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2009/10/05 15:53
S22	2	S21 and @ad<="19991109"	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2009/10/05 15:53
S23	31	(375/260 375/267 375/362).ccls. and (comput\$3 estimat\$3 determin\$3) near4 phase adj shift same (carrier\$3 sub adj carrier\$1 multi adj carrier)	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2009/10/05 15:54
S24	2	S23 and @ad<="19991109"	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2009/10/05 15:54
S25	3	(375/295).ccls. and (comput\$3 estimat\$3 determin\$3) near4 phase adj shift same (carrier\$3 sub adj carrier\$1 multi adj carrier)	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2009/10/05 15:55
S26	0	\$25 and @ad<="19991109"	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2009/10/05 15:57
\$27	2	"6,590,860" .pn.	US-PGPUB; USPAT; USOCR; FPRS; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2010/04/19 22:54
\$28	6	tzannes.in. and ((randomiz\$3 scrambling) near3 phase).clm.	US-PGPUB; USPAT; USOCR; FPRS; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2010/04/20 08:32
S29	15	tzannes.in. and scrambling near3 phase	US-PGPUB; USP <b>A</b> T	OR	ON	2010/04/22 16:22
S30	5	tzannes.in. and scrambling near3 phase.clm.	US-PGPUB; USPAT; USOCR; FPRS; EPO; JPO; DERWENT;	OR	ON	2010/04/22 16:23

 $file: ///C // Users / Iwilliams 5/Documents / e-Red \% 20 Folder / 11860080 / EAST Search History. 11860080 \_ Accessible Version. htm [9/20/2011\ 10:10:14\ PM]$ 

		1	IBM_TDB			
S31	14	(375/259 375/261 375/295 375/298 375/219 375/220).ccls. and (comput\$3 estimat\$3 determin\$3) near4 phase adj shift same (carrier\$3 sub adj carrier\$1 multi adj carrier)	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2010/04/22 22:45
S32	2	S31 and @ad<="19991109"	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2010/04/22 22:45
S33	43	(375/259 375/261 375/295 375/298 375/219 375/220).ccls. and (randomiz\$3 scrambl\$3) near3 phase	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2010/04/22 22:47
S34	12	S33 and @ad<="19991109"	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2010/04/22 22:47
S35	17	(370/206 370/208).ccls. and (randomiz\$3 scrambl\$3) near3 phase	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2010/04/22 22:52
S36	6	S35 and @ad<="19991109"	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2010/04/22 22:52
S37	2	(455/73 455/91 455/108).ccls. and (randomiz\$3 scrambl\$3) near3 phase	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2010/04/22 22:55
S38	8	"6519292".pn. "6256355".pn. "5742679".pn. "5682376".pn.	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2010/04/26 11:38
S39	4	"6519292".pn. "6256355".pn. "5742679".pn. "5682376".pn.	USPAT	OR	ON	2010/04/26 11:38
S40	4	S38 and (randomiz\$3 scrambl\$3) near3 phase	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2010/04/26 11:39
S41	1	"12255713" and independently	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2010/04/26 11:41
S42	1	"6519292".pn. and randomiz\$3 near2 phase\$1	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2010/04/26 13:50
S43	1	"6519292".pn. and (predetermined adj rule initial adj phase adj value\$1)	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2010/04/26 13:51
S44	1	"6256355".pn. and (predetermined adj rule initial adj phase adj value\$1)	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2010/04/26 13:53
S45	4	(375/377).ccls. and (randomiz\$3 scrambl\$3) near3 phase	US-PGPUB; USPAT;	OR	ON	2010/04/26 16:50

	<u> </u>		EPO; JPO; DERWENT			
S46	25	("6590860"   "6967997"   "6757299"   "7610028"   "20060002454"   "6519292"   "5991262"   "6519929"   "5694395"   "5870016"   "6366555"   "4985900"   "6507585"   "20060140288"   "3955141"   "6256355"   "6704317"   "4069392"   "5381449"   "20050141410"   "5748677"   "20060092902"   "5682376"   "6128350"   "6961369").PN.	US-PGPUB; USPAT	OR	ON	2011/08/30 23:54
S47	4	S46 and (phase near2 characteristic\$1 scrambl\$3 random\$3 spreading) same phase near2 shift same carrier\$1	US-PGPUB; USPAT	OR	ON	2011/08/30 23:56
S48	3	"12255713"	US-PGPUB; USP <b>A</b> T	OR	ON	2011/08/31 00:04
S49	220	(375/259 375/260 375/261 375/267 375/298 375/299 375/316 375/320 375/324 375/340).ccls. and (phase near2 characteristic\$1 scrambl\$3 random\$3 spreading) same phase near2 shift same carrier\$1	US-PGPUB; USPAT	OR	ON	2011/08/31 00:27
S50	220	(375/259 375/260 375/261 375/267 375/298 375/299 375/316 375/320 375/324 375/340).ccls. and (phase near2 characteristic\$1 scrambl\$3 random\$3 spreading) same phase near2 shift same carrier\$1	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2011/08/31 00:27
S51	44	S50 and @ad<="19991109"	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2011/08/31 00:28
S52	41	(375/219 375/220 375/222).ccls. and (phase near2 characteristic\$1 scrambl\$3 random\$3 spreading) same phase near2 shift same carrier\$1	US-PGPUB; USPAT	OR	ON	2011/08/31 00:31
S53	23	S52 and @ad<="19991109"	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2011/08/31 00:31
S54	29	(370/281 370/295 370/343 370/480 370/481).ccls. and (phase near2 characteristic\$1 scrambl\$3 random\$3 spreading) same phase near2 shift same carrier\$1	US-PGPUB; USPAT	OR	ON	2011/08/31 00:32
S55	11	S54 and @ad<="19991109"	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2011/08/31 00:32
S56	6	tzannes.in. and scrambling near3 phase.clm.	US-PGPUB; USPAT; USOCR; FPRS; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2011/08/31 00:39
S57	2	"12840024"	US-PGPUB; USPAT	OR	ON	2011/08/31 01:22

9/ 20/ 2011 10:10:12 PM C:\ Users\ lwilliams5\ Documents\ EAST\ Workspaces\ 11860080a.wsp



## United States Patent and Trademark Office

UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office Address: COMMISSIONER FOR PATENTS P.O. Box 1450 Alexandria, Virginia 22313-1450 www.usplo.gov

APPLICATION NUMBER FILING OR 371(C) DATE FIRST NAMED APPLICANT ATTY. DOCKET NO./TITLE

11/860,080 09/24/2007

Marcos C. Tzannes 5550-47-CON-DIV

CONFIRMATION NO. 5967 NEW OR REVISED PPD NOTICE

62574 Jason H. Vick Sheridan Ross, PC Suite # 1200 1560 Broadway Denver, CO 80202



# NOTICE OF NEW OR REVISED PROJECTED PUBLICATION DATE

The above-identified application has a new or revised projected publication date. The current projected publication date for this application is 01/12/2012. If this is a new projected publication date (there was no previous projected publication date), the application has been cleared by Licensing & Review or a secrecy order has been rescinded and the application is now in the publication queue.

If this is a revised projected publication date (one that is different from a previously communicated projected publication date), the publication date has been revised due to processing delays in the USPTO or the abandonment and subsequent revival of an application. The application is anticipated to be published on a date that is more than six weeks different from the originally-projected publication date.

More detailed publication information is available through the private side of Patent Application Information Retrieval (PAIR) System. The direct link to access PAIR is currently http://pair.uspto.gov. Further assistance in electronically accessing the publication, or about PAIR, is available by calling the Patent Electronic Business Center at 1-866-217-9197.

Questions relating to this Notice should be directed to the Office of Data Management, Application Assistance Unit at (571) 272-4000, or (571) 272-4200, or 1-888-786-0101.

PART 1 - ATTORNEY/APPLICANT COPY page 1 of 1



## UNITED STATES PATENT AND TRADEMARK OFFICE

Commissioner for Patents United States Patent and Trademark Office P.O. Box 1450 Alexandria, VA 22313-1450

Date:

Defense Technology Security Administration 2850 Eisenhower Avenue Alexandria, VA 22314 MAILED

OCT - 5 7011 LICENSING & REVIEW

Attn: DTSA Patent Review

Application serial number(s) identified below was referred at least one DoD defense agency under 35 U.S.C. 181 on the noted dates which are more than the 6 months as provided for in 35 U.S.C. 184. The Patent and Trademark Office (USPTO) has not received a communication from you regarding secrecy of this application under 35 USC 181.

Examination of this application has been completed and has been found to be in condition for allowance as a U.S. Patent. Since the USPTO has no authority to withhold the issue of a patent absent a recommendation for a secrecy order under 181, this application is being prepared for issue as a U.S. patent.

Serial Number

Referral Date

You are also reminded that although these applications are being cleared by the USPTO, dated access acknowledgement forms continue to be required in these applications pursuant to 35 USC 181.

Thank you for attention to this matter.

For: (

Wanda A

Supervisor Ligensing and Review.

UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office Address: COMMISSIONER FOR PATENTS P.O. Box 1450 Alexandria, Virginia 22313-1450 www.usplo.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
11/860,080	09/24/2007	Marcos C. Tzannes	5550-47-CON-DIV	5967
62574 7590 09/27/2011 Jason H. Vick		11	EXAMINER	
Sheridan Ross, Suite # 1200	PC		WILLIAMS, LAWRENCE B	
1560 Broadway			ART UNIT	PAPER NUMBER
Denver, CO 802	202	2611		
			NOTIFICATION DATE	DELIVERY MODE
			09/27/2011	ELECTRONIC

# Please find below and/or attached an Office communication concerning this application or proceeding.

The time period for reply, if any, is set in the attached communication.

Notice of the Office communication was sent electronically on above-indicated "Notification Date" to the following e-mail address(es):

jvick@sheridanross.com

	Application No.	Applicant(s)				
Applicant-Initiated Interview Summary	11/860,080	TZANNES, MAR	cos c.			
Applicant-initiated interview Summary	Examiner	Art Unit				
	TESFALDET BOCURE	2611				
All participants (applicant, applicant's representative, PTO personnel):						
(1) <u>TESFALDET BOCURE</u> .	(3)					
(2) <u>Mr. Vick Jason (Reg. # 45,285)</u> .	(4)					
Date of Interview: 20 September 2011.						
Type: ⊠ Telephonic □ Video Conference □ Personal [copy given to: □ applicant [	☐ applicant's representative]					
Exhibit shown or demonstration conducted:						
Issues Discussed 101 112 102 103 Others (For each of the checked box(es) above, please describe below the issue and detailed description of the discussion)						
Claim(s) discussed: <u>47 and 60</u> .						
Identification of prior art discussed: None.						
Substance of Interview  (For each issue discussed, provide a detailed description and indicate if agreement was reached. Some topics may include: identification or clarification of a reference or a portion thereof, claim interpretation, proposed amendments, arguments of any applied references etc)						
See Continuation Sheet.						
Applicant recordation instructions: The formal written reply to the last Office action must include the substance of the interview. (See MPEP						
section 713.04). If a reply to the last Office action has already been filed, applicant is given a non-extendable period of the longer of one month or thirty days from this interview date, or the mailing date of this interview summary form, whichever is later, to file a statement of the substance of the interview						
<b>Examiner recordation instructions</b> : Examiners must summarize the substance of any interview of record. A complete and proper recordation of the substance of an interview should include the items listed in MPEP 713.04 for complete and proper recordation including the identification of the general thrust of each argument or issue discussed, a general indication of any other pertinent matters discussed regarding patentability and the general results or outcome of the interview, to include an indication as to whether or not agreement was reached on the issues raised.						
☐ Attachment						
/Tesfaldet Bocure/ Primary Examiner, Art Unit 2611						

U.S. Patent and Trademark Office PTOL-413 (Rev. 8/11/2010)

Interview Summary

Paper No. 20110920

### Summary of Record of Interview Requirements

#### Manual of Patent Examining Procedure (MPEP), Section 713.04, Substance of Interview Must be Made of Record

A complete written statement as to the substance of any face-to-face, video conference, or telephone interview with regard to an application must be made of record in the application whether or not an agreement with the examiner was reached at the interview.

#### Title 37 Code of Federal Regulations (CFR) § 1.133 Interviews

Paragraph (b)

In every instance where reconsideration is requested in view of an interview with an examiner, a complete written statement of the reasons presented at the interview as warranting favorable action must be filed by the applicant. An interview does not remove the necessity for reply to Office action as specified in §§ 1.111, 1.135. (35 U.S.C. 132)

## 37 CFR §1.2 Business to be transacted in writing.

All business with the Patent or Trademark Office should be transacted in writing. The personal attendance of applicants or their attorneys or agents at the Patent and Trademark Office is unnecessary. The action of the Patent and Trademark Office will be based exclusively on the written record in the Office. No attention will be paid to any alleged oral promise, stipulation, or understanding in relation to which there is disagreement or doubt.

The action of the Patent and Trademark Office cannot be based exclusively on the written record in the Office if that record is itself incomplete through the failure to record the substance of interviews.

It is the responsibility of the applicant or the attorney or agent to make the substance of an interview of record in the application file, unless the examiner indicates he or she will do so. It is the examiner's responsibility to see that such a record is made and to correct material inaccuracies which bear directly on the question of patentability.

Examiners must complete an Interview Summary Form for each interview held where a matter of substance has been discussed during the interview by checking the appropriate boxes and filling in the blanks. Discussions regarding only procedural matters, directed solely to restriction requirements for which interview recordation is otherwise provided for in Section 812.01 of the Manual of Patent Examining Procedure, or pointing out typographical errors or unreadable script in Office actions or the like, are excluded from the interview recordation procedures below. Where the substance of an interview is completely recorded in an Examiners Amendment, no separate Interview Summary Record is required.

The Interview Summary Form shall be given an appropriate Paper No., placed in the right hand portion of the file, and listed on the "Contents" section of the file wrapper. In a personal interview, a duplicate of the Form is given to the applicant (or attorney or agent) at the conclusion of the interview. In the case of a telephone or video-conference interview, the copy is mailed to the applicant's correspondence address either with or prior to the next official communication. If additional correspondence from the examiner is not likely before an allowance or if other circumstances dictate, the Form should be mailed promptly after the interview rather than with the next official communication.

The Form provides for recordation of the following information:

- Application Number (Series Code and Serial Number)
- Name of applicant
- Name of examiner
- Date of interview
- Type of interview (telephonic, video-conference, or personal)
- Name of participant(s) (applicant, attorney or agent, examiner, other PTO personnel, etc.)
- An indication whether or not an exhibit was shown or a demonstration conducted
- An identification of the specific prior art discussed
- An indication whether an agreement was reached and if so, a description of the general nature of the agreement (may be by attachment of a copy of amendments or claims agreed as being allowable). Note: Agreement as to allowability is tentative and does not restrict further action by the examiner to the contrary.
- The signature of the examiner who conducted the interview (if Form is not an attachment to a signed Office action)

It is desirable that the examiner orally remind the applicant of his or her obligation to record the substance of the interview of each case. It should be noted, however, that the Interview Summary Form will not normally be considered a complete and proper recordation of the interview unless it includes, or is supplemented by the applicant or the examiner to include, all of the applicable items required below concerning the substance of the interview.

A complete and proper recordation of the substance of any interview should include at least the following applicable items:

- 1) A brief description of the nature of any exhibit shown or any demonstration conducted,
- 2) an identification of the claims discussed,
- 3) an identification of the specific prior art discussed,
- 4) an identification of the principal proposed amendments of a substantive nature discussed, unless these are already described on the Interview Summary Form completed by the Examiner,
- 5) a brief identification of the general thrust of the principal arguments presented to the examiner,
  - (The identification of arguments need not be lengthy or elaborate. A verbatim or highly detailed description of the arguments is not required. The identification of the arguments is sufficient if the general nature or thrust of the principal arguments made to the examiner can be understood in the context of the application file. Of course, the applicant may desire to emphasize and fully describe those arguments which he or she feels were or might be persuasive to the examiner.)
- 6) a general indication of any other pertinent matters discussed, and
- 7) if appropriate, the general results or outcome of the interview unless already described in the Interview Summary Form completed by the examiner.

Examiners are expected to carefully review the applicant's record of the substance of an interview. If the record is not complete and accurate, the examiner will give the applicant an extendable one month time period to correct the record.

#### **Examiner to Check for Accuracy**

If the claims are allowable for other reasons of record, the examiner should send a letter setting forth the examiner's version of the statement attributed to him or her. If the record is complete and accurate, the examiner should place the indication, "Interview Record OK" on the paper recording the substance of the interview along with the date and the examiner's initials.

Continuation of Substance of Interview including description of the general nature of what was agreed to if an agreement was reached, or any other comments: Applicant's representative, Mr. Vick Jason (Reg. # 45,285) discussed how to overcome possible 112 2nd paragraph with respect to the drafted claims 47 and 60. The following proposals have been suggested by the Examiner and agreed upon by Mr. Vick (see underlined limitations proposed by the Examiner):

47. (New) A method, in a first multicarrier transceiver that uses a plurality of carrier signals for receiving a bit stream, wherein each carrier signal has a phase characteristic associated with the bit stream, the method comprising: receiving the bit stream, wherein:

each carrier signal is associated with a value determined independently of any bit value corresponding or (associated) to the received bit stream carried by that respective carrier signal, the value associated with each carrier signal determined by a pseudo-random number generator,

a phase shift for each carrier signal is based on:

the value associated with that respective carrier signal, and

the combining of the phase shift for each carrier signal with the phase characteristic of that respective carrier signal so as to substantially scramble the phase characteristics of the plurality of carrier signals, and

multiple carrier signals corresponding to the phase scrambled plurality of carrier signals are used by the first multicarrier transceiver to demodulate a same input bit value corresponding or (associated) to the received bit stream.

It should be noted that the word "corresponding or associated" can be used interchangeably according to the specification whichever one is applicable. The same proposal also applies to claim 70.

In the meantime, discussed some minor issues regarding:

In the drawing element 54 has been disclosed as received by the scrambler 74 and agreed to correct; and a miss spelled word, "non-lipped" in page 2. Line 26 of the specification (see parent US patent number 7,292,627) to be amended to read as---non-clipped--.

As to the disclosed transmission signal 78, the amended drawing received on 8/30/2011 corrects the concern by the Examiner; therefore, the issue has been resolved.

In the meantime, Mr. Vick agreed to change the scrambler 66' by descrambler 66' since the receiver has been disclosed as performing inverse of that of the scrambler 66 at the transmitter and to include in his remarks that the claimed phase scrambling is performed by the transmitter to overcome drawing objection (Form Par. 6.36).

.

# IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re the Application of: Marcos C. Tzannes	Group Art Unit: 2611
Application No.: 11/860,080	Examiner: WILLIAMS, Lawrence B.
Filed: September 24, 2007	Confirmation No.: 5967
Atty. File No.: 5550-47-CON-DIV	) )

For: SYSTEM AND METHOD FOR DESCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM

Commissioner for Patents P.O. Box 1450 Alexandria, VA 22313

# SIXTH PRELIMINARY AMENDMENT

Dear Sir:

Prior to the initial review of the above-identified patent application by the Examiner, and supplemental to the September 9, 2011 Preliminary Amendment, please enter the following Preliminary Amendment. Although Applicants do not believe that any fees are due based upon the filing of this Preliminary Amendment, please charge any such fees to Deposit Account 19-1970.

Please amend the above-identified patent application as follows:

Amendments to the Specification begin on page 2 of this paper.

Amendments to the Drawings begin on page 3 of this paper and include both an attached replacement sheet and an annotated sheet showing changes.

Amendments to the Claims are shown in the listing of claims which begin on page 4 of this paper.

1

Remarks begin on page 9 of this paper.

# AMENDMENTS TO THE SPECIFICATION

2

Submitted herewith is a marked-up and clean version of a substitute specification. No new matter is believed to have been added therein.

# **AMENDMENTS TO THE DRAWINGS:**

The attached drawing sheet(s) include(s) changes to Figure 1. This sheet, which includes Figure 1 replaces the previously submitted sheet.

3

# AMENDMENTS TO THE CLAIMS

This listing of claims will replace all prior versions, and listings, of claims in the application.

# **Listing of Claims:**

1-46. (Canceled)

47. (Currently Amended) <u>A method, Inin</u> a first multicarrier transceiver, <u>having that</u> <u>uses</u> a plurality of carrier signals for receiving a bit stream, <u>wherein</u> each carrier signal <u>havinghas</u> a phase characteristic associated with the bit stream, <u>athe</u> method comprising:

demodulating receiving the bit stream, wherein:

each carrier signal <u>wasis</u> associated with a value determined independently of any bit value <u>of the bit stream</u> carried by that <u>respective</u> carrier signal, <u>the value associated with each carrier signal determined by a pseudo-random number generator</u>,

a phase shift for each carrier signal is based on:

was computed for each carrier signal based on the value associated with that carrier signal, and

the phase shift computed for each carrier signal was combined with the phase characteristic of that carrier signal the combining of a phase for each carrier signal with the phase characteristic of that respective carrier signal so as to substantially scramble the phase characteristics of the plurality of carrier signals, and

multiple carrier signals <u>corresponding to the plurality of phase shifted and scrambled carrier signals were are</u> used <u>by the first multicarrier transceiver to modulatedemodulate</u> a same <u>input</u> bit value, <u>and</u>

a value associated with the carrier signal was determined using a pseudo-random number generator, of the received bit stream.

48. (Previously Presented) The method of claim 47, wherein the first transceiver is a cable transceiver.

4

- 49. (Previously Presented) The method of claim 47, wherein the first transceiver is VDSL transceiver.
- 50. (Previously Presented) The method of claim 47, wherein the bit stream is used to transport video.
- 51. (Previously Presented) The method of claim 47, wherein the bit stream is used to transport high speed internet access.
- 52. (Previously Presented) The method of claim 47, further comprising, in a second transceiver in communication with the first transceiver, independently deriving the values associated with each carrier using a second pseudo-random number generator in the second transceiver.
- 53. (Previously Presented) The method of claim 52, wherein the first and second transceivers use a same seed for the pseudo-random number generator.
- 54. (Previously Presented) The method of claim 52, wherein the first and second transceivers are wireless transceivers.
- 55. (Previously Presented) The method of claim 52, wherein the first and second transceivers are cable transceivers.
- 56. (Previously Presented) The method of claim 52, wherein the first and second transceivers are DSL transceivers connected using a pair of twisted wires of a telephone subscriber system.
- 57. (Previously Presented) The method of claim 56, wherein the first and second transceivers are VDSL transceivers.

- 58. (Previously Presented) The method of claim 52, wherein the bit stream is used to transport video.
- 59. (Previously Presented) The method of claim 52, wherein the bit stream is used to transport high speed internet access.
- 60. (Currently Amended) A multicarrier system including a first transceiver having a that uses a plurality of carrier signals for receiving a bit stream, wherein each carrier signal having has a phase characteristic associated with the bit stream, the transceiver capable of demodulating receiving the bit stream, wherein:

each carrier signal <u>wasis</u> associated with a value determined independently of any bit value <u>of the bit stream</u> carried by that <u>respective</u> carrier signal, the value associated with each carrier signal determined by a pseudo-random number generator,

a phase shift for each carrier signal is based on:

was computed for each carrier signal based on the value associated with that respective carrier signal, and

the phase shift computed for each carrier signal was combined with the phase characteristic of that carrier signal the combining of a phase shift for each carrier signal with the phase characteristic of that respective carrier signal so as to substantially scramble the phase characteristics of the plurality of carrier signals,

multiple carrier signals <u>corresponding to the plurality of phase shifted and scrambled carrier signals were are</u> used <u>by the first multicarrier transceiver to modulatedemodulate</u> a same <u>input</u> bit value, and

a value associated with the carrier signal was determined using a pseudo-random number generator of the received bit stream.

- 61. (Previously Presented) The system of claim 60, wherein the first transceiver is a cable transceiver.
- 62. (Previously Presented) The system of claim 60, wherein the first transceiver is VDSL transceiver.

6

- 63. (Previously Presented) The system of claim 60, wherein the bit stream is used to transport video.
- 64. (Previously Presented) The system of claim 60, wherein the bit stream is used to transport high speed internet access.
- 65. (Previously Presented) The system of claim 60, further comprising a second transceiver in communication with the first transceiver, the second transceiver independently deriving the values associated with each carrier using a second pseudo-random number generator in the second transceiver.
- 66. (Previously Presented) The system of claim 65, wherein the first and second transceivers use a same seed for the pseudo-random number generator.
- 67. (Previously Presented) The system of claim 65, wherein the first and second transceivers are wireless transceivers.
- 68. (Previously Presented) The system of claim 65, wherein the first and second transceivers are cable transceivers.
- 69. (Previously Presented) The system of claim 65, wherein the first and second transceivers are DSL transceivers connected using a pair of twisted wires of a telephone subscriber system.
- 70. (Previously Presented) The system of claim 69, wherein the first and second transceivers are VDSL transceivers.
- 71. (Previously Presented) The system of claim 65, wherein the bit stream is used to transport video.

7

(Previously Presented) The system of claim 65, wherein the bit stream is used to 72. transport high speed internet access.

8

# **REMARKS/ARGUMENTS**

Applicant requests examination on the merits.

Applicant would like to thank Examiners Bocure and Williams for the courtesies extended during the September 20 telephone conference. During the conference, the Examiner requested the changes to the claims as shown above. The Examiner also requested element 66' be changed to "phase descrambler" since it is performing the inverse functions of phase scrambler 66.

Attached hereto are a substitute specification and replacement figure that make the changes as requested.

Applicant believes that the pending claims are in condition for allowance and such disposition is respectfully requested. In the event that a telephone conversation would further prosecution and/or expedite allowance, the Examiner is invited to contact the undersigned.

The Commissioner is hereby authorized to charge to Deposit Account No. 19-1970 any fees under 37 C.F.R. §§ 1.16 and 1.17 that may be required by this paper and to credit any overpayment to that Account. If any extension of time is required in connection with the filing of this paper and has not been separately requested, such extension is hereby Petitioned.

Respectfully submitted,

SHERIDAN ROSS P.C.

9

Jason H. Vick

Registration No. 45,285

1560 Broadway, Suite 1200

Denver, Colorado 80202-5141

(303) 863-9700

Date: 22 Sem 1/

# A System and Method for Descrambling the Phase of the Carriers in a Multicarrier Communications System

# Related Application

5

10

15

20

25

This application is a divisional of U.S. Application No. 11/211,535, filed August 26, 2005, now U.S. Patent No. 7,292,627, which is a continuation of U.S. Application No. 09/710,310, filed on November 9, 2000, now U.S. Patent No. 6,961,369, which claims the benefit of the filing date of copending U.S. Provisional Application, Serial No. 60/164,134, filed November 9, 1999, entitled "A Method For Randomizing The Phase Of The Carriers In A Multicarrier Communications System To Reduce The Peak To Average Power Ratio Of The Transmitted Signal," the entirety of which provisional application is incorporated by reference herein.

# Field of the Invention

This invention relates to communications systems using multicarrier modulation. More particularly, the invention relates to multicarrier communications systems that lower the peak-to-average power ratio (PAR) of transmitted signals.

# Background of the Invention

In a conventional multicarrier communications system, transmitters communicate over a communication channel using multicarrier modulation or Discrete Multitone Modulation (DMT). Carrier signals (carriers) or sub-channels spaced within a usable frequency band of the communication channel are modulated at a symbol (i.e., block) transmission rate of the system. An input signal, which includes input data bits, is sent to a DMT transmitter, such as a DMT modem. The DMT transmitter typically modulates the phase characteristic, or phase, and amplitude of the carrier signals using an Inverse Fast Fourier Transform (IFFT) to generate a time domain signal, or transmission signal, that represents the input signal. The DMT transmitter transmits the transmission signal, which is a linear combination of the multiple carriers, to a DMT receiver over the communication channel.

The phase and amplitude of the carrier signals of DMT transmission signal can be considered random because the phase and amplitude result from the modulation of an arbitrary sequence of input data bits comprising the transmitted information. Therefore, under the condition that the modulated data bit stream is random, the DMT transmission signal can be approximated as having a Gaussian probability distribution. A bit scrambler is often used in the DMT transmitter to scramble the input data bits before the bits are modulated to assure that the transmitted data bits are random and, consequently, that the modulation of those bits produces a DMT transmission signal with a Gaussian probability distribution.

5

10

15

20

25

30

With an appropriate allocation of transmit power levels to the carriers or subchannels, such a system provides a desirable performance. Further, generating a transmission signal with a Gaussian probability distribution is important in order to transmit a transmission signal with a low peak-to-average ratio (PAR), or peak-to-average power ratio. The PAR of a transmission signal is the ratio of the instantaneous peak value (i.e., maximum magnitude) of a signal parameter (e.g., voltage, current, phase, frequency, power) to the time-averaged value of the signal parameter. In DMT systems, the PAR of the transmitted signal is determined by the probability of the random transmission signal reaching a certain peak voltage during the time interval required for a certain number of symbols. An example of the PAR of a transmission signal transmitted from a DMT transmitter is 14.5 dB, which is equivalent to having a 1E-7 probability of clipping. The PAR of a transmission signal transmitted and received in a DMT communication system is an important consideration in the design of the DMT communication system because the PAR of a signal affects the communication system's total power consumption and component linearity requirements of the system.

If the phase of the modulated carriers is not random, then the PAR can increase greatly. Examples of cases where the phases of the modulated carrier signals are not random are when bit scramblers are not used, multiple carrier signals are used to modulate the same input data bits, and the constellation maps, which are mappings of input data bits to the phase of a carrier signal, used for modulation are not random enough (i.e., a zero value for a data bit corresponds to a 90 degree phase characteristic of the DMT carrier signal and a one value

for a data bit corresponds to a -90 degree phase characteristic of the DMT carrier signal). An increased PAR can result in a system with high power consumption and/or with high probability of clipping the transmission signal. Thus, there remains a need for a system and method that can effectively scramble the phase of the modulated carrier signals in order to provide a low PAR for the transmission signal.

# Summary of the Invention

5

10

15

20

25

30

The present invention features a system and method that scrambles the phase characteristics of the modulated carrier signals in a transmission signal. In one aspect, a value is associated with each carrier signal. A phase shift is computed for each carrier signal based on the value associated with that carrier signal. The value is determined independently of any input bit value carried by that carrier signal. The phase shift computed for each carrier signal is combined with the phase characteristic of that carrier signal to substantially scramble the phase characteristics of the carrier signals.

In one embodiment, the input bit stream is modulated onto the carrier signals having the substantially scrambled phase characteristic to produce a transmission signal with a reduced peak-to-average power ratio (PAR). The value is derived from a predetermined parameter, such as a random number generator, a carrier number, a DMT symbol count, a superframe count, and a hyperframe count. In another embodiment, a predetermined transmission signal is transmitted when the amplitude of the transmission signal exceeds a certain level.

In another aspect, the invention features a method wherein a value is associated with each carrier signal. The value is determined independently of any input bit value carried by that carrier signal. A phase shift for each carrier signal is computed based on the value associated with that carrier signal. The transmission signal is demodulated using the phase shift computed for each carrier signal.

In another aspect, the invention features a system comprising a phase scrambler that computes a phase shift for each carrier signal based on a value associated with that carrier signal. The phase scrambler also combines the phase shift computed for each carrier signal with the phase characteristic of that carrier signal to substantially scramble the phase characteristic of the carrier signals. In one embodiment, a modulator, in communication with

the phase scrambler, modulates bits of an input signal onto the carrier signals having the substantially scrambled phase characteristics to produce a transmission signal with a reduced PAR.

# Description of the Drawings

The invention is pointed out with particularity in the appended claims. The advantages of the invention described above, as well as further advantages of the invention, may be better understood by reference to the following description taken in conjunction with the accompanying drawings, in which:

5

10

15

20

25

30

FIG. 1 is a block diagram of an embodiment of a digital subscriber line communications system including a DMT (discrete multitone modulation) transceiver, in communication with a remote transceiver, having a phase scrambler for substantially scrambling the phase characteristics of carrier signals; and

FIG. 2 is a flow diagram of an embodiment of a process for scrambling the phase characteristics of the carrier signals in a transmission signal.

# **Detailed Description**

FIG. 1 shows a digital subscriber line (DSL) communication system 2 including a discrete multitone (DMT) transceiver 10 in communication with a remote transceiver 14 over a communication channel 18 using a transmission signal 38 having a plurality of carrier signals. The DMT transceiver 10 includes a DMT transmitter 22 and a DMT receiver 26. The remote transceiver 14 includes a transmitter 30 and a receiver 34. Although described with respect to discrete multitone modulation, the principles of the invention apply also to other types of multicarrier modulation, such as, but not limited to, orthogonally multiplexed quadrature amplitude modulation (OQAM), discrete wavelet multitone (DWMT) modulation, and orthogonal frequency division multiplexing (OFDM).

The communication channel 18 provides a downstream transmission path from the DMT transmitter 22 to the remote receiver 34, and an upstream transmission path from the remote transmitter 30 to the DMT receiver 26. In one embodiment, the communication channel 18 is a pair of twisted wires of a telephone subscriber line. In other embodiments, the communication channel 18 can be a fiber optic wire, a quad cable, consisting of two pairs of twisted wires, or a quad cable that is one of a star quad cable, a Dieselhorst-Martin quad

cable, and the like. In a wireless communication system wherein the transceivers 10, 14 are wireless modems, the communication channel 18 is the air through which the transmission signal 38 travels between the transceivers 10, 14.

By way of example, the DMT transmitter 22 shown in FIG. 1 includes a quadrature amplitude modulation (QAM) encoder 42, a modulator 46, a bit allocation table (BAT) 44, and a phase scrambler 66. The DMT transmitter 22 can also include a bit scrambler 74, as described further below. The remote transmitter 30 of the remote transceiver 14 comprises equivalent components as the DMT transmitter 22. Although this embodiment specifies a detailed description of the DMT transmitter 22, the inventive concepts apply also to the receivers 34, 26 which have similar components to that of the DMT transmitter 22, but perform inverse functions in a reverse order.

5

10

15

20

25

30

The QAM encoder 42 has a single input for receiving an input serial data bit stream 54 and multiple parallel outputs to transmit QAM symbols 58 generated by the QAM encoder 42 from the bit stream 54. In general, the QAM encoder 42 maps the input serial bit-stream 54 in the time domain into parallel QAM symbols 58 in the frequency domain. In particular, the QAM encoder 42 maps the input serial data bit stream 54 into N parallel quadrature amplitude modulation (QAM) constellation points 58, or QAM symbols 58, where N represents the number of carrier signals generated by the modulator 46. The BAT 44 is in communication with the QAM encoder 42 to specify the number of bits carried by each carrier signal. The QAM symbols 58 represent the amplitude and the phase characteristic of each carrier signal.

The modulator 46 provides functionality associated with the DMT modulation and transforms the QAM symbols 58 into DMT symbols 70 each comprised of a plurality of time-domain samples. The modulator 46 modulates each carrier signal with a different QAM symbol 58. As a result of this modulation, carrier signals have phase and amplitude characteristics based on the QAM symbol 58 and therefore based on the input-bit stream 54. In particular, the modulator 46 uses an inverse fast Fourier transform (IFFT) to change the QAM symbols 58 into a transmission signal 38 comprised of a sequence of DMT symbols 70. The modulator 46 changes the QAM symbols 58 into DMT symbols 70 through modulation of the carrier signals. In another embodiment, the modulator 46 uses the inverse

discrete Fourier transform (IDFT) to change the QAM symbols 58 into DMT symbols 70. In one embodiment, a pilot tone is included in the transmission signal 38 to provide a reference signal for coherent demodulation of the carrier signals in the remote receiver 34 during reception of the transmission signal 38.

5

10

20

25

30

The modulator 46 also includes a phase scrambler 66 that combines a phase shift computed for each QAM-modulated carrier signal with the phase characteristic of that carrier signal. Combining phase shifts with phase characteristics, in accordance with the principles of the invention, substantially scrambles the phase characteristics of the carrier signals in the transmission signal 38. By scrambling the phase characteristics of the carrier signals, the resulting transmission signal 38 has a substantially minimized peak-to-average (PAR) power ratio. The phase scrambler 66 can be part of or external to the modulator 46. Other embodiments of the phase scrambler 66 include, but are not limited to, a software program that is stored in local memory and is executed on the modulator 46, a digital signal processor (DSP) capable of performing mathematical functions and algorithms, and the like. The remote receiver 34 similarly includes a phase scrambler descrambler 66' for use when demodulating carrier signals that have had their phase characteristics adjusted by the phase scrambler 66 of the DMT transceiver 10.

To compute a phase shift for each carrier signal, the phase scrambler 66 associates one or more values with that carrier signal. The phase scrambler 66 determines each value for a carrier signal independently of the QAM symbols 58, and, therefore, independently of the bit value(s) modulated onto the carrier signal. The actual value(s) that the phase scrambler 66 associates with each carrier signal can be derived from one or more predefined parameters, such as a pseudo-random number generator (pseudo-RNG), a DMT carrier number, a DMT symbol count, a DMT superframe count, a DMT hyperframe count, and the like, as described in more detail below. Irrespective of the technique used to produce each value, the same technique is used by the DMT transmitter 22 and the remote receiver 34 so that the value associated with a given carrier signal is known at both ends of the communication channel 18.

The phase scrambler 66 then solves a predetermined equation to compute a phase shift for the carrier signal, using the value(s) associated with that carrier signal as input that

effects the output of the equation. Any equation suitable for computing phase shifts can be used to compute the phase shifts. When the equation is independent of the bit values of the input serial bit stream 54, the computed phase shifts are also independent of such bit values.

In one embodiment (shown in phantom), the DMT transmitter 22 includes a bit scrambler 74, which receives the input serial bit stream 54 and outputs data bits 76 that are substantially scrambled. The substantially scrambled bits 76 are then passed to the QAM encoder 42. When the bit scrambler 74 is included in the DMT transmitter 22, the operation of the phase scrambler 66 further assures that the transmission signal 38 has a Gaussian probability distribution and, therefore, a substantially minimized PAR.

5

10

15

20

25

FIG. 2 shows embodiments of a process used by the DMT transmitter 22 for adjusting the phase characteristic of each carrier signal and combining these carrier signals to produce the transmission signal 38. The DMT transmitter 22 generates (step 100) a value that is associated with a carrier signal. Because the value is being used to alter the phase characteristics of the carrier signal, both the DMT transmitter 22 and the remote receiver 34 must recognize the value as being associated with the carrier signal. Either the DMT transmitter 22 and the remote receiver 34 independently derive the associated value, or one informs the other of the associated value. For example, in one embodiment the DMT transmitter 22 can derive the value from a pseudo-RNG and then transmit the generated value to the remote receiver 34. In another embodiment, the remote receiver 34 similarly derives the value from the same pseudo-RNG and the same seed as used by the transmitter (i.e., the transmitter pseudo-RNG produces the same series of random numbers as the receiver pseudo-RNG).

As another example, the DMT transmitter 22 and the remote receiver 34 can each maintain a symbol counter for counting DMT symbols. The DMT transmitter 22 increments its symbol counter upon transmitting a DMT symbol; the remote receiver 34 upon receipt. Thus, when the DMT transmitter 22 and the remote receiver 34 both use the symbol count as a value for computing phase shifts, both the DMT transmitter 22 and remote receiver 34 "know" that the value is associated with a particular DMT symbol and with each carrier signal of that DMT symbol.

Values can also be derived from other types of predefined parameters. For example, if the predefined parameter is the DMT carrier number, then the value associated with a particular carrier signal is the carrier number of that signal within the DMT symbol. The number of a carrier signal represents the location of the frequency of the carrier signal relative to the frequency of other carrier signals within a DMT symbol. For example, in one embodiment the DSL communication system 2 provides 256 carrier signals, each separated by a frequency of 4.3125 kHz and spanning the frequency bandwidth from 0 kHz to 1104 kHz. The DMT transmitter 22 numbers the carrier signals from 0 to 255. Therefore, "DMT carrier number 50" represents the 51st DMT carrier signal which is located at the frequency of 215.625 kHz (i.e., 51 x 4.3125 kHz).

5

10

15

20

25

30

Again, the DMT transmitter 22 and the remote receiver 34 can know the value that is associated with the carrier signal because both the DMT transmitter 22 and the remote receiver 34 use the same predefined parameter (here, the DMT carrier number) to make the value-carrier signal association. In other embodiments (as exemplified above with the transmitter pseudo-RNG), the DMT transmitter 22 can transmit the value to the remote receiver 34 (or vice versa) over the communication channel 18.

In other embodiments, other predefined parameters can be used in conjunction with the symbol count. One example of such a predefined parameter is the superframe count that increments by one every 69 DMT symbols. One exemplary implementation that achieves the superframe counter is to perform a modulo 68 operation on the symbol count. As another example, the DMT transmitter 22 can maintain a hyperframe counter for counting hyperframes. An exemplary implementation of the hyperframe count is to perform a modulo 255 operation on the superframe count. Thus, the hyperframe count increments by one each time the superframe count reaches 255.

Accordingly, it is seen that some predefined parameters produce values that vary from carrier signal to carrier signal. For example, when the predefined parameter is the DMT carrier number, values vary based on the frequency of the carrier signal. As another example, the pseudo-RNG generates a new random value for each carrier signal.

Other predefined parameters produce values that vary from DMT symbol 70 to DMT symbol 70. For example, when the predefined parameter is the symbol count, the superframe

count, or hyperframe count, values vary based on the numerical position of the DMT symbol 70 within a sequence of symbols, superframes, or hyperframes. Predefined parameters such as the pseudo-RNG, symbol count, superframe count, and superframe can also be understood to be parameters that vary values over time. Any one or combination of the predefined parameters can provide values for input to the equation that computes a phase shift for a given carrier signal.

5

10

15

20

25

In one embodiment, the phase scrambling is used to avoid clipping of the transmission signal 38 on a DMT symbol 70 by DMT symbol 70 basis. In this embodiment, the DMT transmitter 22 uses a value based on a predefined parameter that varies over time, such as the symbol count, to compute the phase shift. It is to be understood that other types of predefined parameters that vary the values associated with carrier signals can be used to practice the principles of the invention. As described above, the transceivers 10, 14 may communicate (step 110) the values to synchronize their use in modulating and demodulating the carrier signals.

The DMT transmitter 22 then computes (step 115) the phase shift that is used to adjust the phase characteristic of each carrier signal. The amount of the phase shift combined with the phase characteristic of each QAM-modulated carrier signal depends upon the equation used and the one or more values associated with that carrier signal.

The DMT transmitter 22 then combines (step 120) the phase shift computed for each carrier signal with the phase characteristic of that carrier signal. By scrambling the phase characteristics of the carrier signals, the phase scrambler 66 reduces (with respect to unscrambled phase characteristics) the combined PAR of the plurality of carrier signals and, consequently, the transmission signal 38. The following three phase shifting examples, PS #1-PS #3, illustrate methods used by the phase scrambler 66 to combine a computed phase shift to the phase characteristic of each carrier signal.

# Phase Shifting Example #1

Phase shifting example #1 (PS #1) corresponds to adjusting the phase characteristic of the QAM-modulated carrier signal associated with a carrier number N by  $N \times \frac{\pi}{3}$ , modulo (mod)  $2\pi$ . In this example, a carrier signal having a carrier number N equal to 50 has a phase shift added to the phase characteristic of that carrier signal equal to  $50 \times \frac{\pi}{3}$  (mod  $2\pi$ ) =  $\frac{2}{3}\pi$ . The carrier signal with a carrier number N equal to 51 has a phase shift added to the phase characteristic of that carrier signal equal to  $51 \times \frac{\pi}{3}$  (mod  $2\pi$ ) =  $\pi$ . The carrier signal with the carrier number N equal to 0 has no phase shift added to the phase characteristic of that carrier signal.

10

5

# Phase Shifting Example #2

Phase shifting example #2 (PS #2) corresponds to adjusting the phase characteristic of the QAM-modulated carrier signal associated with a carrier number N by  $(N+M)\times\frac{\pi}{4}$ , mod  $2\pi$ , where M is the symbol count. In this example, a carrier signal having a carrier number N equal to 50 on DMT symbol count M equal to 8 has a phase shift added to the phase characteristic of that carrier signal equal to  $(50+8)\times\frac{\pi}{4}$  (mod  $2\pi$ ) =  $\frac{\pi}{2}$ . The carrier signal with the same carrier number N equal to 50 on the next DMT symbol count M equal to 9 has a phase shift added to the phase characteristic of that carrier signal equal to  $(50+9)\times\frac{\pi}{4}$  (mod  $2\pi$ ) =  $\frac{3\pi}{4}$ .

20

15

# Phase Shifting Example #3

Phase shifting example #3 (PS #3) corresponds to adjusting the phase characteristic of the QAM-modulated carrier signal associated with a carrier number N by  $(X_N) \times \frac{\pi}{6}$ , mod  $2\pi$ , where  $X_N$  is an array of N pseudo-random numbers. In this example, a carrier signal having a carrier number N equal to 5 and  $X_N$  equal to [3, 8, 1, 4, 9, 5, . . .] has a phase shift added to the phase characteristic of the carrier signal that is equal to  $(9) \times \frac{\pi}{6} \pmod{2\pi} = \frac{3\pi}{2}$  (Note that 9 is the 5<sup>th</sup> value in  $X_N$ .) The carrier signal with a carrier number N equal to 6 has a phase shift added to the phase characteristic of the carrier signal equal to  $(5) \times \frac{\pi}{6} \pmod{2\pi} = \frac{5\pi}{6}$ .

It is to be understood that additional and/or different phase shifting techniques can be used by the phase scrambler 66, and that PS #1, #2, and #3 are merely illustrative examples of the principles of the invention. The DMT transmitter 22 then combines (step 130) the carrier signals to form the transmission signal 38. If the transmission signal is not clipped, as described below, the DMT transmitter 22 consequently transmits (step 160) the transmission signal 38 to the remote receiver 34.

# **Clipping of Transmission Signals**

5

10

15

20

25

30

A transmission signal 38 that has high peak values of voltage (i.e., a high PAR) can induce non-linear distortion in the DMT transmitter 22 and the communication channel 18. One form of this non-linear distortion of the transmission signal 38 that may occur is the limitation of the amplitude of the transmission signal 38 (i.e., clipping). For example, a particular DMT symbol 70 clips in the time domain when one or more time domain samples in that DMT symbol 70 are larger than the maximum allowed digital value for the DMT symbols 70. In multicarrier communication systems when clipping occurs, the transmission signal 38 does not accurately represent the input serial data bit signal 54.

In one embodiment, the DSL communication system 2 avoids the clipping of the transmission signal 38 on a DMT symbol 70 by DMT symbol 70 basis. The DMT transmitter 22 detects (step 140) the clipping of the transmission signal 38. If a particular DMT symbol 70 clips in the time domain to produce a clipped transmission signal 38, the DMT transmitter 22 substitutes (step 150) a predefined transmission signal 78 for the clipped transmission signal 38.

The predefined transmission signal 78 has the same duration as a DMT symbol 70 (e.g., 250 ms) in order to maintain symbol timing between the DMT transmitter 22 and the remote receiver 34. The predefined transmission signal 78 is not based on (i.e., independent of) the modulated input data bit stream 54; it is a bit value pattern that is recognized by the remote receiver 34 as a substituted signal. In one embodiment, the predefined transmission signal 78 is a known pseudo-random sequence pattern that is easily detected by the remote receiver 34. In another embodiment, the predefined transmission signal 78 is an "all zeros" signal, which is a zero voltage signal produced at the DMT transmitter 22 output (i.e., zero

volts modulated on all the carrier signals). In addition to easy detection by the remote receiver 34, the zero voltage signal reduces the power consumption of the DMT transmitter 22 when delivered by the DMT transmitter 22. Further, a pilot tone is included in the predefined transmission signal 78 to provide a reference signal for coherent demodulation of the carrier signals in the remote receiver 34 during reception of the predefined transmission signal 78.

5

10

15

20

25

30

After the remote receiver 34 receives the transmission signal 38, the remote receiver 34 determines if the transmission signal 38 is equivalent to the predefined transmission signal 78. In one embodiment, when the remote receiver 34 identifies the predefined transmission signal 78, the remote receiver 34 ignores (i.e., discards) the predefined transmission signal 78.

Following the transmission of the predefined transmission signal 78, the phase scrambler 66 shifts (step 120) the phase characteristic of the QAM-modulated carrier signals (based on one of the predefined parameters that varies over time). For example, consider that a set of QAM symbols 58 produces a DMT symbol 70 comprising a plurality of time domain samples, and that one of the time domain samples is larger than the maximum allowed digital value for the DMT symbol 70. Therefore, because the transmission signal 38 would be clipped when sent to the remote receiver 34, the DMT transmitter 22 sends the predefined transmission signal 78 instead.

After transmission of the predefined transmission signal 78, the DMT transmitter 22 again attempts to send the same bit values that produced the clipped transmission signal 38 in a subsequent DMT symbol 70'. Because the generation of phase shifts in this embodiment is based on values that vary over time, the phase shifts computed for the subsequent DMT symbol 70' are different than those that were previously computed for the DMT symbol 70 with the clipped time domain sample. These different phase shifts are combined to the phase characteristics of the modulated carrier signals to produce carrier signals of the subsequent DMT symbol 70' with different phase characteristics than the carrier signals of the DMT symbol 70 with the clipped time domain sample.

DMT communication systems 2 infrequently produce transmission signals 38 that clip (e.g., approximately one clip every 10<sup>7</sup> time domain samples 70). However, if the

subsequent DMT symbol 70' includes a time domain sample that clips, then the predefined transmission signal 78 is again transmitted (step 150) to the remote receiver 34 instead of the clipped transmission signal 38. The clipping time domain sample may be on the same or on a different carrier signal than the previously clipped DMT symbol 70. The DMT transmitter 22 repeats the transmission of the predefined transmission signal 78 until the DMT transmitter 22 produces a subsequent DMT symbol 70' that is not clipped. When the DMT transmitter 22 produces a DMT symbol 70' that is not clipped, the DTM transmitter 22 transmits (step 160) the transmission signal 38 to the remote receiver 34. The probability of a DMT symbol 70 producing a transmission signal 38 that clips in the time domain depends on the PAR of the transmission signal 38.

For example, the following phase shifting example, PST #4, illustrates the method used by the phase scrambler 66 to combine a different phase shift to the phase characteristic of each carrier signal to avoid the clipping of the transmission signal 38.

# Phase Shifting Example #4

5

10

15

20

25

30

Phase shifting example #4 (PS #4) corresponds to adjusting the phase characteristic of the carrier signal associated with a carrier number N by  $\frac{\pi}{3} \times (M+N)$ , mod  $2\pi$ , where M is the DMT symbol count. In this example, if the DMT symbol 70 clips when the DMT symbol count M equals 5, the predefined transmission signal 78 is transmitted instead of the current clipped transmission signal 38. On the following DMT symbol period, the DMT count M equals 6, thereby causing a different set of time domain samples to be generated for the subsequent DMT symbol 70', although the QAM symbols 58 used to produce both DMT symbols 70, 70' are the same.

If this different set of time domain samples (and consequently the transmission signal 38) is not clipped, the DMT transmitter 22 sends the transmission signal 38. If one of the time domain samples in the different set of time domain samples 70 (and consequently the transmission signal 38) is clipped, then the DMT transmitter 22 sends the predefined transmission signal 78 again. The process continues until a DMT symbol 70 is produced without a time domain sample 70 that is clipped. In one embodiment, the transmitter 22 stops attempting to produce a non-clipped DMT symbol 70' for the particular set of QAM symbols 58 after generating a predetermined number of clipped DMT symbols 70'. At that moment,

the transmitter 22 can transmit the most recently produced clipped DMT symbol 70' or the predetermined transmission signal 78.

5

10

15

20

The PAR of the DSL communication system 2 is reduced because the predefined transmission signal 78 is sent instead of the transmission signal 38 when the DMT symbol 70 clips. For example, a DMT communication system 2 that normally has a clipping probability of 10-7 for the time domain transmission signal 38 can therefore operate with a 10-5 probability of clipping and a lower PAR equal to 12.8 dB (as compared to 14.5 dB). When operating at a 10-5 probability of clipping, assuming a DMT symbol 70 has 512 time-domain samples 70, the DMT transmitter 22 experiences one clipped DMT symbol 70 out of every  $\frac{10^5}{512}$ , or 195 DMT symbols 70. This results in the predefined (non-data carrying) transmission signal 78 being transmitted, on average, once every 195 DMT symbols. Although increasing the probability of clipping to  $10^{-5}$  results in approximately a 0.5% (1/195) decrease in throughput, the PAR of the transmission signal 38 is reduced by 1.7 dB, which reduces transmitter complexity in the form of power consumption and component linearity.

While the invention has been shown and described with reference to specific preferred embodiments, it should be understood by those skilled in the art that various changes in form and detail may be made therein without departing from the spirit and scope of the invention as defined by the following claims. For example, although the specification uses DSL to describe the invention, it is to be understood that various form of DSL can be used, e.g., ADSL, VDSL, SDSL, HDSL, HDSL2, or SHDSL. It is also to be understood that the principles of the invention apply to various types of applications transported over DSL systems (e.g., telecommuting, video conferencing, high speed Internet access, video-on demand).

Marked-Up Copy of Substitute Specification US App No. 11/860,080 Attorney Docket No. 5550-47-CON-DIV

#### **Abstract**

A system and method that scrambles the phase characteristic of a carrier signal are described. The scrambling of the phase characteristic of each carrier signal includes associating a value with each carrier signal and computing a phase shift for each carrier signal based on the value associated with that carrier signal. The value is determined independently of any input bit value carried by that carrier signal. The phase shift computed for each carrier signal is combined with the phase characteristic of that carrier signal so as to substantially scramble the phase characteristic of the carrier signals. Bits of an input signal are modulated onto the carrier signals having the substantially scrambled phase characteristic to produce a transmission signal with a reduced PAR.

# A System and Method for Descrambling the Phase of the Carriers in a Multicarrier Communications System

# Related Application

5

10

15

20

25

This application is a divisional of U.S. Application No. 11/211,535, filed August 26, 2005, now U.S. Patent No. 7,292,627, which is a continuation of U.S. Application No. 09/710,310, filed on November 9, 2000, now U.S. Patent No. 6,961,369, which claims the benefit of the filing date of copending U.S. Provisional Application, Serial No. 60/164,134, filed November 9, 1999, entitled "A Method For Randomizing The Phase Of The Carriers In A Multicarrier Communications System To Reduce The Peak To Average Power Ratio Of The Transmitted Signal," the entirety of which provisional application is incorporated by reference herein.

# Field of the Invention

This invention relates to communications systems using multicarrier modulation. More particularly, the invention relates to multicarrier communications systems that lower the peak-to-average power ratio (PAR) of transmitted signals.

## Background of the Invention

In a conventional multicarrier communications system, transmitters communicate over a communication channel using multicarrier modulation or Discrete Multitone Modulation (DMT). Carrier signals (carriers) or sub-channels spaced within a usable frequency band of the communication channel are modulated at a symbol (i.e., block) transmission rate of the system. An input signal, which includes input data bits, is sent to a DMT transmitter, such as a DMT modem. The DMT transmitter typically modulates the phase characteristic, or phase, and amplitude of the carrier signals using an Inverse Fast Fourier Transform (IFFT) to generate a time domain signal, or transmission signal, that represents the input signal. The DMT transmitter transmits the transmission signal, which is a linear combination of the multiple carriers, to a DMT receiver over the communication channel.

The phase and amplitude of the carrier signals of DMT transmission signal can be considered random because the phase and amplitude result from the modulation of an arbitrary sequence of input data bits comprising the transmitted information. Therefore, under the condition that the modulated data bit stream is random, the DMT transmission signal can be approximated as having a Gaussian probability distribution. A bit scrambler is often used in the DMT transmitter to scramble the input data bits before the bits are modulated to assure that the transmitted data bits are random and, consequently, that the modulation of those bits produces a DMT transmission signal with a Gaussian probability distribution.

5

10

15

20

25

30

With an appropriate allocation of transmit power levels to the carriers or subchannels, such a system provides a desirable performance. Further, generating a transmission signal with a Gaussian probability distribution is important in order to transmit a transmission signal with a low peak-to-average ratio (PAR), or peak-to-average power ratio. The PAR of a transmission signal is the ratio of the instantaneous peak value (i.e., maximum magnitude) of a signal parameter (e.g., voltage, current, phase, frequency, power) to the time-averaged value of the signal parameter. In DMT systems, the PAR of the transmitted signal is determined by the probability of the random transmission signal reaching a certain peak voltage during the time interval required for a certain number of symbols. An example of the PAR of a transmission signal transmitted from a DMT transmitter is 14.5 dB, which is equivalent to having a 1E-7 probability of clipping. The PAR of a transmission signal transmitted and received in a DMT communication system is an important consideration in the design of the DMT communication system because the PAR of a signal affects the communication system's total power consumption and component linearity requirements of the system.

If the phase of the modulated carriers is not random, then the PAR can increase greatly. Examples of cases where the phases of the modulated carrier signals are not random are when bit scramblers are not used, multiple carrier signals are used to modulate the same input data bits, and the constellation maps, which are mappings of input data bits to the phase of a carrier signal, used for modulation are not random enough (i.e., a zero value for a data bit corresponds to a 90 degree phase characteristic of the DMT carrier signal and a one value

for a data bit corresponds to a -90 degree phase characteristic of the DMT carrier signal). An increased PAR can result in a system with high power consumption and/or with high probability of clipping the transmission signal. Thus, there remains a need for a system and method that can effectively scramble the phase of the modulated carrier signals in order to provide a low PAR for the transmission signal.

# Summary of the Invention

5

10

15

20

25

30

The present invention features a system and method that scrambles the phase characteristics of the modulated carrier signals in a transmission signal. In one aspect, a value is associated with each carrier signal. A phase shift is computed for each carrier signal based on the value associated with that carrier signal. The value is determined independently of any input bit value carried by that carrier signal. The phase shift computed for each carrier signal is combined with the phase characteristic of that carrier signal to substantially scramble the phase characteristics of the carrier signals.

In one embodiment, the input bit stream is modulated onto the carrier signals having the substantially scrambled phase characteristic to produce a transmission signal with a reduced peak-to-average power ratio (PAR). The value is derived from a predetermined parameter, such as a random number generator, a carrier number, a DMT symbol count, a superframe count, and a hyperframe count. In another embodiment, a predetermined transmission signal is transmitted when the amplitude of the transmission signal exceeds a certain level.

In another aspect, the invention features a method wherein a value is associated with each carrier signal. The value is determined independently of any input bit value carried by that carrier signal. A phase shift for each carrier signal is computed based on the value associated with that carrier signal. The transmission signal is demodulated using the phase shift computed for each carrier signal.

In another aspect, the invention features a system comprising a phase scrambler that computes a phase shift for each carrier signal based on a value associated with that carrier signal. The phase scrambler also combines the phase shift computed for each carrier signal with the phase characteristic of that carrier signal to substantially scramble the phase characteristic of the carrier signals. In one embodiment, a modulator, in communication with

the phase scrambler, modulates bits of an input signal onto the carrier signals having the substantially scrambled phase characteristics to produce a transmission signal with a reduced PAR.

# Description of the Drawings

The invention is pointed out with particularity in the appended claims. The advantages of the invention described above, as well as further advantages of the invention, may be better understood by reference to the following description taken in conjunction with the accompanying drawings, in which:

5

10

15

20

25

30

FIG. 1 is a block diagram of an embodiment of a digital subscriber line communications system including a DMT (discrete multitone modulation) transceiver, in communication with a remote transceiver, having a phase scrambler for substantially scrambling the phase characteristics of carrier signals; and

FIG. 2 is a flow diagram of an embodiment of a process for scrambling the phase characteristics of the carrier signals in a transmission signal.

# **Detailed Description**

FIG. 1 shows a digital subscriber line (DSL) communication system 2 including a discrete multitone (DMT) transceiver 10 in communication with a remote transceiver 14 over a communication channel 18 using a transmission signal 38 having a plurality of carrier signals. The DMT transceiver 10 includes a DMT transmitter 22 and a DMT receiver 26. The remote transceiver 14 includes a transmitter 30 and a receiver 34. Although described with respect to discrete multitone modulation, the principles of the invention apply also to other types of multicarrier modulation, such as, but not limited to, orthogonally multiplexed quadrature amplitude modulation (OQAM), discrete wavelet multitone (DWMT) modulation, and orthogonal frequency division multiplexing (OFDM).

The communication channel 18 provides a downstream transmission path from the DMT transmitter 22 to the remote receiver 34, and an upstream transmission path from the remote transmitter 30 to the DMT receiver 26. In one embodiment, the communication channel 18 is a pair of twisted wires of a telephone subscriber line. In other embodiments, the communication channel 18 can be a fiber optic wire, a quad cable, consisting of two pairs of twisted wires, or a quad cable that is one of a star quad cable, a Dieselhorst-Martin quad

cable, and the like. In a wireless communication system wherein the transceivers 10, 14 are wireless modems, the communication channel 18 is the air through which the transmission signal 38 travels between the transceivers 10, 14.

By way of example, the DMT transmitter 22 shown in FIG. 1 includes a quadrature amplitude modulation (QAM) encoder 42, a modulator 46, a bit allocation table (BAT) 44, and a phase scrambler 66. The DMT transmitter 22 can also include a bit scrambler 74, as described further below. The remote transmitter 30 of the remote transceiver 14 comprises equivalent components as the DMT transmitter 22. Although this embodiment specifies a detailed description of the DMT transmitter 22, the inventive concepts apply also to the receivers 34, 26 which have similar components to that of the DMT transmitter 22, but perform inverse functions in a reverse order.

5

10

15

20

25

30

The QAM encoder 42 has a single input for receiving an input serial data bit stream 54 and multiple parallel outputs to transmit QAM symbols 58 generated by the QAM encoder 42 from the bit stream 54. In general, the QAM encoder 42 maps the input serial bit-stream 54 in the time domain into parallel QAM symbols 58 in the frequency domain. In particular, the QAM encoder 42 maps the input serial data bit stream 54 into N parallel quadrature amplitude modulation (QAM) constellation points 58, or QAM symbols 58, where N represents the number of carrier signals generated by the modulator 46. The BAT 44 is in communication with the QAM encoder 42 to specify the number of bits carried by each carrier signal. The QAM symbols 58 represent the amplitude and the phase characteristic of each carrier signal.

The modulator 46 provides functionality associated with the DMT modulation and transforms the QAM symbols 58 into DMT symbols 70 each comprised of a plurality of time-domain samples. The modulator 46 modulates each carrier signal with a different QAM symbol 58. As a result of this modulation, carrier signals have phase and amplitude characteristics based on the QAM symbol 58 and therefore based on the input-bit stream 54. In particular, the modulator 46 uses an inverse fast Fourier transform (IFFT) to change the QAM symbols 58 into a transmission signal 38 comprised of a sequence of DMT symbols 70. The modulator 46 changes the QAM symbols 58 into DMT symbols 70 through modulation of the carrier signals. In another embodiment, the modulator 46 uses the inverse

discrete Fourier transform (IDFT) to change the QAM symbols 58 into DMT symbols 70. In one embodiment, a pilot tone is included in the transmission signal 38 to provide a reference signal for coherent demodulation of the carrier signals in the remote receiver 34 during reception of the transmission signal 38.

5

10

15

20

25

30

The modulator 46 also includes a phase scrambler 66 that combines a phase shift computed for each QAM-modulated carrier signal with the phase characteristic of that carrier signal. Combining phase shifts with phase characteristics, in accordance with the principles of the invention, substantially scrambles the phase characteristics of the carrier signals in the transmission signal 38. By scrambling the phase characteristics of the carrier signals, the resulting transmission signal 38 has a substantially minimized peak-to-average (PAR) power ratio. The phase scrambler 66 can be part of or external to the modulator 46. Other embodiments of the phase scrambler 66 include, but are not limited to, a software program that is stored in local memory and is executed on the modulator 46, a digital signal processor (DSP) capable of performing mathematical functions and algorithms, and the like. The remote receiver 34 similarly includes a phase descrambler 66' for use when demodulating carrier signals that have had their phase characteristics adjusted by the phase scrambler 66 of the DMT transceiver 10.

To compute a phase shift for each carrier signal, the phase scrambler 66 associates one or more values with that carrier signal. The phase scrambler 66 determines each value for a carrier signal independently of the QAM symbols 58, and, therefore, independently of the bit value(s) modulated onto the carrier signal. The actual value(s) that the phase scrambler 66 associates with each carrier signal can be derived from one or more predefined parameters, such as a pseudo-random number generator (pseudo-RNG), a DMT carrier number, a DMT symbol count, a DMT superframe count, a DMT hyperframe count, and the like, as described in more detail below. Irrespective of the technique used to produce each value, the same technique is used by the DMT transmitter 22 and the remote receiver 34 so that the value associated with a given carrier signal is known at both ends of the communication channel 18.

The phase scrambler 66 then solves a predetermined equation to compute a phase shift for the carrier signal, using the value(s) associated with that carrier signal as input that

effects the output of the equation. Any equation suitable for computing phase shifts can be used to compute the phase shifts. When the equation is independent of the bit values of the input serial bit stream 54, the computed phase shifts are also independent of such bit values.

In one embodiment (shown in phantom), the DMT transmitter 22 includes a bit scrambler 74, which receives the input serial bit stream 54 and outputs data bits 76 that are substantially scrambled. The substantially scrambled bits 76 are then passed to the QAM encoder 42. When the bit scrambler 74 is included in the DMT transmitter 22, the operation of the phase scrambler 66 further assures that the transmission signal 38 has a Gaussian probability distribution and, therefore, a substantially minimized PAR.

5

10

15

20

25

FIG. 2 shows embodiments of a process used by the DMT transmitter 22 for adjusting the phase characteristic of each carrier signal and combining these carrier signals to produce the transmission signal 38. The DMT transmitter 22 generates (step 100) a value that is associated with a carrier signal. Because the value is being used to alter the phase characteristics of the carrier signal, both the DMT transmitter 22 and the remote receiver 34 must recognize the value as being associated with the carrier signal. Either the DMT transmitter 22 and the remote receiver 34 independently derive the associated value, or one informs the other of the associated value. For example, in one embodiment the DMT transmitter 22 can derive the value from a pseudo-RNG and then transmit the generated value to the remote receiver 34. In another embodiment, the remote receiver 34 similarly derives the value from the same pseudo-RNG and the same seed as used by the transmitter (i.e., the transmitter pseudo-RNG produces the same series of random numbers as the receiver pseudo-RNG).

As another example, the DMT transmitter 22 and the remote receiver 34 can each maintain a symbol counter for counting DMT symbols. The DMT transmitter 22 increments its symbol counter upon transmitting a DMT symbol; the remote receiver 34 upon receipt. Thus, when the DMT transmitter 22 and the remote receiver 34 both use the symbol count as a value for computing phase shifts, both the DMT transmitter 22 and remote receiver 34 "know" that the value is associated with a particular DMT symbol and with each carrier signal of that DMT symbol.

Values can also be derived from other types of predefined parameters. For example, if the predefined parameter is the DMT carrier number, then the value associated with a particular carrier signal is the carrier number of that signal within the DMT symbol. The number of a carrier signal represents the location of the frequency of the carrier signal relative to the frequency of other carrier signals within a DMT symbol. For example, in one embodiment the DSL communication system 2 provides 256 carrier signals, each separated by a frequency of 4.3125 kHz and spanning the frequency bandwidth from 0 kHz to 1104 kHz. The DMT transmitter 22 numbers the carrier signals from 0 to 255. Therefore, "DMT carrier number 50" represents the 51st DMT carrier signal which is located at the frequency of 215.625 kHz (i.e., 51 x 4.3125 kHz).

5

10

15

20

25

30

Again, the DMT transmitter 22 and the remote receiver 34 can know the value that is associated with the carrier signal because both the DMT transmitter 22 and the remote receiver 34 use the same predefined parameter (here, the DMT carrier number) to make the value-carrier signal association. In other embodiments (as exemplified above with the transmitter pseudo-RNG), the DMT transmitter 22 can transmit the value to the remote receiver 34 (or vice versa) over the communication channel 18.

In other embodiments, other predefined parameters can be used in conjunction with the symbol count. One example of such a predefined parameter is the superframe count that increments by one every 69 DMT symbols. One exemplary implementation that achieves the superframe counter is to perform a modulo 68 operation on the symbol count. As another example, the DMT transmitter 22 can maintain a hyperframe counter for counting hyperframes. An exemplary implementation of the hyperframe count is to perform a modulo 255 operation on the superframe count. Thus, the hyperframe count increments by one each time the superframe count reaches 255.

Accordingly, it is seen that some predefined parameters produce values that vary from carrier signal to carrier signal. For example, when the predefined parameter is the DMT carrier number, values vary based on the frequency of the carrier signal. As another example, the pseudo-RNG generates a new random value for each carrier signal.

Other predefined parameters produce values that vary from DMT symbol 70 to DMT symbol 70. For example, when the predefined parameter is the symbol count, the superframe

count, or hyperframe count, values vary based on the numerical position of the DMT symbol 70 within a sequence of symbols, superframes, or hyperframes. Predefined parameters such as the pseudo-RNG, symbol count, superframe count, and superframe can also be understood to be parameters that vary values over time. Any one or combination of the predefined parameters can provide values for input to the equation that computes a phase shift for a given carrier signal.

5

10

15

20

25

In one embodiment, the phase scrambling is used to avoid clipping of the transmission signal 38 on a DMT symbol 70 by DMT symbol 70 basis. In this embodiment, the DMT transmitter 22 uses a value based on a predefined parameter that varies over time, such as the symbol count, to compute the phase shift. It is to be understood that other types of predefined parameters that vary the values associated with carrier signals can be used to practice the principles of the invention. As described above, the transceivers 10, 14 may communicate (step 110) the values to synchronize their use in modulating and demodulating the carrier signals.

The DMT transmitter 22 then computes (step 115) the phase shift that is used to adjust the phase characteristic of each carrier signal. The amount of the phase shift combined with the phase characteristic of each QAM-modulated carrier signal depends upon the equation used and the one or more values associated with that carrier signal.

The DMT transmitter 22 then combines (step 120) the phase shift computed for each carrier signal with the phase characteristic of that carrier signal. By scrambling the phase characteristics of the carrier signals, the phase scrambler 66 reduces (with respect to unscrambled phase characteristics) the combined PAR of the plurality of carrier signals and, consequently, the transmission signal 38. The following three phase shifting examples, PS #1-PS #3, illustrate methods used by the phase scrambler 66 to combine a computed phase shift to the phase characteristic of each carrier signal.

#### Phase Shifting Example #1

Phase shifting example #1 (PS #1) corresponds to adjusting the phase characteristic of the QAM-modulated carrier signal associated with a carrier number N by  $N \times \frac{\pi}{3}$ , modulo (mod)  $2\pi$ . In this example, a carrier signal having a carrier number N equal to 50 has a phase shift added to the phase characteristic of that carrier signal equal to  $50 \times \frac{\pi}{3}$  (mod  $2\pi$ ) =  $\frac{2}{3}\pi$ . The carrier signal with a carrier number N equal to 51 has a phase shift added to the phase characteristic of that carrier signal equal to  $51 \times \frac{\pi}{3}$  (mod  $2\pi$ ) =  $\pi$ . The carrier signal with the carrier number N equal to 0 has no phase shift added to the phase characteristic of that carrier signal.

10

5

# Phase Shifting Example #2

Phase shifting example #2 (PS #2) corresponds to adjusting the phase characteristic of the QAM-modulated carrier signal associated with a carrier number N by  $(N+M)\times\frac{\pi}{4}$ , mod  $2\pi$ , where M is the symbol count. In this example, a carrier signal having a carrier number N equal to 50 on DMT symbol count M equal to 8 has a phase shift added to the phase characteristic of that carrier signal equal to  $(50+8)\times\frac{\pi}{4}$  (mod  $2\pi$ ) =  $\frac{\pi}{2}$ . The carrier signal with the same carrier number N equal to 50 on the next DMT symbol count M equal to 9 has a phase shift added to the phase characteristic of that carrier signal equal to  $(50+9)\times\frac{\pi}{4}$  (mod  $2\pi$ ) =  $\frac{3\pi}{4}$ .

20

15

# Phase Shifting Example #3

Phase shifting example #3 (PS #3) corresponds to adjusting the phase characteristic of the QAM-modulated carrier signal associated with a carrier number N by  $(X_N) \times \frac{\pi}{6}$ , mod  $2\pi$ , where  $X_N$  is an array of N pseudo-random numbers. In this example, a carrier signal having a carrier number N equal to 5 and  $X_N$  equal to [3, 8, 1, 4, 9, 5, . . .] has a phase shift added to the phase characteristic of the carrier signal that is equal to  $(9) \times \frac{\pi}{6} \pmod{2\pi} = \frac{3\pi}{2}$  (Note that 9 is the 5<sup>th</sup> value in  $X_N$ .) The carrier signal with a carrier number N equal to 6 has a phase shift added to the phase characteristic of the carrier signal equal to  $(5) \times \frac{\pi}{6} \pmod{2\pi} = \frac{5\pi}{6}$ .

It is to be understood that additional and/or different phase shifting techniques can be used by the phase scrambler 66, and that PS #1, #2, and #3 are merely illustrative examples of the principles of the invention. The DMT transmitter 22 then combines (step 130) the carrier signals to form the transmission signal 38. If the transmission signal is not clipped, as described below, the DMT transmitter 22 consequently transmits (step 160) the transmission signal 38 to the remote receiver 34.

# **Clipping of Transmission Signals**

5

10

15

20

25

30

A transmission signal 38 that has high peak values of voltage (i.e., a high PAR) can induce non-linear distortion in the DMT transmitter 22 and the communication channel 18. One form of this non-linear distortion of the transmission signal 38 that may occur is the limitation of the amplitude of the transmission signal 38 (i.e., clipping). For example, a particular DMT symbol 70 clips in the time domain when one or more time domain samples in that DMT symbol 70 are larger than the maximum allowed digital value for the DMT symbols 70. In multicarrier communication systems when clipping occurs, the transmission signal 38 does not accurately represent the input serial data bit signal 54.

In one embodiment, the DSL communication system 2 avoids the clipping of the transmission signal 38 on a DMT symbol 70 by DMT symbol 70 basis. The DMT transmitter 22 detects (step 140) the clipping of the transmission signal 38. If a particular DMT symbol 70 clips in the time domain to produce a clipped transmission signal 38, the DMT transmitter 22 substitutes (step 150) a predefined transmission signal 78 for the clipped transmission signal 38.

The predefined transmission signal 78 has the same duration as a DMT symbol 70 (e.g., 250 ms) in order to maintain symbol timing between the DMT transmitter 22 and the remote receiver 34. The predefined transmission signal 78 is not based on (i.e., independent of) the modulated input data bit stream 54; it is a bit value pattern that is recognized by the remote receiver 34 as a substituted signal. In one embodiment, the predefined transmission signal 78 is a known pseudo-random sequence pattern that is easily detected by the remote receiver 34. In another embodiment, the predefined transmission signal 78 is an "all zeros" signal, which is a zero voltage signal produced at the DMT transmitter 22 output (i.e., zero

volts modulated on all the carrier signals). In addition to easy detection by the remote receiver 34, the zero voltage signal reduces the power consumption of the DMT transmitter 22 when delivered by the DMT transmitter 22. Further, a pilot tone is included in the predefined transmission signal 78 to provide a reference signal for coherent demodulation of the carrier signals in the remote receiver 34 during reception of the predefined transmission signal 78.

5

10

15

20

25

30

After the remote receiver 34 receives the transmission signal 38, the remote receiver 34 determines if the transmission signal 38 is equivalent to the predefined transmission signal 78. In one embodiment, when the remote receiver 34 identifies the predefined transmission signal 78, the remote receiver 34 ignores (i.e., discards) the predefined transmission signal 78.

Following the transmission of the predefined transmission signal 78, the phase scrambler 66 shifts (step 120) the phase characteristic of the QAM-modulated carrier signals (based on one of the predefined parameters that varies over time). For example, consider that a set of QAM symbols 58 produces a DMT symbol 70 comprising a plurality of time domain samples, and that one of the time domain samples is larger than the maximum allowed digital value for the DMT symbol 70. Therefore, because the transmission signal 38 would be clipped when sent to the remote receiver 34, the DMT transmitter 22 sends the predefined transmission signal 78 instead.

After transmission of the predefined transmission signal 78, the DMT transmitter 22 again attempts to send the same bit values that produced the clipped transmission signal 38 in a subsequent DMT symbol 70'. Because the generation of phase shifts in this embodiment is based on values that vary over time, the phase shifts computed for the subsequent DMT symbol 70' are different than those that were previously computed for the DMT symbol 70 with the clipped time domain sample. These different phase shifts are combined to the phase characteristics of the modulated carrier signals to produce carrier signals of the subsequent DMT symbol 70' with different phase characteristics than the carrier signals of the DMT symbol 70 with the clipped time domain sample.

DMT communication systems 2 infrequently produce transmission signals 38 that clip (e.g., approximately one clip every 10<sup>7</sup> time domain samples 70). However, if the

subsequent DMT symbol 70' includes a time domain sample that clips, then the predefined transmission signal 78 is again transmitted (step 150) to the remote receiver 34 instead of the clipped transmission signal 38. The clipping time domain sample may be on the same or on a different carrier signal than the previously clipped DMT symbol 70. The DMT transmitter 22 repeats the transmission of the predefined transmission signal 78 until the DMT transmitter 22 produces a subsequent DMT symbol 70' that is not clipped. When the DMT transmitter 22 produces a DMT symbol 70' that is not clipped, the DTM transmitter 22 transmits (step 160) the transmission signal 38 to the remote receiver 34. The probability of a DMT symbol 70 producing a transmission signal 38 that clips in the time domain depends on the PAR of the transmission signal 38.

For example, the following phase shifting example, PST #4, illustrates the method used by the phase scrambler 66 to combine a different phase shift to the phase characteristic of each carrier signal to avoid the clipping of the transmission signal 38.

# Phase Shifting Example #4

5

10

15

20

25

30

Phase shifting example #4 (PS #4) corresponds to adjusting the phase characteristic of the carrier signal associated with a carrier number N by  $\frac{\pi}{3} \times (M+N)$ , mod  $2\pi$ , where M is the DMT symbol count. In this example, if the DMT symbol 70 clips when the DMT symbol count M equals 5, the predefined transmission signal 78 is transmitted instead of the current clipped transmission signal 38. On the following DMT symbol period, the DMT count M equals 6, thereby causing a different set of time domain samples to be generated for the subsequent DMT symbol 70', although the QAM symbols 58 used to produce both DMT symbols 70, 70' are the same.

If this different set of time domain samples (and consequently the transmission signal 38) is not clipped, the DMT transmitter 22 sends the transmission signal 38. If one of the time domain samples in the different set of time domain samples 70 (and consequently the transmission signal 38) is clipped, then the DMT transmitter 22 sends the predefined transmission signal 78 again. The process continues until a DMT symbol 70 is produced without a time domain sample 70 that is clipped. In one embodiment, the transmitter 22 stops attempting to produce a non-clipped DMT symbol 70' for the particular set of QAM symbols 58 after generating a predetermined number of clipped DMT symbols 70'. At that moment,

the transmitter 22 can transmit the most recently produced clipped DMT symbol 70' or the predetermined transmission signal 78.

5

10

15

20

The PAR of the DSL communication system 2 is reduced because the predefined transmission signal 78 is sent instead of the transmission signal 38 when the DMT symbol 70 clips. For example, a DMT communication system 2 that normally has a clipping probability of 10-7 for the time domain transmission signal 38 can therefore operate with a 10-5 probability of clipping and a lower PAR equal to 12.8 dB (as compared to 14.5 dB). When operating at a 10-5 probability of clipping, assuming a DMT symbol 70 has 512 time-domain samples 70, the DMT transmitter 22 experiences one clipped DMT symbol 70 out of every  $\frac{10^5}{512}$ , or 195 DMT symbols 70. This results in the predefined (non-data carrying) transmission signal 78 being transmitted, on average, once every 195 DMT symbols. Although increasing the probability of clipping to  $10^{-5}$  results in approximately a 0.5% (1/195) decrease in throughput, the PAR of the transmission signal 38 is reduced by 1.7 dB, which reduces transmitter complexity in the form of power consumption and component linearity.

While the invention has been shown and described with reference to specific preferred embodiments, it should be understood by those skilled in the art that various changes in form and detail may be made therein without departing from the spirit and scope of the invention as defined by the following claims. For example, although the specification uses DSL to describe the invention, it is to be understood that various form of DSL can be used, e.g., ADSL, VDSL, SDSL, HDSL, HDSL2, or SHDSL. It is also to be understood that the principles of the invention apply to various types of applications transported over DSL systems (e.g., telecommuting, video conferencing, high speed Internet access, video-on demand).

Clean Copy of Substitute Specification US App No. 11/860,080 Attorney Docket No. 5550-47-CON-DIV

#### **Abstract**

A system and method that scrambles the phase characteristic of a carrier signal are described. The scrambling of the phase characteristic of each carrier signal includes associating a value with each carrier signal and computing a phase shift for each carrier signal based on the value associated with that carrier signal. The value is determined independently of any input bit value carried by that carrier signal. The phase shift computed for each carrier signal is combined with the phase characteristic of that carrier signal so as to substantially scramble the phase characteristic of the carrier signals. Bits of an input signal are modulated onto the carrier signals having the substantially scrambled phase characteristic to produce a transmission signal with a reduced PAR.

FIG. 1

FIG. 1

Electronic Acknowledgement Receipt				
EFS ID:	11014460			
Application Number:	11860080			
International Application Number:				
Confirmation Number:	5967			
Title of Invention:	SYSTEM AND METHOD FOR SCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM			
First Named Inventor/Applicant Name:	Marcos C. Tzannes			
Customer Number:	62574			
Filer:	Jason Vick/Joanne Vos			
Filer Authorized By:	Jason Vick			
Attorney Docket Number:	5550-47-CON-DIV			
Receipt Date:	22-SEP-2011			
Filing Date:	24-SEP-2007			
Time Stamp:	14:21:57			
Application Type:	Utility under 35 USC 111(a)			

# Payment information:

Submitted with Payment	no
File Listing:	

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1		AMEND PRELIM 06.pdf	525938	ves	g
'		AMEND_I NEEIM_00.pdi	5b9f6b1922f778f6cfb07059cd83acf0b4ea2 52f	,	

	Multip	oart Description/PDF files in	zip description		
	Document De	Start	End		
	Preliminary Am	1	1		
	Specificat	2	2		
	Drawings-only black and	3	3		
	Claims	4	8		
	Applicant Arguments/Remarks	9	9		
Warnings:					
Information:					
2	Second_M		136808	yes	15
		Substitute_Spec.pdf	be73105b6ee07014b69936882263f8f86b9 b475c		
	Multip	oart Description/PDF files in	zip description		
	Document De	Start	End		
	Specificat	1	14		
	Abstrac	15	15		
Warnings:					
Information:					
3		Second_Clean_Copy_of_Substi	136498	yes	15
		tute_Spec.pdf	7351fcadd9ad877094287ed2a9352b3b7ca e0a41		
	Multip	oart Description/PDF files in	zip description		
	Document De	Document Description		End	
	Specification		1	14	
	Abstrac	15	15		
Warnings:					
Information:					
Drawings-only black and white		SecondAnnotatedSheet1.pdf	52870	no	1
	drawings		f66e26fa69603b6e0b6d2bdac1eeea8a9cff a6b4		
Warnings:		•		l .	
Information:					

Drawings-only black and white line drawings	= *	SecondReplacementSheet1.pdf	52881	no	1
	- Secondicipation of the second of the secon	1019c6a68779567dbe21a9dbb9ce5e4b55 86ab0c	10	, 	
Warnings:					
Information:	}				
		Total Files Size (in bytes):	9	04995	

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

#### New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

#### National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

# New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

PTO/SB/06 (07-06)
Approved for use through 1/31/2007. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE to a collection of information unless it displays a valid OMB control number. Under the Panerwork Reduction Act of 1995, no persons are required to rest

PATENT APPLICATION FEE DETERMINATION RECORD Substitute for Form PTO-875					А	Application or Docket Number 11/860,080		Filing Date 09/24/2007		To be Mailed	
	APPLICATION AS FILED - PART I (Column 1) (Column 2)						SMALL ENTITY				HER THAN
	FOR	N	JMBER FIL	· · · · · · · · · · · · · · · · · · ·		П	RATE (\$)	FEE (\$)		RATE (\$)	FEE (\$)
	BASIC FEE (37 CFR 1.16(a), (b),	or (c))	N/A	N/A		1	N/A		1	N/A	
	SEARCH FEE (37 CFR 1.16(k), (i), (i)		N/A		N/A	1	N/A		1	N/A	
	EXAMINATION FE (37 CFR 1.16(o), (p),		N/A		N/A		N/A			N/A	
	TAL CLAIMS CFR 1.16(i))		mir	nus 20 = *		1	X \$ =		OR	X \$ =	
	EPENDENT CLAIM CFR 1.16(h))	IS	m	inus 3 = *		1	X \$ =		1	X \$ =	
	☐APPLICATION SIZE FEE (37 CFR 1.16(s))  If the specification and drawings exceed 10 sheets of paper, the application size fee du is \$250 (\$125 for small entity) for each additional 50 sheets or fraction thereof. Se 35 U.S.C. 41(a)(1)(G) and 37 CFR 1.16(s)		n size fee due for each n thereof. See								
	MULTIPLE DEPEN	IDENT CLAIM PR	ESENT (3	7 CFR 1.16(j))							
* If 1	the difference in colu	umn 1 is less than	zero, ente	r "0" in column 2.			TOTAL			TOTAL	
	APPLICATION AS AMENDED - PART II  (Column 1) (Column 2) (Column 3)					SMALL ENTITY		OR	OTHER THAN SMALL ENTITY		
AMENDMENT	09/22/2011	CLAIMS REMAINING AFTER AMENDMENT		HIGHEST NUMBER PREVIOUSLY PAID FOR	PRESENT EXTRA		RATE (\$)	ADDITIONAL FEE (\$)		RATE (\$)	ADDITIONAL FEE (\$)
ME	Total (37 CFR 1.16(i))	* 26	Minus	** 26	= 0		X \$ =		OR	X \$52=	0
EN	Independent (37 CFR 1.16(h))	* 2	Minus	***3	= 0		X \$ =		OR	X \$220=	0
AM	Application Size Fee (37 CFR 1.16(s))										
	FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM (37 CFR 1.16(j))		R 1.16(j))				OR				
	•						TOTAL ADD'L FEE		OR	TOTAL ADD'L FEE	0
		(Column 1)		(Column 2)	(Column 3)		•		_		
		CLAIMS REMAINING AFTER AMENDMENT		HIGHEST NUMBER PREVIOUSLY PAID FOR	PRESENT EXTRA		RATE (\$)	ADDITIONAL FEE (\$)		RATE (\$)	ADDITIONAL FEE (\$)
ENT	Total (37 CFR 1.16(i))	*	Minus	**	=		X \$ =		OR	X \$ =	
NDME	Independent (37 CFR 1.16(h))	*	Minus	***	=		X \$ =		OR	X \$ =	
EN	Application Si	ize Fee (37 CFR 1	.16(s))								
AMEI	FIRST PRESEN	NTATION OF MULTIF	LE DEPEN	DENT CLAIM (37 CF	R 1.16(j))				OR		
							TOTAL ADD'L FEE		OR	TOTAL ADD'L FEE	
** If	the entry in column the "Highest Numbe If the "Highest Numb · "Highest Number P	er Previously Paid oer Previously Paid	For" IN TH I For" IN T	HIS SPACE is less HIS SPACE is less	than 20, enter "20's than 3, enter "3".		/TIA BE	nstrument Ex NTLEY/ priate box in colu		er:	

This collection of information is required by 37 CFR 1.16. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS

ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

# IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re the Application of: Marcos C. Tzannes	Group Art Unit: 2611
Application No.: 11/860,080	Examiner: WILLIAMS, Lawrence B.
Filed: September 24, 2007	Confirmation No.: 5967
Atty. File No.: 5550-47-CON-DIV	

For: SYSTEM AND METHOD FOR DESCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM

Commissioner for Patents P.O. Box 1450 Alexandria, VA 22313

# FIFTH PRELIMINARY AMENDMENT

Dear Sir:

Prior to the initial review of the above-identified patent application by the Examiner, and supplemental to the August 30, 2011 Preliminary Amendment, please enter the following Preliminary Amendment. Although Applicants do not believe that any fees are due based upon the filing of this Preliminary Amendment, please charge any such fees to Deposit Account 19-1970.

1

Please amend the above-identified patent application as follows:

Amendments to the Specification begin on page 2 of this paper.

**Remarks** begin on page 3 of this paper.

Attorney Docket No.: 5550-47-CON-DIV

# **AMENDMENTS TO THE SPECIFICATION**

Submitted herewith is a marked-up and clean version of a substitute specification. No new matter is believed to have been added therein.

Attorney Docket No.: 5550-47-CON-DIV

# REMARKS/ARGUMENTS

Applicant requests examination on the merits.

Applicant believes that the pending claims are in condition for allowance and such disposition is respectfully requested. In the event that a telephone conversation would further prosecution and/or expedite allowance, the Examiner is invited to contact the undersigned.

The Commissioner is hereby authorized to charge to Deposit Account No. 19-1970 any fees under 37 C.F.R. §§ 1.16 and 1.17 that may be required by this paper and to credit any overpayment to that Account. If any extension of time is required in connection with the filing of this paper and has not been separately requested, such extension is hereby Petitioned.

Respectfully submitted,

SHERIDAN ROSS P.C.

3

Jason H. Vick

Registration No. 45,285

1560 Broadway, Suite 1200

Denver, Colorado 80202-5141

(303) 863-9700

Date: 9 SEPT "

Attorney Docket No.: 5550-47-CON-DIV

A System and Method for <u>Descrambling</u>Serambling the Phase of the Carriers in a Multicarrier Communications System

#### Related Application

5

10

15

20

25

This application is a divisional of U.S. Application No. 11/211,535, filed August 26, 2005, now U.S. Patent No. 7,292,627, which is a continuation of U.S. Application No. 09/710,310, filed on November 9, 2000, now U.S. Patent No. 6,961,369, which This application claims the benefit of the filing date of copending U.S. Provisional Application, Serial No. 60/164,134, filed November 9, 1999, entitled "A Method For Randomizing The Phase Of The Carriers In A Multicarrier Communications System To Reduce The Peak To Average Power Ratio Of The Transmitted Signal," the entirety of which provisional application is incorporated by reference herein.

## Field of the Invention

This invention relates to communications systems using multicarrier modulation. More particularly, the invention relates to multicarrier communications systems that lower the peak-to-average power ratio (PAR) of transmitted signals.

#### Background of the Invention

In a conventional multicarrier communications system, transmitters communicate over a communication channel using multicarrier modulation or Discrete Multitone Modulation (DMT). Carrier signals (carriers) or sub-channels spaced within a usable frequency band of the communication channel are modulated at a symbol (i.e., block) transmission rate of the system. An input signal, which includes input data bits, is sent to a DMT transmitter, such as a DMT modem. The DMT transmitter typically modulates the phase characteristic, or phase, and amplitude of the carrier signals using an Inverse Fast Fourier Transform (IFFT) to generate a time domain signal, or transmission signal, that represents the input signal. The DMT transmitter transmits the transmission signal, which is a linear combination of the multiple carriers, to a DMT receiver over the communication channel.

The phase and amplitude of the carrier signals of DMT transmission signal can be considered random because the phase and amplitude result from the modulation of an arbitrary sequence of input data bits comprising the transmitted information. Therefore, under the condition that the modulated data bit stream is random, the DMT transmission signal can be approximated as having a Gaussian probability distribution. A bit scrambler is often used in the DMT transmitter to scramble the input data bits before the bits are modulated to assure that the transmitted data bits are random and, consequently, that the modulation of those bits produces a DMT transmission signal with a Gaussian probability distribution.

5

10

15

20

25

30

With an appropriate allocation of transmit power levels to the carriers or subchannels, such a system provides a desirable performance. Further, generating a transmission signal with a Gaussian probability distribution is important in order to transmit a transmission signal with a low peak-to-average ratio (PAR), or peak-to-average power ratio. The PAR of a transmission signal is the ratio of the instantaneous peak value (i.e., maximum magnitude) of a signal parameter (e.g., voltage, current, phase, frequency, power) to the time-averaged value of the signal parameter. In DMT systems, the PAR of the transmitted signal is determined by the probability of the random transmission signal reaching a certain peak voltage during the time interval required for a certain number of symbols. An example of the PAR of a transmission signal transmitted from a DMT transmitter is 14.5 dB, which is equivalent to having a 1E-7 probability of clipping. The PAR of a transmission signal transmitted and received in a DMT communication system is an important consideration in the design of the DMT communication system because the PAR of a signal affects the communication system's total power consumption and component linearity requirements of the system.

If the phase of the modulated carriers is not random, then the PAR can increase greatly. Examples of cases where the phases of the modulated carrier signals are not random are when bit scramblers are not used, multiple carrier signals are used to modulate the same input data bits, and the constellation maps, which are mappings of input data bits to the phase of a carrier signal, used for modulation are not random enough (i.e., a zero value for a data bit corresponds to a 90 degree phase characteristic of the DMT carrier signal and a one value

Marked-Up Substitute Specification US App No. 11/860,080 Attorney Docket No. 5550-47-CON-DIV

for a data bit corresponds to a -90 degree phase characteristic of the DMT carrier signal). An increased PAR can result in a system with high power consumption and/or with high probability of clipping the transmission signal. Thus, there remains a need for a system and method that can effectively scramble the phase of the modulated carrier signals in order to provide a low PAR for the transmission signal.

5

#### Summary of the Invention

The present invention features a system and method that scrambles the phase characteristics of the modulated carrier signals in a transmission signal. In one aspect, a value is associated with each carrier signal. A phase shift is computed for each carrier signal based on the value associated with that carrier signal. The value is determined independently of any input bit value carried by that carrier signal. The phase shift computed for each carrier signal is combined with the phase characteristic of that carrier signal to substantially scramble the phase characteristics of the carrier signals.

In one embodiment, the input bit stream is modulated onto the carrier signals having the substantially scrambled phase characteristic to produce a transmission signal with a reduced peak-to-average power ratio (PAR). The value is derived from a predetermined parameter, such as a random number generator, a carrier number, a DMT symbol count, a superframe count, and a hyperframe count. In another embodiment, a predetermined transmission signal is transmitted when the amplitude of the transmission signal exceeds a certain level.

In another aspect, the invention features a method wherein a value is associated with each carrier signal. The value is determined independently of any input bit value carried by that carrier signal. A phase shift for each carrier signal is computed based on the value associated with that carrier signal. The transmission signal is demodulated using the phase shift computed for each carrier signal.

In another aspect, the invention features a system comprising a phase scrambler that computes a phase shift for each carrier signal based on a value associated with that carrier signal. The phase scrambler also combines the phase shift computed for each carrier signal with the phase characteristic of that carrier signal to substantially scramble the phase characteristic of the carrier signals. In one embodiment, a modulator, in communication with the phase scrambler, modulates bits of an input signal onto the carrier signals having the substantially scrambled phase characteristics to produce a transmission signal with a reduced PAR.

30

25

5

10

15

20

# **Description of the Drawings**

The invention is pointed out with particularity in the appended claims. The advantages of the invention described above, as well as further advantages of the invention, may be better understood by reference to the following description taken in conjunction with the accompanying drawings, in which:

5

10

15

20

25

FIG. 1 is a block diagram of an embodiment of a digital subscriber line communications system including a DMT (discrete multitone modulation) transceiver, in communication with a remote transceiver, having a phase scrambler for substantially scrambling the phase characteristics of carrier signals; and

FIG. 2 is a flow diagram of an embodiment of a process for scrambling the phase characteristics of the carrier signals in a transmission signal.

# **Detailed Description**

FIG. 1 shows a digital subscriber line (DSL) communication system 2 including a discrete multitone (DMT) transceiver 10 in communication with a remote transceiver 14 over a communication channel 18 using a transmission signal 38 having a plurality of carrier signals. The DMT transceiver 10 includes a DMT transmitter 22 and a DMT receiver 26. The remote transceiver 14 includes a transmitter 30 and a receiver 34. Although described with respect to discrete multitone modulation, the principles of the invention apply also to other types of multicarrier modulation, such as, but not limited to, orthogonally multiplexed quadrature amplitude modulation (OQAM), discrete wavelet multitone (DWMT) modulation, and orthogonal frequency division multiplexing (OFDM).

The communication channel 18 provides a downstream transmission path from the DMT transmitter 22 to the remote receiver 34, and an upstream transmission path from the remote transmitter 30 to the DMT receiver 26. In one embodiment, the communication channel 18 is a pair of twisted wires of a telephone subscriber line. In other embodiments, the communication channel 18 can be a fiber optic wire, a quad cable, consisting of two pairs of twisted wires, or a quad cable that is one of a star quad cable, a Dieselhorst-Martin quad cable, and the like. In a wireless communication system wherein the transceivers 10, 14 are

wireless modems, the communication channel 18 is the air through which the transmission signal 38 travels between the transceivers 10, 14.

By way of example, the DMT transmitter 22 shown in FIG. 1 includes a quadrature amplitude modulation (QAM) encoder 42, a modulator 46, a bit allocation table (BAT) 44, and a phase scrambler 66. The DMT transmitter 22 can also include a bit scrambler 74, as described further below. The remote transmitter 30 of the remote transceiver 14 comprises equivalent components as the DMT transmitter 22. Although this embodiment specifies a detailed description of the DMT transmitter 22, the inventive concepts apply also to the receivers 34, 2636 which have similar components to that of the DMT transmitter 22, but perform inverse functions in a reverse order.

5

10

15

20

25

30

The QAM encoder 42 has a single input for receiving an input serial data bit stream 54 and multiple parallel outputs to transmit QAM symbols 58 generated by the QAM encoder 42 from the bit stream 54. In general, the QAM encoder 42 maps the input serial bit-stream 54 in the time domain into parallel QAM symbols 58 in the frequency domain. In particular, the QAM encoder 42 maps the input serial data bit stream 54 into N parallel quadrature amplitude modulation (QAM) constellation points 58, or QAM symbols 58, where N represents the number of carrier signals generated by the modulator 46. The BAT 44 is in communication with the QAM encoder 42 to specify the number of bits carried by each carrier signal. The QAM symbols 58 represent the amplitude and the phase characteristic of each carrier signal.

The modulator 46 provides functionality associated with the DMT modulation and transforms the QAM symbols 58 into DMT symbols 70 each comprised of a plurality of time-domain samples. The modulator 46 modulates each carrier signal with a different QAM symbol 58. As a result of this modulation, carrier signals have phase and amplitude characteristics based on the QAM symbol 58 and therefore based on the input-bit stream 54. In particular, the modulator 46 uses an inverse fast Fourier transform (IFFT) to change the QAM symbols 58 into a transmission signal 38 comprised of a sequence of DMT symbols 70. The modulator 46 changes the QAM symbols 58 into DMT symbols 70 through modulation of the carrier signals. In another embodiment, the modulator 46 uses the inverse discrete Fourier transform (IDFT) to change the QAM symbols 58 into DMT symbols 70. In

one embodiment, a pilot tone is included in the transmission signal 38 to provide a reference signal for coherent demodulation of the carrier signals in the remote receiver 34 during reception of the transmission signal 38.

5

10

15

20

25

30

The modulator 46 also includes a phase scrambler 66 that combines a phase shift computed for each QAM-modulated carrier signal with the phase characteristic of that carrier signal. Combining phase shifts with phase characteristics, in accordance with the principles of the invention, substantially scrambles the phase characteristics of the carrier signals in the transmission signal 38. By scrambling the phase characteristics of the carrier signals, the resulting transmission signal 38 has a substantially minimized peak-to-average (PAR) power ratio. The phase scrambler 66 can be part of or external to the modulator 46. Other embodiments of the phase scrambler 66 include, but are not limited to, a software program that is stored in local memory and is executed on the modulator 46, a digital signal processor (DSP) capable of performing mathematical functions and algorithms, and the like. The remote receiver 34 similarly includes a phase scrambler 66' for use when demodulating carrier signals that have had their phase characteristics adjusted by the phase scrambler 66 of the DMT transceiver 10.

To compute a phase shift for each carrier signal, the phase scrambler 66 associates one or more values with that carrier signal. The phase scrambler 66 determines each value for a carrier signal independently of the QAM symbols 58, and, therefore, independently of the bit value(s) modulated onto the carrier signal. The actual value(s) that the phase scrambler 66 associates with each carrier signal can be derived from one or more predefined parameters, such as a pseudo-random number generator (pseudo-RNG), a DMT carrier number, a DMT symbol count, a DMT superframe count, a DMT hyperframe count, and the like, as described in more detail below. Irrespective of the technique used to produce each value, the same technique is used by the DMT transmitter 22 and the remote receiver 34 so that the value associated with a given carrier signal is known at both ends of the communication channel 18.

The phase scrambler 66 then solves a predetermined equation to compute a phase shift for the carrier signal, using the value(s) associated with that carrier signal as input that effects the output of the equation. Any equation suitable for computing phase shifts can be

used to compute the phase shifts. When the equation is independent of the bit values of the input serial bit stream 54, the computed phase shifts are also independent of such bit values.

In one embodiment (shown in phantom), the DMT transmitter 22 includes a bit scrambler 74, which receives the input serial bit stream 54 and outputs data bits 76 that are substantially scrambled. The substantially scrambled bits 76 are then passed to the QAM encoder 42. When the bit scrambler 74 is included in the DMT transmitter 22, the operation of the phase scrambler 66 further assures that the transmission signal 38 has a Gaussian probability distribution and, therefore, a substantially minimized PAR.

5

10

15

20

25

FIG. 2 shows embodiments of a process used by the DMT transmitter 22 for adjusting the phase characteristic of each carrier signal and combining these carrier signals to produce the transmission signal 38. The DMT transmitter 22 generates (step 100) a value that is associated with a carrier signal. Because the value is being used to alter the phase characteristics of the carrier signal, both the DMT transmitter 22 and the remote receiver 34 must recognize the value as being associated with the carrier signal. Either the DMT transmitter 22 and the remote receiver 34 independently derive the associated value, or one informs the other of the associated value. For example, in one embodiment the DMT transmitter 22 can derive the value from a pseudo-RNG and then transmit the generated value to the remote receiver 34. In another embodiment, the remote receiver 34 similarly derives the value from the same pseudo-RNG and the same seed as used by the transmitter (i.e., the transmitter pseudo-RNG produces the same series of random numbers as the receiver pseudo-RNG).

As another example, the DMT transmitter 22 and the remote receiver 34 can each maintain a symbol counter for counting DMT symbols. The DMT transmitter 22 increments its symbol counter upon transmitting a DMT symbol; the remote receiver 34 upon receipt. Thus, when the DMT transmitter 22 and the remote receiver 34 both use the symbol count as a value for computing phase shifts, both the DMT transmitter 22 and remote receiver 34 "know" that the value is associated with a particular DMT symbol and with each carrier signal of that DMT symbol.

Values can also be derived from other types of predefined parameters. For example, if the predefined parameter is the DMT carrier number, then the value associated with a particular carrier signal is the carrier number of that signal within the DMT symbol. The number of a carrier signal represents the location of the frequency of the carrier signal relative to the frequency of other carrier signals within a DMT symbol. For example, in one embodiment the DSL communication system 2 provides 256 carrier signals, each separated by a frequency of 4.3125 kHz and spanning the frequency bandwidth from 0 kHz to 1104 kHz. The DMT transmitter 22 numbers the carrier signals from 0 to 255. Therefore, "DMT carrier number 50" represents the 51st DMT carrier signal which is located at the frequency of 215.625 kHz (i.e., 51 x 4.3125 kHz).

5

10

15

20

25

30

Again, the DMT transmitter 22 and the remote receiver 34 can know the value that is associated with the carrier signal because both the DMT transmitter 22 and the remote receiver 34 use the same predefined parameter (here, the DMT carrier number) to make the value-carrier signal association. In other embodiments (as exemplified above with the transmitter pseudo-RNG), the DMT transmitter 22 can transmit the value to the remote receiver 34 (or vice versa) over the communication channel 18.

In other embodiments, other predefined parameters can be used in conjunction with the symbol count. One example of such a predefined parameter is the superframe count that increments by one every 69 DMT symbols. One exemplary implementation that achieves the superframe counter is to perform a modulo 68 operation on the symbol count. As another example, the DMT transmitter 22 can maintain a hyperframe counter for counting hyperframes. An exemplary implementation of the hyperframe count is to perform a modulo 255 operation on the superframe count. Thus, the hyperframe count increments by one each time the superframe count reaches 255.

Accordingly, it is seen that some predefined parameters produce values that vary from carrier signal to carrier signal. For example, when the predefined parameter is the DMT carrier number, values vary based on the frequency of the carrier signal. As another example, the pseudo-RNG generates a new random value for each carrier signal.

Other predefined parameters produce values that vary from DMT symbol 70 to DMT symbol 70. For example, when the predefined parameter is the symbol count, the superframe

count, or hyperframe count, values vary based on the numerical position of the DMT symbol 70 within a sequence of symbols, superframes, or hyperframes. Predefined parameters such as the pseudo-RNG, symbol count, superframe count, and superframe can also be understood to be parameters that vary values over time. Any one or combination of the predefined parameters can provide values for input to the equation that computes a phase shift for a given carrier signal.

5

10

15

20

25

In one embodiment, the phase scrambling is used to avoid clipping of the transmission signal 38 on a DMT symbol 70 by DMT symbol 70 basis. In this embodiment, the DMT transmitter 22 uses a value based on a predefined parameter that varies over time, such as the symbol count, to compute the phase shift. It is to be understood that other types of predefined parameters that vary the values associated with carrier signals can be used to practice the principles of the invention. As described above, the transceivers 10, 14 may communicate (step 110) the values to synchronize their use in modulating and demodulating the carrier signals.

The DMT transmitter 22 then computes (step 115) the phase shift that is used to adjust the phase characteristic of each carrier signal. The amount of the phase shift combined with the phase characteristic of each QAM-modulated carrier signal depends upon the equation used and the one or more values associated with that carrier signal.

The DMT transmitter 22 then combines (step 120) the phase shift computed for each carrier signal with the phase characteristic of that carrier signal. By scrambling the phase characteristics of the carrier signals, the phase scrambler 66 reduces (with respect to unscrambled phase characteristics) the combined PAR of the plurality of carrier signals and, consequently, the transmission signal 38. The following three phase shifting examples, PS #1-PS #3, illustrate methods used by the phase scrambler 66 to combine a computed phase shift to the phase characteristic of each carrier signal.

# Phase Shifting Example #1

5

10

15

Phase shifting example #1 (PS #1) corresponds to adjusting the phase characteristic of

the QAM-modulated carrier signal associated with a carrier number N by  $N \times \frac{\pi}{3}$ , modulo (mod)  $2\pi$ . In this example, a carrier signal having a carrier number N equal to 50 has a phase

shift added to the phase characteristic of that carrier signal equal to  $50 \times \frac{\pi}{3} \pmod{2\pi} = \frac{2}{3} \pi$ . The carrier signal with a carrier number N equal to 51 has a phase shift added to the phase

characteristic of that carrier signal equal to  $51^{\times} \frac{\pi}{3}$  (mod $2\pi$ )= $\pi$ . The carrier signal with the carrier number N equal to 0 has no phase shift added to the phase characteristic of that carrier signal.

# Phase Shifting Example #2

Phase shifting example #2 (PS #2) corresponds to adjusting the phase characteristic of

the QAM-modulated carrier signal associated with a carrier number N by  $\frac{(N+M)\times \overline{4}}{4}$ , mod  $2\pi$ , where M is the symbol count. In this example, a carrier signal having a carrier number N equal to 50 on DMT symbol count M equal to 8 has a phase shift added to the phase

characteristic of that carrier signal equal to  $(50+8) \times \frac{\pi}{4} \pmod{2\pi} = \frac{\pi}{2}$ . The carrier signal with the same carrier number N equal to 50 on the next DMT symbol count M equal to 9 has a

phase shift added to the phase characteristic of that carrier signal equal to  $\frac{3\pi}{4} \pmod{2\pi} = \frac{3\pi}{4}.$ 

# 20 Phase Shifting Example #3

Phase shifting example #3 (PS #3) corresponds to adjusting the phase characteristic of

the QAM-modulated carrier signal associated with a carrier number N by  $(X_N) \times \frac{\pi}{6}$ , mod  $2\pi$ ,

where XN is an array of N pseudo-random numbers. In this example, a carrier signal having a carrier number N equal to 5 and XN equal to [3, 8, 1, 4, 9, 5, . . .] has a phase shift added

to the phase characteristic of the carrier signal that is equal to  $(9) \times \frac{\pi}{6} \pmod{2\pi} = \frac{3\pi}{2}$  (Note that 9 is the 5th value in XN.) The carrier signal with a carrier number N equal to 6 has a phase shift added to the phase characteristic of the carrier signal equal to

$$(5) \times \frac{\pi}{6} \pmod{2\pi} = \frac{5\pi}{6}$$

5

10

20

25

It is to be understood that additional and/or different phase shifting techniques can be used by the phase scrambler 66, and that PS #1, #2, and #3 are merely illustrative examples of the principles of the invention. The DMT transmitter 22 then combines (step 130) the carrier signals to form the transmission signal 38. If the transmission signal is not clipped, as described below, the DMT transmitter 22 consequently transmits (step 160) the transmission signal 38 to the remote receiver 34.

#### 15 Clipping of Transmission Signals

A transmission signal 38 that has high peak values of voltage (i.e., a high PAR) can induce non-linear distortion in the DMT transmitter 22 and the communication channel 18. One form of this non-linear distortion of the transmission signal 38 that may occur is the limitation of the amplitude of the transmission signal 38 (i.e., clipping). For example, a particular DMT symbol 70 clips in the time domain when one or more time domain samples in that DMT symbol 70 are larger than the maximum allowed digital value for the DMT symbols 70. In multicarrier communication systems when clipping occurs, the transmission signal 38 does not accurately represent the input serial data bit signal 54.

In one embodiment, the DSL communication system 2 avoids the clipping of the transmission signal 38 on a DMT symbol 70 by DMT symbol 70 basis. The DMT transmitter 22 detects (step 140) the clipping of the transmission signal 38. If a particular DMT symbol 70 clips in the time domain to produce a clipped transmission signal 38, the DMT transmitter

22 substitutes (step 150) a predefined transmission signal 78 for the clipped transmission signal 38.

5

10

15

20

25

30

The predefined transmission signal 78 has the same duration as a DMT symbol 70 (e.g., 250 ms) in order to maintain symbol timing between the DMT transmitter 22 and the remote receiver 34. The predefined transmission signal 78 is not based on (i.e., independent of) the modulated input data bit stream 54; it is a bit value pattern that is recognized by the remote receiver 34 as a substituted signal. In one embodiment, the predefined transmission signal 78 is a known pseudo-random sequence pattern that is easily detected by the remote receiver 34. In another embodiment, the predefined transmission signal 78 is an "all zeros" signal, which is a zero voltage signal produced at the DMT transmitter 22 output (i.e., zero volts modulated on all the carrier signals). In addition to easy detection by the remote receiver 34, the zero voltage signal reduces the power consumption of the DMT transmitter 22 when delivered by the DMT transmitter 22. Further, a pilot tone is included in the predefined transmission signal 78 to provide a reference signal for coherent demodulation of the carrier signals in the remote receiver 34 during reception of the predefined transmission signal 78.

After the remote receiver 34 receives the transmission signal 38, the remote receiver 34 determines if the transmission signal 38 is equivalent to the predefined transmission signal 78. In one embodiment, when the remote receiver 34 identifies the predefined transmission signal 78, the remote receiver 34 ignores (i.e., discards) the predefined transmission signal 78.

Following the transmission of the predefined transmission signal 78, the phase scrambler 66 shifts (step 120) the phase characteristic of the QAM-modulated carrier signals (based on one of the predefined parameters that varies over time). For example, consider that a set of QAM symbols 58 produces a DMT symbol 70 comprising a plurality of time domain samples, and that one of the time domain samples is larger than the maximum allowed digital value for the DMT symbol 70. Therefore, because the transmission signal 38 would be clipped when sent to the remote receiver 34, the DMT transmitter 22 sends the predefined transmission signal 78 instead.

After transmission of the predefined transmission signal 78, the DMT transmitter 22 again attempts to send the same bit values that produced the clipped transmission signal 38 in a subsequent DMT symbol 70'. Because the generation of phase shifts in this embodiment is based on values that vary over time, the phase shifts computed for the subsequent DMT symbol 70' are different than those that were previously computed for the DMT symbol 70 with the clipped time domain sample. These different phase shifts are combined to the phase characteristics of the modulated carrier signals to produce carrier signals of the subsequent DMT symbol 70' with different phase characteristics than the carrier signals of the DMT symbol 70 with the clipped time domain sample.

5

10

15

20

DMT communication systems 2 infrequently produce transmission signals 38 that clip (e.g., approximately one clip every 10<sup>7</sup> time domain samples 70). However, if the subsequent DMT symbol 70' includes a time domain sample that clips, then the predefined transmission signal 78 is again transmitted (step 150) to the remote receiver 34 instead of the clipped transmission signal 38. The clipping time domain sample may be on the same or on a different carrier signal than the previously clipped DMT symbol 70. The DMT transmitter 22 repeats the transmission of the predefined transmission signal 78 until the DMT transmitter 22 produces a subsequent DMT symbol 70' that is not clipped. When the DMT transmitter 22 produces a DMT symbol 70' that is not clipped, the DTM transmitter 22 transmits (step 160) the transmission signal 38 to the remote receiver 34. The probability of a DMT symbol 70 producing a transmission signal 38 that clips in the time domain depends on the PAR of the transmission signal 38.

For example, the following phase shifting example, PST #4, illustrates the method used by the phase scrambler 66 to combine a different phase shift to the phase characteristic of each carrier signal to avoid the clipping of the transmission signal 38.

# Phase Shifting Example #4

10

15

20

Phase shifting example #4 (PS #4) corresponds to adjusting the phase characteristic of

the carrier signal associated with a carrier number N by  $\frac{\pi}{3} \times (M+N)$ , mod  $2\pi$ , where M is the DMT symbol count. In this example, if the DMT symbol 70 clips when the DMT symbol count M equals 5, the predefined transmission signal 78 is transmitted instead of the current clipped transmission signal 38. On the following DMT symbol period, the DMT count M equals 6, thereby causing a different set of time domain samples to be generated for the subsequent DMT symbol 70', although the QAM symbols 58 used to produce both DMT symbols 70, 70' are the same.

If this different set of time domain samples (and consequently the transmission signal 38) is not clipped, the DMT transmitter 22 sends the transmission signal 38. If one of the time domain samples in the different set of time domain samples 70 (and consequently the transmission signal 38) is clipped, then the DMT transmitter 22 sends the predefined transmission signal 78 again. The process continues until a DMT symbol 70 is produced without a time domain sample 70 that is clipped. In one embodiment, the transmitter 22 stops attempting to produce a non-clipped DMT symbol 70' for the particular set of QAM symbols 58 after generating a predetermined number of clipped DMT symbols 70'. At that moment, the transmitter 22 can transmit the most recently produced clipped DMT symbol 70' or the predetermined transmission signal 78.

The PAR of the DSL communication system 2 is reduced because the predefined transmission signal 78 is sent instead of the transmission signal 38 when the DMT symbol 70 clips. For example, a DMT communication system 2 that normally has a clipping probability of 10-7 for the time domain transmission signal 38 can therefore operate with a 10-5 probability of clipping and a lower PAR equal to 12.8 dB (as compared to 14.5 dB). When operating at a 10-5 probability of clipping, assuming a DMT symbol 70 has 512 time-domain samples 70, the DMT transmitter 22 experiences one clipped DMT symbol 70 out of every

 $\frac{10}{512}$ , or 195 DMT symbols 70. This results in the predefined (non-data carrying) transmission signal 78 being transmitted, on average, once every 195 DMT symbols.

Marked-Up Substitute Specification US App No. 11/860,080 Attorney Docket No. 5550-47-CON-DIV

Although increasing the probability of clipping to 10<sup>-5</sup> results in approximately a 0.5% (1/195) decrease in throughput, the PAR of the transmission signal 38 is reduced by 1.7 dB, which reduces transmitter complexity in the form of power consumption and component linearity.

5

10

While the invention has been shown and described with reference to specific preferred embodiments, it should be understood by those skilled in the art that various changes in form and detail may be made therein without departing from the spirit and scope of the invention as defined by the following claims. For example, although the specification uses DSL to describe the invention, it is to be understood that various form of DSL can be used, e.g., ADSL, VDSL, SDSL, HDSL, HDSL2, or SHDSL. It is also to be understood that the principles of the invention apply to various types of applications transported over DSL systems (e.g., telecommuting, video conferencing, high speed Internet access, video-on demand).

Marked-Up Substitute Specification US App No. 11/860,080 Attorney Docket No. 5550-47-CON-DIV

#### **Abstract**

A system and method that scrambles the phase characteristic of a carrier signal are described. The scrambling of the phase characteristic of each carrier signal includes associating a value with each carrier signal and computing a phase shift for each carrier signal based on the value associated with that carrier signal. The value is determined independently of any input bit value carried by that carrier signal. The phase shift computed for each carrier signal is combined with the phase characteristic of that carrier signal so as to substantially scramble the phase characteristic of the carrier signals. Bits of an input signal are modulated onto the carrier signals having the substantially scrambled phase characteristic to produce a transmission signal with a reduced PAR.

# A System and Method for Descrambling the Phase of the Carriers in a Multicarrier Communications System

# Related Application

5

10

15

20

25

This application is a divisional of U.S. Application No. 11/211,535, filed August 26, 2005, now U.S. Patent No. 7,292,627, which is a continuation of U.S. Application No. 09/710,310, filed on November 9, 2000, now U.S. Patent No. 6,961,369, which claims the benefit of the filing date of copending U.S. Provisional Application, Serial No. 60/164,134, filed November 9, 1999, entitled "A Method For Randomizing The Phase Of The Carriers In A Multicarrier Communications System To Reduce The Peak To Average Power Ratio Of The Transmitted Signal," the entirety of which provisional application is incorporated by reference herein.

# Field of the Invention

This invention relates to communications systems using multicarrier modulation.

More particularly, the invention relates to multicarrier communications systems that lower the peak-to-average power ratio (PAR) of transmitted signals.

# Background of the Invention

In a conventional multicarrier communications system, transmitters communicate over a communication channel using multicarrier modulation or Discrete Multitone Modulation (DMT). Carrier signals (carriers) or sub-channels spaced within a usable frequency band of the communication channel are modulated at a symbol (i.e., block) transmission rate of the system. An input signal, which includes input data bits, is sent to a DMT transmitter, such as a DMT modem. The DMT transmitter typically modulates the phase characteristic, or phase, and amplitude of the carrier signals using an Inverse Fast Fourier Transform (IFFT) to generate a time domain signal, or transmission signal, that represents the input signal. The DMT transmitter transmits the transmission signal, which is a linear combination of the multiple carriers, to a DMT receiver over the communication channel.

The phase and amplitude of the carrier signals of DMT transmission signal can be considered random because the phase and amplitude result from the modulation of an arbitrary sequence of input data bits comprising the transmitted information. Therefore, under the condition that the modulated data bit stream is random, the DMT transmission signal can be approximated as having a Gaussian probability distribution. A bit scrambler is often used in the DMT transmitter to scramble the input data bits before the bits are modulated to assure that the transmitted data bits are random and, consequently, that the modulation of those bits produces a DMT transmission signal with a Gaussian probability distribution.

5

10

15

20

25

30

With an appropriate allocation of transmit power levels to the carriers or subchannels, such a system provides a desirable performance. Further, generating a transmission signal with a Gaussian probability distribution is important in order to transmit a transmission signal with a low peak-to-average ratio (PAR), or peak-to-average power ratio. The PAR of a transmission signal is the ratio of the instantaneous peak value (i.e., maximum magnitude) of a signal parameter (e.g., voltage, current, phase, frequency, power) to the time-averaged value of the signal parameter. In DMT systems, the PAR of the transmitted signal is determined by the probability of the random transmission signal reaching a certain peak voltage during the time interval required for a certain number of symbols. An example of the PAR of a transmission signal transmitted from a DMT transmitter is 14.5 dB, which is equivalent to having a 1E-7 probability of clipping. The PAR of a transmission signal transmitted and received in a DMT communication system is an important consideration in the design of the DMT communication system because the PAR of a signal affects the communication system's total power consumption and component linearity requirements of the system.

If the phase of the modulated carriers is not random, then the PAR can increase greatly. Examples of cases where the phases of the modulated carrier signals are not random are when bit scramblers are not used, multiple carrier signals are used to modulate the same input data bits, and the constellation maps, which are mappings of input data bits to the phase of a carrier signal, used for modulation are not random enough (i.e., a zero value for a data bit corresponds to a 90 degree phase characteristic of the DMT carrier signal and a one value

for a data bit corresponds to a -90 degree phase characteristic of the DMT carrier signal). An increased PAR can result in a system with high power consumption and/or with high probability of clipping the transmission signal. Thus, there remains a need for a system and method that can effectively scramble the phase of the modulated carrier signals in order to provide a low PAR for the transmission signal.

### Summary of the Invention

5

10

15

20

25

30

The present invention features a system and method that scrambles the phase characteristics of the modulated carrier signals in a transmission signal. In one aspect, a value is associated with each carrier signal. A phase shift is computed for each carrier signal based on the value associated with that carrier signal. The value is determined independently of any input bit value carried by that carrier signal. The phase shift computed for each carrier signal is combined with the phase characteristic of that carrier signal to substantially scramble the phase characteristics of the carrier signals.

In one embodiment, the input bit stream is modulated onto the carrier signals having the substantially scrambled phase characteristic to produce a transmission signal with a reduced peak-to-average power ratio (PAR). The value is derived from a predetermined parameter, such as a random number generator, a carrier number, a DMT symbol count, a superframe count, and a hyperframe count. In another embodiment, a predetermined transmission signal is transmitted when the amplitude of the transmission signal exceeds a certain level.

In another aspect, the invention features a method wherein a value is associated with each carrier signal. The value is determined independently of any input bit value carried by that carrier signal. A phase shift for each carrier signal is computed based on the value associated with that carrier signal. The transmission signal is demodulated using the phase shift computed for each carrier signal.

In another aspect, the invention features a system comprising a phase scrambler that computes a phase shift for each carrier signal based on a value associated with that carrier signal. The phase scrambler also combines the phase shift computed for each carrier signal with the phase characteristic of that carrier signal to substantially scramble the phase characteristic of the carrier signals. In one embodiment, a modulator, in communication with

the phase scrambler, modulates bits of an input signal onto the carrier signals having the substantially scrambled phase characteristics to produce a transmission signal with a reduced PAR.

### Description of the Drawings

The invention is pointed out with particularity in the appended claims. The advantages of the invention described above, as well as further advantages of the invention, may be better understood by reference to the following description taken in conjunction with the accompanying drawings, in which:

5

10

15

20

25

30

FIG. 1 is a block diagram of an embodiment of a digital subscriber line communications system including a DMT (discrete multitone modulation) transceiver, in communication with a remote transceiver, having a phase scrambler for substantially scrambling the phase characteristics of carrier signals; and

FIG. 2 is a flow diagram of an embodiment of a process for scrambling the phase characteristics of the carrier signals in a transmission signal.

## **Detailed Description**

FIG. 1 shows a digital subscriber line (DSL) communication system 2 including a discrete multitone (DMT) transceiver 10 in communication with a remote transceiver 14 over a communication channel 18 using a transmission signal 38 having a plurality of carrier signals. The DMT transceiver 10 includes a DMT transmitter 22 and a DMT receiver 26. The remote transceiver 14 includes a transmitter 30 and a receiver 34. Although described with respect to discrete multitone modulation, the principles of the invention apply also to other types of multicarrier modulation, such as, but not limited to, orthogonally multiplexed quadrature amplitude modulation (OQAM), discrete wavelet multitone (DWMT) modulation, and orthogonal frequency division multiplexing (OFDM).

The communication channel 18 provides a downstream transmission path from the DMT transmitter 22 to the remote receiver 34, and an upstream transmission path from the remote transmitter 30 to the DMT receiver 26. In one embodiment, the communication channel 18 is a pair of twisted wires of a telephone subscriber line. In other embodiments, the communication channel 18 can be a fiber optic wire, a quad cable, consisting of two pairs of twisted wires, or a quad cable that is one of a star quad cable, a Dieselhorst-Martin quad

cable, and the like. In a wireless communication system wherein the transceivers 10, 14 are wireless modems, the communication channel 18 is the air through which the transmission signal 38 travels between the transceivers 10, 14.

By way of example, the DMT transmitter 22 shown in FIG. 1 includes a quadrature amplitude modulation (QAM) encoder 42, a modulator 46, a bit allocation table (BAT) 44, and a phase scrambler 66. The DMT transmitter 22 can also include a bit scrambler 74, as described further below. The remote transmitter 30 of the remote transceiver 14 comprises equivalent components as the DMT transmitter 22. Although this embodiment specifies a detailed description of the DMT transmitter 22, the inventive concepts apply also to the receivers 34, 26 which have similar components to that of the DMT transmitter 22, but perform inverse functions in a reverse order.

5

10

15

20

25

30

The QAM encoder 42 has a single input for receiving an input serial data bit stream 54 and multiple parallel outputs to transmit QAM symbols 58 generated by the QAM encoder 42 from the bit stream 54. In general, the QAM encoder 42 maps the input serial bit-stream 54 in the time domain into parallel QAM symbols 58 in the frequency domain. In particular, the QAM encoder 42 maps the input serial data bit stream 54 into N parallel quadrature amplitude modulation (QAM) constellation points 58, or QAM symbols 58, where N represents the number of carrier signals generated by the modulator 46. The BAT 44 is in communication with the QAM encoder 42 to specify the number of bits carried by each carrier signal. The QAM symbols 58 represent the amplitude and the phase characteristic of each carrier signal.

The modulator 46 provides functionality associated with the DMT modulation and transforms the QAM symbols 58 into DMT symbols 70 each comprised of a plurality of time-domain samples. The modulator 46 modulates each carrier signal with a different QAM symbol 58. As a result of this modulation, carrier signals have phase and amplitude characteristics based on the QAM symbol 58 and therefore based on the input-bit stream 54. In particular, the modulator 46 uses an inverse fast Fourier transform (IFFT) to change the QAM symbols 58 into a transmission signal 38 comprised of a sequence of DMT symbols 70. The modulator 46 changes the QAM symbols 58 into DMT symbols 70 through modulation of the carrier signals. In another embodiment, the modulator 46 uses the inverse

discrete Fourier transform (IDFT) to change the QAM symbols 58 into DMT symbols 70. In one embodiment, a pilot tone is included in the transmission signal 38 to provide a reference signal for coherent demodulation of the carrier signals in the remote receiver 34 during reception of the transmission signal 38.

5

10

15

20

25

30

The modulator 46 also includes a phase scrambler 66 that combines a phase shift computed for each QAM-modulated carrier signal with the phase characteristic of that carrier signal. Combining phase shifts with phase characteristics, in accordance with the principles of the invention, substantially scrambles the phase characteristics of the carrier signals in the transmission signal 38. By scrambling the phase characteristics of the carrier signals, the resulting transmission signal 38 has a substantially minimized peak-to-average (PAR) power ratio. The phase scrambler 66 can be part of or external to the modulator 46. Other embodiments of the phase scrambler 66 include, but are not limited to, a software program that is stored in local memory and is executed on the modulator 46, a digital signal processor (DSP) capable of performing mathematical functions and algorithms, and the like. The remote receiver 34 similarly includes a phase scrambler 66' for use when demodulating carrier signals that have had their phase characteristics adjusted by the phase scrambler 66 of the DMT transceiver 10.

To compute a phase shift for each carrier signal, the phase scrambler 66 associates one or more values with that carrier signal. The phase scrambler 66 determines each value for a carrier signal independently of the QAM symbols 58, and, therefore, independently of the bit value(s) modulated onto the carrier signal. The actual value(s) that the phase scrambler 66 associates with each carrier signal can be derived from one or more predefined parameters, such as a pseudo-random number generator (pseudo-RNG), a DMT carrier number, a DMT symbol count, a DMT superframe count, a DMT hyperframe count, and the like, as described in more detail below. Irrespective of the technique used to produce each value, the same technique is used by the DMT transmitter 22 and the remote receiver 34 so that the value associated with a given carrier signal is known at both ends of the communication channel 18.

The phase scrambler 66 then solves a predetermined equation to compute a phase shift for the carrier signal, using the value(s) associated with that carrier signal as input that

effects the output of the equation. Any equation suitable for computing phase shifts can be used to compute the phase shifts. When the equation is independent of the bit values of the input serial bit stream 54, the computed phase shifts are also independent of such bit values.

In one embodiment (shown in phantom), the DMT transmitter 22 includes a bit scrambler 74, which receives the input serial bit stream 54 and outputs data bits 76 that are substantially scrambled. The substantially scrambled bits 76 are then passed to the QAM encoder 42. When the bit scrambler 74 is included in the DMT transmitter 22, the operation of the phase scrambler 66 further assures that the transmission signal 38 has a Gaussian probability distribution and, therefore, a substantially minimized PAR.

5

10

15

20

25

FIG. 2 shows embodiments of a process used by the DMT transmitter 22 for adjusting the phase characteristic of each carrier signal and combining these carrier signals to produce the transmission signal 38. The DMT transmitter 22 generates (step 100) a value that is associated with a carrier signal. Because the value is being used to alter the phase characteristics of the carrier signal, both the DMT transmitter 22 and the remote receiver 34 must recognize the value as being associated with the carrier signal. Either the DMT transmitter 22 and the remote receiver 34 independently derive the associated value, or one informs the other of the associated value. For example, in one embodiment the DMT transmitter 22 can derive the value from a pseudo-RNG and then transmit the generated value to the remote receiver 34. In another embodiment, the remote receiver 34 similarly derives the value from the same pseudo-RNG and the same seed as used by the transmitter (i.e., the transmitter pseudo-RNG produces the same series of random numbers as the receiver pseudo-RNG).

As another example, the DMT transmitter 22 and the remote receiver 34 can each maintain a symbol counter for counting DMT symbols. The DMT transmitter 22 increments its symbol counter upon transmitting a DMT symbol; the remote receiver 34 upon receipt. Thus, when the DMT transmitter 22 and the remote receiver 34 both use the symbol count as a value for computing phase shifts, both the DMT transmitter 22 and remote receiver 34 "know" that the value is associated with a particular DMT symbol and with each carrier signal of that DMT symbol.

Values can also be derived from other types of predefined parameters. For example, if the predefined parameter is the DMT carrier number, then the value associated with a particular carrier signal is the carrier number of that signal within the DMT symbol. The number of a carrier signal represents the location of the frequency of the carrier signal relative to the frequency of other carrier signals within a DMT symbol. For example, in one embodiment the DSL communication system 2 provides 256 carrier signals, each separated by a frequency of 4.3125 kHz and spanning the frequency bandwidth from 0 kHz to 1104 kHz. The DMT transmitter 22 numbers the carrier signals from 0 to 255. Therefore, "DMT carrier number 50" represents the 51st DMT carrier signal which is located at the frequency of 215.625 kHz (i.e., 51 x 4.3125 kHz).

5

10

15

20

25

30

Again, the DMT transmitter 22 and the remote receiver 34 can know the value that is associated with the carrier signal because both the DMT transmitter 22 and the remote receiver 34 use the same predefined parameter (here, the DMT carrier number) to make the value-carrier signal association. In other embodiments (as exemplified above with the transmitter pseudo-RNG), the DMT transmitter 22 can transmit the value to the remote receiver 34 (or vice versa) over the communication channel 18.

In other embodiments, other predefined parameters can be used in conjunction with the symbol count. One example of such a predefined parameter is the superframe count that increments by one every 69 DMT symbols. One exemplary implementation that achieves the superframe counter is to perform a modulo 68 operation on the symbol count. As another example, the DMT transmitter 22 can maintain a hyperframe counter for counting hyperframes. An exemplary implementation of the hyperframe count is to perform a modulo 255 operation on the superframe count. Thus, the hyperframe count increments by one each time the superframe count reaches 255.

Accordingly, it is seen that some predefined parameters produce values that vary from carrier signal to carrier signal. For example, when the predefined parameter is the DMT carrier number, values vary based on the frequency of the carrier signal. As another example, the pseudo-RNG generates a new random value for each carrier signal.

Other predefined parameters produce values that vary from DMT symbol 70 to DMT symbol 70. For example, when the predefined parameter is the symbol count, the superframe

count, or hyperframe count, values vary based on the numerical position of the DMT symbol 70 within a sequence of symbols, superframes, or hyperframes. Predefined parameters such as the pseudo-RNG, symbol count, superframe count, and superframe can also be understood to be parameters that vary values over time. Any one or combination of the predefined parameters can provide values for input to the equation that computes a phase shift for a given carrier signal.

5

10

15

20

25

In one embodiment, the phase scrambling is used to avoid clipping of the transmission signal 38 on a DMT symbol 70 by DMT symbol 70 basis. In this embodiment, the DMT transmitter 22 uses a value based on a predefined parameter that varies over time, such as the symbol count, to compute the phase shift. It is to be understood that other types of predefined parameters that vary the values associated with carrier signals can be used to practice the principles of the invention. As described above, the transceivers 10, 14 may communicate (step 110) the values to synchronize their use in modulating and demodulating the carrier signals.

The DMT transmitter 22 then computes (step 115) the phase shift that is used to adjust the phase characteristic of each carrier signal. The amount of the phase shift combined with the phase characteristic of each QAM-modulated carrier signal depends upon the equation used and the one or more values associated with that carrier signal.

The DMT transmitter 22 then combines (step 120) the phase shift computed for each carrier signal with the phase characteristic of that carrier signal. By scrambling the phase characteristics of the carrier signals, the phase scrambler 66 reduces (with respect to unscrambled phase characteristics) the combined PAR of the plurality of carrier signals and, consequently, the transmission signal 38. The following three phase shifting examples, PS #1-PS #3, illustrate methods used by the phase scrambler 66 to combine a computed phase shift to the phase characteristic of each carrier signal.

### Phase Shifting Example #1

Phase shifting example #1 (PS #1) corresponds to adjusting the phase characteristic of the QAM-modulated carrier signal associated with a carrier number N by  $N \times \frac{\pi}{3}$ , modulo (mod)  $2\pi$ . In this example, a carrier signal having a carrier number N equal to 50 has a phase shift added to the phase characteristic of that carrier signal equal to  $50 \times \frac{\pi}{3}$  (mod  $2\pi$ ) =  $\frac{2}{3}\pi$ . The carrier signal with a carrier number N equal to 51 has a phase shift added to the phase characteristic of that carrier signal equal to  $51 \times \frac{\pi}{3}$  (mod  $2\pi$ ) =  $\pi$ . The carrier signal with the carrier number N equal to 0 has no phase shift added to the phase characteristic of that carrier signal.

10

5

## Phase Shifting Example #2

Phase shifting example #2 (PS #2) corresponds to adjusting the phase characteristic of the QAM-modulated carrier signal associated with a carrier number N by  $(N+M)\times\frac{\pi}{4}$ , mod  $2\pi$ , where M is the symbol count. In this example, a carrier signal having a carrier number N equal to 50 on DMT symbol count M equal to 8 has a phase shift added to the phase characteristic of that carrier signal equal to  $(50+8)\times\frac{\pi}{4}$  (mod  $2\pi$ ) =  $\frac{\pi}{2}$ . The carrier signal with the same carrier number N equal to 50 on the next DMT symbol count M equal to 9 has a phase shift added to the phase characteristic of that carrier signal equal to  $(50+9)\times\frac{\pi}{4}$  (mod  $2\pi$ ) =  $\frac{3\pi}{4}$ .

20

15

## Phase Shifting Example #3

Phase shifting example #3 (PS #3) corresponds to adjusting the phase characteristic of the QAM-modulated carrier signal associated with a carrier number N by  $(X_N) \times \frac{\pi}{6}$ , mod  $2\pi$ , where  $X_N$  is an array of N pseudo-random numbers. In this example, a carrier signal having a carrier number N equal to 5 and  $X_N$  equal to [3, 8, 1, 4, 9, 5, . . .] has a phase shift added to the phase characteristic of the carrier signal that is equal to  $(9) \times \frac{\pi}{6} \pmod{2\pi} = \frac{3\pi}{2}$  (Note that 9 is the 5<sup>th</sup> value in  $X_N$ .) The carrier signal with a carrier number N equal to 6 has a phase shift added to the phase characteristic of the carrier signal equal to  $(5) \times \frac{\pi}{6} \pmod{2\pi} = \frac{5\pi}{6}$ .

It is to be understood that additional and/or different phase shifting techniques can be used by the phase scrambler 66, and that PS #1, #2, and #3 are merely illustrative examples of the principles of the invention. The DMT transmitter 22 then combines (step 130) the carrier signals to form the transmission signal 38. If the transmission signal is not clipped, as described below, the DMT transmitter 22 consequently transmits (step 160) the transmission signal 38 to the remote receiver 34.

## **Clipping of Transmission Signals**

5

10

15

20

25

30

A transmission signal 38 that has high peak values of voltage (i.e., a high PAR) can induce non-linear distortion in the DMT transmitter 22 and the communication channel 18. One form of this non-linear distortion of the transmission signal 38 that may occur is the limitation of the amplitude of the transmission signal 38 (i.e., clipping). For example, a particular DMT symbol 70 clips in the time domain when one or more time domain samples in that DMT symbol 70 are larger than the maximum allowed digital value for the DMT symbols 70. In multicarrier communication systems when clipping occurs, the transmission signal 38 does not accurately represent the input serial data bit signal 54.

In one embodiment, the DSL communication system 2 avoids the clipping of the transmission signal 38 on a DMT symbol 70 by DMT symbol 70 basis. The DMT transmitter 22 detects (step 140) the clipping of the transmission signal 38. If a particular DMT symbol 70 clips in the time domain to produce a clipped transmission signal 38, the DMT transmitter 22 substitutes (step 150) a predefined transmission signal 78 for the clipped transmission signal 38.

The predefined transmission signal 78 has the same duration as a DMT symbol 70 (e.g., 250 ms) in order to maintain symbol timing between the DMT transmitter 22 and the remote receiver 34. The predefined transmission signal 78 is not based on (i.e., independent of) the modulated input data bit stream 54; it is a bit value pattern that is recognized by the remote receiver 34 as a substituted signal. In one embodiment, the predefined transmission signal 78 is a known pseudo-random sequence pattern that is easily detected by the remote receiver 34. In another embodiment, the predefined transmission signal 78 is an "all zeros" signal, which is a zero voltage signal produced at the DMT transmitter 22 output (i.e., zero

volts modulated on all the carrier signals). In addition to easy detection by the remote receiver 34, the zero voltage signal reduces the power consumption of the DMT transmitter 22 when delivered by the DMT transmitter 22. Further, a pilot tone is included in the predefined transmission signal 78 to provide a reference signal for coherent demodulation of the carrier signals in the remote receiver 34 during reception of the predefined transmission signal 78.

5

10

15

20

25

30

After the remote receiver 34 receives the transmission signal 38, the remote receiver 34 determines if the transmission signal 38 is equivalent to the predefined transmission signal 78. In one embodiment, when the remote receiver 34 identifies the predefined transmission signal 78, the remote receiver 34 ignores (i.e., discards) the predefined transmission signal 78.

Following the transmission of the predefined transmission signal 78, the phase scrambler 66 shifts (step 120) the phase characteristic of the QAM-modulated carrier signals (based on one of the predefined parameters that varies over time). For example, consider that a set of QAM symbols 58 produces a DMT symbol 70 comprising a plurality of time domain samples, and that one of the time domain samples is larger than the maximum allowed digital value for the DMT symbol 70. Therefore, because the transmission signal 38 would be clipped when sent to the remote receiver 34, the DMT transmitter 22 sends the predefined transmission signal 78 instead.

After transmission of the predefined transmission signal 78, the DMT transmitter 22 again attempts to send the same bit values that produced the clipped transmission signal 38 in a subsequent DMT symbol 70'. Because the generation of phase shifts in this embodiment is based on values that vary over time, the phase shifts computed for the subsequent DMT symbol 70' are different than those that were previously computed for the DMT symbol 70 with the clipped time domain sample. These different phase shifts are combined to the phase characteristics of the modulated carrier signals to produce carrier signals of the subsequent DMT symbol 70' with different phase characteristics than the carrier signals of the DMT symbol 70 with the clipped time domain sample.

DMT communication systems 2 infrequently produce transmission signals 38 that clip (e.g., approximately one clip every 10<sup>7</sup> time domain samples 70). However, if the

subsequent DMT symbol 70' includes a time domain sample that clips, then the predefined transmission signal 78 is again transmitted (step 150) to the remote receiver 34 instead of the clipped transmission signal 38. The clipping time domain sample may be on the same or on a different carrier signal than the previously clipped DMT symbol 70. The DMT transmitter 22 repeats the transmission of the predefined transmission signal 78 until the DMT transmitter 22 produces a subsequent DMT symbol 70' that is not clipped. When the DMT transmitter 22 produces a DMT symbol 70' that is not clipped, the DTM transmitter 22 transmits (step 160) the transmission signal 38 to the remote receiver 34. The probability of a DMT symbol 70 producing a transmission signal 38 that clips in the time domain depends on the PAR of the transmission signal 38.

For example, the following phase shifting example, PST #4, illustrates the method used by the phase scrambler 66 to combine a different phase shift to the phase characteristic of each carrier signal to avoid the clipping of the transmission signal 38.

## Phase Shifting Example #4

5

10

15

20

25

30

Phase shifting example #4 (PS #4) corresponds to adjusting the phase characteristic of the carrier signal associated with a carrier number N by  $\frac{\pi}{3} \times (M+N)$ , mod  $2\pi$ , where M is the DMT symbol count. In this example, if the DMT symbol 70 clips when the DMT symbol count M equals 5, the predefined transmission signal 78 is transmitted instead of the current clipped transmission signal 38. On the following DMT symbol period, the DMT count M equals 6, thereby causing a different set of time domain samples to be generated for the subsequent DMT symbol 70', although the QAM symbols 58 used to produce both DMT symbols 70, 70' are the same.

If this different set of time domain samples (and consequently the transmission signal 38) is not clipped, the DMT transmitter 22 sends the transmission signal 38. If one of the time domain samples in the different set of time domain samples 70 (and consequently the transmission signal 38) is clipped, then the DMT transmitter 22 sends the predefined transmission signal 78 again. The process continues until a DMT symbol 70 is produced without a time domain sample 70 that is clipped. In one embodiment, the transmitter 22 stops attempting to produce a non-clipped DMT symbol 70' for the particular set of QAM symbols 58 after generating a predetermined number of clipped DMT symbols 70'. At that moment,

the transmitter 22 can transmit the most recently produced clipped DMT symbol 70' or the predetermined transmission signal 78.

5

10

15

20

The PAR of the DSL communication system 2 is reduced because the predefined transmission signal 78 is sent instead of the transmission signal 38 when the DMT symbol 70 clips. For example, a DMT communication system 2 that normally has a clipping probability of 10-7 for the time domain transmission signal 38 can therefore operate with a 10-5 probability of clipping and a lower PAR equal to 12.8 dB (as compared to 14.5 dB). When operating at a 10-5 probability of clipping, assuming a DMT symbol 70 has 512 time-domain samples 70, the DMT transmitter 22 experiences one clipped DMT symbol 70 out of every  $\frac{10^5}{512}$ , or 195 DMT symbols 70. This results in the predefined (non-data carrying) transmission signal 78 being transmitted, on average, once every 195 DMT symbols. Although increasing the probability of clipping to  $10^{-5}$  results in approximately a 0.5% (1/195) decrease in throughput, the PAR of the transmission signal 38 is reduced by 1.7 dB, which reduces transmitter complexity in the form of power consumption and component linearity.

While the invention has been shown and described with reference to specific preferred embodiments, it should be understood by those skilled in the art that various changes in form and detail may be made therein without departing from the spirit and scope of the invention as defined by the following claims. For example, although the specification uses DSL to describe the invention, it is to be understood that various form of DSL can be used, e.g., ADSL, VDSL, SDSL, HDSL, HDSL2, or SHDSL. It is also to be understood that the principles of the invention apply to various types of applications transported over DSL systems (e.g., telecommuting, video conferencing, high speed Internet access, video-on demand).

Clean Copy of Substitute Specification US App No. 11/860,080 Attorney Docket No. 5550-47-CON-DIV

#### **Abstract**

A system and method that scrambles the phase characteristic of a carrier signal are described. The scrambling of the phase characteristic of each carrier signal includes associating a value with each carrier signal and computing a phase shift for each carrier signal based on the value associated with that carrier signal. The value is determined independently of any input bit value carried by that carrier signal. The phase shift computed for each carrier signal is combined with the phase characteristic of that carrier signal so as to substantially scramble the phase characteristic of the carrier signals. Bits of an input signal are modulated onto the carrier signals having the substantially scrambled phase characteristic to produce a transmission signal with a reduced PAR.

Electronic Acknowledgement Receipt						
EFS ID:	10918003					
Application Number:	11860080					
International Application Number:						
Confirmation Number:	5967					
Title of Invention:	SYSTEM AND METHOD FOR SCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM					
First Named Inventor/Applicant Name:	Marcos C. Tzannes					
Customer Number:	62574					
Filer:	Jason Vick/Joanne Vos					
Filer Authorized By:	Jason Vick					
Attorney Docket Number:	5550-47-CON-DIV					
Receipt Date:	09-SEP-2011					
Filing Date:	24-SEP-2007					
Time Stamp:	17:23:14					
Application Type:	Utility under 35 USC 111(a)					

# Payment information:

Submitted with Payment	no
File Listing:	

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1		AMEND PRELIM 05.pdf	143172	ves	3
'		AMEND_I NEEIM_03.pdi	7dad4639d0ac97e1a5c5fb90aeb516d025b 7833d	· '	,

	Multip	art Description/PDF files in .	zip description			
	Document De	scription	Start	End		
	Preliminary Am	1	1			
	Specificat	2	2			
	Applicant Arguments/Remarks	3	3	3		
Warnings:			1			
Information:						
2		Marked_Up_Substitute_Spec.	137685	yes	17	
_		pdf	551dc688929a043951a42c39d87dfbb0d24 55594			
	Multip	art Description/PDF files in .	zip description			
	Document De	Start	End			
	Specificat	1	16			
	Abstrac	17	17			
Warnings:			ll			
Information:						
3		Clean_Copy_Substitute_Spec.	136450	VOS	15	
3		pdf	yes 517bf1e8fd6bcb2602b16f78b55a3bc63d9 bdaa3		15	
	Multip	art Description/PDF files in .	zip description			
	Document De	scription	Start	Er	nd	
	Specificat	ion	1	14		
	Abstrac	t	15	15		
Warnings:						
Information:						
		Total Files Size (in bytes):	41	17307		

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

#### New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

#### National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

#### New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office Address: COMMISSIONER FOR PATENTS P.O. Box 1450 Alexandria, Virginia 22313-1450 www.usplo.gov

APPLICATION NO. FILING DATE		FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.	
11/860,080 09/24/2007		Marcos C. Tzannes	5550-47-CON-DIV	5967	
62574 Jason H. Vick	7590 08/31/201	.1	EXAM	IINER	
Sheridan Ross, PC			WILLIAMS, I	AWRENCE B	
Suite # 1200 1560 Broadway			ART UNIT	PAPER NUMBER	
Denver, CO 80202			2611		
			NOTIFICATION DATE	DELIVERY MODE	
			08/31/2011	ELECTRONIC	

# Please find below and/or attached an Office communication concerning this application or proceeding.

The time period for reply, if any, is set in the attached communication.

Notice of the Office communication was sent electronically on above-indicated "Notification Date" to the following e-mail address(es):

jvick@sheridanross.com

	Application No.	Applicant(s)						
Interview Summary	11/860,080	TZANNES, MARCOS C.						
interview Summary	Examiner	Art Unit						
	LAWRENCE WILLIAMS	2611						
All participants (applicant, applicant's representative, PTO p	ersonnel):							
(1) <u>LAWRENCE WILLIAMS</u> .	(3)MARCOS C. TZANNES	<b>2</b> .						
(2) <u>JASON VICK</u> . (4)								
Date of Interview: 15 August 2011.								
Type: a)☐ Telephonic b)☐ Video Conference c)☑ Personal [copy given to: 1)☐ applicant 2	☐ applicant's representative							
Exhibit shown or demonstration conducted: d) Yes If Yes, brief description:	e)⊠ No.							
Claim(s) discussed: <u>21 and 34</u> .								
Identification of prior art discussed:								
Agreement with respect to the claims f)⊠ was reached. g)	☐ was not reached. h)☐ N	//A.						
Substance of Interview including description of the general reached, or any other comments: <u>Discussed independent called the claims to be more in line with specification since specification demdulation for the phase characteristics of the signals.</u>	laims in respect to specification	on. Applicant will rewrite						
(A fuller description, if necessary, and a copy of the amendr allowable, if available, must be attached. Also, where no co allowable is available, a summary thereof must be attached	py of the amendments that w							
THE FORMAL WRITTEN REPLY TO THE LAST OFFICE ACTION MUST INCLUDE THE SUBSTANCE OF THE INTERVIEW. (See MPEP Section 713.04). If a reply to the last Office action has already been filed, APPLICANT IS GIVEN A NON-EXTENDABLE PERIOD OF THE LONGER OF ONE MONTH OR THIRTY DAYS FROM THIS INTERVIEW DATE, OR THE MAILING DATE OF THIS INTERVIEW SUMMARY FORM, WHICHEVER IS LATER, TO FILE A STATEMENT OF THE SUBSTANCE OF THE INTERVIEW. See Summary of Record of Interview requirements on reverse side or on attached sheet.								
/Lawrence B Williams/ Examiner, Art Unit 2611								

U.S. Patent and Trademark Office
PTOL-413 (Rev. 04-03) Interview Summary Paper No. 1

#### **Summary of Record of Interview Requirements**

#### Manual of Patent Examining Procedure (MPEP), Section 713.04, Substance of Interview Must be Made of Record

A complete written statement as to the substance of any face-to-face, video conference, or telephone interview with regard to an application must be made of record in the application whether or not an agreement with the examiner was reached at the interview.

#### Title 37 Code of Federal Regulations (CFR) § 1.133 Interviews

Paragraph (b)

In every instance where reconsideration is requested in view of an interview with an examiner, a complete written statement of the reasons presented at the interview as warranting favorable action must be filed by the applicant. An interview does not remove the necessity for reply to Office action as specified in §§ 1.111, 1.135. (35 U.S.C. 132)

#### 37 CFR §1.2 Business to be transacted in writing.

All business with the Patent or Trademark Office should be transacted in writing. The personal attendance of applicants or their attorneys or agents at the Patent and Trademark Office is unnecessary. The action of the Patent and Trademark Office will be based exclusively on the written record in the Office. No attention will be paid to any alleged oral promise, stipulation, or understanding in relation to which there is disagreement or doubt.

The action of the Patent and Trademark Office cannot be based exclusively on the written record in the Office if that record is itself incomplete through the failure to record the substance of interviews.

It is the responsibility of the applicant or the attorney or agent to make the substance of an interview of record in the application file, unless the examiner indicates he or she will do so. It is the examiner's responsibility to see that such a record is made and to correct material inaccuracies which bear directly on the question of patentability.

Examiners must complete an Interview Summary Form for each interview held where a matter of substance has been discussed during the interview by checking the appropriate boxes and filling in the blanks. Discussions regarding only procedural matters, directed solely to restriction requirements for which interview recordation is otherwise provided for in Section 812.01 of the Manual of Patent Examining Procedure, or pointing out typographical errors or unreadable script in Office actions or the like, are excluded from the interview recordation procedures below. Where the substance of an interview is completely recorded in an Examiners Amendment, no separate Interview Summary Record is required.

The Interview Summary Form shall be given an appropriate Paper No., placed in the right hand portion of the file, and listed on the "Contents" section of the file wrapper. In a personal interview, a duplicate of the Form is given to the applicant (or attorney or agent) at the conclusion of the interview. In the case of a telephone or video-conference interview, the copy is mailed to the applicant's correspondence address either with or prior to the next official communication. If additional correspondence from the examiner is not likely before an allowance or if other circumstances dictate, the Form should be mailed promptly after the interview rather than with the next official communication.

The Form provides for recordation of the following information:

- Application Number (Series Code and Serial Number)
- Name of applicant
- Name of examiner
- Date of interview
- Type of interview (telephonic, video-conference, or personal)
- Name of participant(s) (applicant, attorney or agent, examiner, other PTO personnel, etc.)
- An indication whether or not an exhibit was shown or a demonstration conducted
- An identification of the specific prior art discussed
- An indication whether an agreement was reached and if so, a description of the general nature of the agreement (may be by attachment of a copy of amendments or claims agreed as being allowable). Note: Agreement as to allowability is tentative and does not restrict further action by the examiner to the contrary.
- The signature of the examiner who conducted the interview (if Form is not an attachment to a signed Office action)

It is desirable that the examiner orally remind the applicant of his or her obligation to record the substance of the interview of each case. It should be noted, however, that the Interview Summary Form will not normally be considered a complete and proper recordation of the interview unless it includes, or is supplemented by the applicant or the examiner to include, all of the applicable items required below concerning the substance of the interview.

A complete and proper recordation of the substance of any interview should include at least the following applicable items:

- 1) A brief description of the nature of any exhibit shown or any demonstration conducted,
- 2) an identification of the claims discussed,
- 3) an identification of the specific prior art discussed,
- 4) an identification of the principal proposed amendments of a substantive nature discussed, unless these are already described on the Interview Summary Form completed by the Examiner,
- 5) a brief identification of the general thrust of the principal arguments presented to the examiner,
  - (The identification of arguments need not be lengthy or elaborate. A verbatim or highly detailed description of the arguments is not required. The identification of the arguments is sufficient if the general nature or thrust of the principal arguments made to the examiner can be understood in the context of the application file. Of course, the applicant may desire to emphasize and fully describe those arguments which he or she feels were or might be persuasive to the examiner.)
- 6) a general indication of any other pertinent matters discussed, and
- 7) if appropriate, the general results or outcome of the interview unless already described in the Interview Summary Form completed by the examiner.

Examiners are expected to carefully review the applicant's record of the substance of an interview. If the record is not complete and accurate, the examiner will give the applicant an extendable one month time period to correct the record.

#### **Examiner to Check for Accuracy**

If the claims are allowable for other reasons of record, the examiner should send a letter setting forth the examiner's version of the statement attributed to him or her. If the record is complete and accurate, the examiner should place the indication, "Interview Record OK" on the paper recording the substance of the interview along with the date and the examiner's initials.

#### IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re the Application of: Marcos C. Tzannes	Group Art Unit: 2611
Application No.: 11/860,080	Examiner: WILLIAMS, Lawrence B
Filed: September 24, 2007	Confirmation No.: 5967
Atty. File No.: 5550-47-CON-DIV	)

For: SYSTEM AND METHOD FOR DESCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM

Commissioner for Patents P.O. Box 1450 Alexandria, VA 22313

## **FOURTH PRELIMINARY AMENDMENT**

Dear Sir:

Prior to the initial review of the above-identified patent application by the Examiner, and supplemental to the August 11, 2011 Preliminary Amendment, please enter the following Preliminary Amendment. Although Applicants do not believe that any fees are due based upon the filing of this Preliminary Amendment, please charge any such fees to Deposit Account 19-1970.

Please amend the above-identified patent application as follows:

**Amendments to the Claims** are shown in the listing of claims which begin on page 2 of this paper.

1

**Amendments to the Drawings** begin on page 6 of this paper and include both an attached replacement sheet and an annotated sheet showing changes.

Remarks begin on page 7 of this paper.

### **AMENDMENTS TO THE CLAIMS**

This listing of claims will replace all prior versions, and listings, of claims in the application.

## **Listing of Claims:**

1-46. (Canceled)

47. (New) In a first multicarrier transceiver, having a plurality of carrier signals for receiving a bit stream, each carrier signal having a phase characteristic associated with the bit stream, a method comprising:

demodulating the bit stream, wherein:

each carrier signal was associated with a value determined independently of any bit value carried by that carrier signal,

a phase shift was computed for each carrier signal based on the value associated with that carrier signal,

the phase shift computed for each carrier signal was combined with the phase characteristic of that carrier signal so as to substantially scramble the phase characteristics of the plurality of carrier signals,

multiple carrier signals were used to modulate a same input bit value, and a value associated with the carrier signal was determined using a pseudo-random number generator.

- 48. (New) The method of claim 47, wherein the first transceiver is a cable transceiver.
- 49. (New) The method of claim 47, wherein the first transceiver is VDSL transceiver.
- 50. (New) The method of claim 47, wherein the bit stream is used to transport video.
- 51. (New) The method of claim 47, wherein the bit stream is used to transport high speed internet access.

- 52. (New) The method of claim 47, further comprising, in a second transceiver in communication with the first transceiver, independently deriving the values associated with each carrier using a second pseudo-random number generator in the second transceiver.
- 53. (New) The method of claim 52, wherein the first and second transceivers use a same seed for the pseudo-random number generator.
- 54. (New) The method of claim 52, wherein the first and second transceivers are wireless transceivers.
- 55. (New) The method of claim 52, wherein the first and second transceivers are cable transceivers.
- 56. (New) The method of claim 52, wherein the first and second transceivers are DSL transceivers connected using a pair of twisted wires of a telephone subscriber system.
- 57. (New) The method of claim 56, wherein the first and second transceivers are VDSL transceivers.
  - 58. (New) The method of claim 52, wherein the bit stream is used to transport video.
- 59. (New) The method of claim 52, wherein the bit stream is used to transport high speed internet access.
- 60. (New) A multicarrier system including a first transceiver having a plurality of carrier signals for receiving a bit stream, each carrier signal having a phase characteristic associated with the bit stream, the transceiver capable of demodulating the bit stream, wherein:

each carrier signal was associated with a value determined independently of any bit value carried by that carrier signal,

3

a phase shift was computed for each carrier signal based on the value associated with that carrier signal,

the phase shift computed for each carrier signal was combined with the phase characteristic of that carrier signal so as to substantially scramble the phase characteristics of the plurality of carrier signals,

multiple carrier signals were used to modulate a same input bit value, and a value associated with the carrier signal was determined using a pseudo-random number generator.

- 61. (New) The system of claim 60, wherein the first transceiver is a cable transceiver.
- 62. (New) The system of claim 60, wherein the first transceiver is VDSL transceiver.
- 63. (New) The system of claim 60, wherein the bit stream is used to transport video.
- 64. (New) The system of claim 60, wherein the bit stream is used to transport high speed internet access.
- 65. (New) The system of claim 60, further comprising a second transceiver in communication with the first transceiver, the second transceiver independently deriving the values associated with each carrier using a second pseudo-random number generator in the second transceiver.
- 66. (New) The system of claim 65, wherein the first and second transceivers use a same seed for the pseudo-random number generator.
- 67. (New) The system of claim 65, wherein the first and second transceivers are wireless transceivers.
- 68. (New) The system of claim 65, wherein the first and second transceivers are cable transceivers.

- 69. (New) The system of claim 65, wherein the first and second transceivers are DSL transceivers connected using a pair of twisted wires of a telephone subscriber system.
- 70. (New) The system of claim 69, wherein the first and second transceivers are VDSL transceivers.
  - 71. (New) The system of claim 65, wherein the bit stream is used to transport video.
- 72. (New) The system of claim 65, wherein the bit stream is used to transport high speed internet access.

5

# **AMENDMENTS TO THE DRAWINGS:**

The attached drawing sheet(s) include(s) changes to Figure 1. This sheet, which includes Figure 1 replaces the original sheet.

6

### REMARKS/ARGUMENTS

Applicant requests examination on the merits.

Claims 1-46 are cancelled without prejudice or disclaimer in favor of the new claims presented herein.

By this amendment, Figure 1 has been updated to include all reference numbers from the specification.

Applicant would like to thank Ex. Williams for the courtesies extended during the August 15 Personal Interview. During the Interview, the above claims were discussed and the Examiner requested the Figures be updated to include all reference numbers from the specification.

Applicant believes that the pending claims are in condition for allowance and such disposition is respectfully requested. In the event that a telephone conversation would further prosecution and/or expedite allowance, the Examiner is invited to contact the undersigned.

The Commissioner is hereby authorized to charge to Deposit Account No. 19-1970 any fees under 37 C.F.R. §§ 1.16 and 1.17 that may be required by this paper and to credit any overpayment to that Account. If any extension of time is required in connection with the filing of this paper and has not been separately requested, such extension is hereby Petitioned.

Respectfully submitted,

SHERIDAN ROSS P.C.

By: /Jason H. Vick/

7

Jason H. Vick Registration No. 45,285 1560 Broadway, Suite 1200 Denver, Colorado 80202-5141

(303) 863-9700

Date: \_August 30, 2011

FIG. 1

FIG. 1

Electronic Acknowledgement Receipt						
EFS ID:	10842315					
Application Number:	11860080					
International Application Number:						
Confirmation Number:	5967					
Title of Invention:	SYSTEM AND METHOD FOR SCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM					
First Named Inventor/Applicant Name:	Marcos C. Tzannes					
Customer Number:	62574					
Filer:	Jason Vick/Joanne Vos					
Filer Authorized By:	Jason Vick					
Attorney Docket Number:	5550-47-CON-DIV					
Receipt Date:	30-AUG-2011					
Filing Date:	24-SEP-2007					
Time Stamp:	13:21:24					
Application Type:	Utility under 35 USC 111(a)					

# Payment information:

Submitted with Payment	no
File Listing:	

Document Number	Document Description	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)	
1		AMEND PRELIM 04.pdf	82038	ves	7
'		//MEND_I NEEIM_04.pui	c10eed40268a9f5ce71762d8d0c6e3a02b3 00405	· '	,

	Multipart Description/PDF files in .zip description								
	Document Des	Document Description							
	Preliminary Ame	1	1						
	Claims	2		5					
	Drawings-only black and v	6	6						
	Applicant Arguments/Remarks	7		7					
Warnings:									
Information	:								
2	Drawings-only black and white line	Annotated_Fig_1.pdf	19257	no	1				
	drawings	_ 5_ 1	35a066f307e1f8e9c7926585a554a8a3e91e eb13						
Warnings:									
Information									
3	Drawings-only black and white line	Replacement_Fig_1.pdf	22608	no	1				
-	drawings	drawings Replacement_i ig_i.pdr =			•				
Warnings:	<u>,                                      </u>		,	'					
Information									
		Total Files Size (in bytes)	12	23903					

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

#### New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

#### National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

#### New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

PTO/SB/06 (07-06)
Approved for use through 1/31/2007. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
to a collection of information unless it displays a valid OMB control number. Under the Panerwork Reduction Act of 1995, no persons are required to resp

PATENT APPLICATION FEE DETERMINATION RECORD Substitute for Form PTO-875						А		Docket Number 60,080		ing Date 24/2007	To be Mailed
	APPLICATION AS FILED – PART I (Column 1) (Column 2)						SMALL	ENTITY 🗌	OR		HER THAN
	FOR	N	JMBER FIL	ED NU	MBER EXTRA		RATE (\$)	FEE (\$)		RATE (\$)	FEE (\$)
	BASIC FEE (37 CFR 1.16(a), (b),	or (c))	N/A		N/A	1	N/A			N/A	
	SEARCH FEE (37 CFR 1.16(k), (i), (		N/A		N/A	1	N/A		1	N/A	
	EXAMINATION FE (37 CFR 1.16(o), (p),	Ε	N/A		N/A	1	N/A			N/A	
	TAL CLAIMS CFR 1.16(i))		mir	nus 20 = *		1	X \$ =		OR	X \$ =	
IND	EPENDENT CLAIM CFR 1.16(h))	IS	m	inus 3 = *		1	X \$ =			X \$ =	
	If the specification and drawings exceed 100 sheets of paper, the application size fee due is \$250 (\$125 for small entity) for each additional 50 sheets or fraction thereof. See 35 U.S.C. 41(a)(1)(G) and 37 CFR 1.16(s).										
	MULTIPLE DEPEN	NDENT CLAIM PR	ESENT (3	7 CFR 1.16(j))							
* If	the difference in colu	umn 1 is less than	zero, ente	r "0" in column 2.			TOTAL			TOTAL	
	APP	(Column 1)	AMENE	OED — PART II (Column 2)	(Column 3)		SMALL ENTITY OR		OTHER THAN SMALL ENTITY		
AMENDMENT	08/30/2011	CLAIMS REMAINING AFTER AMENDMENT		HIGHEST NUMBER PREVIOUSLY PAID FOR	PRESENT EXTRA		RATE (\$)	ADDITIONAL FEE (\$)		RATE (\$)	ADDITIONAL FEE (\$)
ME	Total (37 CFR 1.16(i))	⁺ 26	Minus	** 26	= 0		X \$ =		OR	X \$52=	0
N	Independent (37 CFR 1.16(h))	<b>∗</b> 2	Minus	***3	= 0	1	X \$ =		OR	X \$220=	0
√ME	Application Si	ize Fee (37 CFR 1	.16(s))			1					
_	FIRST PRESEN	NTATION OF MULTIF	LE DEPEN	DENT CLAIM (37 CF	R 1.16(j))				OR		
						•	TOTAL ADD'L FEE		OR	TOTAL ADD'L FEE	0
		(Column 1)		(Column 2)	(Column 3)		•				
L		CLAIMS REMAINING AFTER AMENDMENT		HIGHEST NUMBER PREVIOUSLY PAID FOR	PRESENT EXTRA		RATE (\$)	ADDITIONAL FEE (\$)		RATE (\$)	ADDITIONAL FEE (\$)
ENT	Total (37 CFR 1.16(i))	*	Minus	**	=		X \$ =		OR	X \$ =	
NDME	Independent (37 CFR 1.16(h))	*	Minus	lesk de	=		X \$ =		OR	X \$ =	
Ш	Application Si	ize Fee (37 CFR 1	.16(s))			]					
AM	Application Size Fee (37 CFR 1.16(s))  FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM (37 CFR 1.16(j))							OR			
TOTAL TOTAL ADD'L OR ADD'L FEE FEE											
** If	the entry in column the "Highest Numbe If the "Highest Numb · "Highest Number P	er Previously Paid oer Previously Paid	For" IN TH I For" IN T	HIS SPACE is less HIS SPACE is less	than 20, enter "20's than 3, enter "3".		/LYNNE	nstrument Ex ELL JOHNSOI	N/	er:	

This collection of information is required by 37 CFR 1.16. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS

ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.



# United States Patent and Trademark Office

UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
Alexandria, Virginia 22313-1450
www.uspho.gov

**POA ACCEPTANCE LETTER** 

APPLICATION NUMBER FILING OR 371(C) DATE FIRST NAMED APPLICANT ATTY. DOCKET NO./TITLE

11/860,080 09/24/2007 Marcos C. Tzannes

5550-47-CON-DIV **CONFIRMATION NO. 5967** 

62574 Jason H. Vick Sheridan Ross, PC Suite # 1200 1560 Broadway Denver, CO 80202



Date Mailed: 08/18/2011

#### NOTICE OF ACCEPTANCE OF POWER OF ATTORNEY

This is in response to the Power of Attorney filed 08/10/2011.

The Power of Attorney in this application is accepted. Correspondence in this application will be mailed to the above address as provided by 37 CFR 1.33.

/agizaw/				

Office of Data Management, Application Assistance Unit (571) 272-4000, or (571) 272-4200, or 1-888-786-0101

# IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re the Application of: Marcos C. Tzannes	Group Art Unit: 2611
Application No.: 11/860,080	Examiner: WILLIAMS, Lawrence B.
Filed: September 24, 2007	Confirmation No.: 5967
Atty. File No.: 5550-47-CON-DIV	

For: SYSTEM AND METHOD FOR DESCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM (As Amended)

Commissioner for Patents P.O. Box 1450 Alexandria, VA 22313

## THIRD PRELIMINARY AMENDMENT

Dear Sir:

Prior to the initial review of the above-identified patent application by the Examiner, and supplemental to the August 10, 2011 Preliminary Amendment, please enter the following Preliminary Amendment. Although Applicants do not believe that any fees are due based upon the filing of this Preliminary Amendment, please charge any such fees to Deposit Account 19-1970.

Please amend the above-identified patent application as follows:

Amendments to the Specification begin on page 2 of this paper.

**Amendments to the Claims** are shown in the listing of claims which begin on page 3 of this paper.

1

**Remarks** begin on page 7 of this paper.

# AMENDMENTS TO THE SPECIFICATION

Please replace the Title with:

 $\mid$  SYSTEM AND METHOD FOR <u>DESCRAMBLINGSCRAMBLING</u> THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM

2

## AMENDMENTS TO THE CLAIMS

This listing of claims will replace all prior versions, and listings, of claims in the application.

## **Listing of Claims:**

### 1-20. (Canceled)

21. (Currently Amended) In a <u>first</u> multicarrier <u>modulation</u> transceiver having a plurality of carrier signals for demodulating a bit stream, each carrier signal having a phase characteristic associated with the bit stream, a method for descrambling the phase characteristics of the carrier signals comprising:

associating each carrier signal with a value determined independently of any bit value carried by that carrier signal;

computing a phase shift for each carrier signal based on the value associated with that carrier signal; and

using the phase shift computed for each carrier signal to descramble the phase characteristics of the plurality of carrier signals, wherein multiple carrier signals are used to demodulate the same bit value, and the value associated with the carrier signal is determined using a pseudo-random number generator.

- 22. (Currently Amended) The method of claim 21, wherein the <u>first</u> transceiver is a cable transceiver.
- 23. (Currently Amended) The method of claim 21, wherein the <u>first</u> transceiver is VDSL transceiver.
- 24. (Previously Presented) The method of claim 21, wherein the bit stream is used to transport video.
- 25. (Previously Presented) The method of claim 21, wherein the bit stream is used to transport high speed internet access.

3

- 26. (Previously Presented) The method of claim 21, further comprising, in a second transceiver in communication with the first transceiver, independently deriving the values associated with each carrier using a second pseudo-random number generator in the second transceiver.
- 27. (Previously Presented) The method of claim 26, wherein the first and second transceivers use a same seed for the pseudo-random number generator.
- 28. (Previously Presented) The method of claim 26, wherein the first and second transceivers are wireless transceivers.
- 29. (Previously Presented) The method of claim 26, wherein the first and second transceivers are cable transceivers.
- 30. (Previously Presented) The method of claim 26, wherein the first and second transceivers are DSL transceivers connected using a pair of twisted wires of a telephone subscriber system.
- 31. (Previously Presented) The method of claim 30, wherein the first and second transceivers are VDSL transceivers.
- 32. (Previously Presented) The method of claim 26, wherein the bit stream is used to transport video.
- 33. (Previously Presented) The method of claim 26, wherein the bit stream is used to transport high speed internet access.
- 34. (Currently Amended) A multicarrier modulation system including a <u>first</u> transceiver having a plurality of carrier signals for demodulating a bit stream, each carrier signal having a phase characteristic associated with the bit stream, the transceiver capable of:

associating each carrier signal with a value determined independently of any bit value carried by that carrier signal;

computing a phase shift for each carrier signal based on the value associated with that carrier signal; and

using the phase shift computed for each carrier signal to descramble the phase characteristics of the plurality of carrier signals, wherein multiple carrier signals are used to demodulate the same bit value, and the value associated with the carrier signal is determined using a pseudo-random number generator.

- 35. (Currently Amended) The system of claim 34, wherein the <u>first</u> transceiver is a cable transceiver.
- 36. (Currently Amended) The system of claim 34, wherein the <u>first</u> transceiver is VDSL transceiver.
- 37. (Previously Presented) The system of claim 34, wherein the bit stream is used to transport video.
- 38. (Previously Presented) The system of claim 34, wherein the bit stream is used to transport high speed internet access.
- 39. (Previously Presented) The system of claim 34, further comprising a second transceiver in communication with the first transceiver, the second transceiver independently deriving the values associated with each carrier using a second pseudo-random number generator in the second transceiver.
- 40. (Previously Presented) The system of claim 39, wherein the first and second transceivers use a same seed for the pseudo-random number generator.
- 41. (Previously Presented) The system of claim 39, wherein the first and second transceivers are wireless transceivers.

- 42. (Previously Presented) The system of claim 39, wherein the first and second transceivers are cable transceivers.
- 43. (Previously Presented) The system of claim 39, wherein the first and second transceivers are DSL transceivers connected using a pair of twisted wires of a telephone subscriber system.
- 44. (Previously Presented) The system of claim 43, wherein the first and second transceivers are VDSL transceivers.
- 45. (Previously Presented) The system of claim 39, wherein the bit stream is used to transport video.
- 46. (Previously Presented) The system of claim 39, wherein the bit stream is used to transport high speed internet access.

## **REMARKS/ARGUMENTS**

Applicant requests examination on the merits.

Applicant believes that the pending claims are in condition for allowance and such disposition is respectfully requested. In the event that a telephone conversation would further prosecution and/or expedite allowance, the Examiner is invited to contact the undersigned.

The Commissioner is hereby authorized to charge to Deposit Account No. 19-1970 any fees under 37 C.F.R. §§ 1.16 and 1.17 that may be required by this paper and to credit any overpayment to that Account. If any extension of time is required in connection with the filing of this paper and has not been separately requested, such extension is hereby Petitioned.

Respectfully submitted,

SHERIDAN ROSS P.C.

Bv

Jason H. Vick

Registration No. 45,285 1560 Broadway, Suite 1200

Denver, Colorado 80202-5141

(303) 863-9700

Electronic Acknowledgement Receipt					
EFS ID:	10713879				
Application Number:	11860080				
International Application Number:					
Confirmation Number:	5967				
Title of Invention:	SYSTEM AND METHOD FOR SCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM				
First Named Inventor/Applicant Name:	Marcos C. Tzannes				
Customer Number:	62574				
Filer:	Jason Vick/Joanne Vos				
Filer Authorized By:	Jason Vick				
Attorney Docket Number:	5550-47-CON-DIV				
Receipt Date:	11-AUG-2011				
Filing Date:	24-SEP-2007				
Time Stamp:	12:30:08				
Application Type:	Utility under 35 USC 111(a)				

# Payment information:

Submitted with Payment	no		
File Listing:			
_	•	 	_

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1		AMEND PRELIM 03.pdf	408764	ves	7
·		7.17/E/10_1 (16E)17/_03.pdi	27bd65c9f156cca5a915ad016b91f259bbe 4f51a	′	,

	Multipart Description/PDF files in .zip description					
	Document Description	Start	End			
	Preliminary Amendment	1	1			
	Specification	2	2			
	Claims	3	6			
	Applicant Arguments/Remarks Made in an Amendment	7	7			
Warnings		•	1			

#### Warnings:

#### Information:

Total Files Size (in bytes)	408764
-----------------------------	--------

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

#### New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

### National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

### New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

PTO/SB/06 (07-06)
Approved for use through 1/31/2007. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
to a collection of information unless it displays a valid OMB control number. Under the Panerwork Reduction Act of 1995, no persons are required to response

PATENT APPLICATION FEE DETERMINATION RECORD Substitute for Form PTO-875					Α	Application or Docket Number 11/860,080			ing Date 24/2007	To be Mailed	
	APPLICATION AS FILED – PART I (Column 1) (Column 2)						SMALL	ENTITY 🗌	OR		HER THAN
	FOR	N	JMBER FIL	_ED NU	MBER EXTRA		RATE (\$)	FEE (\$)		RATE (\$)	FEE (\$)
	BASIC FEE (37 CFR 1.16(a), (b),	or (c))	N/A		N/A	1	N/A			N/A	
	SEARCH FEE (37 CFR 1.16(k), (i), (		N/A		N/A	1	N/A		1	N/A	
	EXAMINATION FE (37 CFR 1.16(o), (p),	Ε	N/A		N/A	1	N/A			N/A	
	TAL CLAIMS CFR 1.16(i))		mir	nus 20 = *		1	X \$ =		OR	X \$ =	
IND	EPENDENT CLAIM	IS	m	inus 3 = *		1	X \$ =		1	X \$ =	
(37 CFR 1.16(h))  If the specification and drawings exceed 100 sheets of paper, the application size fee due is \$250 (\$125 for small entity) for each additional 50 sheets or fraction thereof. See 35 U.S.C. 41(a)(1)(G) and 37 CFR 1.16(s).											
	MULTIPLE DEPEN	NDENT CLAIM PR	ESENT (3	7 CFR 1.16(j))							
* If	the difference in col	umn 1 is less than	zero, ente	r "0" in column 2.			TOTAL			TOTAL	
	APPLICATION AS AMENDED - PART II  (Column 1) (Column 2) (Column 3)			SMAL	L ENTITY	OR		ER THAN ALL ENTITY			
AMENDMENT	08/11/2011	CLAIMS REMAINING AFTER AMENDMENT		HIGHEST NUMBER PREVIOUSLY PAID FOR	PRESENT EXTRA		RATE (\$)	ADDITIONAL FEE (\$)		RATE (\$)	ADDITIONAL FEE (\$)
OME	Total (37 CFR 1.16(i))	* 26	Minus	·· 20	= 6		X \$ =		OR	X \$52=	312
Ϊ	Independent (37 CFR 1.16(h))	* 1	Minus	***3	= 0	1	X \$ =		OR	X \$220=	0
AMI	Application S	ize Fee (37 CFR 1	.16(s))								
	FIRST PRESEN	NTATION OF MULTIF	LE DEPEN	DENT CLAIM (37 CF)	R 1.16(j))				OR		
						• '	TOTAL ADD'L FEE		OR	TOTAL ADD'L FEE	312
		(Column 1)		(Column 2)	(Column 3)		•			•	
L		CLAIMS REMAINING AFTER AMENDMENT		HIGHEST NUMBER PREVIOUSLY PAID FOR	PRESENT EXTRA		RATE (\$)	ADDITIONAL FEE (\$)		RATE (\$)	ADDITIONAL FEE (\$)
ENT	Total (37 CFR 1.16(i))	*	Minus	**	=		X \$ =		OR	X \$ =	
NDME	Independent (37 CFR 1.16(h))	*	Minus	***	=	]	X \$ =		OR	X \$ =	
EN	Application S	ize Fee (37 CFR 1	.16(s))			ll					
AME	FIRST PRESEN	NTATION OF MULTIF	LE DEPEN	DENT CLAIM (37 CF	R 1.16(j))				OR		
							TOTAL ADD'L FEE		OR	TOTAL ADD'L FEE	
** If	the entry in column the "Highest Numb If the "Highest Numb · "Highest Number F	er Previously Paid oer Previously Paid	For" IN TH I For" IN T	HIS SPACE is less HIS SPACE is less	than 20, enter "20's than 3, enter "3".		/SONY	nstrument Ex A HILLIARD/		er:	

This collection of information is required by 37 CFR 1.16. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS

ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

PTO/SB/06 (07-06)
Approved for use through 1/31/2007. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

PATENT APPLICATION FEE DETERMINATION RECORD  Substitute for Form PTO-875						_	pplication or	Docket Number 60,080	Fil	ing Date 24/2007	To be Mailed
	AF	APPLICATION AS FILED – PART I (Column 1) (Column 2)			SMALL ENTITY			OR		HER THAN ALL ENTITY	
	FOR		NUMBER FIL	.ED NUI	MBER EXTRA	П	RATE (\$)	FEE (\$)		RATE (\$)	FEE (\$)
	BASIC FEE (37 CFR 1.16(a), (b),	or (c))	N/A		N/A	11	N/A			N/A	
	SEARCH FEE (37 CFR 1.16(k), (i), (ii)		N/A		N/A	11	N/A			N/A	
	EXAMINATION FE (37 CFR 1.16(o), (p),		N/A		N/A	] [	N/A			N/A	
	ΓAL CLAIMS CFR 1.16(i))		mir	ius 20 = *		] [	X \$ =		OR	X \$ =	
	EPENDENT CLAIM CFR 1.16(h))	IS	m	inus 3 = *		Ш	X \$ =			X \$ =	
	APPLICATION SIZE (37 CFR 1.16(s))	FEE is	sheets of pap s \$250 (\$125 additional 50	ation and drawing er, the application for small entity) sheets or fraction a)(1)(G) and 37	on size fee due for each n thereof. See						
	MULTIPLE DEPEN	IDENT CLAIN	M PRESENT (3	7 CFR 1.16(j))							
* If 1	he difference in colu	umn 1 is less	than zero, ente	r "0" in column 2.			TOTAL			TOTAL	
	APPLICATION AS AMENDED - PART II  (Column 1) (Column 2) (Column 3)			SMAL	L ENTITY	OR		ER THAN ALL ENTITY			
AMENDMENT	08/11/2011	CLAIMS REMAININ AFTER AMENDME		HIGHEST NUMBER PREVIOUSLY PAID FOR	PRESENT EXTRA		RATE (\$)	ADDITIONAL FEE (\$)		RATE (\$)	ADDITIONAL FEE (\$)
ME	Total (37 CFR 1.16(i))	* 26	Minus	** 26	= 0	П	X \$ =		OR	X \$52=	0
EN	Independent (37 CFR 1.16(h))	* 2	Minus	***3	= 0	П	X \$ =		OR	X \$220=	0
AM	Application Si	ize Fee (37 C	FR 1.16(s))			П					
	FIRST PRESEN	NTATION OF M	ULTIPLE DEPEN	DENT CLAIM (37 CF	R 1.16(j))	Ш			OR		
							TOTAL ADD'L FEE		OR	TOTAL ADD'L FEE	0
		(Column	•	(Column 2)	(Column 3)		•				
L		CLAIMS REMAININ AFTER AMENDME	NG	HIGHEST NUMBER PREVIOUSLY PAID FOR	PRESENT EXTRA		RATE (\$)	ADDITIONAL FEE (\$)		RATE (\$)	ADDITIONAL FEE (\$)
ENT	Total (37 CFR 1.16(i))	*	Minus	**	=	П	X \$ =		OR	X \$ =	
NDME	Independent (37 CFR 1.16(h))	*	Minus	***	=	] [	X \$ =		OR	X \$ =	
1EN	Application Si	ize Fee (37 C	FR 1.16(s))			П					
AME	FIRST PRESEN	NTATION OF M	ULTIPLE DEPEN	DENT CLAIM (37 CFI	R 1.16(j))	Ш			OR		
							TOTAL ADD'L FEE		OR	TOTAL ADD'L FEE	
** If	the entry in column the "Highest Numbe f the "Highest Numb "Highest Number P	er Previously per Previously	Paid For" IN Th Paid For" IN T	HIS SPACE is less HIS SPACE is less	than 20, enter "20" s than 3, enter "3".		/MOLIK			er:	

This collection of information is required by 37 CFR 1.16. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS

ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

## POWER OF ATTORNEY TO PROSECUTE APPLICATIONS BEFORE THE USPTO

					11 11 al al 1 1.	amont under
l hereby rev	oke all pre 3(b).	evious powers of attorney (	given in the applic	ation identified in	the attached state	ement under
I hereby app						
✓ Practitioners associated with the Customer Number: 62574						
OR	•					
Practitio	ner(s) name	d below (if more than ten patent	practitioners are to be	named, then a custor	ner number must be u	isea):
	Name		Registration Number	Nai	me	Registration Number
			(A)			
			<u> </u>			
-			2.3			
\ <del></del>						
any and all pa attached to th	itent applicat is form in ac	to represent the undersigned bet tions assigned <u>only</u> to the unders cordance with 37 CFR 3.73(b).	signed according to the	USPTO assignment	lecolds of assignment	( dodd)) site
Please chang	e the corres	pondence address for the applica	ation identified in the a	ttached statement und	der 37 CFR 3.73(b) to:	1
						-
✓ The	address as	sociated with Customer Number:	:   6	2574		•
OR						
Firm o	or dual Name		•			
Address	Juai Ivairie					
			State		Zip	
City			Olalo			
Country						
Telephone				Email		
L						
Assignee Na	me and Add	ress:				
AWARE, I	NC.					
40 Middle	sex Turnp	ike				
Bedford, N	WA 07130	-1423				
A copy of	this form.	together with a statement (	under 37 CFR 3.73(	b) (Form PTO/SB/	96 or equivalent) is	s required to be
the musetif	lianare ani	tion in which this form is di pointed in this form if the a e application in which this	nnointed bractition	er is authonzeu u	aut on benan of t	in doorginee;
and must	identity til		NATURE of Assignee			
	The i	ndividual whose signature and t	itle is supplied below i	s authorized to act or	behalf of the assigne	e
Signature	0	W. Jel			Date 1/8/0 Telephone 78/	9
Name		Kova C. Rissel			Telephone 79/	-687-033
Title		Vl. beverl Cours	in			
1		- 1/ 0/0-0-1			et builden en	Life which is to file /

This collection of information is required by 37 CFR 1.31, 1.32 and 1.33. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 3 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

Electronic Patent Application Fee Transmittal						
Application Number:	11:	11860080				
Filing Date:	24	-Sep-2007				
Title of Invention:	SYSTEM AND METHOD FOR SCRAMBLING THE PHASE OF THE CARRIER MULTICARRIER COMMUNICATIONS SYSTEM				F THE CARRIERS IN A	
First Named Inventor/Applicant Name:	Ma	rcos C. Tzannes				
Filer:	Jason Vick/Joanne Vos					
Attorney Docket Number:	55:	50-47-CON-DIV				
Filed as Large Entity						
Utility under 35 USC 111(a) Filing Fees						
Description		Fee Code	Quantity	Amount	Sub-Total in USD(\$)	
Basic Filing:						
Pages:						
Claims:						
Claims in excess of 20		1202	6	52	312	
Miscellaneous-Filing:						
Petition:						
Patent-Appeals-and-Interference:						
Post-Allowance-and-Post-Issuance:						
Extension-of-Time:						

Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Miscellaneous:				
	Tot	al in USD	(\$)	312

Electronic Ack	knowledgement Receipt
EFS ID:	10702498
Application Number:	11860080
International Application Number:	
Confirmation Number:	5967
Title of Invention:	SYSTEM AND METHOD FOR SCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM
First Named Inventor/Applicant Name:	Marcos C. Tzannes
Customer Number:	62574
Filer:	Jason Vick/Joanne Vos
Filer Authorized By:	Jason Vick
Attorney Docket Number:	5550-47-CON-DIV
Receipt Date:	10-AUG-2011
Filing Date:	24-SEP-2007
Time Stamp:	11:10:13
Application Type:	Utility under 35 USC 111(a)

## **Payment information:**

Submitted with Payment	yes
Payment Type	Deposit Account
Payment was successfully received in RAM	\$312
RAM confirmation Number	7424
Deposit Account	191970
Authorized User	

The Director of the USPTO is hereby authorized to charge indicated fees and credit any overpayment as follows:

Charge any Additional Fees required under 37 C.F.R. Section 1.16 (National application filing, search, and examination fees)

Charge any Additional Fees required under 37 C.F.R. Section 1.17 (Patent application and reexamination processing fees)

Charge any Additional Fees required under 37 C.F.R. Section 1.19 (Document supply fees)

Charge any Additional Fees required under 37 C.F.R. Section 1.21 (Miscellaneous fees and charges)

## File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1		AMEND_PRELIM_02.pdf	673110	yes	8
'		c20d82d0fe035aa8b6b02920c9208e5cbad 7e213	yes	O	
	Multip	art Description/PDF files in	zip description		
	Document De	scription	Start	E	nd
	Preliminary Am	endment	1		1
	Specificat	ion	2	2	
	Claims	3	5		
	Applicant Arguments/Remarks	6	6		
	Assignee showing of owners	hip per 37 CFR 3.73(b).	7	7	
	Power of Att	corney	8	8	
Warnings:					
Information:					
2	Fee Worksheet (SB06)	fee-info.pdf	30382	no	2
	. cc wondinect (5500)	100 11101901	d95bb122cf897eb8200bfd53a228599ea4b d180a		
Warnings:					
Information:					
		Total Files Size (in bytes)	70	03492	

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

#### New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

#### National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

#### New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re the Application of: Marcos C. Tzannes	Group Art Unit: 2611
Application No.: 11/860,080	Examiner: WILLIAMS, Lawrence B.
Filed: September 24, 2007	Confirmation No.: 5967
Atty. File No.: 5550-47-CON-DIV	

For: SYSTEM AND METHOD FOR SCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM

Commissioner for Patents P.O. Box 1450 Alexandria, VA 22313

## PRELIMINARY AMENDMENT

Dear Sir:

Prior to the initial review of the above-identified patent application by the Examiner, please enter the following Preliminary Amendment. Although Applicants do not believe that any fees are due based upon the filing of this Preliminary Amendment, please charge any such fees to Deposit Account 19-1970.

Please amend the above-identified patent application as follows:

Amendments to the Specification begin on page 2 of this paper.

**Amendments to the Claims** are shown in the listing of claims which begin on page 3 of this paper.

1

Remarks begin on page 6 of this paper.

Attorney Docket No.: 5550-47-CON-DIV

## AMENDMENTS TO THE SPECIFICATION

Please amend the first paragraph of the application beneath the heading "RELATED APPLICATION":

## Related Application

This application is a divisional of U.S. Application No. 11/211,535, filed August 26, 2005, now U.S. Patent No. 7,292,627, which is a continuation of U.S. Application No. 09/710,310, filed November 9, 2000, now U.S. Patent No. 6,961,369, which claims the benefit of the filing date of copending U.S. Provisional Application, Serial No. 60/164,134, filed November 9, 1999, entitled "A Method For Randomizing The Phase Of The Carriers In A Multicarrier Communications System To Reduce The Peak To Average Power Ratio Of The Transmitted Signal," each of which are the entirety of which provisional application is incorporated by reference herein by reference in their entirety.

## AMENDMENTS TO THE CLAIMS

This listing of claims will replace all prior versions, and listings, of claims in the application.

## **Listing of Claims:**

#### 1-20. (Canceled)

- 21. (New) In a multicarrier modulation transceiver having a plurality of carrier signals for demodulating a bit stream, each carrier signal having a phase characteristic associated with the bit stream, a method for descrambling the phase characteristics of the carrier signals comprising: associating each carrier signal with a value determined independently of any bit value carried by that carrier signal; computing a phase shift for each carrier signal based on the value associated with that carrier signal; and using the phase shift computed for each carrier signal to descramble the phase characteristics of the plurality of carrier signals, wherein multiple carrier signals are used to demodulate the same bit value, and the value associated with the carrier signal is determined using a pseudo-random number generator.
  - 22. (New) The method of claim 21, wherein the transceiver is a cable transceiver.
  - 23. (New) The method of claim 21, wherein the transceiver is VDSL transceiver.
  - 24. (New) The method of claim 21, wherein the bit stream is used to transport video.
- 25. (New) The method of claim 21, wherein the bit stream is used to transport high speed internet access.
- 26. (New) The method of claim 21, further comprising, in a second transceiver in communication with the first transceiver, independently deriving the values associated with each carrier using a second pseudo-random number generator in the second transceiver.
- 27. (New) The method of claim 26, wherein the first and second transceivers use a same seed for the pseudo-random number generator.

3

Attorney Docket No.: 5550-47-CON-DIV

- 28. (New) The method of claim 26, wherein the first and second transceivers are wireless transceivers.
- 29. (New) The method of claim 26, wherein the first and second transceivers are cable transceivers.
- 30. (New) The method of claim 26, wherein the first and second transceivers are DSL transceivers connected using a pair of twisted wires of a telephone subscriber system.
- 31. (New) The method of claim 30, wherein the first and second transceivers are VDSL transceivers.
  - 32. (New) The method of claim 26, wherein the bit stream is used to transport video.
- 33. (New) The method of claim 26, wherein the bit stream is used to transport high speed internet access.
- 34. (New) A multicarrier modulation system including a transceiver having a plurality of carrier signals for demodulating a bit stream, each carrier signal having a phase characteristic associated with the bit stream, the transceiver capable of: associating each carrier signal with a value determined independently of any bit value carried by that carrier signal; computing a phase shift for each carrier signal based on the value associated with that carrier signal; and using the phase shift computed for each carrier signal to descramble the phase characteristics of the plurality of carrier signals, wherein multiple carrier signals are used to demodulate the same bit value, and the value associated with the carrier signal is determined using a pseudo-random number generator.
  - 35. (New) The system of claim 34, wherein the transceiver is a cable transceiver.
  - 36. (New) The system of claim 34, wherein the transceiver is VDSL transceiver.
    - Attorney Docket No.: 5550-47-CON-DIV

- 37. (New) The system of claim 34, wherein the bit stream is used to transport video.
- 38. (New) The system of claim 34, wherein the bit stream is used to transport high speed internet access.
- 39. (New) The system of claim 34, further comprising a second transceiver in communication with the first transceiver, the second transceiver independently deriving the values associated with each carrier using a second pseudo-random number generator in the second transceiver.
- 40. (New) The system of claim 39, wherein the first and second transceivers use a same seed for the pseudo-random number generator.
- 41. (New) The system of claim 39, wherein the first and second transceivers are wireless transceivers.
- 42. (New) The system of claim 39, wherein the first and second transceivers are cable transceivers.
- 43. (New) The system of claim 39, wherein the first and second transceivers are DSL transceivers connected using a pair of twisted wires of a telephone subscriber system.
- 44. (New) The system of claim 43, wherein the first and second transceivers are VDSL transceivers.
  - 45. (New) The system of claim 39, wherein the bit stream is used to transport video.
- 46. (New) The system of claim 39, wherein the bit stream is used to transport high speed internet access.

## **REMARKS/ARGUMENTS**

By this amendment, claim 20 has been canceled without prejudice or disclaimer in favor of the newly presented claims.

Applicant requests examination on the merits.

Applicant believes that the pending claims are in condition for allowance and such disposition is respectfully requested. In the event that a telephone conversation would further prosecution and/or expedite allowance, the Examiner is invited to contact the undersigned.

The Commissioner is hereby authorized to charge to Deposit Account No. 19-1970 any fees under 37 C.F.R. §§ 1.16 and 1.17 that may be required by this paper and to credit any overpayment to that Account. If any extension of time is required in connection with the filing of this paper and has not been separately requested, such extension is hereby Petitioned.

Respectfully submitted,

SHERIDAN ROSS P.C.

Jason H. Vick

Registration No. 45,285

1560 Broadway, Suite 1200

Denver, Colorado 80202-5141

(303) 863-9700

6

Date: 16 / 1/

Attorney Docket No.: 5550-47-CON-DIV

Approved for use through 07/31/2012. 0MB 0651-0031

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

STATEMEN	T UNDER 37 CFR 3.73(b)
Applicant/Patent Owner: AWARE, INC.	
Application No./Patent No.: 11/860,080	Filed/Issue Date: September 24, 2007
Titled: SYSTEM AND METHOD FOR SCRAMBLING COMMUNICATIONS SYSTEM	G THE PHASE OF THE CARRIERS IN A MULTICARRIER
AWARE, INC. , a	Corporation
(Name of Assignee)	(Type of Assignee, e.g., corporation, partnership, university, government agency, etc.
states that it is:	
1. $\boxed{X}$ the assignee of the entire right, title, and interes	t in;
2. an assignee of less than the entire right, title, ar (The extent (by percentage) of its ownership int	nd interest in erest is %); or
3. the assignee of an undivided interest in the enti	rety of (a complete assignment from one of the joint inventors was made)
the patent application/patent identified above, by virtue of e	
the United States Patent and Trademark Office copy therefore is attached.  OR	nt application/patent identified above. The assignment was recorded in at Reel 010877 , Frame 0307 , or for which a
	nt application/patent identified above, to the current assignee as follows:
1. From:	To:
	Inited States Patent and Trademark Office at
Reel, Fra	me, or for which a copy thereof is attached.
2. From:	To:
The document was recorded in the U	Inited States Patent and Trademark Office at
Reel, Fra	me, or for which a copy thereof is attached.
3. From:	То:
No. of the control of	United States Patent and Trademark Office at
Reel, Fra	me, or for which a copy thereof is attached.
Additional documents in the chain of title are	isted on a supplemental sheet(s).
or concurrently is being, submitted for recordation	
accordance with 37 CFR Part 3, to record the assign	riginal assignment document(s)) must be submitted to Assignment Division in gnment in the records of the USPTO. <u>See</u> MPEP 302.08]
The undersigned (whose title is supplied below) is authori	zed to act on behalf of the assignee.
Signature	
Jason H. Vick	Attorney for Assignee  Title
Printed or Typed Name	THE

This collection of information is required by 37 CFR 3.73(b). The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

P	ATENT APPL	ICATION FE Substitute fo			N RECORD	Application or Docket Number 11/860,080					To be Mailed
	Al	PPLICATION	AS FILE		(Column 2)		SMALL	ENTITY 🗌	OR		HER THAN ALL ENTITY
	FOR	N	UMBER FIL	_ED NU	JMBER EXTRA		RATE (\$)	FEE (\$)		RATE (\$)	FEE (\$)
	BASIC FEE (37 CFR 1.16(a), (b),	or (c))	N/A		N/A	1	N/A		1	N/A	
	SEARCH FEE (37 CFR 1.16(k), (i), (i		N/A		N/A	1	N/A		1	N/A	
	EXAMINATION FE (37 CFR 1.16(o), (p),	E	N/A		N/A	1	N/A			N/A	
	ΓAL CLAIMS CFR 1.16(i))		mir	nus 20 = *		1	X \$ =		OR	X \$ =	
IND	EPENDENT CLAIM CFR 1.16(h))	S	m	inus 3 = *		1	X \$ =		1	X \$ =	
	APPLICATION SIZE (37 CFR 1.16(s))	shee is \$2 addi	ts of pap 50 (\$125 tional 50 :	ation and drawir er, the application for small entity sheets or fraction a)(1)(G) and 37	) for each on thereof. See						
	MULTIPLE DEPEN	IDENT CLAIM PF	ESENT (3	7 CFR 1.16(j))		]					
* If	the difference in colu	ımn 1 is less than	zero, ente	r "0" in column 2.			TOTAL			TOTAL	
	APP	LICATION AS (Column 1)	AMENE	(Column 2)	(Column 3)		SMAL	L ENTITY	OR		ER THAN ALL ENTITY
AMENDMENT	09/24/2007	CLAIMS REMAINING AFTER AMENDMENT		HIGHEST NUMBER PREVIOUSLY PAID FOR	PRESENT EXTRA		RATE (\$)	ADDITIONAL FEE (\$)		RATE (\$)	ADDITIONAL FEE (\$)
ME	Total (37 CFR 1.16(i))	* 1	Minus	** 20	= 0		X \$ =		OR	X \$50=	0
IZ.	Independent (37 CFR 1.16(h))	* 1	Minus	***3	= 0	]	X \$ =		OR	X \$200=	0
√ME	Application Si	ze Fee (37 CFR 1	.16(s))			]					
_	FIRST PRESEN	TATION OF MULTI	PLE DEPEN	DENT CLAIM (37 CF	FR 1.16(j))				OR		
							TOTAL ADD'L FEE		OR	TOTAL ADD'L FEE	0
		(Column 1)		(Column 2)	(Column 3)						
	08/10/2011	CLAIMS REMAINING AFTER AMENDMENT		HIGHEST NUMBER PREVIOUSLY PAID FOR	PRESENT EXTRA		RATE (\$)	ADDITIONAL FEE (\$)		RATE (\$)	ADDITIONAL FEE (\$)
ENT	Total (37 CFR 1.16(i))	∗ 26	Minus	<b>** 20</b>	= 6	1	X \$ =		OR	X \$52 =	312
DM	Independent (37 CFR 1.16(h))	· 2	Minus	*** 3	= 0	1	X \$ =		OR	X \$220 =	0
EN	Application Si	ze Fee (37 CFR 1	.16(s))			]					
AMENDME	FIRST PRESEN	TATION OF MULTI	PLE DEPEN	DENT CLAIM (37 CF	FR 1.16(j))				OR		
							TOTAL ADD'L FEE		OR	TOTAL ADD'L FEE	312
** If	the entry in column the "Highest Numbe f the "Highest Numb "Highest Number P	er Previously Paid er Previously Pai	For" IN TH d For" IN T	HIS SPACE is less HIS SPACE is les	s than 20, enter "20 ss than 3, enter "3".		/SONY	nstrument Ex A HILLIARD/		er:	

This collection of information is required by 37 CFR 1.16. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

Sub	Substitute for form 1449A/PTO			Comp	olete if Known
				Application Number	11/860,080
			CLOSURE	Filing Date	September 24, 2007
S <sup>-</sup>	TATEME	NT BY AP	PLICANT	First Named Inventor	Marcos C, Tzannes
				Art Unit	2611
				Examiner Name	Not Yet Assigned
Sheet	1	of	2	Attorney Docket Number	5550-47-CON-DIV

			U.S. PATENT DO	CUMENTS	
Examiner Initials*	Cite No.1	Document Number Number-kind Code <sup>2 (If known)</sup>	Publication Date MM-DD-YYYY	Name of Patentee of Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear
	1	5381449	01/10/95	Jasper et al.	
	2	5694395	12/02/97	Myer et al.	
	3	5870016	02/09/99	Shrestha	
	4	5991262	11/23/99	Laird et al.	
	5	6128350	10/03/00	Shastri et al.	
	6	6366555	04/02/02	Gatherer et al.	
	7	6757299	06/29/04	Verma	
	8	7610028	10/27/09	Cimini, Jr. et al.	

FOREIGN PATENT DOCUMENTS								
Examiner Initials*	Cite No. <sup>1</sup>	Foreign Patent Document Country Code <sup>3</sup> ; Number <sup>4</sup> ; Kind Code <sup>5</sup> ( <i>if known</i> )		Name of Patentee or Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear	Τ <sup>6</sup>		

		OTHER ART (Including Author, Title, Date, Pertinent Pages, etc.)
Examiner Initials*	Cite No. <sup>1</sup>	
	9	HENKEL, "Analog Codes for Peak-to-Average Ratio Reduction," in Proceedings 3rd ITG Conf. Source and Channel Coding, Munich, Germany, Jan. 2000, 5 pages
,	10	NARAHASHI et al., "New phasing scheme of N multiple carriers for reducing peak-to-average power ratio," Electronics Letters, Aug. 1994, Vol. 30(17), pp. 1382-83
	11	TELLADO et al., "Revisiting DMT's Peak-to-Average Ratio," Antwerp, Apr. 20-24, 1998, pp. 1-14
	12	TELLAMBURA, "A coding technique for reducing peak-to-average power ratio in OFDM," In the Proceedings of Global Telecommunications Conference, IEEE, Nov. 1998, pp. 2783-2787
	13	TELLAMBURA, "Phase optimisation criterion for reducing peak-to-average power ratio in OFDM," Electronics Letters, Jan. 1998, Vol. 34(2), pp. 169-170

	<b>D</b> .	
Examiner	Date	
Signature	Considered	

\*EXAMINER: Initial if reference is considered, whether or not citation is in conformance and not considered. Include copy of this form with next communication to applicant.

Substitute for form 1449A/PTO		Complete if Known			
				Application Number	11/860,080
INFORMATION DISCLOSURE STATEMENT BY APPLICANT				Filing Date	September 24, 2007
			PLICANT	First Named Inventor	Marcos C. Tzannes
				Art Unit	2611
				Examiner Name	Not Yet Assigned
Sheet	2	of	2	Attorney Docket Number	5550-47-CON-DIV

14	VAN EETVELT et al., "Peak to average power reduction for OFDM schemes by selective scrambling," Electronics Letters, Oct. 1996, Vol. 32(21), pp. 1963-64
 15	Written Opinion for International (PCT) Patent Application No. PCT/US00/30958, mailed Dec. 18, 2001 (Attorney Ref. No. 5550-47-PCT)
16	Official Action for U.S. Patent Application No. 09/710,310, mailed May 4, 2004 (Attorney Ref. No. 5550-47)
 17	Notice of Allowance for U.S. Patent Application No. 09/710,310, mailed Jul 5, 2005 (Attorney Ref. No. 5550-47)
18	Notice of Allowance for U.S. Patent Application No. 11/211,535, mailed Sep. 6, 2007 (Attorney Ref. No. 5550-47-CON)

Examiner	Date	
Signature	 Considered	

\*EXAMINER: Initial if reference is considered, whether or not citation is in conformance and not considered. Include copy of this form with next communication to applicant.

### PATENT COOPERATION TREATY

From the INTERNATIONAL PRELIMINARY EXAMINING AUTHORITY PCT VICK, Jason H. Nixon Peabody LLP 8180 Greensboro Drive, Suite 800 WRITTEN OPINION McLean, Virginia 22102 **ETATS-UNIS D'AMERIQUE** (PCT Rule 66) Date of mailing (day/month/year) 18.12.2001 **REPLY DUE** within 1 month(s) and 15 days Applicant's or agent's file reference from the above date of mailing 081513-49 International application No. International filing date (day/month/year) Priority date (day/month/year) PCT/US00/30958 09/11/2000 09/11/1999 International Patent Classification (IPC) or both national classification and IPC H04L27/26 Applicant AWARE, INC. This written opinion is the first drawn up by this International Preliminary Examining Authority. 2. This opinion contains indications relating to the following items: Basis of the opinion ☐ Priority П Non-establishment of opinion with regard to novelty, inventive step and industrial applicability ☐ Lack of unity of invention Reasoned statement under Rule 66.2(a)(ii) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement V١ ☐ Certain document cited ☐ Certain defects in the international application VII VIII ☐ Certain observations on the international application 3. The applicant is hereby invited to reply to this opinion. When? See the time limit indicated above. The applicant may, before the expiration of that time limit, request this Authority to grant an extension, see Rule 66.2(d). How? By submitting a written reply, accompanied, where appropriate, by amendments, according to Rule 66.3.

examination report must be established according to Rule 69.2 is: 09/03/2002.

For an additional opportunity to submit amendments, see Rule 66.4.

For an informal communication with the examiner, see Rule 66.6.

For the form and the language of the amendments, see Rules 66.8 and 66.9.

For the examiner's obligation to consider amendments and/or arguments, see Rule 66.4 bis.

Authorized officer / Examiner

Barrio Baranano, A

Telephone No. +49 89 2399 8621

If no reply is filed, the international preliminary examination report will be established on the basis of this opinion.

Name and mailing address of the international preliminary examining authority:

Also:

European Patent Office
D-80298 Munich
Pajatakis, E
Formalities officer (incl. extension of time limits)

Tel. +49 89 2399 - 0 Tx: 523656 epmu d

The final date by which the international preliminary

Fax: +49 89 2399 - 4465

Form PCT/IPEA/408 (cover sheet) (January 1994)



#### Re Item III

Non-establishment of opinion with regard to novelty, inventive step and industrial applicability

- 1. According to the description (page 3, lines 10-16, page 4, lines 4-10) the phase characteristics of the modulated carrier signals are scrambled by combining the phase shift computed for each carrier signal with the phase characteristic of that carrier signal. As this essential feature is missing from Claims 20-36, their scope comprises embodiments in which phase scrambling is carried out without the above feature which are not supported by the description, see also Guidelines III, 4.3.
- 2. To meet the requirement of conciseness, Article 6, a single independent claim in each category should be filed for the first invention.

### Re Item V

Reasoned statement under Rule 66.2(a)(ii) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

- 1. The subject-matter of Claim 1 is not new, Article 33(2)
  - **D1** = BAUML R W ET AL: 'REDUCING THE PEAK-TO-AVERAGE POWER RATIO OF MULTICARRIER MODULATIONBY SELECTED MAPPING' ELECTRONICS LETTERS, GB, IEE STEVENAGE, vol. 32, no. 22, 24 October 1996 (1996-10-24), pages 2056-2057, **XP000643915** ISSN: 0013-5194 discloses a method for scrambling the phase characteristics of the carrier signals in a multicarrier modulation system. The method comprises associating each carrier signal **V(μ)** with a value  $\phi_{\mu}$  determined independently of any input bit value (page 2056, right col., last but one paragraph). A phase shift  $e^{i\phi_{\mu}}$  is computed for each carrier signal and combined with the phase characteristic of that carrier signal so as to substantially scramble the phase characteristics of the plurality of the carrier signals (page 2056, right col., equation 4).
- 2. All features of Claim 1 are also known from **D2 = EP-A-0 719 004** (col. 14, line 39 col. 15, fig. 9).

- 3. The above finding also applies to Claim 37 which corresponds to Claim 1.
- 4. The additional features of the dependent claims do not add anything new or inventive to the above-mentioned independent claims because these features are either known from the above prior art (reduced peak-to-average power ratio, varying value with each carrier, pseudo-random pattern) or common measures (using symbol and frame counts).

I. Ba	eie	∩f ·	the	n	in	ion

1.			ments of the international application (Replacement sheets which have been furnished to response to an invitation under Article 14 are referred to in this opinion as "originally filed",
	Des	scription, pages:	
	1-1	7	as originally filed
	Cla	ims, No.:	
	1-3	9	as originally filed
	Dra	wings, sheets:	
	1/2-	-2/2	as originally filed
2.		•	guage, all the elements marked above were available or furnished to this Authority in the international application was filed, unless otherwise indicated under this item.
	The	ese elements were	available or furnished to this Authority in the following language: , which is:
		the language of a	translation furnished for the purposes of the international search (under Rule 23.1(b)).
		the language of po	ublication of the international application (under Rule 48.3(b)).
		the language of a 55.2 and/or 55.3).	translation furnished for the purposes of international preliminary examination (under Rule
3.			cleotide and/or amino acid sequence disclosed in the international application, the ry examination was carried out on the basis of the sequence listing:
		contained in the ir	nternational application in written form.
		filed together with	the international application in computer readable form.
		furnished subsequ	uently to this Authority in written form.
		furnished subsequ	uently to this Authority in computer readable form.
			at the subsequently furnished written sequence listing does not go beyond the disclosure in application as filed has been furnished.
		The statement that listing has been fu	at the information recorded in computer readable form is identical to the written sequence urnished.
4.	The	amendments have	e resulted in the cancellation of:
		the description,	pages:

Form PCT/IPEA/408 (Boxes I-VIII, Sheet 1) (July 1998)

Nos.:

☐ the claims,

W	RIT	TEN OPINION			International application No.	PCT/US00/30958
		the drawings,	sheets:			
5.				s if (some of) the ar sure as filed (Rule	mendments had not been made, 70.2(c)):	since they have been
		(Any replacement report.)	sheet containing	ı such amendments	must be referred to under item	1 and annexed to this
6.	Add	ditional observation	s, if necessary:			
III.	No	n-establishment o	f opinion with re	egard to novelty, ir	nventive step and industrial ap	plicability
1.					e novel, to involve an inventive s d will not be examined in respect	
		the entire internat	ional application,			
	$\boxtimes$	claims Nos. 20-36	5,			
be	cau	se:				
				r the said claims No nary examination (s	os. relate to the following subject pecify):	t matter which does
				(indicate particular e formed (specify):	relements below) or said claims	Nos. are so unclear
	$\boxtimes$	the claims, or said opinion could be f		36 are so inadequa	tely supported by the description	that no meaningful
		no international se	earch report has I	oeen established fo	r the said claims Nos	
2.					nucleotide and/or amino acid sed Iministrative Instructions:	quence listing to
		the written form h	as not been furnis	shed or does not co	emply with the standard.	
		the computer read	dable form has no	ot been furnished or	does not comply with the standa	ard.
۷.				(a)(ii) with regard g such statement	to novelty, inventive step or in	dustrial applicability;
1.		tement velty (N)	Claims	1-3,6,19,37,38		

Form PCT/IPEA/408 (Boxes I-VIII, Sheet 2) (July 1998)

Inventive step (IS) Claims 1-19,37,38

Industrial applicability (IA) Claims

2. Citations and explanations see separate sheet

Electronic Acknowledgement Receipt				
EFS ID:	10200509			
Application Number:	11860080			
International Application Number:				
Confirmation Number:	5967			
Title of Invention:	SYSTEM AND METHOD FOR SCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM			
First Named Inventor/Applicant Name:	Marcos C. Tzannes			
Customer Number:	62574			
Filer:	Jason Vick/Amy Duarte			
Filer Authorized By:	Jason Vick			
Attorney Docket Number:	5550-47-CON-DIV			
Receipt Date:	31-MAY-2011			
Filing Date:	24-SEP-2007			
Time Stamp:	18:31:47			
Application Type:	Utility under 35 USC 111(a)			

# Payment information:

Submitted with Payment	no
File Listing:	

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1		IDS 07.pdf	449175	ves	5
'		103_07.pai	f2b27b78a342ae19ccbf03cb31ae4e658ea4 2058	yes	ı

	Multipart Description/PDF files in .zip description					
	Document	t Description	Start	Eı	nd	
	Transm	ittal Letter	1	;	3	
	Information Disclosure S	tatement (IDS) Filed (SB/08)	4	5		
Warnings:						
Information:						
2	NPL Documents	HENKEL_Analog_Codes_for_Pe		no	5	
		Average_Ratio_Reduction.pdf	2c1b320e0b94c6d90f5c272e2987ed97d0e af570			
Warnings:						
Information:			·			
3	NPL Documents	NARAHASHI_New_phasing_sc heme_of_N_multiple_carriers.	147248	no	2	
		pdf	8c45df546b08740ad1dd0eb9b327bfe403a a268c			
Warnings:		·	·			
Information:						
4	NPL Documents	TELLADO_Revisiting_DMTs_pe	972642	no	14	
		ak-to-average_ratio.pdf	df9cb589d6b86d63ba05051c152c86e9cff5 42a1			
Warnings:						
Information:						
5	NPL Documents	TELLAMBURA_A_coding_techn ique_for_reducing_peak-to-	277399	no	5	
		average.pdf	4933268ef1c93386e1aacd07f8691a302292 9b4c			
Warnings:				I		
Information:						
6	NPL Documents	TELLAMBURA_Phase_optimisat	231957	no	2	
	THE BOCUMENTS	ak-to-average.pdf	dbae4da1faf4a5eeac61904a7b28c8b9d208 8382	110	-	
Warnings:						
Information:						
7	NPL Documents	VAN_EETVELT_Peak_to_averag	193140	no	2	
		e_power_reduction.pdf	13b49ed5b534c38620bc3af3fd93c2ac1ea4 afac		<b>-</b>	
Warnings:		·				
Information:						
8	5550-47- NPL Documents PCT_Written_Opinion		184614	no	6	
		-18.pdf	bedc3d6d7e70564f2cf26bfc6fa7930a6e0a 678d			
Warnings:		·	· I	'		
Information:						

9	NPL Documents	5550-47_OA_2004-05-04.pdf	351958	no	12
	NI E Bocamento	3330 47_67(_2004 03 04.pul	09508213fd8563650b43804c9bea1773825 80dfa	1	
Warnings:					
Information					
10	NPL Documents	5550-47_NOA_2005-07-05.pdf	292063	no	no 7
	THE BOCKING	I	25f50caab184e8ea497aa1c7adebaca49522 cd65		
Warnings:					
Information					
11	NPL Documents	5550-47-	324363	no	8
		CON_NOA_2007-09-06.pdf			
Warnings:					
Information					
		Total Files Size (in bytes)	37	75304	

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

## New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

#### National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

#### New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Dath	e Application of:		`	Group Art Unit: 2611
			)	•
	ΓZANNES, Marcos C.		)	Confirmation No.: 5967
Serial No.: 11/860,080			)	Examiner: Not Yet Assigned
Filed: So	eptember 24, 2007		) }	
Atty. Fil	le No.: 5550-47-CON-DIV		)	SUPPLEMENTAL INFORMATION DISCLOSURE
	: "System and Method for Scramb	oling the	)	STATEMENT
	f the Carriers in a Multicarrier nications System"		)	Electronically Submitted
	ssioner for Patents			
P.O. Box Alexand	x 1450 Iria, VA 22313-1450			
Dear Sir	:			
	The references cited on attached F	Form PTO-	-144	9 are being called to the attention
of the E	xaminer.			
	Copies of the cited non-patent and/	or foreign	refe	erences are enclosed herewith.
	Copies of the cited U.S. patents and	d/or patent	app	olications are enclosed herewith.
$\boxtimes$	Copies of the cited U.S. patents/pa	atent applic	catio	on publications are not enclosed in
accorda	nce with 37 C.F.R. § 1.98(a).			
	Copies of the cited references ar	e not encl	lose	ed, in accordance with 37 C.F.R.
§ 1.98(d	), because the references were	cited by o	or s	submitted to the U.S. Patent and
				filed,
	relied upon for an earlier filing da			
				of the foreign-language references
				sh abstracts and/or in the figures,
	n applicants do not necessarily vou		_	<del>=</del> '
	Examiner's attention is drawn to the	e followin	g re	lated applications:
	Serial No filed	(	- (Att	orney Ref. No.
	Serial No filed			
S	Submission of the above information			
	e under the statutes or rules to supp			•
	its analogous art, or that those skill			•
	ce of any reference without the be			· ·

drawn as to the pertinence of the references based on the order in which they are presented. Submission of this statement should not be taken as an indication that a search has been conducted, or that no better art exists.

It is respectfully requested that the cited information be expressly considered during the prosecution of this application and the references made of record therein.

## **FEES**

37 CFR 1.97(b): No fee is believed due in connection with this submission, because the information disclosure statement submitted herewith is satisfied by one of the following conditions ("X" indicates satisfaction):  Within three months of the filing date of a national application other than a continued prosecution application under 37 CFR 1.53(d), or  Within three months of the date of entry into the national stage of an international application as set forth in 37 CFR 1.491 or  Before the mailing date of a first Office Action on the merits, or			
37 CFR 1.114.  Although no fee is believed due, if any fee is deemed due in connection with this submission, please charge such fee to Deposit Account 19-1970.			
37 CFR 1.97(e): The information disclosure statement transmitted herewith is being filed after all the above conditions (37 CFR 1.97(b)), but before the mailing date of one of the following conditions:  (1) a final action under 37 C.F.R. 1.113 or  (2) a notice of allowance under 37 C.F.R. 1.311, or  (3) an action that otherwise closes prosecution in the application.  This Information Disclosure Statement is accompanied by:  A Certification (below) as specified by 37 C.F.R. 1.97(e). Although no fee is believed due, if any fee is deeme due in connection with this submission, please charge such fee to Deposit Account 19-1970.  OR  Please charge Deposit Account 19-1970 in the amount of \$180.00 for the fee set forth in 37 C.F.R. 1.17(p) for submission of an information disclosure statement. Please credit any overpayment or charge any underpayment to Deposit Account 19-1970.			
37 CFR 1.97(d): This Information Disclosure Statement is being submitted after the period specified in 37 CFR 1.97(c).  This information Disclosure Statement includes a Certification (below) as specified by 37 C.F.R. 1.97(e)  AND  Applicants hereby requests consideration of the reference(s) disclosed herein. Please charge Deposit Account 19-1970 in the amount of \$180.00 under 37 C.F.R. 1.17(p). Please credit any overpayment or charge any underpayment to Deposit Account 19-1970. Election to pay the fee should not be taken as an indication that applicant(s) cannot execute a certification.			

	Certification (37 C.F.R. 1.97(e)) (Applicable only if checked)			
	The undersigned certifies that:  Each item of information contained in this information disclosure statement was first cited in any communication from a foreign patent office in a counterpart foreign application not more than three months prior to the filing of this statement. 37 C.F.R. 1.97(e)(1).  A copy of the communication from the foreign patent office is enclosed.			
	OR			
No item of information contained in this information disclosure statement wa cited in a communication from a foreign patent office in a counterpart foreign application, and, to the knowledge of the undersigned after making reasonable inquiry, no item of information contained in this Information Disclosure Statemer was known to any individual designated in 37 C.F.R. 1.56(c) more than three mor prior to the filing of this statement. 37 C.F.R. 1.97(e)(2).				
	Respectfully submitted,			
	SHERIDAN ROSS P.C.			
Date:	By:			

Substitute for form 1449A/PTO		Complete if Known			
		TION DIO		Application Number	11/860,080
INFORMATION DISCLOSURE				Filing Date	September 24, 2007
S	STATEMENT BY APPLICANT			First Named Inventor	Marcos C. Tzannes
				Art Unit	2611
				Examiner Name	Not yet assigned
Sheet	1	of	1	Attorney Docket Number	5550-47-CON-DIV

U.S. PATENT DOCUMENTS					
Initials* No.1 Number-kind Code <sup>2 (ff known)</sup> MM-DD-YYYY Applicant of Cited Document Relevant Pa		Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear			
	1	6519292	02/11/03	Sakoda et al.	
	2	6519929	02/18/03	Ahrendt	
	3	12/783725		Tzannes (05-20-2010)	

FOREIGN PATENT DOCUMENTS						
Examiner Initials*	Cite No. <sup>1</sup>	Foreign Patent Document  Country Code <sup>3</sup> ; Number <sup>4</sup> ; Kind  Code <sup>5</sup> (if known)		Name of Patentee or Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear	T <sup>6</sup>

	OTHER ART (Including Author, Title, Date, Pertinent Pages, etc.)				
Examiner Initials*	Cite No. <sup>1</sup>				
		Notice of Allowance for U.S. Patent Application No. 12/255,713, mailed May 18, 2010 (Attorney's File No. 5550-47-CON-3)			

Examiner	Date	
Signature	Considered	

<sup>\*</sup>EXAMINER: Initial if reference is considered, whether or not citation is in conformance and not considered. Include copy of this form with next communication to applicant.

Electronic Acknowledgement Receipt				
EFS ID:	7852239			
Application Number:	11860080			
International Application Number:				
Confirmation Number:	5967			
Title of Invention:	SYSTEM AND METHOD FOR SCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM			
First Named Inventor/Applicant Name:	Marcos C. Tzannes			
Customer Number:	62574			
Filer:	Jason Vick/Debra Kesner			
Filer Authorized By:	Jason Vick			
Attorney Docket Number:	5550-47-CON-DIV			
Receipt Date:	21-JUN-2010			
Filing Date:	24-SEP-2007			
Time Stamp:	10:54:19			
Application Type:	Utility under 35 USC 111(a)			

# Payment information:

Submitted with Payment	no		
Eilo Listings			

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1		IDS 06.pdf	331763	1/05	4
'		iD3_00.μαί	3831a8b9ec4826821c738b456a02f16ba73 b7a85	yes	4

	Multipart Description/PDF files in .zip description				
	Document Des	Start	E	nd	
	Transmittal L	1		3	
	Information Disclosure Statem	4		4	
Warnings:					
Information:					
2	NPL Documents	5550-47-CON-3_NOA_5-18-10.	881767	no 2	22
2	Ni E Documents	pdf	ee99c4b0d143cc258a1a401185159623090 621eb	110	22
Warnings:					
Information:					
		Total Files Size (in bytes)	12	13530	

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

#### New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

#### National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

#### New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

#### IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re the	Application of:	)	Group Art Unit: 2611		
Marcos C		)	Confirmation No.: 5967		
	.: 11/860,080	)	Examiner: Not yet assigned		
	otember 24, 2007	)			
Atty. File Entitled: Phase of t	No.: 5550-47-CON-DIV  "System and Method for Scrambling the the Carriers in a Multicarrier ications System"	) ) ) )	INFORMATION DISCLOSURE STATEMENT Electronically Submitted		
P.O. Box	ioner for Patents 1450 ia, VA 22313-1450				
Dear Sir:					
of the Exa	The references cited on attached Form PTO-1449 are being called to the attention of the Examiner.  Copies of the cited non-patent and/or foreign references are enclosed herewith.  Copies of the cited U.S. patents and/or patent applications are enclosed herewith.  Copies of the cited U.S. patents/patent application publications are not enclosed in accordance with 37 C.F.R. § 1.98(a).  Copies of the cited references are not enclosed, in accordance with 37 C.F.R. § 1.98(d), because the references were cited by or submitted to the U.S. Patent and Trademark Office in prior application Serial No				
Su	ibmission of the above information is not i	nten	ded as an admission that any item		
	is citable under the statutes or rules to support a rejection, that any item disclosed				
represents analogous art, or that those skilled in the art would refer to or recognize the					

pertinence of any reference without the benefit of hindsight, nor should an inference be drawn as to the pertinence of the references based on the order in which they are presented. Submission of this statement should not be taken as an indication that a search has been conducted, or that no better art exists.

It is respectfully requested that the cited information be expressly considered during the prosecution of this application and the references made of record therein.

#### **FEES**

37 CFR 1.97(b): No fee is believed due in connection with this submission, because the information disclosure statement submitted herewith is satisfied by one of the following conditions ("X" indicates satisfaction):  Within three months of the filing date of a national application other than a continued prosecution application under 37 CFR 1.53(d), or  Within three months of the date of entry into the national stage of an international application as set forth in 37 CFR 1.491 or  Before the mailing date of a first Office Action on the merits, or  Before the mailing of a first Office action after the filing of a request for continued examination under 37 CFR 1.114.  Although no fee is believed due, if any fee is deemed due in connection with this submission, please charge such fee to Deposit Account 19-1970.
37 CFR 1.97(e): The information disclosure statement transmitted herewith is being filed after all the above conditions (37 CFR 1.97(b)), but before the mailing date of one of the following conditions:  (1) a final action under 37 C.F.R. 1.113 or (2) a notice of allowance under 37 C.F.R. 1.311, or (3) an action that otherwise closes prosecution in the application.  This Information Disclosure Statement is accompanied by:  A Certification (below) as specified by 37 C.F.R. 1.97(e). Although no fee is believed due, if any fee is deemed due in connection with this submission, please charge such fee to Deposit Account 19-1970.  OR  Please charge Deposit Account 19-1970 in the amount of \$180.00 for the fee set forth in 37 C.F.R. 1.17(p) for submission of an information disclosure statement. Please credit any overpayment or charge any underpayment to Deposit Account 19-1970.
37 CFR 1.97(d): This Information Disclosure Statement is being submitted after the period specified in 37 CFR 1.97(c).  This information Disclosure Statement includes a Certification (below) as specified by 37 C.F.R. 1.97(e)  AND  Applicants hereby requests consideration of the reference(s) disclosed herein. Please charge Deposit Account 19-1970 in the amount of \$180.00 under 37 C.F.R. 1.17(p). Please credit any overpayment or charge any underpayment to Deposit Account 19-1970. Election to pay the fee should not be taken as an indication that applicant(s) cannot execute a certification.

	Certification (37 C.F.R. 1.97(e)) (Applicable only if checked)
	The undersigned certifies that:  Each item of information contained in this information disclosure statement wa first cited in any communication from a foreign patent office in a counterpart foreign application not more than three months prior to the filing of this statement. 37 C.F.R 1.97(e)(1).  A copy of the communication from the foreign patent office is enclosed.
	OR
	No item of information contained in this information disclosure statement was cited in a communication from a foreign patent office in a counterpart foreign application, and, to the knowledge of the undersigned after making reasonable inquiry, no item of information contained in this Information Disclosure Statement was known to any individual designated in 37 C.F.R. 1.56(c) more than three months prior to the filing of this statement. 37 C.F.R. 1.97(e)(2).
	Respectfully submitted,
	SHERIDAN ROSS P.C.
Date:	By:  Jason H. Vick  Registration No. 45,285  1560 Broadway, Suite 1200  Denver, Colorado 80202-5141  (303) 863-9700

Sub	Substitute for form 1449A/PTO		Complete if Known			
INFORMATION DISCLOSURE				Application Number	11/860,080	
				Filing Date	September 24, 2007	
5	STATEMENT BY APPLICANT			First Named Inventor	Marcos C. Tzannes	
				Art Unit	2611	
			Examiner Name	Not yet assigned		
Sheet	1	of	1	Attorney Docket Number	5550-47-CON-DIV	

U.S. PATENT DOCUMENTS					
Initials* No.1 Number-kind Code 2 (If known) MM-DD-YYYY Applicant of Cited Document Relevant Passages or Relevant					Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear
	1	4069392	01/17/78	Goldenberg et al.	
	2	6967997	11/22/05	Humphrey	

FOREIGN PATENT DOCUMENTS						
Examiner Initials*	Cite No. <sup>1</sup>	Foreign Patent Document  Country Code <sup>3</sup> ; Number <sup>4</sup> ; Kind  Code <sup>5</sup> ( <i>if known</i> )		Name of Patentee or Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear	T <sup>6</sup>

OTHER ART (Including Author, Title, Date, Pertinent Pages, etc.)					
Examiner Initials*	Cite No. <sup>1</sup>				
		Official Action for U.S. Patent Application No. 12/255,713, mailed October 15, 2009 (Attorney's File No. 5550-47-CON-3)			

Examiner	Date	
Signature	Considered	

\*EXAMINER: Initial if reference is considered, whether or not citation is in conformance and not considered. Include copy of this form with next communication to applicant.

Electronic Acknowledgement Receipt				
EFS ID:	6827858			
Application Number:	11860080			
International Application Number:				
Confirmation Number:	5967			
Title of Invention:	SYSTEM AND METHOD FOR SCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM			
First Named Inventor/Applicant Name:	Marcos C. Tzannes			
Customer Number:	62574			
Filer:	Jason Vick/Debra Kesner			
Filer Authorized By:	Jason Vick			
Attorney Docket Number:	5550-47-CON-DIV			
Receipt Date:	18-JAN-2010			
Filing Date:	24-SEP-2007			
Time Stamp:	13:48:43			
Application Type:	Utility under 35 USC 111(a)			

# Payment information:

Submitted with Payment	no
File Listing:	

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1		IDS 05.pdf	329361	ves	4
·		183_03.pui	c734a97f08012f1829c33acb8fe1ca3f15480 ff3	· ′	·

	Multipart Description/PDF files in .zip description				
	Document Des	Start End		nd	
	Transmittal I	1		3	
	Information Disclosure Staten	4	4		
Warnings:					
Information:					
2	NPL Documents	5550-47-CON-3_OA_10-15-09.	573466	no	17
2	W E Documents	pdf	dc8a44f661c43463a4823ee9ea3538767aa6 6aa0	110	17
Warnings:			•		
Information:					
		Total Files Size (in bytes)	90	)2827	

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

#### New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

#### National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

#### New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re the Application of:	)	Group Art Unit: 2611		
Marcos C. Tzannes		Confirmation No.: 5967		
Serial No.: 11/860,080	)	Examiner: Not yet assigned		
Filed: September 24, 2007	)			
Atty. File No.: 5550-47-CON-DIV	)	INFORMATION DISCLOSURE		
Entitled: "System and Method for Scrambling the	)	<u>STATEMENT</u>		
Phase of the Carriers in a Multicarrier	)	Electronically Submitted		
Communications System"				
Commissioner for Patents P.O. Box 1450 Alexandria, VA 22313-1450				
Dear Sir:				
The references cited on attached Form PTC	D-144	49 are being called to the attention		
of the Examiner.				
Copies of the cited non-patent and/or foreign				
Copies of the cited U.S. patents and/or pater				
Copies of the cited U.S. patents/patent appl	icatio	on publications are not enclosed in		
accordance with 37 C.F.R. § 1.98(a).	مامعد	ed in accordance with 27 CED		
Copies of the cited references are not en § 1.98(d), because the references were cited by				
Trademark Office in prior application Serial No				
which is relied upon for an earlier filing date under				
To the best of applicants' belief, the pertine				
are believed to be summarized in the attached Engli		0 0 0		
applicants do not necessarily vouch for the accuracy				
Examiner's attention is drawn to the followi	ng re	elated applications:		
Serial Nofiled	(/	Attorney's Ref. No)		
Serial Nofiled	(/	Attorney's Ref. No)		
Other:				
Submission of the above information is not intended as an admission that any item				
is citable under the statutes or rules to support a rejection, that any item disclosed				

represents analogous art, or that those skilled in the art would refer to or recognize the pertinence of any reference without the benefit of hindsight, nor should an inference be drawn as to the pertinence of the references based on the order in which they are presented. Submission of this statement should not be taken as an indication that a search has been conducted, or that no better art exists.

It is respectfully requested that the cited information be expressly considered during the prosecution of this application and the references made of record therein.

#### **FEES**

37 CFR 1.97(b): No fee is believed due in connection with this submission, because the information disclosure statement submitted herewith is satisfied by one of the following conditions ("X" indicates satisfaction):  Within three months of the filing date of a national application other than a continued prosecution application under 37 CFR 1.53(d), or  Within three months of the date of entry into the national stage of an international application as set forth in 37 CFR 1.491 or  Before the mailing date of a first Office Action on the merits, or
37 CFR 1.114.  Although no fee is believed due, if any fee is deemed due in connection with this submission, please charge such fee to Deposit Account 19-1970.
37 CFR 1.97(c): The information disclosure statement transmitted herewith is being filed after all the above conditions (37 CFR 1.97(b)), but before the mailing date of one of the following conditions:  (1) a final action under 37 C.F.R. 1.113 or  (2) a notice of allowance under 37 C.F.R. 1.311, or  (3) an action that otherwise closes prosecution in the application.  This Information Disclosure Statement is accompanied by:  A Certification (below) as specified by 37 C.F.R. 1.97(e). Although no fee is believed due, if any fee is deemed due in connection with this submission, please charge such fee to Deposit Account 19-1970.  OR  Please charge Deposit Account 19-1970 in the amount of \$180.00 for the fee set forth in 37 C.F.R. 1.17(p) for submission of an information disclosure statement. Please credit any overpayment or charge any underpayment to Deposit Account 19-1970.
37 CFR 1.97(d): This Information Disclosure Statement is being submitted after the period specified in 37 CFR 1.97(c).  This information Disclosure Statement includes a Certification (below) as specified by 37 C.F.R. 1.97(e)  AND  Applicants hereby requests consideration of the reference(s) disclosed herein. Please charge Deposit Account 19-1970 in the amount of \$180.00 under 37 C.F.R. 1.17(p). Please credit any overpayment or charge any underpayment to Deposit Account 19-1970. Election to pay the fee should not be taken as an indication that applicant(s) cannot execute a certification.

	7 C.F.R. 1.97(e)) nly if checked)						
first cited in any communication application not more than three n 1.97(e)(1).	ntained in this information disclosure statement was from a foreign patent office in a counterpart foreign nonths prior to the filing of this statement. 37 C.F.R. nication from the foreign patent office is enclosed.						
	OR						
No item of information contained in this information disclosure statement was cited in a communication from a foreign patent office in a counterpart foreign application, and, to the knowledge of the undersigned after making reasonable inquiry, no item of information contained in this Information Disclosure Statement was known to any individual designated in 37 C.F.R. 1.56(c) more than three month prior to the filing of this statement. 37 C.F.R. 1.97(e)(2).							
Res	spectfully submitted,						
SH	ERIDAN ROSS P.C.						
By:  Date: 18 5m 110	Jason H. Vick Registration No. 45285 1560 Broadway, Suite 1200 Denver, Colorado 80202-5141 (303) 863-9700						

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re the Application of:	) Group Art Unit: 2611
Tzannes	Confirmation No.: 5967
Serial No.: 11/860,080	) Examiner: Not yet assigned
Filed: 09-24-2007	) ) <u>INFORMATION DISCLOSURE STATEMENT</u>
Atty. File No.: 5550-47-CON-DIV	Electronically Submitted
For: SYSTEM AND METHOD FOR SCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM	
Mail Stop Amendment Commissioner for Patents P.O. Box 1450 Alexandria, VA 22313-1450	
Dear Sir:	
	n PTO-SB08 are being called to the attention of the
Examiner.	
☐ Copies of the cited non-patent	and/or foreign references are enclosed herewith.
□ Copies of the cited U.S. patent	s and/or patent applications are enclosed herewith.
☐ Copies of the cited U.S. patent	s/patent application publications are not enclosed in
accordance with 37 C.F.R. § 1.98(a).	
□ Copies of the cited reference	s are not enclosed, in accordance with 37 C.F.R.
$\S 1.98(d)$ , because the references were cited by	or submitted to the U.S. Patent and Trademark Office
in prior application Serial No fil	ed, which is relied upon for an earlier
filing date under 35 U.S.C. § 120.	
oxdot To the best of applicants' belief.	the pertinence of the foreign-language references are
believed to be summarized in the attached Eng	glish abstracts and in the figures, although applicants
do not necessarily vouch for the accuracy of the	ne translation.

$\boxtimes$	Examiner's attention is drawn to the following co-pending applications,:					
	Serial No. <u>12/255713</u> filed <u>10-22-2008</u> (Attorney's Ref. No. 5550-47-CON-3)					
	Other:					

Submission of the above information is not intended as an admission that any item is citable under the statutes or rules to support a rejection, that any item disclosed represents analogous art, or that those skilled in the art would refer to or recognize the pertinence of any reference without the benefit of hindsight, nor should an inference be drawn as to the pertinence of the references based on the order in which they are presented. Submission of this statement should not be taken as an indication that a search has been conducted, or that no better art exists.

It is respectfully requested that the cited information be expressly considered during the prosecution of this application and the references made of record therein.

#### **FEES**

FEEE						
⊠	37 CFR 1.97(b): No fee is believed due in connection with this submission, because the information disclosure statement submitted herewith is satisfies one of the following conditions ("X" indicates satisfaction):					
	☐ Within three months of the filing date of a national application other than a continued prosecution application under 37 CFR 1.53(d), or					
	☐ Within three months of the date of entry into the national stage of an international application as set forth in 37 CFR 1.491 or					
	☐ Before the mailing date of a first Office Action on the merits, or					
	Before the mailing of a first Office action after the filing of a request for continued examination under 37 CFR 1.114.					
	Although no fee is believed due, if any fee is deemed due in connection with this submission, please charge such fee to Deposit Account 19-1970.					
	37 CFR 1.97(c): The information disclosure statement transmitted herewith is being filed after all the above conditions (37 CFR 1.97(b)), but before the mailing date of one of the following conditions:  (1) a final action under 37 C.F.R. 1.113 or  (2) a notice of allowance under 37 C.F.R. 1.311, or  (3) an action that otherwise closes prosecution in the application.  This Information Disclosure Statement is accompanied by:					
	☐ A Certification (below) as specified by 37 C.F.R. 1.97(e). Although no fee is believed due, if any fee is deemed due in connection with this submission, please charge such fee to Deposit Account 19-1970.  OR					
	Please charge Deposit Account 19-1970 in the amount of \$180.00 for the fee set forth in 37 C.F.R. 1.17 for submission of an information disclosure statement. Please credit any overpayment or charge any underpayment to Deposit Account 19-1970.					
П	37 CFR 1.97(d): This Information Disclosure Statement is being submitted after the period specified in 37 CFR 1.97(c).					
	☐ This information Disclosure Statement includes a Certification (below) as specified by 37 C.F.R. 1.97(e)  AND					
	Applicants hereby requests consideration of the reference(s) disclosed herein. Please charge Deposit					
	Account 19-1970 in the amount of \$180.00 under 37 C.F.R. 1.17(p). Please credit any overpayment or					
	charge any underpayment to Deposit Account 19-1970. Election to pay the fee should not be taken as an indication that applicant(s) cannot execute a certification.					

Certification (37 C.F.R. 1.97(e)) (Applicable only if checked)
☐ The undersigned certifies that:
☐ Each item of information contained in this information disclosure statement was first cited in any communication from a foreign patent office in a counterpart foreign application not more than three months prior to the filing of this statement. 37 C.F.R. 1.97(e)(1).
☐ A copy of the communication from the foreign patent office is enclosed.
OR
□ No item of information contained in this information disclosure statement was cited in a communication from a foreign patent office in a counterpart foreign application, and, to the knowledge of the undersigned after making reasonable inquiry, no item of information contained in this Information Disclosure Statement was known to any individual designated in 37 C.F.R. 1.56(c) more than three months prior to the filing of this statement. 37 C.F.R. 1.97(e)(2).
Respectfully submitted,
SHERIDAN ROSS P.C.
By:
Jason H. Vick
Registration No. 45285
1560 Broadway, Suite 1200 Denver, Colorado 80202-5141
Date: 25 Nov 18 (303) 863-9700

Suk	Substitute for form 1449A/PTO			Complete if Known		
TA:		FIGN DIG	21 221125	Application Number	11/860,080	
			CLOSURE	Filing Date	09-24-2007	
STATEMENT BY APPLICANT		PLICANT	First Named Inventor	Tzannes		
				Art Unit	2611	
				Examiner Name	Not yet assigned	
Sheet	1	of	1	Attorney Docket Number	5550-47-CON-DIV	

	U.S. PATENT DOCUMENTS						
Examiner Initials*	Cite No.1	Document Number Number-kind Code <sup>2 (if known)</sup>	Publication Date MM-DD-YYYY	Name of Patentee of Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear		
	1	12/255713		Tzannes (10-22-2008)			

FOREIGN PATENT DOCUMENTS						
Examiner Initials*	Cite No. <sup>1</sup>	Foreign Patent Document  Country Code <sup>3</sup> ; Number <sup>4</sup> ; Kind  Code <sup>5</sup> (if known)		Name of Patentee or Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear	T <sup>6</sup>

		OTHER ART (Including Author, Title, Date, Pertinent Pages, etc.)
Examiner Initials*	Cite No.1	
	2	Decision of Refusal (including translation) for Japanese Patent Application No. 2001-537217, date of dispatch, November 4, 2008 (Attorney's Ref. No. 5550-47-PJP)

Examiner	1	Date	
Signature		Considered	

<sup>\*</sup>EXAMINER: Initial if reference is considered, whether or not citation is in conformance and not considered. Include copy of this form with next communication to applicant.

Electronic Acknowledgement Receipt				
EFS ID:	4353355			
Application Number:	11860080			
International Application Number:				
Confirmation Number:	5967			
Title of Invention:	SYSTEM AND METHOD FOR SCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM			
First Named Inventor/Applicant Name:	Marcos C. Tzannes			
Customer Number:	62574			
Filer:	Jason Vick/Debra Kesner			
Filer Authorized By:	Jason Vick			
Attorney Docket Number:	5550-47-CON-DIV			
Receipt Date:	25-NOV-2008			
Filing Date:	24-SEP-2007			
Time Stamp:	15:31:02			
Application Type:	Utility under 35 USC 111(a)			

# **Payment information:**

Submitted with Payment	no

# File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /₊zip	Pages (if appl.)
1		IDS 04.pdf	326906	ves	4
, ,		183_0 1.pai	6efb66b204231d4f798dfa6b858207755a8 6c9b9	, i	·

	Multipart Description/PDF files in .zip description					
	Document Des	Start	E	nd		
	Information Disclosure S	1		3		
	Information Disclosure Statem	4		4		
Warnings:						
Information:						
2	NPL Documents	5550-47-PJP_OA_11-4-08.pdf	137000	no	3	
_	2 3 3 5 5 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	5555 ;; ; ; <u>55, _</u> ; ; ; ; 55, pa.	46159ab02ab5c03caf5c5b33b9a18e570e1 7f14f	0		
Warnings:						
Information:						
		Total Files Size (in bytes)	: 46	3906		

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

#### New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

#### National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

#### New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

# INFORMATION DISCLOSURE STATEMENT BY APPLICANT (Not for submission under 37 CFR 1.99) Application Number 11860080 Filing Date 2007-09-24 First Named Inventor Tzannes Art Unit 2611 Examiner Name Not yet assigned Attorney Docket Number 5550-47-CON-DIV

					U.S.F	PATENTS			Remove	
Examiner Initial*	Cite No	Patent Number	Kind Code <sup>1</sup>	Issue D	)ate	Name of Patentee or Applicant of cited Document		nt Pages,Columns,Line Relevant Passages of Figures Appear		
	1									
If you wish to add additional U.S. Patent citation information please click the Add button.										
			U.S.P.	ATENT	APPLIC	CATION PUBL	LICATIONS		Remove	
Examiner Initial*	Cite No	Publication Number			of cited Document Releva		Releva	ges,Columns,Lines where levant Passages or Relevant ures Appear		
	1									
If you wis	h to ac	dd additional U.S. Publis	shed Ap	plication	citation	n information p	lease click the Add	d button	Add	
				FOREIC	3N PAT	ENT DOCUM	ENTS		Remove	
					Publication Date	Name of Patentee Applicant of cited Document	or    -	Pages,Columns,Li where Relevant Passages or Relev Figures Appear	T5	
	1									
If you wis	h to ac	dd additional Foreign Pa	itent Do	cument	citation	information pl	ease click the Add	button	Add	
			NON	I-PATEN	1T LITE	RATURE DO	CUMENTS		Remove	
Examiner Initials*	Cite No	Include name of the au (book, magazine, journ publisher, city and/or c	nal, seria	al, symp	osium,	catalog, etc), c				n T5

# Application Number 11860080 Filing Date 2007-09-24 First Named Inventor Tzannes Art Unit 2611 Examiner Name Not yet assigned Attorney Docket Number 5550-47-CON-DIV

	1	Notice CON-	e of Allowance for U.S. Patent Application No. 11/863,581, mailed -2)	October 8, 2008 (Attor	mey's File No. 5550-47-		
If you wisl	h to ac	dd add	ditional non-patent literature document citation information pl	lease click the Add b	outton Add		
			EXAMINER SIGNATURE				
Examiner	Examiner Signature Date Considered						
			reference considered, whether or not citation is in conforma rmance and not considered. Include copy of this form with r		•		
Standard ST  4 Kind of doo	Г.3). <sup>3</sup> F cument	or Japa by the a	O Patent Documents at <a href="https://www.uspto.gov">www.uspto.gov</a> or MPEP 901.04. <sup>2</sup> Enter office anese patent documents, the indication of the year of the reign of the Empe appropriate symbols as indicated on the document under WIPO Standard Son is attached.	eror must precede the ser	ial number of the patent doc	ument.	

# INFORMATION DISCLOSURE STATEMENT BY APPLICANT

( Not for submission under 37 CFR 1.99)

Application Number		11860080	
Filing Date		2007-09-24	
First Named Inventor Tzanr		nes	
Art Unit		2611	
Examiner Name	Not ye	et assigned	
Attorney Docket Number		5550-47-CON-DIV	

		CERTIFICATION	STATEMENT					
Plea	ase see 37 CFR 1	.97 and 1.98 to make the appropriate selection	on(s):					
	That each item of information contained in the information disclosure statement was first cited in any communication from a foreign patent office in a counterpart foreign application not more than three months prior to the filing of the information disclosure statement. See 37 CFR 1.97(e)(1).							
OF	ł							
	foreign patent of after making rea any individual d	information contained in the information diffice in a counterpart foreign application, and sonable inquiry, no item of information containsignated in 37 CFR 1.56(c) more than thread CFR 1.97(e)(2).	d, to the knowledge of the lined in the information dis	e person signing the certification sclosure statement was known to				
	See attached ce	rtification statement.						
	Fee set forth in 3	B7 CFR 1.17 (p) has been submitted herewith						
X	None							
	ignature of the ap n of the signature.	SIGNAT plicant or representative is required in accord		8. Please see CFR 1.4(d) for the				
Sigi	nature	/Jason H. Vick/	Date (YYYY-MM-DD)	2008-10-17				
Nar	ne/Print	Jason H. Vick	Registration Number	45285				
pub 1.14 app requ	lic which is to file  1. This collection lication form to the uire to complete the	rmation is required by 37 CFR 1.97 and 1.98. (and by the USPTO to process) an applicatio is estimated to take 1 hour to complete, include USPTO. Time will vary depending upon the first form and/or suggestions for reducing this be k Office, U.S. Department of Commerce, P.O	n. Confidentiality is govern ding gathering, preparing a e individual case. Any com ourden, should be sent to t	ned by 35 U.S.C. 122 and 37 CFR and submitting the completed nments on the amount of time you the Chief Information Officer, U.S.				

FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria,

VA 22313-1450.

#### **Privacy Act Statement**

The Privacy Act of 1974 (P.L. 93-579) requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

- 1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C. 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether the Freedom of Information Act requires disclosure of these record s.
- A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a
  court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement
  negotiations.
- 3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
- 4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
- A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
- 6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
- 7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (i.e., GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
- 8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspections or an issued patent.
  - 9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

Electronic Acknowledgement Receipt				
EFS ID:	4134417			
Application Number:	11860080			
International Application Number:				
Confirmation Number:	5967			
Title of Invention:	SYSTEM AND METHOD FOR SCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM			
First Named Inventor/Applicant Name:	Marcos C. Tzannes			
Customer Number:	62574			
Filer:	Jason Vick/Debra Kesner			
Filer Authorized By:	Jason Vick			
Attorney Docket Number:	5550-47-CON-DIV			
Receipt Date:	17-OCT-2008			
Filing Date:	24-SEP-2007			
Time Stamp:	16:25:58			
Application Type:	Utility under 35 USC 111(a)			

# **Payment information:**

Submitted wi	th Payment	no			
File Listin	g:				
Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Information Disclosure Statement (IDS)	IDS 03.pdf	763139	no	4
,	Filed (SB/08)	<b></b>	37d827e86146966725ca276c25a2d3a1ea9 bfd83		·

Information:

A U.S. Patent Number Citation or a U.S. Publication Number Citation is required in the Information Disclosure Statement (IDS) form for autoloading of data into USPTO systems. You may remove the form to add the required data in order to correct the Informational Message if you are citing U.S. References. If you chose not to include U.S. References, the image of the form will be processed and be made available within the Image File Wrapper (IFW) system. However, no data will be extracted from this form. Any additional data such as Foreign Patent Documents or Non Patent Literature will be manually reviewed and keyed into USPTO systems.

2	NPL Documents	5550-47-CON-2_OA_10-08-08.	315738	no	6
	NI E Bocamento	pdf	84b7306f5676758faedbf784984cb640103b afc5		
Warnings:					
Information:	:				
		Total Files Size (in bytes):	10	78877	

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

#### New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

#### National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

#### New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

# IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re the Application of:		) Group Art Unit: 2611
	Tzannes	) Confirmation No.: 5967
Serial 1	No.: 11/860,080	) Examiner: Not yet assigned
Filed: (	09-24-2007	) ) <u>INFORMATION DISCLOSURE STATEMENT</u>
Atty. F	ile No.: 5550-47-CON-DIV	) Electronically Submitted
For:	SYSTEM AND METHOD FOR SCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM	) ) ) ) )
Commi	top Amendment issioner for Patents ox 1450 dria, VA 22313-1450	
Dear Si	ir:	
		n PTO-SB08 are being called to the attention of the
Examir	ner.	
	☐ Copies of the cited non-patent	and/or foreign references are enclosed herewith.
	☐ Copies of the cited U.S. patent	s and/or patent applications are enclosed herewith.
	□ Copies of the cited U.S. patent	s/patent application publications are not enclosed in
accorda	ance with 37 C.F.R. § 1.98(a).	
	□ Copies of the cited reference	s are not enclosed, in accordance with 37 C.F.R.
§ 1.98(d	d), because the references were cited by	or submitted to the U.S. Patent and Trademark Office
in prior	application Serial No fil	ed, which is relied upon for an earlier
filing d	ate under 35 U.S.C. § 120.	
	☐ To the best of applicants' belief	the pertinence of the foreign-language references are
believe	d to be summarized in the attached Eng	glish abstracts and in the figures, although applicants
do not 1	necessarily vouch for the accuracy of the	he translation.

$\boxtimes$	Examiner's attention is drawn to the following co-pending applications,:
	Serial No. <u>11/863581</u> filed <u>09-28-2007</u>
	Other:

Submission of the above information is not intended as an admission that any item is citable under the statutes or rules to support a rejection, that any item disclosed represents analogous art, or that those skilled in the art would refer to or recognize the pertinence of any reference without the benefit of hindsight, nor should an inference be drawn as to the pertinence of the references based on the order in which they are presented. Submission of this statement should not be taken as an indication that a search has been conducted, or that no better art exists.

It is respectfully requested that the cited information be expressly considered during the prosecution of this application and the references made of record therein.

#### **FEES**

⊠	37 CFR 1.97(b): No fee is believed due in connection with this submission, because the information disclosure statement submitted herewith is satisfies one of the following conditions ("X" indicates satisfaction):							
	☐ Within three months of the filing date of a national application other than a continued prosecution application under 37 CFR 1.53(d), or							
	☐ Within three months of the date of entry into the national stage of an international application as set forth in 37 CFR 1.491 or							
	☐ Before the mailing date of a first Office Action on the merits, or							
	Before the mailing of a first Office action after the filing of a request for continued examination under 37 CFR 1.114.							
	Although no fee is believed due, if any fee is deemed due in connection with this submission, please charge such fee to Deposit Account 19-1970.							
	37 CFR 1.97(e): The information disclosure statement transmitted herewith is being filed after all the above conditions (37 CFR 1.97(b)), but before the mailing date of one of the following conditions:  (1) a final action under 37 C.F.R. 1.113 or  (2) a notice of allowance under 37 C.F.R. 1.311, or  (3) an action that otherwise closes prosecution in the application.  This Information Disclosure Statement is accompanied by:   A Certification (below) as specified by 37 C.F.R. 1.97(e). Although no fee is believed due, if any fee is							
	deemed due in connection with this submission, please charge such fee to Deposit Account 19-1970.  OR							
	☐ Please charge Deposit Account 19-1970 in the amount of \$180.00 for the fee set forth in 37 C.F.R. 1.17(p) for submission of an information disclosure statement. Please credit any overpayment or charge any underpayment to Deposit Account 19-1970.							
	37 CFR 1.97(d): This Information Disclosure Statement is being submitted after the period specified in 37 CFR 1.97(c).  □ This information Disclosure Statement includes a Certification (below) as specified by 37 C.F.R. 1.97(e)  AND							
	☐ Applicants hereby requests consideration of the reference(s) disclosed herein. Please charge Deposit							
	Account 19-1970 in the amount of \$180.00 under 37 C.F.R. 1.17(p). Please credit any overpayment or							
	charge any underpayment to Deposit Account 19-1970. Election to pay the fee should not be taken as an indication that applicant(s) cannot execute a certification.							

Certification (37 C.F.R. 1.97(e)) (Applicable only if checked)	
☐ The undersigned certifies that:	
☐ Each item of information contained in this information disclosure statement was first cited any communication from a foreign patent office in a counterpart foreign application not more that three months prior to the filing of this statement. 37 C.F.R. 1.97(e)(1).	
$\square$ A copy of the communication from the foreign patent office is enclosed.	
OR	
□ No item of information contained in this information disclosure statement was cited in communication from a foreign patent office in a counterpart foreign application, and, to the knowledge of the undersigned after making reasonable inquiry, no item of information contained in this Information Disclosure Statement was known to any individual designated in 37 C.F.F. 1.56(c) more than three months prior to the filing of this statement. 37 C.F.R. 1.97(e)(2).	ne ed

Respectfully submitted,

SHERIDAN ROSS P.C.

By:

Jason H. Vick

Registration No. 45285 1560 Broadway, Suite 1200 Denver, Colorado 80202-5141

(303) 863-9700

-3-

Substitute for form 1449A/PTO				Complete if Known		
INI		TION DICC		Application Number	11/860,080	
	INFORMATION DISCLOSURE STATEMENT BY APPLICANT			Filing Date	09-24-2007	
ા ગ				First Named Inventor	Tzannes	
				Art Unit	2611	
				Examiner Name	Not yet assigned	
Sheet	1	of	1	Attorney Docket Number	5550-47-CON-DIV	

U.S. PATENT DOCUMENTS						
Examiner Initials*	Cite No. <sup>1</sup>	Document Number Number-kind Code <sup>2 (If known)</sup>	Publication Date MM-DD-YYYY	Name of Patentee of Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear	
	1	5,682,376	10/28/97	Hayashino et al.		

	FOREIGN PATENT DOCUMENTS						
Examiner Initials*	Cite No. <sup>1</sup>	Foreign Patent Document  Country Code <sup>3</sup> ; Number <sup>4</sup> ; Kind  Code <sup>5</sup> ( <i>if known</i> )	Publication Date MM-DD-YYYY	Name of Patentee or Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear	T <sup>6</sup>	
	2	JP H10(1998)-084329		NIPPON HOSO KYOKAI		(Translated Abstract and partial translation)	
	3	JP H08(1996)-321820	12/03/96	MATSUSHITA ELECTRIC IND CO LTD		(Translated Abstract)	

OTHER ART (Including Author, Title, Date, Pertinent Pages, etc.)					
Examiner Initials*	Cite No. <sup>1</sup>				
	4	Notification of Reasons for Refusal (including translation) for Japanese Patent Application No. 2001-537217, date of dispatch, March 3, 2008 (Attorney's Ref. No. 5550-47-PJP)			
	5	Official Action for U.S. Patent Application No. 11/863,581, mailed February 6, 2008 (Attorney's File No. 5550-47-CON-2)			

		TW
Examiner Signature	Date Considered	

<sup>\*</sup>EXAMINER: Initial if reference is considered, whether or not citation is in conformance and not considered. Include copy of this form with next communication to applicant.

1/1 ページ

### PATENT ABSTRACTS OF JAPAN

(11)Publication number:

10-084329

(43) Date of publication of application: 31.03.1998

(51)Int.Cl.

H04J 11/00

(21)Application number: 08-238917

(71)Applicant: NIPPON HOSO KYOKAI <NHK>

10.09,1996 (22)Date of filing:

(72)Inventor: SATO SHOE

SAITO TOMOHIRO MORIYAMA SHIGEKI

(54) TRANSMISSION METHOD FOR OFDM MODULATION SIGNAL, OFDM TRANSMITTER AND RECEIVER

(57)Abstract:

PROBLEM TO BE SOLVED: To prevent production of distortion by spreading a reference phase of each carrier of the frequency orthogonal division multiplex (OFDM) system and changing the amplitude of each carrier of the OFDM without giving effect on transmitted information so as to suppress a peak level of signals.

SOLUTION: After multiplying a complex code series ejsk (Sk=pk2, p is an optional real number not being zero, 0≤k≤N, N is a total carrier number) with an input coded signal, inverse FFT is applied to the product to generate an OFDM modulation signal and it is transmitted. At a receiver side, a complex code series ejsk (Sk is the same as above) is multiplied with a signal resulting from FFT processing to a received signal and an OFDM demodulation signal is obtained. The information relating to the ejsk required for demodulation is included in the input coded information, or sent in advance from the transmitter side to the receiver side through other transmission line. Thus, the reference phases of each carrier of the OFDM are hardly arranged and the level of transmission signals is suppressed and the resulting signal is sent, then an operating point of amplifiers is set higher.

\* NOTICES \*

JPO and INPIT are not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.

2.\*\*\*\* shows the word which can not be translated.

3.In the drawings, any words are not translated.

#### **CLAIMS**

[Claim(s)]

[Claim 1]In the transmitting side, it is a complex code sequence to an input encoded signal. [External Character 1]  $_{\rm e}$  i S  $_{\rm t}$ 

(— the signal which they generated the OFDM modulation signal here and transmitted to it as reverse FFT of  $S_k$ =pk², the arbitrary real numbers whose p is not zero,  $0 \le k \le N$ , and the N was carried out after they carried out the multiplication of total number of careers) here, and carried out FFT of the input signal in the receiver — a complex code sequence [External Character 2]  $e^{-i}$   $S_k$ 

A transmission method of an OFDM modulation signal carrying out the multiplication of  $(S_k$  is the same here to said  $S_k$ ), and acquiring an OFDM demodulation signal.

[Claim 2]Said complex code sequence required for an OFDM recovery [ in / on a transmission method of the OFDM signal according to claim 1, and / a receiver ] [External Character 3]

the arbitrary real numbers  $S_k = pk^2$  and whose p are not zero here. A transmission method of an OFDM modulation signal, wherein  $0 \le k \le N$  and N include the information about the total number of careers in said input encoded signal or transmit it to a receiver beforehand from the transmitting side in transmission lines other than the transmission line for OFDM transmission concerned

[Claim 3]It is a complex code sequence to an input encoded signal at least. [External Character 4]  $_{\rm e}$  ; S  $_{\rm t}$ 

(— the OFDM sending set which  $S_k = pk^2$ , the arbitrary real numbers whose p is not zero, 0  $\leq k \leq N$ , and N are provided with the means which carries out the multiplication of total number of careers) here, and is characterized by things.

[Claim 4]It is a complex code sequence to a signal which carried out FFT of the input signal at least. [External Character 5]  $_{\rm e}$  –  $_{\rm i}$  S  $_{\rm x}$ 

(-- the OFDM receiving set which  $S_k = pk^2$ , the arbitrary real numbers whose p is not zero, 0  $\leq k \leq N$ , and N are provided with the means which carries out the multiplication of total number of careers) here, and is characterized by things.

[Claim 5]In a transmission method of an OFDM modulation signal which generates a modulating signal of either BPSKOFDM and a QPSKOFDM modulating signal, and is transmitted, After carrying out the multiplication of two or more constants which make equal amplitude of positive [ of a phase which said one of modulating signals can take ], and a negative ingredient in an

http://www4.ipdl.inpit.go.jp/cgi-bin/tran web cgi ejje?atw u=http://www4.ipdl.inpit.g... 08/03/06

amplitude peak period of one of said modulating signals according to a value of an input encoded signal, respectively, A transmission method of an OFDM modulation signal characterized by carrying out reverse FFT, generating an OFDM modulation signal, and making it transmit. [Claim 6]In an OFDM sending set which generates a modulating signal of either BPSKOFDM and a QPSKOFDM modulating signal, and transmits, An OFDM sending set which is provided with a means which carries out the multiplication of two or more constants which make equal amplitude of positive [ of a phase which said one of modulating signals can take at least ], and a negative ingredient in an amplitude peak period of one of said modulating signals according to a value of an input encoded signal, respectively, and is characterized by things.

[Translation done.]

http://www4.ipdl.inpit.go.jp/cgi-bin/tran\_web\_cgi\_ejje?atw\_u=http://www4.ipdl.inpit.g... 08/03/06

#### \* NOTICES \*

JPO and INPIT are not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.

2.\*\*\*\* shows the word which can not be translated.

3.In the drawings, any words are not translated.

#### **DETAILED DESCRIPTION**

[Detailed Description of the Invention] [0001]

[Field of the Invention] In a broadcasting satellite, in order to use the generating electric power by a solar cell, the output of a relay amplifier has restriction, but. This invention, A transmission method and an OFDM sending set of a frequency rectangular cross division multiplex (OFDM:Orthogonal Frequency Division Multiplexing) modulating signal suitable for using it for digital broadcasting in such a satellite system (as opposed to a ground system), etc., It is related with a receiving set.

[0002]

[Problem(s) to be Solved by the Invention] Conventionally, there are phase modulations, such as BPSK and QPSK, in the modulation method of each career of OFDM. In these modulation methods, the reference phase of each career by which multiplex was carried out is constant, and, in the case of BPSK, in the case of a binary and QPSK, the phase which each modulating signal can take is restricted with four value. Therefore, in the phase of each career, by this method, the peak of amplitude may occur on a set or the OFDM time base signal which becomes empty.

[0003] For example, in the relay amplifier for broadcast, while generating electric power and amplifier efficiency have restriction, in order to secure the rate of a service period, and the rate of a place, it is used near the saturation region. In order to secure the rate of a service period, and the rate of a place also in digital broadcasting using an OFDM modulation method, to take the high operating point of an amplifier is desired. However, it is one side, and if the high operating point is taken in this way, in the amplitude peak of an OFDM modulation signal, it will become easy to generate distortion.

[0004]In the situation which has restriction in the above generating electric power and amplifier efficiency, the purpose of this invention is to suppress the amplitude peak of an OFDM signal and to perform little transmission in the high operating point.

[0005]

[Means for Solving the Problem] It is going to control an amplitude peak of a signal by diffusing a reference phase of OFDM each career, or changing amplitude of OFDM each career, without affecting information which should be transmitted in this invention, in order to attain the above—mentioned purpose. In order to make diffusion of these reference phases thru/or change of amplitude perform, in this invention, the multiplication of the specific signal (S) is carried out so that an input encoded signal may not be affected at transmitted data (a case where it amends by a receiver so that it may not be affected is included), OFDM modulation is performed based on it, and each career is transmitted.

[0006]When carrying out signal (S) multiplication and diffusing a reference phase of each career now, a phase of each career becomes difficult to gather and can be transmitted by suppressing a peak of amplitude. In this case, in a receiver, the multiplication of the signal (S\*) corresponding to a signal (S) which carried out multiplication at the above-mentioned transmitting side is carried out to an OFDM demodulation signal, and right information is restored.

[0007]When each career does not have information in amplitude directions, such as BPSK and QPSK, in carrying out the multiplication of the signal (S) at the transmitting side, transmission

http://www4.ipdl.inpit.go.jp/cgi-bin/tran web cgi ejje?atw u=http%3A%2F%2Fwww4... 08/03/06

which suppressed a signal peak is performed by choosing a signal (S) which carries out multiplication so that amplitude of a career with which phases produce an amplitude peak together, and a career with an ingredient of an opposite phase may be enlarged — things can be carried out. Here, since multiplication of a signal (S) can be performed only by calculation by a discrete time, it can respond flexibly with software.

[0008] That is, a transmission method of this invention OFDM modulation signal is a complex code sequence to an input encoded signal in the transmitting side. [External Character 6]  $_{\rm e}$  i S  $_{\rm e}$ 

(— a signal which they generated an OFDM modulation signal here and transmitted to it as reverse FFT of  $S_k$ =pk², the arbitrary real numbers whose p is not zero, 0 <=k<=N, and the N was carried out after they carried out the multiplication of total number of careers) here, and carried out FFT of the input signal in a receiver — a complex code sequence [External Character 7] e — i  $S_x$ 

The multiplication of  $(S_k)$  is the same here to said  $S_k$ ) is carried out, and the OFDM demodulation signal was acquired.

[0009]Said complex code sequence which needs the transmission method of this invention OFDM modulation signal for the OFDM recovery in a receiver [External Character 8]  $_{\rm e}$   $^{-i}$  S  $_{\rm k}$ 

the arbitrary real numbers  $S_k = pk^2$  and whose p are not zero here.  $0 \le k \le N$  and N include the information about the total number of careers in said input encoded signal, or transmitted it to the receiver beforehand from the transmitting side in transmission lines other than the transmission line for OFDM transmission concerned.

[0010]this invention OFDM sending set is a complex code sequence to an input encoded signal at least. [External Character 9]  $_{\rm e}$   $_{\rm i}$  S  $_{\rm c}$ 

 $(S_k=pk^2,$  the arbitrary real numbers whose p is not zero,  $0 \le k \le N$ , and N are provided with the means which carries out the multiplication of total number of careers) here [0011]this invention OFDM receiving set is a complex code sequence to the signal which carried out FFT of the input signal at least. [External Character 10]  $e^{-i \cdot S_k}$ 

 $(S_{L}=pk^{2}, the arbitrary real numbers whose p is not zero, 0 <=k<=N, and N are provided with the$ means which carries out the multiplication of total number of careers) here [0012]A transmission method of this invention OFDM modulation signal, In a transmission method of an OFDM modulation signal which generates a modulating signal of either BPSKOFDM and a QPSKOFDM modulating signal, and is transmitted, After carrying out the multiplication of two or more constants which make equal amplitude of positive ∫ of a phase which said one of modulating signals can take ], and a negative ingredient in an amplitude peak period of one of said modulating signals according to a value of an input encoded signal, respectively, Reverse FFT is carried out, an OFDM modulation signal is generated, and it was made to transmit. [0013]In an OFDM sending set which this invention OFDM sending set generates a modulating signal of either BPSKOFDM and a QPSKOFDM modulating signal, and transmits, It has a means which carries out the multiplication of two or more constants which make equal amplitude of positive [ of a phase which said one of modulating signals can take at least ], and a negative ingredient in an amplitude peak period of one of said modulating signals according to a value of an input encoded signal, respectively. [0014]

[Embodiment of the Invention]With reference to an accompanying drawing, this invention is explained in detail based on an embodiment of the invention below. <u>Drawing 1</u> is a transmission

http://www4.ipdl.inpit.go.jp/cgi-bin/tran web cgi ejje?atw u=http%3A%2F%2Fwww4... 08/03/06

code series (input encoded signal). [External Character 11] X k \*\*\*\* - To the signal which carried out the parallel conversion, it is an example of a numerals system. [External Character 12] S k (book specification preceding paragraph shows one embodiment of the OFDM sending set by this invention which only carries out the multiplication of (having expressed with S)), and is transmitted. This embodiment is an embodiment which diffuses a phase to BPSKOFDM and controls a signal peak. [0015]In drawing 1, it is a code sequence as an input encoded signal. [External Character 13] Хĸ Direct in the serial/parallel conversion machine 1 - Carry out a parallel conversion and it is made a parallel signal. Furthermore, an OFDM modulation signal is acquired from an output terminal of the converter 3 via reverse FFT circuit (Invers Fast Fourier Transform circuit) 2 and the parallel serial change machine 3. It is a process of the usual OFDM modulation signal generation so far (however, when there is no multiplier 4 in drawing 1). [0016]On the other hand, a code sequence which the multiplier 4 is inserted, respectively between each parallel line between the serial/parallel conversion machine 1 and the reverse FFT (IFFT) circuit 2, and is an input encoded signal as this invention is shown in drawing 1 [External Character 14] Хĸ Code sequence [External Character 15]  $S_k$ Multiplication is performed in between and the multiplication result is supplied to reverse FFT circuit 2. The composition of drawing 1 is [ in / are an example and / this invention ] a code sequence. [External Character 16] Хĸ It is alike and a code sequence. [External Character 17] Sk What is necessary is just the composition by which multiplication is carried out to \*\*\*\*\*\*, and it is not necessary to follow circuit arrangement shown in drawing 1. [0017] Here, it is an input code sequence. [External Character 18] X k It is a code sequence of \*\* and the binary (-either 1 or 1 is taken) of N pieces, and is a code sequence. [External Character 19]  $S_k$ \*\*\*\*\*\*\* [External Character 20] Хĸ

http://www4.ipdl.inpit.go.jp/cgi-bin/tran web cgi ejje?atw u=http%3A%2F%2Fwww4... 08/03/06

A complex code sequence at least for \*\* to diffuse a phase [External Character 21]

e i S k

It comes out.  $S_k$  is a known series beforehand in a receiver, for example, the time delay of each career is proportional to frequency — as [Equation 1]  $S_k = p k^2$ 

However, the arbitrary real numbers whose p is not zero,  $0 \le K \le N$ , and N are the total numbers of careers.

In this way, the input code sequence of a binary [External Character 22]

Хĸ

A compound code sequence for \*\* and phase diffusion [External Character 23]

Multiplication is mutually carried out by the multiplier 4. The OFDM modulation signal by which phase diffusion was carried out as a result of multiplication [External Character 24]

T k

It is obtained by the output terminal of the \*\* parallel serial converter 3. [0018] <u>Drawing 2</u> (a) and (b) is a code sequence (complex code sequence) to the BPSKOFDM modulating-signal generate time mentioned above. [External Character 25]

S k

An example of a constellation of each career of a modulating signal a time (the usual BPSKOFDM) of not carrying out multiplication and when multiplication is carried out by this invention is shown, respectively. <a href="Drawing 3">Drawing 3</a> (a) and (b) shows an example of a signal wave form of an OFDM modulation signal corresponding to them, respectively. It turns out that it is transmitted as a signal (<a href="drawing 3">drawing 3</a> (b)) with which a phase of each career becomes difficult to gather compared with a case where phase diffusion of the time base waveform of a signal by which phase diffusion was carried out is not carried out (<a href="drawing 2">drawing 2</a> (b)), and a peak of amplitude was suppressed from <a href="drawing 2">drawing 3</a>.

[0019]A signal which carried out FFT of the input signal with which <u>drawing 4</u> received a signal (that is, phase diffusion was carried out and transmitted) transmitted by an above-mentioned method

[External Character 26]

R k

It is alike and is a complex code sequence. [External Character 27]

(-- this specification preceding paragraph -- only  $(S^*)$  -- a table -- the bottom --) -- carrying out multiplication -- a right received code series [External Character 28]

Хĸ

One embodiment of an OFDM receiving set by this invention to restore is shown. [0020]In drawing 4, it is an input signal.

[External Character 29]

R k

Direct in the serial/parallel conversion machine 5 - A parallel conversion is carried out, it is made a parallel signal, and an OFDM recovery is further carried out in FFT circuit 6. It is a complex code sequence to this OFDM demodulation signal to which it restored. [External

http://www4.ipdl.inpit.go.jp/cgi-bin/tran web cgi ejje?atw u=http%3A%2F%2Fwww4... 08/03/06

```
Character 30]
```

S k

Each multiplier 7 for carrying out multiplication is arranged between FFT circuit (fast Fourier Transform circuit) 6 and the parallel serial conversion circuit 8.

[0021]Complex code sequence [External Character 31]

Sk

It is a complex code sequence at \*\* and the transmitting side at the time of OFDM modulation. [External Character 32]

e i S k

The signal with which phase diffusion also of the receiver was carried out since multiplication was carried out and phase diffusion of the modulated wave was carried out will be received, and it is a right received code series as it is. [External Character 33]

X k

Specifically at the code sequence for carrying out reverse correction of it becoming impossible to restore, it is a complex code sequence. [External Character 34]

( $S_k$  is a known series beforehand in a receiver, for example, is  $S_k=k^2$ ;, however 0<=K<=N(N: total number of careers)). A code sequence restored eventually [External Character 35]

Χĸ

It is a code sequence of 1 or 1 [-] of k \*\*. [0022]Thereby, it is an input signal. [External Character 36]

R k

FFT is carried out by FFT6 through the \*\* serial/parallel conversion 5, and it is inputted into the multiplication terminal of the multiplier 7. On the other hand, it is a code sequence of a reverse correction sake about phase diffusion. [External Character 37]

Sk

In \*\*\*\*\*\*\*\*, it is known beforehand and is inputted into a multiplication terminal of the multiplier 7. In an output multiplier, it is a received code series of a binary (-1, 1). [External Character 38]  $\dot{X}_k$ 

It \*\*\*\*\* and is taken out via the parallel serial converter 8.

[0023] The complex code sequence which is needed above by a receiver for a right OFDM recovery [External Character 39]

<sub>ட</sub> – j**S** ;

It must be transmitted to a receiver in \*\* and a certain form. This is a complex code sequence. [External Character 40]

е - i **S** х

The very thing is not transmitted but information which it can reproduce by a receiver should just be sent. As a transmission method, it is made to contain in an input encoded signal at the transmitting side, and transmits in a transmitted symbol, or may transmit in a transmission line different from it.

[0024]A code sequence used in this invention when performing OFDM modulation and a recovery

http://www4.ipdl.inpit.go.jp/cgi-bin/tran web cgi ejje?atw u=http%3A%2F%2Fwww4... 08/03/06

by drawing 1 and drawing 4, respectively [External Character 41]

 $S_k$ 

[External Character 42]

Sk

\*\* -- a transmission code series a peak is still more apt to break off even if this changes a transmission code series for every symbol by a known method at the transmitting side, and transmits by performing phase diffusion and it is made to carry out reverse correction by a receiver, although it was considered as a regularity (it does not change) thing in time [External Character 43]

X k

Being spread is possible.

[0025]In consideration of the case where the amplitude of each career of an OFDM signal has information in the above-mentioned example (actually, in BPSKOFDM of the above-mentioned example, it does not have, but in the case of the multiple value QAMOFDM, it has information), it is the transmitting side and is a complex code sequence. [External Character 44]

 $S_k$ 

Since multiplication is carried out, and the topology will be lost if phase diffusion is carried out, in order to recover this, it is a receiver, and it is a complex code sequence. [External Character 45]

Sk

Multiplication was carried out.

[0026]On the other hand, in BPSKOFDM and QPSKOFDM, there is information only in the phase of each career and it does not have information in the amplitude direction of each career. Then, in BPSKOFDM, it is <u>drawing 1</u>, for example. [External Character 46]

 $S_k$ 

It carries out and is a transmission code series. [External Character 47]

Χı

case N/(2N  $_1$ ) of \*\* 1, and a case of 1 [ –] — N/(2N  $_2$ ) — the multiplication of the constant shall be carried out to a transmission code series (equivalent to an input encoded signal), respectively It is here, and N is symbol length and N $_1$  and N $_2$  is in a symbol, respectively.

[External Character 48]

X k

It is the number of \*\*1 and -1. By carrying out like this, it is a transmission signal. [External Character 49]

T k

Since a size of an ingredient 1, -1 or positive, and negative becomes equal at a \*\*\*\*\*\* peak period, a peak of amplitude can be suppressed and transmitted like the above-mentioned example. In this case, in a receiver, since it does not have information in an amplitude direction of each career, reverse correction of career diffusion for right decoding is not needed.

[0027]

[Effect of the Invention] According to this invention, as explained above, also in the amplifier which has restriction in generating electric power, such as satellite broadcasting, it has the purpose of securing a hour rate and the rate of a place, and even if it makes it operate in the

http://www4.ipdl.inpit.go.jp/cgi-bin/tran web cgi ejje?atw u=http%3A%2F%2Fwww4... 08/03/06

higher operating point, it becomes possible to carry out little distorted OFDM transmission.
[Translation done.]

http://www4.ipdl.inpit.go.jp/cgi-bin/tran\_web\_cgi\_ejje?atw\_u=http%3A%2F%2Fwww4... 08/03/06

(19)日本国特許庁(JP)

# (12) 公開特許公報(A)

(11)特許出願公開番号

特開平10-84329

(43)公開日 平成10年(1998) 3月31日

(51) Int.Cl.<sup>6</sup>

識別記号

庁内整理番号

 $\mathbf{F}$  I

技術表示箇所

H04J 11/00

H04J 11/00

Z

審査請求 未請求 請求項の数6 OL (全 7 頁)

(21)出願番号

特願平8-238917

(71)出願人 000004352

日本放送協会

(22)出願日

平成8年(1996)9月10日

東京都渋谷区神南2丁目2番1号(72)発明者 佐藤 庄衛

東京都世田谷区砧1丁目10番11号 日本放

送協会 放送技術研究所内

(72)発明者 斉藤 知弘

東京都世田谷区砧1丁目10番11号 日本放

送協会 放送技術研究所内

(72)発明者 森山 繁樹

東京都世田谷区砧1丁目10番11号 日本放

送協会 放送技術研究所内

(74)代理人 弁理士 杉村 暁秀 (外3名)

#### (54) 【発明の名称】 OFDM変調信号の伝送方法およびOFDM送信装置、受信装置

(57)【要約】

(修正有)

【課題】 OFDM変調方式を用いたディジタル放送において、サービス時間率、場所率を確保するためには増幅器の動作点を高くとると、OFDM変調信号のピークにおいて歪みを発生し易くなる。

【解決手段】 送信側においては、入力符号化信号

X k

に複素符号系列

e 1 S k

(ここに、 $S_k = p k^2$  , pはゼロでない任意の実数、 $0 \le k \le N$ , Nは総キャリア数)を乗算(4)した後逆 F F T(2)するようにしてO F DM変調信号

Τ×

を生成して送信し、受信側においては、受信信号をFFTした信号に複素符号系列

e - : S x

(ここに、 $S_{\kappa}$  は上記  $S_{\kappa}$  に同じ)を乗算してOFDM 復調出力信号を得るようにした。

10

1

【特許請求の範囲】

【請求項1】 送信側においては、入力符号化信号に複素符号系列

#### 【外1】

e i S k

(ここに、 $S_1 = p k^2$ , pはゼロでない任意の実数、 $0 \le k \le N$ , Nは総キャリア数)を乗算した後逆FFT するようにしてOFDM変調信号を生成して送信し、受信側においては、受信信号をFFTした信号に複素符号系列

#### [外2]

# e - : 5 x

(ここに、 $S_R$  は前記 $S_R$  に同じ)を乗算してOFDM 復調信号を得るようにしたことを特徴とするOFDM変 調信号の伝送方法。

【請求項2】 請求項1記載の0FDM信号の伝送方法 において、受信側における0FDM復調のために必要な 前記複素符号系列

#### 【外3】

e -; **5** k

(ここに、 $S_k = p k^2$  , pはゼロでない任意の実数、 $0 \le k \le N$  , Nは総キャリア数)に関する情報を、前記入力符号化信号に含ませ、または当該OFDM伝送用伝送路以外の伝送路にて送信側から受信側に予め伝送するようにしたことを特徴とするOFDM変調信号の伝送方法。

【請求項3】 少なくとも入力符号化信号に複素符号系列

# 【外4】

e i S x

(ここに、 $S_k = p k^2$  , pはゼロでない任意の実数、 $0 \le k \le N$  , Nは総キャリア数)を乗算する手段を具えてなることを特徴とするOFDM送信装置。

【請求項4】 少なくとも受信信号をFFTした信号に 複素符号系列

#### 【外5】

e - i 5 x

(ここに、 $S_k = p k^4$ , pはゼロでない任意の実数、 $0 \le k \le N$ , Nは総キャリア数)を乗算する手段を具えてなることを特徴とするO F D M受信装置。

【請求項5】 BPSKOFDMおよびQPSKOFD M変調信号のいずれかの変調信号を生成して送信するOFDM変調信号の伝送方法において、前記いずれかの変調信号がとりうる位相の正と負の成分の振幅を、前記いずれかの変調信号の振幅ピーク時において等しくするような複数の定数を入力符号化信号の値に応じてそれぞれ乗算した後、逆FFTしてOFDM変調信号を生成して送信するようにしたことを特徴とするOFDM変調信号の伝送方法。

【請求項6】 BPSKOFDMおよびQPSKOFD 50

M変調信号のいずれかの変調信号を生成して送信するOFDM送信装置において、少なくとも前記いずれかの変調信号がとりうる位相の正と負の成分の振幅を、前記いずれかの変調信号の振幅ピーク時において等しくするような複数の定数を入力符号化信号の値に応じてそれぞれ乗算する手段を具えてなることを特徴とするOFDM送信装置。

2

#### 【発明の詳細な説明】

[0001]

【発明の属する技術分野】放送衛星においては、太陽電池による発生電力を使用するため、中継増幅器の出力に制限があるが、本発明は、そのような衛星系(地上系に対して)でのディジタル放送等に使用するのに適している周波数直交分割多重(OFDM:Orthogonal Frequency Division Multiplexing)変調信号の伝送方法およびOFDM送信装置、受信装置に関する。

#### [0002]

【発明が解決しようとする課題】従来、OFDMの各キャリアの変調方式には、BPSK,QPSKなどの位相変調がある。これらの変調方式では多重された各キャリアの基準位相は一定であり、各変調信号のとりうる位相はBPSKの場合2値、QPSKの場合4値と限られている。従って、この方式では各キャリアの位相がそろいやすく、OFDM時間軸信号上に振幅のピークが発生する場合がある。

【0003】例えば、放送用中継増幅器においては、発生電力、増幅器効率に制限があるなかでサービス時間率、場所率を確保するために飽和領域付近で使用されている。また、OFDM変調方式を用いたディジタル放送においてもサービス時間率、場所率を確保するためには増幅器の動作点を高くとることが望まれる。しかし一方で、このように動作点を高くとると、OFDM変調信号の振幅ピークにおいて歪みを発生し易くなる。

【0004】本発明の目的は、上記のような発生電力、 増幅器効率に制限がある状況において、OFDM信号の 振幅ピークを抑え高い動作点で歪みの少ない伝送を行う ことにある。

#### [0005]

【課題を解決するための手段】上記目的を達成するた 40 め、本発明においては、伝送すべき情報に影響を与えることなく、OFDM各キャリアの基準位相を拡散させ、または、OFDM各キャリアの振幅を変化させることによって信号の振幅ピークを抑制しようとするものである。これら基準位相の拡散、ないし振幅の変化を行わせるために、本発明では、入力符号化信号に伝送情報に影響を与えないように(受信側で、影響を与えないように補正する場合を含む)特定の信号(S)を乗算し、それをもとにOFDM変調を行い、各キャリアの伝送を行う。

【0006】いま、信号(S)乗算して各キャリアの基

準位相を拡散させる場合、各キャリアの位相はそろいにくくなり、振幅のピークを抑えて伝送を行うことができる。この場合、受信側において、上記送信側で乗算した信号(S) をOFDM復調信号に乗算して正しい情報を復元するようにする。

【0007】また、各キャリアがBPSK, QPSKなど振幅方向に情報を持たない場合、送信側で信号(S)を乗算するにあたり、位相がそろって振幅ピークを生じるキャリアと逆位相の成分を持つキャリアの振幅を大きくするように乗算する信号(S)を選ぶことによって、信号ピークを抑えた伝送を行うことできる。ここで、信号(S)の乗算は離散時間での計算だけで行うことができるため、ソフトウェアによって柔軟に対応することができる。

【0008】すなわち、本発明OFDM変調信号の伝送 方法は、送信側においては、入力符号化信号に複素符号 系列

【外6】

e i S x

(ここに、 $S_k = p k^2$  , pはゼロでない任意の実数、 $0 \le k \le N$  , Nは総キャリア数)を乗算した後逆FFT するようにしてOFDM変調信号を生成して送信し、受信側においては、受信信号をFFTした信号に複素符号系列

【外7】

е - і 5 х

(ここに、S・は前記S・に同じ)を乗算してOFDM 復調信号を得るようにしたことを特徴とするものであ る。

【0009】また、本発明OFDM変調信号の伝送方法 30 は、受信側におけるOFDM復調のために必要な前記複素符号系列

【外8】

е-і **б**к

(ここに、 $S_k = p k^2$ , pはゼロでない任意の実数、 $0 \le k \le N$ , Nは総キャリア数)に関する情報を、前記入力符号化信号に含ませ、または当該OFDM伝送用伝送路以外の伝送路にて送信側から受信側に予め伝送するようにしたことを特徴とするものである。

【0010】また、本発明OFDM送信装置は、少なく 40とも入力符号化信号に複素符号系列

【外9】

e i S x

(ここに、 $S_k = p k^2$  , pはゼロでない任意の実数、 $0 \le k \le N$  , Nは総キャリア数)を乗算する手段を具えてなることを特徴とするものである。

【0011】また、本発明OFDM受信装置は、少なくとも受信信号をFFTした信号に複素符号系列

【外10】

e - i 5 x

(ここに、 $S_k = p k^2$  , pはゼロでない任意の実数、 $0 \le k \le N$  , Nは総キャリア数)を乗算する手段を具えてなることを特徴とするものである。

【0012】また、本発明OFDM変調信号の伝送方法は、BPSKOFDMおよびQPSKOFDM変調信号のいずれかの変調信号を生成して送信するOFDM変調信号の伝送方法において、前記いずれかの変調信号がとりうる位相の正と負の成分の振幅を、前記いずれかの変調信号の振幅ピーク時において等しくするような複数の定数を入力符号化信号の値に応じてそれぞれ乗算した後、逆FFTしてOFDM変調信号を生成して送信するようにしたことを特徴とするものである。

【0013】また、本発明OFDM送信装置は、BPSKOFDMおよびQPSKOFDM変調信号のいずれかの変調信号を生成して送信するOFDM送信装置において、少なくとも前記いずれかの変調信号がとりうる位相の正と負の成分の振幅を、前記いずれかの変調信号の振幅ピーク時において等しくするような複数の定数を入力符号化信号の値に応じてそれぞれ乗算する手段を具えてなることを特徴とするものである。

[0014]

(3)

【発明の実施の形態】以下に添付図面を参照し、発明の 実施の形態に基づいて本発明を詳細に説明する。図 1 は、送信符号系列(入力符号化信号)

【外11】

X k

を直一並列変換した信号に、符号系例

【外12】

 $S_k$ 

(本明細書前段では、単に(S)にて表した)を乗算して伝送する本発明によるOFDM送信装置の一実施形態を示している。なお、本実施形態は、BPSKOFDMに位相の拡散を行って信号ピークを抑制する実施形態である。

【0015】図1において、入力符号化信号としての符号系列

【外13】

X k

をシリアルーパラレル変換器1において直一並列変換して並列信号にし、さらに逆FFT回路(Invers Fast Fo urier Transform circuit)2およびパラレルーシリアル変化器3を介して変換器3の出力端子からOFDM変調信号が得られる。ここまでは通常のOFDM変調信号発生のプロセスである(但し、図1において乗算器4がない場合)。

【0016】これに対し、本発明においては、図1に示50 すように、シリアルーパラレル変換器1と逆FFT(I

DISH Exhibit 1005 Page 294 (4) 特開平10-84329

FFT)回路2との間の各並列線の間にそれぞれ乗算器4を介挿し、入力符号化信号である符号系列

【外14】

Χĸ

と符号系列

【外15】

Sk

との間で乗算を行い、その乗算結果が逆FFT回路2に 10 供給されるようにする。なお、図1の構成は一例であ り、本発明においては、符号系列

【外16】

· X k

に符号系列

【外17】

 $S_k$ 

が相互に乗算されるような構成であればよく、図1に示 20 す回路配置に従う必要はない。

【0017】ここで、入力符号系列

【外18】

Хĸ

は、N個の2値(1, -1のいずれかをとる)の符号系列であり、符号系列

【外19】

Sk

は符号系列

[外20]

. X k

の位相を拡散するための複素符号系列

【外21】

e i S x

である。(S<sub>1</sub> は受信側で予め既知の系列であり、例えば、各キャリアの遅れ時間が周波数に比例するように、

【数1】

 $S_k = p k^2$ 

ただし、pはゼロでない任意の実数、 $0 \le K \le N$ , Nは 総キャリア数である。)

こうして、2値の入力符号系列

【外22】

X k

は、位相拡散のための複合符号系列

【外23】

eisk

と乗算器4によって相互に乗算される。乗算の結果、位 相拡散されたOFDM変調信号

【外24】

T k

がパラレルーシリアル変換器3の出力端子に得られる。 【0018】図2(a),(b)は、上述したBPSKOFDM変調信号生成時に符号系列(複素符号系列) 【外25】

S k

を乗算しない(通常のBPSKOFDM)ときと、本発明によって乗算したときの変調信号の各キャリアのコンスタレーションの一例をそれぞれ示している。また、図3(a),(b)は、それらに対応したOFDM変調信号の信号波形の一例をそれぞれ示している。図2および図3から、位相拡散された信号の時間軸波形は、位相拡散されない場合に比べ各キャリアの位相がそろいにくくなり(図2(b))、振幅のピークが抑えられた信号(図3(b))として伝送されることが分かる。【0019】図4は、上述の方法で送信された(すなわち、位相拡散して送信された)信号を受信した受信信号

【外26】

R k

に複素符号系列

をFFTした信号

【外27】

s.\*

(本明細書前段では、単に( $S^{*}$ )で表した)を乗算して正しい受信符号系列

【外28】

Хĸ

を復元する本発明による OF DM受信装置の一実施形態を示している。

【0020】図4において、受信信号

【外29】

Rъ

をシリアルーパラレル変換器5において直一並列変換して並列信号にし、さらにFFT回路6においてOFDM復調する。この復調されたOFDM復調信号に複素符号系列

【外30】

S k

を乗算するための各乗算器7がFFT回路 (fast Fouri 50 er Transform circuit)6とパラレルーシリアル変換回

路8との間に配置される。 【0021】複素符号系列

【外31】

 $S_k$ 

は、送信側でOFDM変調時に複素符号系列 【外32】

eiSx

を乗算し、変調波を位相拡散させたため、受信側でも位 相拡散された信号が受信されてしまい、そのままでは正 10 しい受信符号系列

【外33】

X k

を復元できなくなるのを逆補正するための符号系列で、 具体的には、複素符号系列

【外34】

e - i 5 k

(Sk は受信側で予め既知の系列であり、例えば、Sk  $=k^2$ ;ただし0 $\leq K \leq N$ (N:総キャリア数))であ 20 る。また、最終的に復元される符号系列

【外35】

Χk

はk個の1または-1の符号系列である。

【0022】これにより、受信信号

【外36】

R k

Tされ乗算器7の被乗算端子に入力される。一方、位相 拡散を逆補正ための符号系列

【外37】

 $S_k$ 

は受信側において予め既知であり、乗算器7の乗算端子 に入力される。乗算器出力には2値(-1,1)の受信 符号系列

【外38】

X k

が復元され、パラレルーシリアル変換器8を介して取り 出される。

【0023】以上において、正しいOFDM復調のため に受信側で必要となる複素符号系列

【外39】

е-і **5** к

は、何らかのかたちで受信側に伝送されなければならな い。これは複素符号系列

【外40】

e - i 5 x

そのものを伝送するのでなく、それが受信側で再現でき る情報が送られればよい。伝送方法としては、送信側で 入力符号化信号に含ませ、伝送済みのシンボルの中で伝 送しておくか、それとは別の伝送路で伝送してもよい。 【0024】また、図1、図4でそれぞれOFDM変調 および復調を行う際に本発明において使用する符号系列

Sk

【外42】

【外41】

 $S_k$ 

は時間的に一定(変化しない)ものとしたが、これは、 送信符号系列を送信側で既知の方法でシンボルごとに変 化させ位相拡散を行って伝送し、受信側で逆補正するよ うにしても、なおピークのたちやすい送信符号系列 【外43】

X k

を拡散することが可能である。

【0025】上述例においては、OFDM信号の各キャ リアの振幅が情報をもつ場合を考慮して(実際には、上 述例のBPSKOFDMの場合はもたないが、多値QA MOFDMの場合には情報をもつ)、送信側で複素符号 系列

【外44】

 $S_k$ 

はシリアルーパラレル変換5を経てFFT6によりFF 30 を乗算して位相拡散させると、その位相情報が失われる ため、これを回復させるために受信側で複素符号系列 【外45】

 $S_k$ 

を乗算した。

【0026】これに対し、BPSKOFDM, QPSK OFDMなどでは各キャリアの位相のみに情報があり、 各キャリアの振幅方向には情報をもたない。そこで、例 えばBPSKOFDMの場合、図1の

40 【外46】

 $S_{k}$ 

として、送信符号系列

【外47】

X k

が1の場合N/(2N1)、また、-1の場合N/(2 N2) なる定数をそれぞれ送信符号系列(入力符号化信 号に相当) に乗算するものとする。ここで、Nはシンボ 50 ル長、N<sub>1</sub> , N<sub>2</sub> はそれぞれシンボル中の

(6)

特開平10-84329

10

[外48] X k

の 1 , -1 の個数である。こうすることにより、伝送信号

9

【外49】

T k

の振幅ピーク時には 1 と-1 あるいは正と負の成分の大きさが等しくなるため、前述例と同様に振幅のピークを 10 抑えて伝送することができる。この場合、受信側では、各キャリアの振幅方向には情報をもたないため、正しい符号復元のためのキャリア拡散の逆補正を必要としない。

# [0027]

【発明の効果】以上説明したように、本発明によれば、 衛星放送などの発生電力に制限のある増幅器において も、時間率、場所率を確保する目的をもって、より高い\* \*動作点で動作させても歪の少ないOFDM伝送をすることが可能となる。

#### 【図面の簡単な説明】

【図1】本発明によるOFDM送信装置の一実施形態を示している。


【図2】従来および本発明によるOFDM変調信号の各 キャリアのコンスタレーションの一例を示している。


【図3】従来および本発明によるOFDM変調信号の信号波形の一例を示している。

【図4】本発明によるOFDM受信装置の一実施形態を示している。


#### 【符号の説明】


- 1,5 シリアルーパラレル変換器
- 2 逆FFT回路
- 3,8 パラレルーシリアル変換器
- 4, 7 乗算器
- 6 FFT回路

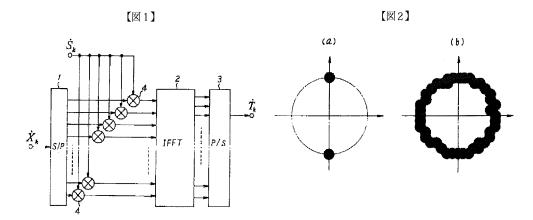

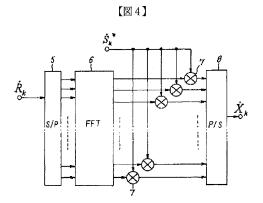









#### PATENT ABSTRACTS OF JAPAN

(11) Publication number: 08321820 A(43) Date of publication of application: 03.12.1996

(51) Int. CI **H04J 11/00** 

H04J 1/00

(21) Application number: 07325996

(22) Date of filing: 14.12.1995

(30) Priority: **20.12.1994 JP 06316900** 

20.03.1995 JP 07 60732

(71) Applicant: MATSUSHITA ELECTRIC IND CO

LTD

(72) Inventor: HAYASHINO YUJI

UNO YASUHIRO HARADA YASUO KIMURA TOMOHIRO

**OUE YUJI** 

#### (54) TRANSMISSION METHOD FOR ORTHOGONAL FREQUENCY DIVISION/ MULTIPLEX SIGNAL AND ITS TRANSMITTER AND/RECEIVER


#### (57) Abstract:

PURPOSE: To effectively remove waveform distortion occurred in a data component on the frequency axis of respective symbols by means of a multipath and the like at the time of transmitting an OFDM signals.

CONSTITUTION: In a transmission device 1, a complex multiplier 13 complex-multiplies a carrier modulation signal group by a complex number signal group which has a previously decided special pattern and in which the phase changes at random. An inverse Fourier transformer 15 executes inverse Fourier transform against the output of the complex multiplier 13, and transforms a digital signal multiplexed on the frequency axis into the OFDM signal of a time axis. A guard time insertion part 16 adds front guard time to

the front parts of the respective symbols of the OFDM signal and rear guard time to rear parts. Data similar to the trailing end part of the corresponding symbol is included in front guard time, and data similar to the front end part of the corresponding symbol is included in rear guard time. The OFDM signals to which front guard time and rear guard time are added are transformed into analog signals and are transmitted to a reception-side. The reception-side executes a processing inverse to a transmission-side and therefore distortion owing to time delay is removed.

COPYRIGHT: (C)1996,JPO



#### (19)日本国特許庁(JP)

# (12) 公開特許公報(A)

#### (11)特許出願公開番号

# 特開平8-321820

(43)公開日 平成8年(1996)12月3日

(51) Int.Cl. <sup>6</sup>	識別記号	庁内整理番号	FΙ	技術表示箇所
H 0 4 J 11/00			H 0 4 J 11/00	Z
1/00			1/00	

#### 審査請求 未請求 請求項の数12 OL (全 14 頁)


		<b>奋</b> 宜請	木前水 前水填の数12 OL (宝 14 貝)
(21)出願番号	特願平7-325996	(71)出願人	000005821
			松下電器産業株式会社
(22)出願日	平成7年(1995)12月14日		大阪府門真市大字門真1006番地
		(72)発明者	林野 裕司
(31)優先権主張番号	特願平6-316900		大阪府門真市大字門真1006番地 松下電器
(32)優先日	平6 (1994)12月20日		産業株式会社内
(33)優先権主張国	日本(JP)	(72)発明者	宇野 矢壽弘
(31)優先権主張番号	特願平7-60732		大阪府門真市大字門真1006番地 松下電器
(32)優先日	平7 (1995) 3月20日		産業株式会社内
(33)優先権主張国	日本(JP)	(72)発明者	原田 泰男
			大阪府門真市大字門真1006番地 松下電器
			産業株式会社内
		(74)代理人	弁理士 小笠原 史朗
			最終頁に続く

#### (54) 【発明の名称】 直交周波数分割多重信号の伝送方法ならびにその送信装置および受信装置

### (57)【要約】

【課題】 OFDM信号を伝送する際に、マルチパス等によって各シンボルの周波数軸上のデータ成分に生じる 波形歪みを効果的に除去することである。

【解決手段】 送信装置において、複素乗算器13は、 搬送波変調信号群と、予め定められた特定パターンを有 しかつその位相がランダムに変化している複素数信号群 とを複素乗算する。逆フーリエ変換器15は、複素乗算 器13の出力に対して逆フーリエ変換を施し、周波数軸 上で多重されたディジタル信号を、時間軸上のOFDM 信号に変換する。ガードタイム挿入部16は、OFDM 信号の各シンボルの前部に前部ガードタイムを、後部に 後部ガードタイムを付加する。前部ガードタイムには対 応するシンボルの後端部と同じデータが含められ、後部 ガードタイムには対応するシンボルの前端部と同じデー 夕が含められる。前部ガードタイムおよび後部ガードタ イムが付加されたOFDM信号は、アナログ信号に変換 された後、受信側に伝送される。受信側で送信側と逆の 処理を行うことにより、時間遅延による歪みが除去され る。

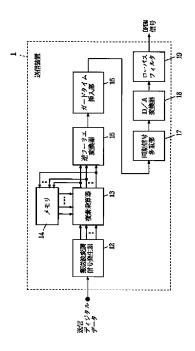

#### 【特許請求の範囲】

【請求項1】 有線または無線の伝送路を介し、送信側 から受信側に対して、所定長のシンボル毎に直交周波数 分割多重信号を伝送する方法であって、

周波数軸上で互いに直交する複数のキャリアの位相と振 幅とを決定する搬送波変調信号群をシンボル毎に逆フー リエ変換することにより、時間軸上の前記直交周波数分 割多重信号に変換する第1のステップと、

前記直交周波数分割多重信号の各シンボルに対し、その 前部にその後端部と同じデータを含む前部ガードタイム 10 前記逆フーリエ変換手段から出力される前記直交周波数 を付加するとともに、その後部にその前端部と同じデー 夕を含む後部ガードタイムを付加して、前記受信側に送 信する第2のステップとを備える、直交周波数分割多重 信号の伝送方法。

【請求項2】 前記搬送波変調信号群と、基準複素数信 号群とを周波数軸上で複素乗算する第3のステップをさ らに備え、

前記第1のステップは、前記第3のステップで得られた 複素乗算結果を、前記直交周波数分割多重信号に変換す

【請求項3】 前記第3のステップは、前記搬送波変調 信号群の各シンボルについて、その一定シンボル前に複 素乗算した結果を、前記基準複素数信号群として各前記 搬送波変調信号群に複素乗算する、請求項2に記載の直 交周波数分割多重信号の伝送方法。

【請求項4】 予め定められた特定パターンを有し、か つ各信号の位相がランダムに変化している複素数信号群 をシンボル毎に発生する第4のステップをさらに備え、

前記第3のステップは、前記搬送波変調信号群の各シン 30 ボルについて、前記第4のステップで得られた複素数信 号群を、前記基準複素数信号群として使用し、

前記第1のステップは、常時は前記第3のステップで得 られた複素乗算結果を前記直交周波数分割多重信号に変 換し、定期的に前記基準複素数信号群を前記直交周波数 分割多重信号に変換する、請求項2に記載の直交周波数 分割多重信号の伝送方法。

【請求項5】 所定長のシンボル毎に前記送信側から送 信されてきた前記直交周波数分割多重信号を、前記搬送 波変調信号群に対応する受信搬送波変調信号群に変換す 40 る第5のステップと、

前記第5のステップで得られた受信信号群を、所定の基 準複素数信号群により、周波数軸上で複素除算する第6 のステップとを備える、請求項2に記載の直交周波数分 割多重信号の伝送方法。

【請求項6】 有線または無線の伝送路を介し、受信側 に、所定長のシンボル毎に直交周波数分割多重信号を送 信する装置であって、

基準複素数信号群を記憶するメモリ手段と、

周波数軸上で互いに直交する複数のキャリアの位相と振 50 受信搬送波変調信号群を、受信基準複素数信号群として

幅とを決定する搬送波変調信号群と、前記メモリ手段に 記憶された前記基準複素数信号群とを周波数軸上で複素 乗算し、送信搬送波変調信号群を出力する複素乗算手段 ٤.

前記複素乗算手段から出力される送信搬送波変調信号群 に対して、各シンボル毎に逆フーリエ演算を施すことに より、当該送信搬送波変調信号群を、時間軸上の前記直 交周波数分割多重信号に変換する逆フーリエ変換手段

分割多重信号の各シンボルに対し、その前部にその後端 部と同じデータを含む前部ガードタイムを付加するとと もに、その後部にその前端部と同じデータを含む後部ガ ードタイムを付加するガードタイム付加手段と、

前記前部ガードタイムおよび前記後部ガードタイムの付 加された前記直交周波数分割多重信号を、各シンボル毎 に前記受信側に送信する送信手段とを備える、直交周波 数分割多重信号の送信装置。

【請求項7】 前記メモリ手段は、前記複素乗算手段の る、請求項1に記載の直交周波数分割多重信号の伝送方 20 一定シンボル前の複素乗算結果を、前記基準複素数信号 群として記憶する、請求項6に記載の直交周波数分割多 重信号の送信装置。

> 【請求項8】 前記メモリ手段は、予め定められた複素 数信号群を、前記基準複素数信号群として記憶し、

> 前記複素乗算手段は、前記搬送波変調信号群と、前記メ モリ手段に記憶された前記基準複素数信号群とを周波数 軸上で複素乗算して出力し、

前記逆フーリエ変換手段は、常時はシンボル毎に前記複 素乗算手段から出力された複素乗算結果を前記直交周波 数分割多重信号に変換し、定期的に前記メモリ手段から 出力された前記基準複素数信号群を前記直交周波数分割 多重信号に変換する、請求項6に記載の直交周波数分割 多重信号の送信装置。

【請求項9】 前記メモリ手段は、前記基準複素数信号 群として疑似雑音信号を発生する疑似雑音信号発生手段 の出力を保持していることを特徴とする、請求項8に記 載の直交周波数分割多重信号の送信装置。

【請求項10】 前記メモリ手段は、前記基準複素数信 号群として周波数掃引信号を発生する周波数掃引信号発 生手段の出力を保持していることを特徴とする、請求項 8に記載の直交周波数分割多重信号の送信装置。

【請求項11】 有線または無線の伝送路を介し、送信 側から所定長のシンボル毎に送信されてくる直交周波数 分割多重信号を受信する装置であって、

時間軸上の前記直交周波数分割多重信号に対して、シン ボル毎にフーリエ変換演算を施すことにより、当該直交 周波数分割多重信号を、周波数軸上の受信搬送波変調信 号群に変換するフーリエ変換手段と、

前記フーリエ変換手段から一定シンボル毎に出力された

-202-

3

記憶するメモリ手段と、

前記フーリエ変換手段から出力された受信搬送波変調信 号群を、前記メモリ手段に記憶された受信基準複素数信 号群により、周波数軸上で複素除算する複素除算手段と を備える、直交周波数分割多重信号の受信装置。

【請求項12】 有線または無線の伝送路を介し、送信 側から受信側に対して、所定長のシンボル毎に直交周波 数分割多重信号を伝送する方法であって、

周波数軸上で互いに直交する複数のキャリアの位相と振幅とを決定するための搬送波変調信号群をシンボル毎に 10 生成する第1のステップと、

予め定められた特定パターンを有し、かつ各信号の位相 がランダムに変化している複素数信号群を発生する第2 のステップと、

前記搬送波変調信号群と前記複素数信号群とをシンボル 毎に周波数軸上で複素乗算することにより、当該搬送波 変調信号群の各信号の位相をランダム化する第3のステップと、

常時は前記第3のステップで各信号の位相がランダム化された搬送波変調信号群をシンボル毎に逆フーリエ変換 20 して時間軸上の前記直交周波数分割多重信号に変換し、定期的に前記複素数信号群を逆フーリエ変換して前記直交周波数分割多重信号に変換し、それぞれを前記受信側に送信する第4のステップとを備える、直交周波数分割多重信号の伝送方法。

#### 【発明の詳細な説明】

[0001]

【発明の属する技術分野】本発明は、直交周波数分割多重(Orthogonal FrequencyDivision Multiplexing;以下、OFD 30 Mと称す)伝送方法に関し、より特定的には、有線または無線の伝送路を介し、送信側と受信側との間で、所定長のシンボルと当該シンボル間に配置された所定長のガードタイムとを含む直交周波数分割多重信号を用いてデータを伝送する方法に関する。

[0002]

【従来の技術】周知のごとく、OFDM伝送方式は、符号化したデータを分割して、数百以上の搬送波に振り分け、これを多重して伝送する方式である。近年、移動体向けディジタル音声放送や、地上ディジタルテレビ放送 40 等において、OFDM信号を用いた通信が着目されている。なぜならば、OFDM信号は、多量のデータの高速伝送が可能で、波形等価器なしでも反射波による特性劣化が少なく、その信号波形がランダム雑音に近い形となるので、他のサービスに混信妨害を与えにくい等の特質を有しているからである。

【0003】 このようなOFDM信号を用いた伝送方式は、1993年10月1日付け発行のNIKKEI E LECTRONICS BOOKS「データ圧縮とディジタル変調」の第207~222頁において、郵政省、

通信総合研究所の福地一により書かれた「数百以上の搬送波を使うOFDMディジタル放送の移動受信に向く」 に開示されている。

【0004】図13は上記先行文献に開示された従来のOFDM信号の送信装置の構成を示すプロック回路図であり、図14は図13の送信装置から送信されるOFDM信号の構成を示す図である。図13において、送信装置5は、直並列変換器52と、逆フーリエ変換器53と、並直列変換器54と、D/A変換器55と、ローパスフィルタ56とを備える。なお、図14において、(a)はOFDM信号の直接波を示し、(b)はOFDM信号の反射波を示し、(c)はOFDM信号の合成波を示し、(d)は時間窓Wを示している。

【0005】送信装置5の直並列変換器52には、入力 シンボル列が供給されている。入力シンボル列は、ディ ジタル変調された送信データであり、1 伝送シンボル中 には複数のデータ値が含まれている。なお、ディジタル 変調方式としては、QPSK(quadriphase phase shift keying) 変調や、1 6QAM (quadrature amplitude modulation)等が採用される。直並列変換 器52は、入力シンボル列を、1シンボル毎に、直並列 変換して、より低速な複数のシンボル列にする。ここで の並列度は、逆フーリエ変換回路53で使用する複数の 搬送波(相互に位相が直交している)の数(数十~数 千、たとえば512)と同じになる。このような操作に より、直並列変換器52は、逆フーリエ変換回路53で 使用する複数の搬送波のそれぞれの振幅および位相を決 定するための搬送波変調信号群を出力する。

80 【0006】逆フーリエ変換回路53は、搬送波変調信 号群を、1シンボル毎に、周波数軸上に並ぶ各搬送波に 割り当て(これによって、1シンボル分のデータが周波 数軸上で多重された信号となる)、これらに対して一括 的に逆フーリエ変換を施すことにより、時間軸上の多重 信号(この段階では、並列のディジタル信号である)に 変換する。

【0007】並直列変換器54は、時間軸上の多重信号を並直列変換することにより、離散的なOFDM信号を生成する。D/A変換回路55は、離散的なOFDM信号を、アナログのOFDMベースバンド信号に変換する。ローパスフィルタ56は、エイリアシングによるチャネル間干渉が生じないようにするため、OFDMベースバンド信号に帯域制限をかける。

【0008】上記のような一連の操作の結果、送信装置 5は、伝送路に対し、図14に示すようなガードタイム Gm とシンボルSm とを含むOFDM信号を出力する。 図示しない復調装置は、伝送路を介して受信したOFD M信号に対して変調装置 5と逆の信号処理を行い、入力シンボル列と同じ出力シンボル列を再生する。

50 [0009]

【発明が解決しようとする課題】ところで、伝送路上で は、いわゆるマルチパスが発生する。このため、受信装 置側では、送信装置から送信されてきたOFDM信号の 直接波と、直接波から時間遅延した反射波とを重なって 受信する。シンボルSmを例にとると、直接波(図14 (a) 参照) にマルチパスによる反射波(図14(b) 参照) が重なった場合、合成波(図14(c)参照)の シンボルSmの前端部に反射波のガードタイムGmとの 干渉部 am が生じ、ガードタイム Gm の前端部に反射波 のシンボルSm-1 との干渉部βm が生じる。このとき、 干渉部 ß m は、時間窓Wからはずれているため、シンボ ルSm のフーリエ変換には影響を及ぼさない。しかしな がら、干渉部 αm は、時間窓W内に生じ、かつガードタ イムGm のデータ成分が「O」であるため、フーリエ変 換後の各シンボルSm の周波数軸上のデータ成分に波形 歪みを生じるという第1の問題点があった。

【0010】また、伝送路の遅延特性や、送信側のD/ A変換器および受信側のA/D変換器のクロックが一致 していないことに起因してサンプリングのタイミングに ずれが生じる等の理由から、送信装置から受信装置に到 20 達するまでの間に、OFDM信号に時間遅延が発生す る。このため、受信装置では、時間窓Wを時間軸上で調 整する必要があるという第2の問題点もあった。

【0011】また、直並列変換器52から出力される搬 送波変調信号群は、その位相が相互に異なっているだけ でなく、その位相がすべて同一の場合もありうる。例え ば、ディジタル音声放送では無音状態を1シンボル期間 を超えて送信する場合に、地上ディジタルテレビ放送で は一色の映像を1シンボル期間を超えて送信する場合 に、搬送波変調信号群の位相がすべて同一になる。ま た、有音状態を送信する場合や、多色の映像を送信する 場合においても、QPSK変調や、16QAM等のよう なディジタル変調方式では、位相の異なる信号点の配点 数が限られるため、搬送波変調信号群の位相がすべて同 一になりやすい。

【0012】このように、搬送波変調信号群の位相がす べて同一になった場合、この搬送波変調信号群を逆フー リエ変換すると、時間軸上で各搬送波の節が一致し、加 算増加箇所が時間軸上で一箇所に集中するため、時間軸 上のOFDM信号の信号波形がインパルス状になり、電 40 力集中が生じる。この様子を図15に示す。

【0013】図15 (a) は、相互に直交するn本の搬 送波をそれぞれ変調するn個の搬送波変調信号群の複素 平面上での位相がすべて同一の場合を示している。図1 5 (b) は、図15 (a) のn個の搬送波変調信号群で 変調されたn本の搬送波を時間軸上で多重した状態を示 している。このように搬送波変調信号群の位相がすべて 同一の場合には、OFDM信号は、インパルス状の波形 信号になる。なお、図15(c)は、相互に直交するn

の複素平面上での位相がランダムな場合を示している。 また、図15 (d) は、図15 (c) のn個の搬送波変 調信号群で変調されたn本の搬送波を時間軸上で多重し た状態を示している。このように、搬送波変調信号群の 位相がすべて異なる場合には、OFDM信号は、時間軸

上に平均的に拡散され、ランダム状の波形信号になる。

6

【0014】上記のように、搬送波変調信号群の位相が すべて同一になった場合、OFDM信号がインパルス状 になり、最大電力が極端に大きくなるため、OFDM信 10 号は、送受信装置や伝送路に含まれる中継増幅器(衛星 や CAT V など) 等の非線形性の影響を受けやすくなる という第3の問題点もあった。この場合、OFDM信号 がインパルス状になっても、非線形性の影響を与えない ように、送受信装置や中継増幅器等のダイナミックレン ジを大きくすることも考えられるが、送受信装置や中継 増幅器等が高価になるという別の問題が発生する。

【0015】それ故に、本発明の目的は、マルチパスに より反射波が直接波に重なった場合でも、フーリエ変換 後の各シンボルの周波数軸上のデータ成分に波形歪みを 生じないOFDM信号の伝送方法ならびにその送信装置 および受信装置を提供することである。本発明の他の目 的は、送信側から受信側に到達するまでの間に、OFD M信号に時間遅延が発生しても、時間窓の時間軸上での 調整が容易なOFDM信号の伝送方法ならびにその送信 装置および受信装置を提供することである。本発明のさ らに他の目的は、安価な構成で、OFDM信号に対する 非線形性の影響を軽減したOFDM信号の伝送方法なら びにその送信装置および受信装置を提供することであ

#### [0016]

【課題を解決するための手段および発明の効果】本発明 の第1の局面は、有線または無線の伝送路を介し、送信 側から受信側に対して、所定長のシンボル毎に直交周波 数分割多重信号を伝送する方法に向けられており、周波 数軸上で互いに直交する複数のキャリアの位相と振幅と を決定する搬送波変調信号群をシンボル毎に逆フーリエ 変換することにより、時間軸上の直交周波数分割多重信 号に変換する第1のステップと、直交周波数分割多重信 号の各シンボルに対し、その前部にその後端部と同じデ ータを含む前部ガードタイムを付加するとともに、その 後部にその前端部と同じデータを含む後部ガードタイム を付加して、受信側に送信する第2のステップとを備え ている。

【0017】上記のように、第1の局面では、OFDM 信号の各シンボルを送信する際に、各シンボルの前部お よび後部に、そのシンボルの一部と同じデータを含む前 部ガードタイムおよび後部ガードタイムを付加するよう にしているので、受信側では、フーリエ変換時における 時間窓が受信信号のシンボル区間から多少ずれても、時 本の搬送波をそれぞれ変調するn個の搬送波変調信号群 50 間軸上に並ぶ1シンボル区間内のすべてのデータ成分を

再生することができる。従って、送信側から受信側に到 達するまでの間に、OFDM信号に時間遅延が発生して も、時間窓をシンボル区間に正確に一致させる必要がな くなり、時間窓の時間軸上での調整が容易になる。ま た、マルチパスにより直接波のシンボル区間と反射波の ガードタイムとが重なっても、受信側でフーリエ変換後 の周波数軸上に現れる各データ成分の振幅位相歪みは、 各シンボル間ですべて一様なものとなる。したがって、 簡単な演算処理(乗算、加算等)によって、受信側での それらの波形歪みを除去することが可能となる。

【0018】上記第1の局面において、好ましい実施形 態では、搬送波変調信号群と基準複素数信号群とを周波 数軸上で複素乗算し、この複素乗算結果をOFDM信号 に変換して、受信側に伝送するようにしている。また、 受信側では、送信側から送信されてきたOFDM信号を 受信搬送波変調信号群に変換し、この受信搬送波変調信 号群を、基準複素数信号群により、周波数軸上で複素除 算するようにしている。これによって、送信側と受信側 との間でOFDM信号に時間遅延が発生しても、受信側 20 で時間遅延の影響のない復調データを得ることができ る。

【0019】なお、搬送波変調信号群に複素乗算される 基準複素数信号群としては、搬送波変調信号群の各シン ボルについて、その一定シンボル前に複素乗算した結果 を用いても良い。

【0020】また、予め定められた特定パターンを有 し、かつ各信号の位相がランダムに変化している複素数 信号群を、基準複素数信号群として用いても良い。ただ し、この場合、常時は第3のステップで得られた複素乗 30 算結果がOFDM信号に変換され、定期的に基準複素数 信号群がOFDM信号に変換される。これによって、搬 送波変調信号群の各信号の絶対基準位相がランダムな値 になり、逆フーリエ変換によって得られたOFDM信号 に電力の時間集中がおこるのを抑制できる。従って、送 信装置、受信装置および伝送路のダイナミックレンジを 大きくする必要がなく、安価な構成で、送受信器や中継 増幅器等の非線形性がOFDM信号に与える影響を軽減 することができる。

【0021】本発明の第2の局面は、有線または無線の 40 とを備えている。 伝送路を介し、受信側に、所定長のシンボル毎に直交周 波数分割多重信号を送信する装置に向けられており、基 準複素数信号群を記憶するメモリ手段と、周波数軸上で 互いに直交する複数のキャリアの位相と振幅とを決定す る搬送波変調信号群と、メモリ手段に記憶された基準複 素数信号群とを周波数軸上で複素乗算し、送信搬送波変 調信号群を出力する複素乗算手段と、複素乗算手段から 出力される送信搬送波変調信号群に対して、各シンボル 毎に逆フーリエ演算を施すことにより、当該送信搬送波

換する逆フーリエ変換手段と、逆フーリエ変換手段から 出力される直交周波数分割多重信号の各シンボルに対 し、その前部にその後端部と同じデータを含む前部ガー ドタイムを付加するとともに、その後部にその前端部と 同じデータを含む後部ガードタイムを付加するガードタ イム付加手段と、前部ガードタイムおよび後部ガードタ イムの付加された直交周波数分割多重信号を、各シンボ

8

【0022】上記第2の局面において、好ましい実施形 1シンボル区間の周波数軸上のデータ成分から、容易に 10 態では、メモリ手段は、複素乗算手段の一定シンボル前 の複素乗算結果を、基準複素数信号群として記憶してい

ル毎に受信側に送信する送信手段とを備えている。

【0023】上記第2の局面において、他の好ましい実 施形態では、メモリ手段は、予め定められた複素数信号 群を、基準複素数信号群として記憶する。また、複素乗 算手段は、搬送波変調信号群と、メモリ手段に記憶され た基準複素数信号群とを周波数軸上で複素乗算して出力 する。さらに、逆フーリエ変換手段は、常時はシンボル 毎に複素乗算手段から出力された複素乗算結果を直交周 波数分割多重信号に変換し、定期的にメモリ手段から出 力された基準複素数信号群を直交周波数分割多重信号に 変換する。

【0024】上記第2の局面において、メモリ手段は、 基準複素数信号群として、疑似雑音信号を発生する疑似 雑音信号発生手段の出力を保持しても良いし、周波数掃 引信号を発生する周波数掃引信号発生手段の出力を保持 しても良い。

【0025】本発明の第3の局面は、有線または無線の 伝送路を介し、送信側から所定長のシンボル毎に送信さ れてくる直交周波数分割多重信号を受信する装置に向け られており、時間軸上の直交周波数分割多重信号に対し て、シンボル毎にフーリエ変換演算を施すことにより、 当該直交周波数分割多重信号を、周波数軸上の受信搬送 波変調信号群に変換するフーリエ変換手段と、フーリエ 変換手段から一定シンボル毎に出力された受信搬送波変 調信号群を、受信基準複素数信号群として記憶するメモ リ手段と、フーリエ変換手段から出力された受信搬送波 変調信号群を、メモリ手段に記憶された受信基準複素数 信号群により、周波数軸上で複素除算する複素除算手段

【0026】本発明の第4の局面は、有線または無線の 伝送路を介し、送信側から受信側に対して、所定長のシ ンボル毎に直交周波数分割多重信号を伝送する方法に向 けられており、周波数軸上で互いに直交する複数のキャ リアの位相と振幅とを決定するための搬送波変調信号群 をシンボル毎に生成する第1のステップと、予め定めら れた特定パターンを有し、かつ各信号の位相がランダム に変化している複素数信号群を発生する第2のステップ と、搬送波変調信号群と複素数信号群とをシンボル毎に 変調信号群を、時間軸上の直交周波数分割多重信号に変 50 周波数軸上で複素乗算することにより、当該搬送波変調

信号群の各信号の位相をランダム化する第3のステップ と、常時は第3のステップで各信号の位相がランダム化 された搬送波変調信号群をシンボル毎に逆フーリエ変換 して時間軸上の直交周波数分割多重信号に変換し、定期 的に複素数信号群を逆フーリエ変換して直交周波数分割 多重信号に変換し、それぞれを受信側に送信する第4の ステップとを備えている。

#### [0027]

【発明の実施の形態】以下、本発明の実施形態に係る〇 置について、図面を参照しながら説明する。

【0028】図1は本発明の第1の実施形態の送信装置 を示すブロック図であり、図2は本発明の第1の実施形 態の受信装置の構成を示すブロック図であり、図3は本 発明で用いるOFDM信号の構成の一例を示す図であ る。なお、図3において、(a)はOFDM信号の直接 波を示し、(b) はOFDM信号の反射波を示し、 (c) は時間遅延が生じた場合のOFDM信号の直接波 を示し、(d)は時間遅延が生じた場合のOFDM信号 の反射波を示し、(e)は時間窓Wを示している。

【0029】図1の送信装置1と、図2の受信装置2と は、同軸ケーブルや、光ファイバケーブル等の伝送路 (図示せず) で接続されている。このような送信装置1 および受信装置2は、たとえばディジタルCATVシス テムにおいて用いられる。送信装置1は、OFDM信号 を用い、受信装置2に対して、たとえばテレビの多チャ ンネル分の映像データを伝送するように構成されてい

【0030】図1において、送信装置1は、搬送波変調 信号発生器12と、複素乗算器13と、メモリ14と、 逆フーリエ変換器15と、ガードタイム挿入部16と、 同期信号多重部17と、D/A変換器18と、ローパス フィルタ19とを備えている。

【0031】送信装置1の搬送波変調信号発生器12に は、受信装置2に送信すべき送信ディジタルデータ(ビ ットストリーム信号) が入力されている。搬送波変調信 号発生器12は、入力された送信ディジタルデータを、 ディジタル変調すると共に、1シンボル区間毎に直並列 変換し、相互に直交するn本(n=数十~数千、たとえ ば512)の搬送波を変調するためのn個の搬送波変調 信号を含む搬送波変調信号群に変換する。なお、ディジ タル変調方式としては、QPSK変調や、16QAM等 が採用される。この段階での搬送波変調信号群は、従来 の直並列変換器52 (図13参照) から出力される搬送 波変調信号群と同様である。搬送波変調信号発生器12 から出力される搬送波変調信号群は、複素乗算器13に 与えられる。メモリ14は、複素乗算器13から出力さ れる搬送波変調信号群D' m を1シンボル分記憶するこ とができる。また、メモリ14は、複素乗算器13に搬

ている1シンボル前の搬送波変調信号群D'm-1 を、所 定の基準複素数信号群として、複素乗算器13に出力す る。複素乗算器13は、入力された送信信号群Dmと、 1シンボル前の基準複素数信号群D'm-1 とを、周波数 軸上で、複素乗算することにより、搬送波変調信号群

10

 $D'm (D'm = Dm \times D'm-1)$ を作成する。

【0032】より具体的に説明すると、複素乗算器13 に入力された搬送波変調信号群(n個の搬送波変調信号 FDM信号の伝送方法ならびその送信装置および受信装 10 を含む)のうち、k(k=1, 2, ..., n)番目の搬送 波変調信号の実数部をDm [k] realとし、その虚 数部をDm [k] imagとし、メモリ14に記憶した k番目の搬送波変調信号の実数部をD'm-1 [k] re alとし、その虚数部をD'm-1 [k] imagとした 場合、複素乗算器13は、各搬送波変調信号の実数部お よび虚数部それぞれについて、乗算処理を行い、

> D'm [k] real=Dm [k] real $\times$ D'm-1 [k] real

 $D'm[k]imag=Dm[k]imag\times D'm-1$ 20 [k] imag

を出力する。メモリ14は、複素乗算器13から出力さ れた実数および虚数の搬送波変調信号D'm (D'm [k] realおよびD'm [k] imagを含む)を 記憶保持する。図4に示すように、メモリ14および複 素乗算器13は、上記のような動作を繰り返し実行す

【0033】逆フーリエ変換器15は、複素乗算器13 から出力される搬送波変調信号群D' m 中のそれぞれの 搬送波変調信号を、シンボル区間毎に、順次周波数軸上 に並ぶ各搬送波に割り当て、これらに対して一括的に逆 フーリエ変換を施し、さらに並直列変換を行うことによ り、周波数軸上で各データ成分が多重された搬送波変調 信号群を、時間軸上で各データ成分が多重されたOFD M信号D'mtに変換する。

【0034】ガードタイム挿入部16は、逆フーリエ変 換器15から出力されるディジタルのOFDM信号D' mtを、各シンボル区間毎に、一旦、内部のバッファに蓄 える。次に、ガードタイム挿入回路16は、各シンボル Sm に対して、その前部に前部ガードタイムGhmを、そ の後部に後部ガードタイムGemを、それぞれ付加する (図3参照)。なお、前部ガードタイムGhmの時間長t g1および後部ガードタイムGemの時間長tg2は、そ れぞれ伝送路で発生するマルチパスによる直接波と間接 波との時間差および送信装置1のD/A変換器18と受 信装置2のA/D変換器22との間のサンプリングのず れによる時間遅延を考慮して定められる。また、前部ガ ードタイムGhmには、対応するシンボルSm の後端部S emと同じデータD'emt が含められ、後部ガードタイム Gemには、対応するシンボルSm の前端部Shmと同じデ 送波変調信号群Dm が入力されたときに、内部に記憶し 50 ーp D  $^{\prime}$  bm が含められる。これにより、実質的なシン

11

ボル長が、 t g 1 + t s + t g 2 に延長されることになる。 ガードタイム挿入部 1 6 は、前部ガードタイムG n、シンボル n 、後部ガードタイム n の n を順次出力する。

【0035】同期信号多重部17は、シンボルの区切りを示すため、シンボル毎に、同期信号を、ガードタイムの付加されたOFDM信号に時間軸上で多重し、D/A変換器18に出力する。同期信号は、たとえば、図5(a)に示すようにOFDM信号に対し、周期的に既知の無変調搬送波と抑圧信号等とから構成する。

【0036】D/A変換器18は、同期信号多重部17から出力される、ガードタイムおよび同期信号が付加されたディジタルデータのOFDM信号を、アナログのOFDMベースバンド信号に変換する。ローバスフィルタ19は、エイリアシングによるチャネル間干渉が生じないようにするため、OFDMベースバンド信号に帯域制限をかける。

【0037】上記のような一連の操作の結果、送信装置 1は、伝送路に対して、ガードタイムおよび同期信号を 含むOFDM信号を出力する。

【0038】図2において、受信装置2は、ローパスフィルタ21と、A/D変換器22と、エンベロープ検波器23と、同期再生部24と、フーリエ変換器25と、メモリ26と、複素除算器27と、送信データ再生器28とを備えている。

【0039】ローパスフィルタ21は、伝送路を介して 受信した〇FDM信号から、不要な高周波域のスペクト ル成分を除去する。

【0040】ここで、マルチパスや伝送路の遅延特性等による時間遅延 $\Delta$ t を考慮し、受信装置2において受信 30したOFDM信号を2D'mtとする。なお、2は、

 $Z = e \times p j 2 \pi f c \Delta t$ 

であり、信号の遅延分を表している。

【0041】A/D変換器22は、アナログのOFDM信号の前部ガードタイムGhm、シンボルSm、後部ガードタイムGemにそれぞれ含まれるデータZD' ent、ZD' mt、ZD' hmt を、ディジタルのOFDM信号に変換する。

【0042】エンベロープ検波器23は、OFDM信号をエンベロープ検波することにより、図5(b)に示す 40 エンベロープ検波信号を、シンボル毎に出力する。同期再生部24は、エンベロープ検波器23から出力されたエンベロープ検波信号に基づいて、図5(c)に示す基準タイミング信号を、シンボル毎に出力する。この基準タイミング信号は、フーリエ変換器25およびメモリ26に入力される。

【0043】フーリエ変換器25は、基準タイミング信 m+1 を、メモリ26に保持されてい 号に同期して、A/D変換器22から出力されるOFD 複素除算することにより、データの M信号を、シンボル長tsと同じ長さの時間窓W(図3 ルし、遅延の無い元の搬送波変調 (e) 参照)を介して覗くことにより、各シンボルの必 50 る。すなわち、複素除算器27が、

12

要なデータ部分だけを抽出する。また、フーリエ変換器 25は、この抽出されたデータ部分に対して、フーリエ 変換演算を施すことにより、時間軸上のOFDM信号 を、周波数軸上の受信搬送波変調信号群に変換する。

となる。メモリ26は、基準タイミング信号に同期して、データZD'mを複素除算器27に出力する。複素除算器27は、同期を確立した上で、フーリエ変換器25から出力されるシンボルSm+1のデータZD'mによって複素除算する。すなわち、複素除算器27は、

ZD'm+1/ZD'm=D'm+1/D'm=Dm+1 20 の演算を行う。図6に示すように、フーリエ変換器2 5、メモリ26および複素除算器27は、上記のような 動作を繰り返し実行する。

【0045】前述したように、マルチパスに起因して、図3(a)に示す直接波と図3(b)に示す反射波との間に、相対的な時間遅延が生じる。また、送信装置1のD/A変換器18と受信装置2のA/D変換器22とにおけるサンプリングタイミングが異なることに起因して、直接波および反射波にそれぞれ固有の時間遅延が発生する(図3(c)および図3(d)参照)。フーリエ変換器25において、基準タイミング信号は、これらの時間遅延を考慮していないため、図3(e)に示すように、時間軸上における受信側の時間窓Wの位置は、受信信号のシンボル区間からずれている。

【0046】しかしながら、受信側のフーリエ変換器2 5で、時間窓Wが正確なシンボル区間からずれていて も、前部ガードタイムGhmおよび後部ガードタイムGem には、それぞれデータZD'emt およびZD'hmt が含 まれているため、時間窓Wを介して覗いたデータには、 1シンボル区間に本来含まれるべき時間軸上のすべての データZD'mtが含まれていることになる。このため、 この時間遅延および反射波の重なりは、周波数軸上にお いて各データ成分毎に一様な振幅位相歪みとなって現れ る。また、時間遅延および反射波の特性が一様であれ ば、各シンボル区間毎に振幅位相歪みの大きさは等しく なる。本実施形態では、複素除算器27は、フーリエ変 換器 2 5 から出力されたシンボル Sm+1 のデータ ZD' m+1 を、メモリ26に保持されているデータZD'm で 複素除算することにより、データの遅延分2をキャンセ ルし、遅延の無い元の搬送波変調信号群Dm+1 を得てい 1.3

ZD'm+1/ZD'm=D'm+1/D'm=Dm+1の演算を行うことにより、振幅位相歪みは打ち消される こととなり、各シンボルについて、位相・振幅歪みのな いデータDm が得られる。

【0047】以上のように、上記実施形態では、各シン ボルの前後にそのシンボルの後端部および前端部と同じ データを含むガードタイムを付加して送信するようにし ているので、受信側では、時間窓W内に直接波および反 射波の両方について、時間軸上に並ぶ1シンボル区間内 のすべてのデータ成分を再生することができる。このた 10 め、マルチパスにより反射波が直接波に重なり、直接波 のシンポル区間と反射波のガードタイムとが重なって も、フーリエ変換後に周波数軸上に現れる各データ成分 の振幅位相歪みは、すべて一様なものとなる。したがっ て、送信側および受信側で適当な演算処理(乗算、除 算)を実行することで、1シンボル区間の周波数軸上の 受信搬送波変調信号群から、容易に波形歪みを除去する ことができる。

【0048】また、上記実施形態では、送信側と受信側 数軸上で受信搬送波変調信号群を所定の基準複素数信号 群で複素乗算、複素除算することにより、時間遅延のな い復調データを得ることができる。その結果、時間窓を シンボル区間に正確に一致させる必要がなくなる。

【0049】送信データ再生器28は、複素除算器27 から出力された受信搬送波変調信号群Dm の信号点を複 素平面上にマッピングし、信号点を判定することによ り、送信装置1の送信ディジタル信号群と同値の受信デ ィジタル信号群を得る。前述したように、受信搬送波変 調信号群Dm からは、位相歪みや振幅歪みが除去されて 30 いる。したがって、送信データ再生器28は、複素平面 上へのマッピング位置から、正確かつ容易に元のデータ を判定することができる。

【0050】なお、本願発明者は、計算機を使用して、 マルチパスによる遅延波の影響と、時間軸遅延の影響と について、従来のシステムと本実施形態のシステムとを 比較するシミュレーションを行った。なお、このシミュ レーションは、キャリア数が512本、256番目のキ ャリアのデータだけが振幅「1」,位相「0」、他のキ ャリアのデータはすべて「0」を条件として実施され 40 た。

【0051】図7は、マルチパスによる遅延波の影響に ついて、従来のシステムと本実施形態のシステムとを比 較したシミュレーション結果を示す図である。なお、図 7において、(a), (b), (c), (d) は、それ ぞれ、従来のシステムにおける直接波、間接波、合成 波、合成波をフーリエ演算することにより周波数軸上の 信号に変換した場合のデータ歪みを示している。また、 図7において、(e), (f), (g), (h)は、そ

14

波、合成波、合成波をフーリエ演算することにより周波 数軸上の信号に変換した場合のデータ歪みを示してい

【0052】従来のシステムでは、ガードタイムにいか なるデータも挿入されていないため(図7(b)の $\alpha$ 1 参照)、合成波の時間窓W中に干渉部α2が発生してい る(図7(c)参照)。したがって、合成波を時間窓W でフーリエ演算することにより周波数軸上の信号に変換 すると、図7(d)に示すように、256番目のキャリ アのデータのスペクトルが拡がるとともに、他のキャリ アの本来「0」であったはずのデータに歪みが生じる。 したがって、送信データ再生器28で誤判定が起き易く なる。さらに、他のキャリアについても、送信データ再 生器28で誤判定が起き易くなる。一方、本実施形態の システムでは、ガードタイムにデータが挿入されている ので、他のキャリアのデータに影響を及ぼさない。

【0053】図8は、伝送路等による時間遅延の影響に ついて、従来のシステムと本実施形態のシステムとを比 較したシミュレーション結果を示す図である。図8にお との間で、OFDM信号に時間遅延が発生しても、周波 20 いて、(a) は256番目のキャリアのデータだけが振 幅「1」、位相「0」の場合のスペクトルを示し、

> (b) は (a) のデータを逆フーリエ演算することによ り時間軸上の信号に変換した場合の信号波形を示してい る。また、図8において、(c), (d)は、それぞ れ、従来のシステムにおける時間遅延を生じた合成波、 合成波をフーリエ演算することにより周波数軸上の信号 に変換した場合のデータ歪みを示している。また、図8 において、(e), (f)は、それぞれ、本実施形態の システムにおける時間遅延を生じた合成波、合成波をフ ーリエ演算することにより周波数軸上の信号に変換した 場合のデータ歪みを示している。

> 【0054】従来のシステムでは、ガードタイムにいか なるデータも挿入されていないため(図8(c)の $\alpha$ 1 参照)、図7 (c) の場合と同様に、合成波の時間窓W 中に干渉部 $\alpha$ 2が発生する。したがって、図8(d)に 示すように、合成波を時間窓Wでフーリエ演算すること により周波数軸上の信号に変換すると、256番目のキ ャリアのデータのスペクトルが拡がるとともに、他のキ ャリアの本来「0」であったはずのデータに歪みが生じ る。したがって、他のキャリアについても、送信データ 再生器28で誤判定が起こり易くなる。一方、本実施形 態では、ガードタイムにデータが挿入されているので、 他のキャリアのデータに影響を及ぼさない。

【0055】図9は、本発明の第2の実施形態の送信装 置の構成を示すプロック図である。なお、図9の送信装 置3において、図1の送信装置1の構成と対応する部分 には、同一の参照番号を付し、その説明を省略する。図 9の実施形態で注目すべき点は、メモリ14が、特定パ ターン発生器 3 1 の出力、すなわち、予め定められた特 れぞれ、本実施形態のシステムにおける直接波、間接 50 定パターンを有し、かつ各信号の位相が相互にランダム 15

に変化している複素数信号群D0 を保持していることである。このような複素数信号群D0 は、たとえば $0\sim1$  の間のレベルの疑似ランダム信号を発生する PN系列疑似ランダム信号発生器と、この疑似ランダム信号と $2\pi$  とを乗算する乗算器とを備え、位相が0から $2\pi$ 間でランダムな値を持ち、かつ振幅が1の単位ベクトル信号を生成する疑似雑音信号発生器により形成することができる。また、このような複素数信号群は、位相が0から $2\pi$ までのランダムな値を持った既知の周波数掃引信号を発生する、周波数掃引信号発生器により形成することも 10できる。

【0056】複素乗算器13は、各シンボル区間のデータDm が入力される毎に、データDm とデータD0 とを周波数軸上で複素乗算して、データD'm ( $D'm=Dm\times D0$ ) を作成し、搬送波変調信号群中の各搬送波変調信号の相互の位相を特定パターンにランダム化する。

【0057】図10は、複素乗算器13における複素乗算の動作を示す図である。特に、図10(a)は変調方式に16値QAMを用いた場合の搬送波変調信号の取り得る信号点配置を示し、図10(b)は位相がランダム 20に変化する単位ベクトルiを示し、図10(c)は位相を特定パターンにランダム化された搬送波変調信号を示している。

【0058】図10(a)において、今、一つの搬送波に割り当てられる搬送波変調信号群中の一つの搬送波変調信号が、複素平面上の信号点Aに配点されたと仮定する。信号点Aは、その実数部が3、その虚数部が1の大きさを持つ。また、単位ベクトルiは、この時、位相角3 $\pi/4$ を持ったと仮定する。複素乗算の結果、図10(c)に示す搬送波変調信号A'が得られる。搬送波変 30調信号A'は、実数部が-2.8、虚数部が1.4となり、16値QAMの配置にはない信号点をとることになる。このように、単位ベクトルiの位相がランダムに変化するため、搬送波変調信号発生器12から出力された搬送波変調信号群中の各搬送波変調信号の位相が、たとえ同一であっても、複素乗算器13は、位相が相互にランダム化された搬送波変調信号群を、逆フーリエ変換器15に出力する。

【0059】複素乗算器13は、このような動作を所定の期間繰り返す。また、複素乗算器13は、定期的にデータD0だけを出力する。この時の一連の動作を、図11に示す。すなわち、データD0が挿入されるシンボルをS0とすると、送信装置3は、図12に示すように、定期的にシンボルS0のデータD0を、その他の場合はシンボルSmのデータD1mを出力することになる。逆フーリエ変換器15は、搬送波変調信号群D1mを、シンボル毎に、周波数軸上に並ぶ各搬送波に割り当て、これらに対して一括的に逆フーリエ変換および並直列変換を施すことにより、ディジタルのOFDM信号に変換する。この結果、概送波変調信号群の3位は対してのない。

16

から $2\pi$ までのランダムな値になり、逆フーリエ変換器 15から出力されたOFDM信号に電力集中が起こるのを抑制できる。したがって、送信装置、受信装置のダイナミックレンジを大きくする必要がなく、安価な構成で、OFDM信号への送受信器や中継増幅器等の非線形性からの影響を軽減することができる。送信装置3における他の回路プロック、すなわちガードタイム挿入部150~ローパスフィルタ191は、送信装置10場合と同様に動作する。

【0060】なお、ガードタイム挿入部16は、シンボルSmの場合と同様に、シンボルS0の後端部と同じデータ成分D0を対応する前部ガードタイムに挿入するとともに、シンボルS0の前端部と同じデータ成分を対応する後部ガードタイムに挿入している。

【0061】図9に示す送信装置3を用いた場合、基本的には、図2に示す受信装置2と同じ構成の受信装置を用いることができる。ただし、受信装置のメモリ26には、送信装置3のメモリ14に記憶される基準複素数信号群D0の受信データZD0を記憶させることになる。

【0062】上記した図9の実施形態においても、前述した第1の実施形態と同様の効果が得られる。すなわち、マルチパスにより反射波が直接波に重なり、直接波のシンボル区間と反射波のガードタイムとが重なっても、フーリエ変換後に周波数軸上に現れる受信搬送波変調信号群の振幅位相歪みがすべて一様なものとなり、その除去を簡単な演算処理(乗算、除算)で行える。また、送信側と受信側との間でOFDM信号に時間遅延が発生しても、時間遅延の影響のない復調データを得ることができ、時間窓の時間軸上の調整が容易になる。

【0063】なお、上述の各実施形態は、有線の伝送路を介してデータを伝送するようにしているが、本発明はこれに限定されることなく、無線の伝送路を介してデータを伝送するようにしてもよい。また、上述の各実施形態では、多チャンネル分のテレビの映像データを各搬送波に乗せるようにしたが、1チャンネル分の映像データを時間分割して並列に並び替え、各搬送波に割り当てるようにしてもよい。さらに、映像データに替えて、音声データ、テキストデータ等を各搬送波にのせるようにしてもよい。さらに、CATVに替えて、LAN、WAN等の他のシステムにおいて本発明を実施してもよい。

【0064】さらに、図9の送信装置3では、メモリ14から出力された基準複素数信号群を、定期的に、複素乗算器13を介して逆フーリエ変換器15に入力するようにしたが、基準複素数信号群を、逆フーリエ変換器15に直接入力してもよい。

フーリエ変換器 15は、搬送波変調信号群D' m を、シンボル毎に、周波数軸上に並ぶ各搬送波に割り当て、これらに対して一括的に逆フーリエ変換および並直列変換を施すことにより、ディジタルのOFDM信号に変換する。この結果、搬送波変調信号群の絶対基準位相が、0 50 DM信号に生じる電力集中が生じないような状況下で

17

は、搬送波変調信号群に含める基準複素数信号群として、予め定められた特定パターンを有し、かつ各信号の位相が相互に同一の複素数信号群を使用しても良い。この場合でも、第1の実施形態と同様、簡単な演算処理(乗算、除算)を行うことで、振幅位相歪みを除去できる。

#### 【図面の簡単な説明】

【図1】本発明の第1の実施形態の送信装置の構成を示すブロック図である。

【図2】本発明の第1の実施形態の受信装置の構成を示 10 すブロック図である。

【図3】図1の送信装置1から送信されるOFDM信号の構成を示す図である。

【図4】図1のメモリ14と、複素乗算器13との動作を示す図である。

【図5】図1の送信装置1から出力されたOFDM信号に対する受信装置2のエンベロープ検波器23と同期再生部24との動作を示す図である。

【図6】図2のメモリ26と、複素除算器27との動作を示す図である。

【図7】マルチパスによる遅延波の影響について、従来のシステムと第1の実施形態のシステムとを比較したシミュレーション結果を示す図である。

【図8】伝送路等による時間遅延の影響について、従来のシステムと第1の実施形態のシステムとを比較したシミュレーション結果を示す図である。

【図9】本発明の第2の実施形態の送信装置の構成を示すブロック図である。

【図10】図9の複素乗算器13における搬送波変調信号群と複素数信号群との複素乗算の様子を示す図である。

18 【図11】図9のメモリ14と複素乗算器13との動作 を示す図である。

【図12】図9のOFDM信号の送信装置から送信されるOFDM信号の構成を示す信号構成図である。

【図13】従来のOFDM信号の送信装置の構成を示す ブロック図である。

【図14】図13の送信装置5から送信されるOFDM信号の構成を示す図である。


【図15】相互に直交する搬送波に割り当てられた搬送 2 波変調信号群の位相状態とOFDM信号との関係を示す 信号波形図である。

#### 【符号の説明】


(10)

- 1, 3…送信装置
- 12…搬送波変調信号発生器
- 13…複素乗算器
- 14…メモリ
- 15…逆フーリエ変換器
- 16…ガードタイム挿入部
- 17…同期信号多重部
- 30 18…D/A変換器
  - 19…ローパスフィルタ
  - 31…特定パターン発生器
  - 2 …受信装置
  - 21…ローパスフィルタ
  - 2 2 … A / D変換器
  - 23…エンベロープ検波器
  - 2 4…同期再生部
  - 25…フーリエ変換器
  - 26…メモリ
- 2 7…複素除算器
  - 28…送信データ再生器


【図1】

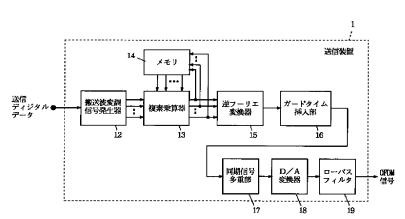


# [図2]

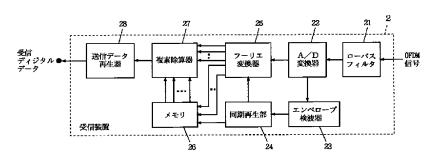


# 【図3】

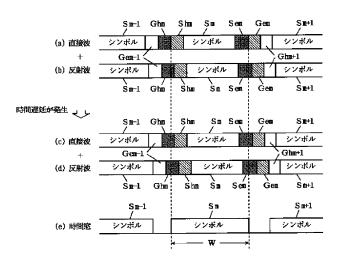



# 【図4】



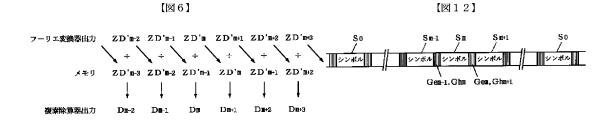




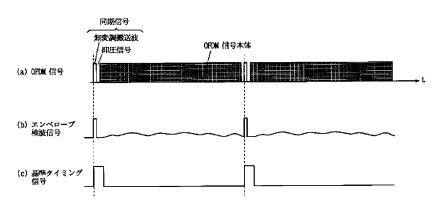


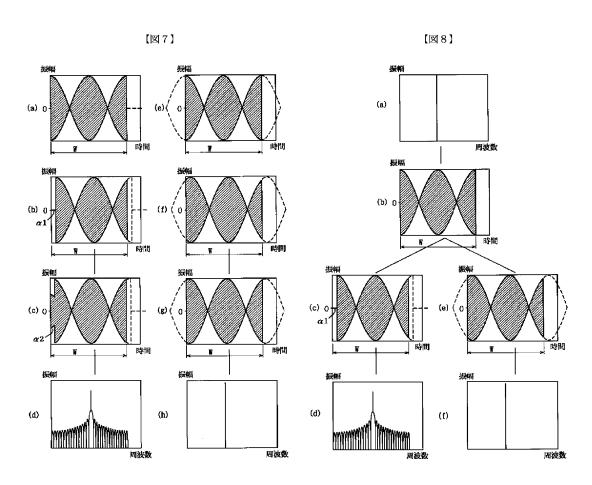

【図9】

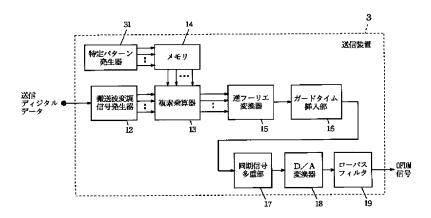


【図10】

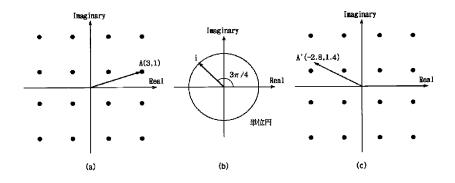

【図11】




【図13】

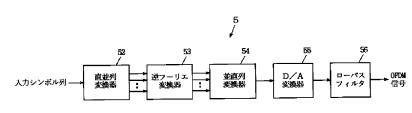


-213-

【図14】

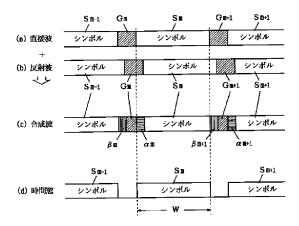

【図15】

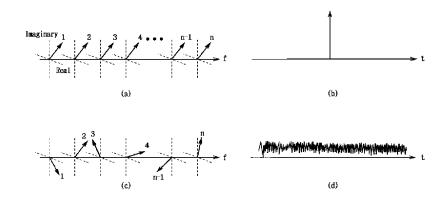

フロントページの続き

(72)発明者 木村 知弘

大阪府門真市大字門真1006番地 松下電器 産業株式会社内 (72)発明者 大植 裕司 大阪府門真市大字門真1006番地 松下電器 産業株式会社内

Electronic Acknowledgement Receipt		
EFS ID:	3233819	
Application Number:	11860080	
International Application Number:		
Confirmation Number:	5967	
Title of Invention:	SYSTEM AND METHOD FOR SCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM	
First Named Inventor/Applicant Name:	Marcos C. Tzannes	
Customer Number:	62574	
Filer:	Jason Vick/Debra Kesner	
Filer Authorized By:	Jason Vick	
Attorney Docket Number:	5550-47-CON-DIV	
Receipt Date:	30-APR-2008	
Filing Date:	24-SEP-2007	
Time Stamp:	15:53:53	
Application Type:	Utility under 35 USC 111(a)	

# Payment information:

Submitted with Payment	no
<u> </u>	

# File Listing:

Document Number	Document Description	File Name	File Size(Bytes) /Message Digest	Multi Part /.zip	Pages (if appl.)
1		IDS 02.pdf	348240	Voc	4
'		103_02.pui	7b22bdee47fd3463ff126acd2c86fe958 b8d81c8	yes	4

	Multipart Description/PDF files in .zip description				
	Document I	Start	E	ind	
	Information Disclosu	re Statement Letter	1		3
	Information Disclosure	Statement (IDS) Filed	4		4
Warnings:					
Information:					
2	Foreign Reference	JP_H10_1998084329.pdf	1648963	no	18
	r oreign richerence	01 _1110_1330_ 004023.pai	40c9155ecb0146a20291f62f095a0a7d 62cf0c00	no	10
Warnings:					
Information:					
3	Foreign Reference	JP8321820A.pdf	1472960	· no	15
	- Torongri Floronor	67 502 10257 tipar	24ac2b63d7fa8eb73096977d4f0bb76e 9ad5da48		
Warnings:					
Information:					
4	NPL Documents	5550-47-PJP_OA_3-3-08.pdf	239891	no	4
·			51dea09ec4c4130a741e3d331e1e8cfa 31a67233		·
Warnings:					
Information:					
5	NPL Documents	5550-47-CON-2_OA_2-6-08.	381810	no no	10
	THE DOOMINGTO	pdf	bb3a2d806d1e7caaeda7cd7eade8367 0b6f23749	110	
Warnings:					
Information:					
		Total Files Size (in bytes)	40	91864	

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

#### New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

#### National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

# New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.



#### United States Patent and Trademark Office

UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office Address: COMMISSIONER FOR PATENTS P.O. Box 1450 Alexandra, Vingnia 22313-1450 www.isplo.gov

APPLICATION	FILING or	GRP ART				
NUMBER	371(c) DATE	UNIT	FIL FEE REC'D	ATTY.DOCKET.NO	TOT CLAIMS	IND CLAIMS
11/860 080	09/24/2007	2611	1000	5550-47-CON-DIV	1	1

62574 Jason H. Vick Sheridan Ross, PC Suite # 1200 1560 Broadway Denver, CO 80202 CONFIRMATION NO. 5967 UPDATED FILING RECEIPT



Date Mailed: 12/17/2007

Receipt is acknowledged of this non-provisional patent application. The application will be taken up for examination in due course. Applicant will be notified as to the results of the examination. Any correspondence concerning the application must include the following identification information: the U.S. APPLICATION NUMBER, FILING DATE, NAME OF APPLICANT, and TITLE OF INVENTION. Fees transmitted by check or draft are subject to collection. Please verify the accuracy of the data presented on this receipt. If an error is noted on this Filing Receipt, please write to the Office of Initial Patent Examination's Filing Receipt Corrections. Please provide a copy of this Filing Receipt with the changes noted thereon. If you received a "Notice to File Missing Parts" for this application, please submit any corrections to this Filing Receipt with your reply to the Notice. When the USPTO processes the reply to the Notice, the USPTO will generate another Filing Receipt incorporating the requested corrections

Applicant(s)

Marcos C. Tzannes, Orinda, CA;

**Assignment For Published Patent Application** 

AWARE, INC., Bedford, MA

Power of Attorney: None

Domestic Priority data as claimed by applicant

This application is a DIV of 11/211,535 08/26/2005 PAT 7,292,627 which is a CON of 09/710,310 11/09/2000 PAT 6,961,369

which claims benefit of 60/164,134 11/09/1999

Foreign Applications

Projected Publication Date: To Be Determined - pending completion of Security Review

Non-Publication Request: No
Early Publication Request: No

page 1 of 3

#### Title

SYSTEM AND METHOD FOR SCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM

#### **Preliminary Class**

375

#### PROTECTING YOUR INVENTION OUTSIDE THE UNITED STATES

Since the rights granted by a U.S. patent extend only throughout the territory of the United States and have no effect in a foreign country, an inventor who wishes patent protection in another country must apply for a patent in a specific country or in regional patent offices. Applicants may wish to consider the filing of an international application under the Patent Cooperation Treaty (PCT). An international (PCT) application generally has the same effect as a regular national patent application in each PCT-member country. The PCT process **simplifies** the filing of patent applications on the same invention in member countries, but **does not result** in a grant of "an international patent" and does not eliminate the need of applicants to file additional documents and fees in countries where patent protection is desired.

Almost every country has its own patent law, and a person desiring a patent in a particular country must make an application for patent in that country in accordance with its particular laws. Since the laws of many countries differ in various respects from the patent law of the United States, applicants are advised to seek guidance from specific foreign countries to ensure that patent rights are not lost prematurely.

Applicants also are advised that in the case of inventions made in the United States, the Director of the USPTO must issue a license before applicants can apply for a patent in a foreign country. The filing of a U.S. patent application serves as a request for a foreign filing license. The application's filing receipt contains further information and quidance as to the status of applicant's license for foreign filing.

Applicants may wish to consult the USPTO booklet, "General Information Concerning Patents" (specifically, the section entitled "Treaties and Foreign Patents") for more information on timeframes and deadlines for filing foreign patent applications. The guide is available either by contacting the USPTO Contact Center at 800-786-9199, or it can be viewed on the USPTO website at http://www.uspto.gov/web/offices/pac/doc/general/index.html.

For information on preventing theft of your intellectual property (patents, trademarks and copyrights), you may wish to consult the U.S. Government website, http://www.stopfakes.gov. Part of a Department of Commerce initiative, this website includes self-help "toolkits" giving innovators guidance on how to protect intellectual property in specific countries such as China, Korea and Mexico. For questions regarding patent enforcement issues, applicants may call the U.S. Government hotline at 1-866-999-HALT (1-866-999-4158).

# LICENSE FOR FOREIGN FILING UNDER Title 35, United States Code, Section 184 Title 37, Code of Federal Regulations, 5.11 & 5.15

# **GRANTED**

The applicant has been granted a license under 35 U.S.C. 184, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" followed by a date appears on this form. Such licenses are issued in all applications where page 2 of 3

the conditions for issuance of a license have been met, regardless of whether or not a license may be required as set forth in 37 CFR 5.15. The scope and limitations of this license are set forth in 37 CFR 5.15(a) unless an earlier license has been issued under 37 CFR 5.15(b). The license is subject to revocation upon written notification. The date indicated is the effective date of the license, unless an earlier license of similar scope has been granted under 37 CFR 5.13 or 5.14.

This license is to be retained by the licensee and may be used at any time on or after the effective date thereof unless it is revoked. This license is automatically transferred to any related applications(s) filed under 37 CFR 1.53(d). This license is not retroactive.

The grant of a license does not in any way lessen the responsibility of a licensee for the security of the subject matter as imposed by any Government contract or the provisions of existing laws relating to espionage and the national security or the export of technical data. Licensees should apprise themselves of current regulations especially with respect to certain countries, of other agencies, particularly the Office of Defense Trade Controls, Department of State (with respect to Arms, Munitions and Implements of War (22 CFR 121-128)); the Bureau of Industry and Security, Department of Commerce (15 CFR parts 730-774); the Office of Foreign AssetsControl, Department of Treasury (31 CFR Parts 500+) and the Department of Energy.

#### **NOT GRANTED**

No license under 35 U.S.C. 184 has been granted at this time, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" DOES NOT appear on this form. Applicant may still petition for a license under 37 CFR 5.12, if a license is desired before the expiration of 6 months from the filing date of the application. If 6 months has lapsed from the filing date of this application and the licensee has not received any indication of a secrecy order under 35 U.S.C. 181, the licensee may foreign file the application pursuant to 37 CFR 5.15(b).

# IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re the Application of:		) Group Art Unit: 2611
Tzan	nes	Confirmation No.: 5967
Serial No.: 11/860,080		) Examiner: Not yet assigned
Filed: 09-24	-2007	) ) INFORMATION DISCLOSURE STATEMENT
Atty. File No	o.: 5550-47-CON-DIV	) Electronically Submitted
SCR. THE MUL	TEM AND METHOD FOR AMBLING THE PHASE OF CARRIERS IN A TICARRIER IMUNICATIONS SYSTEM	
P.O. Box 14:	er for Patents	
Dear Sir:		
The r	references cited on attached Form	n PTO-SB08 are being called to the attention of the
Examiner.		
⊠	Copies of cited non-patent and/o	or foreign references nos. 22-24 are enclosed herewith.
	Copies of the cited U.S. patent	s and/or patent applications are enclosed herewith.
	Copies of the cited U.S. patent	s/patent application publications are not enclosed in
accordance v	vith 37 C.F.R. § 1.98(a).	
$\boxtimes$	Copies of cited references nos.	14-21 are not enclosed, in accordance with 37 C.F.R.
in prior appli	•	or submitted to the U.S. Patent and Trademark Office (led <u>08-26-2005</u> , which is relied upon for an earlier
	To the best of applicants' belief	the pertinence of the foreign-language references are
believed to be summarized in the attached English abstracts and in the figures, although applicants do not necessarily vouch for the accuracy of the translation.		

$\boxtimes$	Examiner's attention is drawn to the following co-pending applications,:
	Serial No. <u>11/211535</u> filed <u>08-26-2005</u>
	Serial No. <u>11/863581</u> filed <u>09-28-2007</u>
	Other:

Submission of the above information is not intended as an admission that any item is citable under the statutes or rules to support a rejection, that any item disclosed represents analogous art, or that those skilled in the art would refer to or recognize the pertinence of any reference without the benefit of hindsight, nor should an inference be drawn as to the pertinence of the references based on the order in which they are presented. Submission of this statement should not be taken as an indication that a search has been conducted, or that no better art exists.

It is respectfully requested that the cited information be expressly considered during the prosecution of this application and the references made of record therein.

#### **FEES**

37 CFR 1.97(b): No fee is believed due in connection with this submission, because the information disclosure statement submitted herewith is satisfies one of the following conditions ("X" indicates satisfaction):			
Within three months of the filing date of a national application other than a continued prosecution application under 37 CFR 1.53(d), or			
Within three months of the date of entry into the national stage of an international application as set forth in 37 CFR 1.491 or			
☐ Before the mailing date of a first Office Action on the merits, or			
Before the mailing of a first Office action after the filing of a request for continued examination under 37 CFR 1.114.			
Although no fee is believed due, if any fee is deemed due in connection with this submission, please charge such fee to Deposit Account 19-1970.			
37 CFR 1.97(c): The information disclosure statement transmitted herewith is being filed after all the above conditions (37 CFR 1.97(b)), but before the mailing date of one of the following conditions:  (1) a final action under 37 C.F.R. 1.113 or  (2) a notice of allowance under 37 C.F.R. 1.311, or  (3) an action that otherwise closes prosecution in the application.  This Information Disclosure Statement is accompanied by:			
☐ A Certification (below) as specified by 37 C.F.R. 1.97(e). Although no fee is believed due, if any fee is deemed due in connection with this submission, please charge such fee to Deposit Account 19-1970.  OR			
☐ Please charge Deposit Account 19-1970 in the amount of \$180.00 for the fee set forth in 37 C.F.R. 1.176 for submission of an information disclosure statement. Please credit any overpayment or charge any underpayment to Deposit Account 19-1970.			
37 CFR 1.97(d): This Information Disclosure Statement is being submitted after the period specified in 37 CFR 1.97(c).  This information Disclosure Statement includes a Certification (below) as specified by 37 C.F.R. 1.97(e)  AND			
Applicants hereby requests consideration of the reference(s) disclosed herein. Please charge Deposit Account 19-1970 in the amount of \$180.00 under 37 C.F.R. 1.17(p). Please credit any overpayment or charge any underpayment to Deposit Account 19-1970. Election to pay the fee should not be taken as an indication that applicant(s) cannot execute a certification.			

	fication (37 C.F.R. 1.97(e)) oplicable only if checked)
☐ The undersigned certifies that:	
any communication from a fo	n contained in this information disclosure statement was first cited in oreign patent office in a counterpart foreign application not more than ng of this statement. 37 C.F.R. 1.97(e)(1).
$\square$ A copy of the co	ommunication from the foreign patent office is enclosed.
	OR
communication from a fore knowledge of the undersigne in this Information Disclosu	a contained in this information disclosure statement was cited in a sign patent office in a counterpart foreign application, and, to the ed after making reasonable inquiry, no item of information contained are Statement was known to any individual designated in 37 C.F.R. aths prior to the filing of this statement. 37 C.F.R. 1.97(e)(2).
	Respectfully submitted,
	SHERIDAN ROSS P.C.
	By:
Date: ( ) & C	Jason H. Vick Registration No. 45285 1560 Broadway, Suite 1200 Denver, Colorado 80202-5141 (303) 863-9700

Sub	Substitute for form 1449A/PTO		Complete if Known		
		FIGNI DIGG	N COURT	Application Number	11/860,080
			CLOSURE	Filing Date	09-24-2007
Si	<b>TATEME</b>	NT BY AP	PLICANT	First Named Inventor	Tzannes
				Art Unit	2611
				Examiner Name	Not yet assigned
Sheet	1	of	2	Attorney Docket Number	5550-47-CON-DIV

U.S. PATENT DOCUMENTS								
Examiner Initials*	Cite No. <sup>1</sup>	<u>Document Number</u> Number-kind Code <sup>2 (ff known)</sup>	Publication Date MM-DD-YYYY	Name of Patentee of Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear			
	1	3,955,141	05/01/76	Lyon et al.				
	2	4,985,900	01/01/91	Rhind et al.				
	3	5,748,677	05/01/98	Kumar				
	4	6,256,355	07/03/01	Sakoda et al.				
	5	6,507,585	01/01/03	Dobson				
	6	6,590,860	07/08/03	Sakoda et al.				
	7	6,704,317	03/01/04	Dobson				
	8	6,961,369	11/01/05	Tzannes				
	9	2005/0141410	06/30/05	Zhang et al.				
	10	2006/0002454	01/05/06	Tzannes				
	11	2006/0092902	05/04/06	Schmidt				
	12	2006/0140288	06/29/06	Holden				
	13	11/863581		Tzannes (09-28-2007)				

		FOR	EIGN PATEN	T DOCUMENTS			
Examiner Initials*	Cite No. <sup>1</sup>	Foreign Patent Document Country Code <sup>3</sup> ; Number <sup>4</sup> ; Kind Code <sup>5</sup> (if known)	Publication Date MM-DD-YYYY	Name of Patent Applicant of Cited D		Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear	T <sup>6</sup>
	14	EP 0584534	03/02/94	ALCATEL ITALI	Α		
	15	EP 0719004	06/26/96	MATSUSHITA ELECTRIC IND LTD	со		
	16	GB 2330491	04/21/99	BRITISH BROADCASTIN CORP	G		
	17	WO 98/32065	07/23/98	FORTRESS TECHNOLOGIE	s INC		
	18	WO 99/22463	05/06/99	MOTOROLA IN	С		
Examiner Signature					Date Consider	ed	

\*EXAMINER: Initial if reference is considered, whether or not citation is in conformance and not considered. Include copy of this form with next communication to applicant.

INFORMATION DISCLOSURE STATEMENT BY APPLICANT	Application Number Filing Date First Named Inventor	11/860,080 09-24-2007	
		09-24-2007	
STATEMENT BY APPLICANT	First Named Inventor		
	i list Named myentor	Tzannes	
	Art Unit	2611	
	Examiner Name	Not yet assigned	
eet 2 of 2	Attorney Docket Number	5550-47-CON-DIV	

		OTHER ART (Including Author, Title, Date, Pertinent Pages, etc.)
Examiner Initials*	Cite No.1	
	20	Bauml R. W. et al.: "Reducing The Peak-To-Average Power Ratio Of Multicarrier Modulation By Selected Mapping" Electronics Letters, GB, IEE Stevenage, vol. 32, No. 22, Oct. 24, 1996, pp. 2056-2057, XP000643915 ISSN: 0013-5194
	21	Copy of Annex to Form PCT/ISA/206 for PCT/US00/30958, Mar. 23, 2001 (5550-47-PCT)
	22	International Search Report for International (PCT) Patent Application No. PCT/US00/30958, completed June 12, 2001 (5550-47-PCT)
,	23	International Preliminary Examination Report for International (PCT) Patent Application No. PCT/US00/30958, completed March 4, 2002 (5550-47-PCT)
	24	Notice of Preliminary Rejection for Korean Patent Application No. 7005830/2002 dated November 22, 2006 (Attorney's Ref. No. 5550-47-PKR)

Examiner Date Signature Considered	
Signature Considered	

\*EXAMINER: Initial if reference is considered, whether or not citation is in conformance and not considered. Include copy of this form with next communication to applicant.

Electronic Acknowledgement Receipt				
EFS ID:	2558394			
Application Number:	11860080			
International Application Number:				
Confirmation Number:	5967			
Title of Invention:	SYSTEM AND METHOD FOR SCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM			
First Named Inventor/Applicant Name:	Marcos C. Tzannes			
Customer Number:	62574			
Filer:	Jason Vick/Debra Kesner			
Filer Authorized By:	Jason Vick			
Attorney Docket Number:	5550-47-CON-DIV			
Receipt Date:	06-DEC-2007			
Filing Date:	24-SEP-2007			
Time Stamp:	17:44:50			
Application Type:	Utility under 35 USC 111(a)			

# Payment information:

Submitted with Payment	no

## File Listing:

Document Number	Document Description	File Name	File Size(Bytes) /Message Digest	Multi Part /.zip	Pages (if appl.)
1		IDS 01.pdf	463631	VOC	5
'		103_01.pui	8dcd917aaf35f9714bd4509fff9049c0dd 76d061	yes	5

	Multipart Description/PDF files in .zip description							
	Document I	Start	E	nd				
	Information Disclosu	re Statement Letter	1	3				
	Information Disclosure	Statement (IDS) Filed	4		5			
Warnings:								
Information:								
2	NPL Documents	5550-47-PCT_Search_Repo	207210	no	6			
-	THE Boodinesto	rt.pdf	fde804da2cecf174e0d00f3a5556afa75 3bd2afb	110				
Warnings:								
Information:								
3	NPL Documents	5550-47-PCT_IPER.pdf	254373	no	6			
ŭ	W E Bocuments	3330 47 1 01 <u>-</u> 11 E11.pai	f0cc0f24d93aaf6927e25ae3344f37551 92fcc91	110				
Warnings:								
Information:								
4	NPL Documents	5550-47-PKR_Rejection.pdf	293800	no	3			
,	THE BOOMING	2230 47 1 TAIL TOJOSTION PAI	ab883fb5d197f76d615b217a2a822de3 4cd82c6b					
Warnings:								
Information:								
		Total Files Size (in bytes)	12	19014				

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

#### New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

#### National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

#### New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re t	he Application of:	) Group Art Unit:	2611
	TZANNES	) Confirmation No.:	5967
Serial ?	No.: 11/860,080	)	
Filed:	September 24, 2007	/	O NOTICE TO FILE PPLICATION PAPERS
Atty. F	File No.: 5550-47-CON-DIV	)	
For:	SYSTEM AND METHOD FOR SCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM	) ) )	
Comm	Stop Missing Parts hissioner for Patents Box 1450		

Dear Sir:

Alexandria, Virginia 22313-1450

In response to the Notice to File Corrected Application Papers mailed October 9, 2007, in connection with the above-identified application, enclosed for filing is a substitute specification. The margins and erasure marks have been removed and amendments from the parent case have been incorporated. The substitute specification contains no new matter in accordance with 37 CFR § 1.125(b). Please charge any underpayment or credit any overpayment to Deposit Account No. 19-1970.

Respectfully submitted,

SHERIDAN ROSS P.C.

By:\_

Jason H. Vick

Registration No. 45,285 1560 Broadway, Suite 1200

Denver, Colorado 80202-5141

(303) 863-9700

Date: 5 ) Re 17

10

15

20

25

30

A System and Method for Scrambling the Phase of the Carriers in a Multicarrier Communications System

#### Related Application

This application claims the benefit of the filing date of copending U.S. Provisional Application, Serial No. 60/164,134, filed November 9, 1999, entitled "A Method For Randomizing The Phase Of The Carriers In A Multicarrier Communications System To Reduce The Peak To Average Power Ratio Of The Transmitted Signal," the entirety of which provisional application is incorporated by reference herein.

#### Field of the Invention

This invention relates to communications systems using multicarrier modulation. More particularly, the invention relates to multicarrier communications systems that lower the peak-to-average power ratio (PAR) of transmitted signals.

#### Background of the Invention

In a conventional multicarrier communications system, transmitters communicate over a communication channel using multicarrier modulation or Discrete Multitone Modulation (DMT). Carrier signals (carriers) or sub-channels spaced within a usable frequency band of the communication channel are modulated at a symbol (i.e., block) transmission rate of the system. An input signal, which includes input data bits, is sent to a DMT transmitter, such as a DMT modem. The DMT transmitter typically modulates the phase characteristic, or phase, and amplitude of the carrier signals using an Inverse Fast Fourier Transform (IFFT) to generate a time domain signal, or transmission signal, that represents the input signal. The DMT transmitter transmits the transmission signal, which is a linear combination of the multiple carriers, to a DMT receiver over the communication channel.

The phase and amplitude of the carrier signals of DMT transmission signal can be considered random because the phase and amplitude result from the modulation of an arbitrary sequence of input data bits comprising the transmitted information. Therefore, under the condition that the modulated data bit stream is random, the DMT transmission signal can be approximated as having a Gaussian probability distribution. A bit scrambler is often used in the DMT transmitter to scramble the input data bits before the bits are modulated to assure that the transmitted data bits are random and, consequently, that the

10

15

20

25

modulation of those bits produces a DMT transmission signal with a Gaussian probability distribution.

With an appropriate allocation of transmit power levels to the carriers or subchannels, such a system provides a desirable performance. Further, generating a transmission signal with a Gaussian probability distribution is important in order to transmit a transmission signal with a low peak-to-average ratio (PAR), or peak-to-average power ratio. The PAR of a transmission signal is the ratio of the instantaneous peak value (i.e., maximum magnitude) of a signal parameter (e.g., voltage, current, phase, frequency, power) to the time-averaged value of the signal parameter. In DMT systems, the PAR of the transmitted signal is determined by the probability of the random transmission signal reaching a certain peak voltage during the time interval required for a certain number of symbols. An example of the PAR of a transmission signal transmitted from a DMT transmitter is 14.5 dB, which is equivalent to having a 1E-7 probability of clipping. The PAR of a transmission signal transmitted and received in a DMT communication system is an important consideration in the design of the DMT communication system because the PAR of a signal affects the communication system's total power consumption and component linearity requirements of the system.

If the phase of the modulated carriers is not random, then the PAR can increase greatly. Examples of cases where the phases of the modulated carrier signals are not random are when bit scramblers are not used, multiple carrier signals are used to modulate the same input data bits, and the constellation maps, which are mappings of input data bits to the phase of a carrier signal, used for modulation are not random enough (i.e., a zero value for a data bit corresponds to a 90 degree phase characteristic of the DMT carrier signal and a one value for a data bit corresponds to a -90 degree phase characteristic of the DMT carrier signal). An increased PAR can result in a system with high power consumption and/or with high probability of clipping the transmission signal. Thus, there remains a need for a system and method that can effectively scramble the phase of the modulated carrier signals in order to provide a low PAR for the transmission signal.

10

15

20

#### Summary of the Invention

The present invention features a system and method that scrambles the phase characteristics of the modulated carrier signals in a transmission signal. In one aspect, a value is associated with each carrier signal. A phase shift is computed for each carrier signal based on the value associated with that carrier signal. The value is determined independently of any input bit value carried by that carrier signal. The phase shift computed for each carrier signal is combined with the phase characteristic of that carrier signal to substantially scramble the phase characteristics of the carrier signals.

In one embodiment, the input bit stream is modulated onto the carrier signals having the substantially scrambled phase characteristic to produce a transmission signal with a reduced peak-to-average power ratio (PAR). The value is derived from a predetermined parameter, such as a random number generator, a carrier number, a DMT symbol count, a superframe count, and a hyperframe count. In another embodiment, a predetermined transmission signal is transmitted when the amplitude of the transmission signal exceeds a certain level.

In another aspect, the invention features a method wherein a value is associated with each carrier signal. The value is determined independently of any input bit value carried by that carrier signal. A phase shift for each carrier signal is computed based on the value associated with that carrier signal. The transmission signal is demodulated using the phase shift computed for each carrier signal.

In another aspect, the invention features a system comprising a phase scrambler that computes a phase shift for each carrier signal based on a value associated with that carrier signal. The phase scrambler also combines the phase shift computed for each carrier signal with the phase characteristic of that carrier signal to substantially scramble the phase characteristic of the carrier signals. In one embodiment, a modulator, in communication with the phase scrambler, modulates bits of an input signal onto the carrier signals having the substantially scrambled phase characteristics to produce a transmission signal with a reduced PAR.

30

10

15

20

25

30

#### Description of the Drawings

The invention is pointed out with particularity in the appended claims. The advantages of the invention described above, as well as further advantages of the invention, may be better understood by reference to the following description taken in conjunction with the accompanying drawings, in which:

FIG. 1 is a block diagram of an embodiment of a digital subscriber line communications system including a DMT (discrete multitone modulation) transceiver, in communication with a remote transceiver, having a phase scrambler for substantially scrambling the phase characteristics of carrier signals; and

FIG. 2 is a flow diagram of an embodiment of a process for scrambling the phase characteristics of the carrier signals in a transmission signal.

#### **Detailed Description**

FIG. 1 shows a digital subscriber line (DSL) communication system 2 including a discrete multitone (DMT) transceiver 10 in communication with a remote transceiver 14 over a communication channel 18 using a transmission signal 38 having a plurality of carrier signals. The DMT transceiver 10 includes a DMT transmitter 22 and a DMT receiver 26. The remote transceiver 14 includes a transmitter 30 and a receiver 34. Although described with respect to discrete multitone modulation, the principles of the invention apply also to other types of multicarrier modulation, such as, but not limited to, orthogonally multiplexed quadrature amplitude modulation (OQAM), discrete wavelet multitone (DWMT) modulation, and orthogonal frequency division multiplexing (OFDM).

The communication channel 18 provides a downstream transmission path from the DMT transmitter 22 to the remote receiver 34, and an upstream transmission path from the remote transmitter 30 to the DMT receiver 26. In one embodiment, the communication channel 18 is a pair of twisted wires of a telephone subscriber line. In other embodiments, the communication channel 18 can be a fiber optic wire, a quad cable, consisting of two pairs of twisted wires, or a quad cable that is one of a star quad cable, a Dieselhorst-Martin quad cable, and the like. In a wireless communication system wherein the transceivers 10, 14 are wireless modems, the communication channel 18 is the air through which the transmission signal 38 travels between the transceivers 10, 14.

15

20

25

30

By way of example, the DMT transmitter 22 shown in FIG. 1 includes a quadrature amplitude modulation (QAM) encoder 42, a modulator 46, a bit allocation table (BAT) 44, and a phase scrambler 66. The DMT transmitter 22 can also include a bit scrambler 74, as described further below. The remote transmitter 30 of the remote transceiver 14 comprises equivalent components as the DMT transmitter 22. Although this embodiment specifies a detailed description of the DMT transmitter 22, the inventive concepts apply also to the receivers 34, 36 which have similar components to that of the DMT transmitter 22, but perform inverse functions in a reverse order.

The QAM encoder 42 has a single input for receiving an input serial data bit stream 54 and multiple parallel outputs to transmit QAM symbols 58 generated by the QAM encoder 42 from the bit stream 54. In general, the QAM encoder 42 maps the input serial bit-stream 54 in the time domain into parallel QAM symbols 58 in the frequency domain. In particular, the QAM encoder 42 maps the input serial data bit stream 54 into N parallel quadrature amplitude modulation (QAM) constellation points 58, or QAM symbols 58, where N represents the number of carrier signals generated by the modulator 46. The BAT 44 is in communication with the QAM encoder 42 to specify the number of bits carried by each carrier signal. The QAM symbols 58 represent the amplitude and the phase characteristic of each carrier signal.

The modulator 46 provides functionality associated with the DMT modulation and transforms the QAM symbols 58 into DMT symbols 70 each comprised of a plurality of time-domain samples. The modulator 46 modulates each carrier signal with a different QAM symbol 58. As a result of this modulation, carrier signals have phase and amplitude characteristics based on the QAM symbol 58 and therefore based on the input-bit stream 54. In particular, the modulator 46 uses an inverse fast Fourier transform (IFFT) to change the QAM symbols 58 into a transmission signal 38 comprised of a sequence of DMT symbols 70. The modulator 46 changes the QAM symbols 58 into DMT symbols 70 through modulation of the carrier signals. In another embodiment, the modulator 46 uses the inverse discrete Fourier transform (IDFT) to change the QAM symbols 58 into DMT symbols 70. In one embodiment, a pilot tone is included in the transmission signal 38 to provide a reference signal for coherent demodulation of the carrier signals in the remote receiver 34 during reception of the transmission signal 38.

10

15

20

The modulator 46 also includes a phase scrambler 66 that combines a phase shift computed for each QAM-modulated carrier signal with the phase characteristic of that carrier signal. Combining phase shifts with phase characteristics, in accordance with the principles of the invention, substantially scrambles the phase characteristics of the carrier signals in the transmission signal 38. By scrambling the phase characteristics of the carrier signals, the resulting transmission signal 38 has a substantially minimized peak-to-average (PAR) power ratio. The phase scrambler 66 can be part of or external to the modulator 46. Other embodiments of the phase scrambler 66 include, but are not limited to, a software program that is stored in local memory and is executed on the modulator 46, a digital signal processor (DSP) capable of performing mathematical functions and algorithms, and the like. The remote receiver 34 similarly includes a phase scrambler 66' for use when demodulating carrier signals that have had their phase characteristics adjusted by the phase scrambler 66 of the DMT transceiver 10.

To compute a phase shift for each carrier signal, the phase scrambler 66 associates one or more values with that carrier signal. The phase scrambler 66 determines each value for a carrier signal independently of the QAM symbols 58, and, therefore, independently of the bit value(s) modulated onto the carrier signal. The actual value(s) that the phase scrambler 66 associates with each carrier signal can be derived from one or more predefined parameters, such as a pseudo-random number generator (pseudo-RNG), a DMT carrier number, a DMT symbol count, a DMT superframe count, a DMT hyperframe count, and the like, as described in more detail below. Irrespective of the technique used to produce each value, the same technique is used by the DMT transmitter 22 and the remote receiver 34 so that the value associated with a given carrier signal is known at both ends of the communication channel 18.

The phase scrambler 66 then solves a predetermined equation to compute a phase shift for the carrier signal, using the value(s) associated with that carrier signal as input that effects the output of the equation. Any equation suitable for computing phase shifts can be used to compute the phase shifts. When the equation is independent of the bit values of the input serial bit stream 54, the computed phase shifts are also independent of such bit values.

30

10

15

20

25

30

In one embodiment (shown in phantom), the DMT transmitter 22 includes a bit scrambler 74, which receives the input serial bit stream 54 and outputs data bits 76 that are substantially scrambled. The substantially scrambled bits 76 are then passed to the QAM encoder 42. When the bit scrambler 74 is included in the DMT transmitter 22, the operation of the phase scrambler 66 further assures that the transmission signal 38 has a Gaussian probability distribution and, therefore, a substantially minimized PAR.

FIG. 2 shows embodiments of a process used by the DMT transmitter 22 for adjusting the phase characteristic of each carrier signal and combining these carrier signals to produce the transmission signal 38. The DMT transmitter 22 generates (step 100) a value that is associated with a carrier signal. Because the value is being used to alter the phase characteristics of the carrier signal, both the DMT transmitter 22 and the remote receiver 34 must recognize the value as being associated with the carrier signal. Either the DMT transmitter 22 and the remote receiver 34 independently derive the associated value, or one informs the other of the associated value. For example, in one embodiment the DMT transmitter 22 can derive the value from a pseudo-RNG and then transmit the generated value to the remote receiver 34. In another embodiment, the remote receiver 34 similarly derives the value from the same pseudo-RNG and the same seed as used by the transmitter (i.e., the transmitter pseudo-RNG produces the same series of random numbers as the receiver pseudo-RNG).

As another example, the DMT transmitter 22 and the remote receiver 34 can each maintain a symbol counter for counting DMT symbols. The DMT transmitter 22 increments its symbol counter upon transmitting a DMT symbol; the remote receiver 34 upon receipt. Thus, when the DMT transmitter 22 and the remote receiver 34 both use the symbol count as a value for computing phase shifts, both the DMT transmitter 22 and remote receiver 34 "know" that the value is associated with a particular DMT symbol and with each carrier signal of that DMT symbol.

Values can also be derived from other types of predefined parameters. For example, if the predefined parameter is the DMT carrier number, then the value associated with a particular carrier signal is the carrier number of that signal within the DMT symbol. The number of a carrier signal represents the location of the frequency of the carrier signal relative to the frequency of other carrier signals within a DMT symbol. For example, in one

10

15

20

25

30

embodiment the DSL communication system 2 provides 256 carrier signals, each separated by a frequency of 4.3125 kHz and spanning the frequency bandwidth from 0 kHz to 1104 kHz. The DMT transmitter 22 numbers the carrier signals from 0 to 255. Therefore, "DMT carrier number 50" represents the 51st DMT carrier signal which is located at the frequency of 215.625 kHz (i.e., 51 x 4.3125 kHz).

Again, the DMT transmitter 22 and the remote receiver 34 can know the value that is associated with the carrier signal because both the DMT transmitter 22 and the remote receiver 34 use the same predefined parameter (here, the DMT carrier number) to make the value-carrier signal association. In other embodiments (as exemplified above with the transmitter pseudo-RNG), the DMT transmitter 22 can transmit the value to the remote receiver 34 (or vice versa) over the communication channel 18.

In other embodiments, other predefined parameters can be used in conjunction with the symbol count. One example of such a predefined parameter is the superframe count that increments by one every 69 DMT symbols. One exemplary implementation that achieves the superframe counter is to perform a modulo 68 operation on the symbol count. As another example, the DMT transmitter 22 can maintain a hyperframe counter for counting hyperframes. An exemplary implementation of the hyperframe count is to perform a modulo 255 operation on the superframe count. Thus, the hyperframe count increments by one each time the superframe count reaches 255.

Accordingly, it is seen that some predefined parameters produce values that vary from carrier signal to carrier signal. For example, when the predefined parameter is the DMT carrier number, values vary based on the frequency of the carrier signal. As another example, the pseudo-RNG generates a new random value for each carrier signal.

Other predefined parameters produce values that vary from DMT symbol 70 to DMT symbol 70. For example, when the predefined parameter is the symbol count, the superframe count, or hyperframe count, values vary based on the numerical position of the DMT symbol 70 within a sequence of symbols, superframes, or hyperframes. Predefined parameters such as the pseudo-RNG, symbol count, superframe count, and superframe can also be understood to be parameters that vary values over time. Any one or combination of the predefined parameters can provide values for input to the equation that computes a phase shift for a given carrier signal.

In one embodiment, the phase scrambling is used to avoid clipping of the transmission signal 38 on a DMT symbol 70 by DMT symbol 70 basis. In this embodiment, the DMT transmitter 22 uses a value based on a predefined parameter that varies over time, such as the symbol count, to compute the phase shift. It is to be understood that other types of predefined parameters that vary the values associated with carrier signals can be used to practice the principles of the invention. As described above, the transceivers 10, 14 may communicate (step 110) the values to synchronize their use in modulating and demodulating the carrier signals.

The DMT transmitter 22 then computes (step 115) the phase shift that is used to adjust the phase characteristic of each carrier signal. The amount of the phase shift combined with the phase characteristic of each QAM-modulated carrier signal depends upon the equation used and the one or more values associated with that carrier signal.

The DMT transmitter 22 then combines (step 120) the phase shift computed for each carrier signal with the phase characteristic of that carrier signal. By scrambling the phase characteristics of the carrier signals, the phase scrambler 66 reduces (with respect to unscrambled phase characteristics) the combined PAR of the plurality of carrier signals and, consequently, the transmission signal 38. The following three phase shifting examples, PS #1-PS #3, illustrate methods used by the phase scrambler 66 to combine a computed phase shift to the phase characteristic of each carrier signal.

#### Phase Shifting Example #1

the QAM-modulated carrier signal associated with a carrier number N by  $N \times \frac{\pi}{3}$ , modulo (mod)  $2\pi$ . In this example, a carrier signal having a carrier number N equal to 50 has a phase shift added to the phase characteristic of that carrier signal equal to  $50 \times \frac{\pi}{3}$  (mod  $2\pi$ ) =  $\frac{2}{3}\pi$ . The carrier signal with a carrier number N equal to 51 has a phase shift added to the phase characteristic of that carrier signal equal to  $51 \times \frac{\pi}{3}$  (mod  $2\pi$ )= $\pi$ . The carrier signal with the carrier number N equal to 0 has no phase shift added to the phase characteristic of that carrier signal.

Phase shifting example #1 (PS #1) corresponds to adjusting the phase characteristic of



10

15

#### Phase Shifting Example #2

Phase shifting example #2 (PS #2) corresponds to adjusting the phase characteristic of the QAM-modulated carrier signal associated with a carrier number N by  $(N+M) \times \frac{\pi}{4}$ , mod  $2\pi$ , where M is the symbol count. In this example, a carrier signal having a carrier number N equal to 50 on DMT symbol count M equal to 8 has a phase shift added to the phase characteristic of that carrier signal equal to  $(50+8) \times \frac{\pi}{4} \pmod{2\pi} = \frac{\pi}{2}$ . The carrier signal with the same carrier number N equal to 50 on the next DMT symbol count M equal to 9 has a phase shift added to the phase characteristic of that carrier signal equal to  $(50+9) \times \frac{\pi}{4} \pmod{2\pi} = \frac{3\pi}{4}$ .

#### 10 Phase Shifting Example #3

Phase shifting example #3 (PS #3) corresponds to adjusting the phase characteristic of the QAM-modulated carrier signal associated with a carrier number N by  $(X_N) \times \frac{\pi}{6}$ , mod  $2\pi$ , where  $X_N$  is an array of N pseudo-random numbers. In this example, a carrier signal having a carrier number N equal to 5 and  $X_N$  equal to [3, 8, 1, 4, 9, 5, . . .] has a phase shift added to the phase characteristic of the carrier signal that is equal to  $(9) \times \frac{\pi}{6} \pmod{2\pi} = \frac{3\pi}{2}$  (Note that 9 is the 5<sup>th</sup> value in  $X_N$ .) The carrier signal with a carrier number N equal to 6 has a phase shift added to the phase characteristic of the carrier signal equal to  $(5) \times \frac{\pi}{6} \pmod{2\pi} = \frac{5\pi}{6}$ .

It is to be understood that additional and/or different phase shifting techniques can be used by the phase scrambler 66, and that PS #1, #2, and #3 are merely illustrative examples of the principles of the invention. The DMT transmitter 22 then combines (step 130) the carrier signals to form the transmission signal 38. If the transmission signal is not clipped, as described below, the DMT transmitter 22 consequently transmits (step 160) the transmission signal 38 to the remote receiver 34.

25

20

10

15

20

#### Clipping of Transmission Signals

A transmission signal 38 that has high peak values of voltage (i.e., a high PAR) can induce non-linear distortion in the DMT transmitter 22 and the communication channel 18. One form of this non-linear distortion of the transmission signal 38 that may occur is the limitation of the amplitude of the transmission signal 38 (i.e., clipping). For example, a particular DMT symbol 70 clips in the time domain when one or more time domain samples in that DMT symbol 70 are larger than the maximum allowed digital value for the DMT symbols 70. In multicarrier communication systems when clipping occurs, the transmission signal 38 does not accurately represent the input serial data bit signal 54.

In one embodiment, the DSL communication system 2 avoids the clipping of the transmission signal 38 on a DMT symbol 70 by DMT symbol 70 basis. The DMT transmitter 22 detects (step 140) the clipping of the transmission signal 38. If a particular DMT symbol 70 clips in the time domain to produce a clipped transmission signal 38, the DMT transmitter 22 substitutes (step 150) a predefined transmission signal 78 for the clipped transmission signal 38.

The predefined transmission signal 78 has the same duration as a DMT symbol 70 (e.g., 250 ms) in order to maintain symbol timing between the DMT transmitter 22 and the remote receiver 34. The predefined transmission signal 78 is not based on (i.e., independent of) the modulated input data bit stream 54; it is a bit value pattern that is recognized by the remote receiver 34 as a substituted signal. In one embodiment, the predefined transmission signal 78 is a known pseudo-random sequence pattern that is easily detected by the remote receiver 34. In another embodiment, the predefined transmission signal 78 is an "all zeros" signal, which is a zero voltage signal produced at the DMT transmitter 22 output (i.e., zero volts modulated on all the carrier signals). In addition to easy detection by the remote receiver 34, the zero voltage signal reduces the power consumption of the DMT transmitter 22 when delivered by the DMT transmitter 22. Further, a pilot tone is included in the predefined transmission signal 78 to provide a reference signal for coherent demodulation of the carrier signals in the remote receiver 34 during reception of the predefined transmission signal 78.

30

10

15

20

25

30

After the remote receiver 34 receives the transmission signal 38, the remote receiver 34 determines if the transmission signal 38 is equivalent to the predefined transmission signal 78. In one embodiment, when the remote receiver 34 identifies the predefined transmission signal 78, the remote receiver 34 ignores (i.e., discards) the predefined transmission signal 78.

Following the transmission of the predefined transmission signal 78, the phase scrambler 66 shifts (step 120) the phase characteristic of the QAM-modulated carrier signals (based on one of the predefined parameters that varies over time). For example, consider that a set of QAM symbols 58 produces a DMT symbol 70 comprising a plurality of time domain samples, and that one of the time domain samples is larger than the maximum allowed digital value for the DMT symbol 70. Therefore, because the transmission signal 38 would be clipped when sent to the remote receiver 34, the DMT transmitter 22 sends the predefined transmission signal 78 instead.

After transmission of the predefined transmission signal 78, the DMT transmitter 22 again attempts to send the same bit values that produced the clipped transmission signal 38 in a subsequent DMT symbol 70'. Because the generation of phase shifts in this embodiment is based on values that vary over time, the phase shifts computed for the subsequent DMT symbol 70' are different than those that were previously computed for the DMT symbol 70 with the clipped time domain sample. These different phase shifts are combined to the phase characteristics of the modulated carrier signals to produce carrier signals of the subsequent DMT symbol 70' with different phase characteristics than the carrier signals of the DMT symbol 70 with the clipped time domain sample.

DMT communication systems 2 infrequently produce transmission signals 38 that clip (e.g., approximately one clip every  $10^7$  time domain samples 70). However, if the subsequent DMT symbol 70' includes a time domain sample that clips, then the predefined transmission signal 78 is again transmitted (step 150) to the remote receiver 34 instead of the clipped transmission signal 38. The clipping time domain sample may be on the same or on a different carrier signal than the previously clipped DMT symbol 70. The DMT transmitter 22 repeats the transmission of the predefined transmission signal 78 until the DMT transmitter 22 produces a subsequent DMT symbol 70' that is not clipped. When the DMT transmitter 22 produces a DMT symbol 70' that is not clipped, the DTM transmitter 22 transmits (step 160)

10

15

20

25

30

the transmission signal 38 to the remote receiver 34. The probability of a DMT symbol 70 producing a transmission signal 38 that clips in the time domain depends on the PAR of the transmission signal 38.

For example, the following phase shifting example, PST #4, illustrates the method used by the phase scrambler 66 to combine a different phase shift to the phase characteristic of each carrier signal to avoid the clipping of the transmission signal 38.

### Phase Shifting Example #4

Phase shifting example #4 (PS #4) corresponds to adjusting the phase characteristic of the carrier signal associated with a carrier number N by  $\frac{\pi}{3} \times (M+N)$ , mod  $2\pi$ , where M is the DMT symbol count. In this example, if the DMT symbol 70 clips when the DMT symbol count M equals 5, the predefined transmission signal 78 is transmitted instead of the current clipped transmission signal 38. On the following DMT symbol period, the DMT count M equals 6, thereby causing a different set of time domain samples to be generated for the subsequent DMT symbol 70', although the QAM symbols 58 used to produce both DMT symbols 70, 70' are the same.

If this different set of time domain samples (and consequently the transmission signal 38) is not clipped, the DMT transmitter 22 sends the transmission signal 38. If one of the time domain samples in the different set of time domain samples 70 (and consequently the transmission signal 38) is clipped, then the DMT transmitter 22 sends the predefined transmission signal 78 again. The process continues until a DMT symbol 70 is produced without a time domain sample 70 that is clipped. In one embodiment, the transmitter 22 stops attempting to produce a non-clipped DMT symbol 70' for the particular set of QAM symbols 58 after generating a predetermined number of clipped DMT symbols 70'. At that moment, the transmitter 22 can transmit the most recently produced clipped DMT symbol 70' or the predetermined transmission signal 78.

The PAR of the DSL communication system 2 is reduced because the predefined transmission signal 78 is sent instead of the transmission signal 38 when the DMT symbol 70 clips. For example, a DMT communication system 2 that normally has a clipping probability of 10<sup>-7</sup> for the time domain transmission signal 38 can therefore operate with a 10<sup>-5</sup> probability of clipping and a lower PAR equal to 12.8 dB (as compared to 14.5 dB). When

10

15

operating at a  $10^{-5}$  probability of clipping, assuming a DMT symbol 70 has 512 time-domain samples 70, the DMT transmitter 22 experiences one clipped DMT symbol 70 out of every  $\frac{10^5}{512}$ , or 195 DMT symbols 70. This results in the predefined (non-data carrying)

transmission signal 78 being transmitted, on average, once every 195 DMT symbols. Although increasing the probability of clipping to 10<sup>-5</sup> results in approximately a 0.5% (1/195) decrease in throughput, the PAR of the transmission signal 38 is reduced by 1.7 dB, which reduces transmitter complexity in the form of power consumption and component linearity.

While the invention has been shown and described with reference to specific preferred embodiments, it should be understood by those skilled in the art that various changes in form and detail may be made therein without departing from the spirit and scope of the invention as defined by the following claims. For example, although the specification uses DSL to describe the invention, it is to be understood that various form of DSL can be used, e.g., ADSL, VDSL, SDSL, HDSL, HDSL2, or SHDSL. It is also to be understood that the principles of the invention apply to various types of applications transported over DSL systems (e.g., telecommuting, video conferencing, high speed Internet access, video-on demand).

#### **Abstract**

A system and method that scrambles the phase characteristic of a carrier signal are described. The scrambling of the phase characteristic of each carrier signal includes associating a value with each carrier signal and computing a phase shift for each carrier signal based on the value associated with that carrier signal. The value is determined independently of any input bit value carried by that carrier signal. The phase shift computed for each carrier signal is combined with the phase characteristic of that carrier signal so as to substantially scramble the phase characteristic of the carrier signals. Bits of an input signal are modulated onto the carrier signals having the substantially scrambled phase characteristic to produce a transmission signal with a reduced PAR.

Electronic Acknowledgement Receipt				
EFS ID:	2550785			
Application Number:	11860080			
International Application Number:				
Confirmation Number:	5967			
Title of Invention:	SYSTEM AND METHOD FOR SCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM			
First Named Inventor/Applicant Name:	Marcos C. Tzannes			
Customer Number:	62574			
Filer:	Jason Vick/Christine Jacquet			
Filer Authorized By:	Jason Vick			
Attorney Docket Number:	5550-47-CON-DIV			
Receipt Date:	05-DEC-2007			
Filing Date:	24-SEP-2007			
Time Stamp:	16:06:42			
Application Type:	Utility under 35 USC 111(a)			

# Payment information:

Submitted with Payment	no

## File Listing:

Document Number	Document Description	File Name	File Size(Bytes) /Message Digest	Multi Part /.zip	Pages (if appl.)
1		RESP_CORRECTED_APP_	1749978	V05	16
'		CLEAN_SPEC.pdf	b14c3d94876e756aa4fc8cfbc1db2168d b7242db	yes	10

	Multipart Description/PDF files in .zip description							
	Document Description	Start	End					
	Applicant Response to Pre-Exam Formalities Notice	1	1					
	Specification	2	16					
Warnings:		1						
Information:								
	Total Files Size (in bytes)	: 17	749978					

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

#### New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

#### National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

#### New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.



UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office Address: CCMMISSIONER FOR PATENTS FO. Box 1450 Alexandra, Vrignia 22313-1450 www.upple.gev

APPLICATION NUMBER	FILING or 371(c) DATE	GRP ART UNIT	FIL FEE REC'D	ATTY.DOCKET.NO	TOT CLAIMS	IND CLAIMS
11/860,080	09/24/2007	2611	1000	5550-47-CON-DIV	1	1

**CONFIRMATION NO. 5967** 

62574 SHERIDAN ROSS P C SUITE 1200 1560 BROADWAY DENVER, CO80202 **FILING RECEIPT** 

Date Mailed: 10/09/2007

Receipt is acknowledged of this non-provisional patent application. The application will be taken up for examination in due course. Applicant will be notified as to the results of the examination. Any correspondence concerning the application must include the following identification information: the U.S. APPLICATION NUMBER, FILING DATE, NAME OF APPLICANT, and TITLE OF INVENTION. Fees transmitted by check or draft are subject to collection. Please verify the accuracy of the data presented on this receipt. If an error is noted on this Filing Receipt, please write to the Office of Initial Patent Examination's Filing Receipt Corrections. Please provide a copy of this Filing Receipt with the changes noted thereon. If you received a "Notice to File Missing Parts" for this application, please submit any corrections to this Filing Receipt with your reply to the Notice. When the USPTO processes the reply to the Notice, the USPTO will generate another Filing Receipt incorporating the requested corrections

Applicant(s)

Marcos C. Tzannes, Orinda, CA;

**Assignment For Published Patent Application** 

AWARE, INC., Bedford, MA

Power of Attorney: None

Domestic Priority data as claimed by applicant

This application is a DIV of 11/211,535 08/26/2005 which is a CON of 09/710,310 11/09/2000 PAT 6,961,369

which claims benefit of 60/164,134 11/09/1999

**Foreign Applications** 

If Required, Foreign Filing License Granted:

Projected Publication Date: To Be Determined - pending completion of Corrected Papers

Non-Publication Request: No Early Publication Request: No

Title

SYSTEM AND METHOD FOR SCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM

#### PROTECTING YOUR INVENTION OUTSIDE THE UNITED STATES

Since the rights granted by a U.S. patent extend only throughout the territory of the United States and have no effect in a foreign country, an inventor who wishes patent protection in another country must apply for a patent in a specific country or in regional patent offices. Applicants may wish to consider the filing of an international application under the Patent Cooperation Treaty (PCT). An international (PCT) application generally has the same effect as a regular national patent application in each PCT-member country. The PCT process **simplifies** the filing of patent applications on the same invention in member countries, but **does not result** in a grant of "an international patent" and does not eliminate the need of applicants to file additional documents and fees in countries where patent protection is desired.

Almost every country has its own patent law, and a person desiring a patent in a particular country must make an application for patent in that country in accordance with its particular laws. Since the laws of many countries differ in various respects from the patent law of the United States, applicants are advised to seek guidance from specific foreign countries to ensure that patent rights are not lost prematurely.

Applicants also are advised that in the case of inventions made in the United States, the Director of the USPTO must issue a license before applicants can apply for a patent in a foreign country. The filing of a U.S. patent application serves as a request for a foreign filing license. The application's filing receipt contains further information and guidance as to the status of applicant's license for foreign filing.

Applicants may wish to consult the USPTO booklet, "General Information Concerning Patents" (specifically, the section entitled "Treaties and Foreign Patents") for more information on timeframes and deadlines for filing foreign patent applications. The guide is available either by contacting the USPTO Contact Center at 800-786-9199, or it can be viewed on the USPTO website at http://www.uspto.gov/web/offices/pac/doc/general/index.html.

For information on preventing theft of your intellectual property (patents, trademarks and copyrights), you may wish to consult the U.S. Government website, http://www.stopfakes.gov. Part of a Department of Commerce initiative, this website includes self-help "toolkits" giving innovators guidance on how to protect intellectual property in specific countries such as China, Korea and Mexico. For questions regarding patent enforcement issues, applicants may call the U.S. Government hotline at 1-866-999-HALT (1-866-999-4158).

# LICENSE FOR FOREIGN FILING UNDER Title 35, United States Code, Section 184 Title 37, Code of Federal Regulations, 5.11 & 5.15

#### **GRANTED**

The applicant has been granted a license under 35 U.S.C. 184, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" followed by a date appears on this form. Such licenses are issued in all applications where the conditions for issuance of a license have been met, regardless of whether or not a license may be required as set forth in 37 CFR 5.15. The scope and limitations of this license are set forth in 37 CFR 5.15(a) unless an earlier license has been issued under 37 CFR 5.15(b). The license is subject to revocation upon written notification. The date indicated is the effective date of the license, unless an earlier license of similar scope has been granted under 37 CFR 5.13 or 5.14.

This license is to be retained by the licensee and may be used at any time on or after the effective date thereof unless it is revoked. This license is automatically transferred to any related applications(s) filed under 37 CFR 1.53(d). This license is not retroactive.

The grant of a license does not in any way lessen the responsibility of a licensee for the security of the

subject matter as imposed by any Government contract or the provisions of existing laws relating to espionage and the national security or the export of technical data. Licensees should apprise themselves of current regulations especially with respect to certain countries, of other agencies, particularly the Office of Defense Trade Controls, Department of State (with respect to Arms, Munitions and Implements of War (22 CFR 121-128)); the Bureau of Industry and Security, Department of Commerce (15 CFR parts 730-774); the Office of Foreign AssetsControl, Department of Treasury (31 CFR Parts 500+) and the Department of Energy.

#### **NOT GRANTED**

No license under 35 U.S.C. 184 has been granted at this time, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" DOES NOT appear on this form. Applicant may still petition for a license under 37 CFR 5.12, if a license is desired before the expiration of 6 months from the filing date of the application. If 6 months has lapsed from the filing date of this application and the licensee has not received any indication of a secrecy order under 35 U.S.C. 181, the licensee may foreign file the application pursuant to 37 CFR 5.15(b).



#### United States Patent and Trademark Office

UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office Address COMMISSIONER FOR PATENTS P.O. Box 1450 Alexandris, Vingnia 22313-1450 www.upib.gov

APPLICATION NUMBER FILING OR 371 (c) DATE FIRST NAMED APPLICANT ATTORNEY DOCKET NUMBER

11/860,080 09/24/2007 Marcos C. Tzannes

5550-47-CON-DIV

62574 SHERIDAN ROSS P C SUITE 1200 1560 BROADWAY DENVER, CO 80202 CONFIRMATION NO. 5967 FORMALITIES LETTER

Date Mailed: 10/09/2007

#### NOTICE TO FILE CORRECTED APPLICATION PAPERS

#### Filing Date Granted

An application number and filing date have been accorded to this application. The application is informal since it does not comply with the regulations for the reason(s) indicated below. Applicant is given TWO MONTHS from the date of this Notice within which to correct the informalities indicated below. Extensions of time may be obtained by filing a petition accompanied by the extension fee under the provisions of 37 CFR 1.136(a).

The required item(s) identified below must be timely submitted to avoid abandonment:

A substitute specification excluding claims in compliance with 37 CFR 1.52, 1.121(b)(3), and 1.125 is required. The substitute specification must be submitted with markings and be accompanied by a clean version (without markings) as set forth in 37 CFR 1.125(c) and a statement that the substitute specification contains no new matter (see 37 CFR 1.125(b)). Since a preliminary amendment was present on the filing date of the application and such amendment is part of the original disclosure of the application, the substitute specification must include all of the desired changes made in the preliminary amendment. See 37 CFR 1.115 and 1.215.

Applicant is cautioned that correction of the above items may cause the specification and drawings page count to exceed 100 pages. If the specification and drawings exceed 100 pages, applicant will need to submit the required application size fee.

Replies should be mailed to: Mail Stop Missing Parts

Commissioner for Patents

P.O. Box 1450

Alexandria VA 22313-1450

Registered users of EFS-Web may alternatively submit their reply to this notice via EFS-Web. <a href="https://sportal.uspto.gov/authenticate/AuthenticateUserLocalEPF.html">https://sportal.uspto.gov/authenticate/AuthenticateUserLocalEPF.html</a>

For more information about EFS-Web please call the USPTO Electronic Business Center at **1-866-217-9197** or visit our website at <a href="http://www.uspto.gov/ebc">http://www.uspto.gov/ebc</a>.

If you are not using EFS-Web to submit your reply, you must include a copy of this notice.

Office of Initial Patent Examination (571) 272-4000, or 1-800-PTO-9199
PART 3 - OFFICE COPY

#### Attorney Docket No. 5550-47-CON-DIV

#### IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application for:

First Named Inventor: Marcos C. Tzannes

**Art Unit:** 

Appln. No.: Not yet assigned

**Examiner:** 

For: SYSTEM AND METHOD FOR SCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM

#### PRELIMINARY AMENDMENT

Commissioner for Patents P.O. Box 1450 Alexandria, VA 22313-1450

Sir:

Prior to the initial review of the above-identified patent application by the Examiner, please enter the following Preliminary Amendment. Please charge any fees to Deposit Account 19-1970.

Please amend the above-identified patent application as follows:

Amendments to the Specification begin on page 2

Amendments to the Claims are reflected in the listing of claims which begins on page 3 of this paper.

Remarks begin on page 4 of this paper.

#### **Amendments to the Specification:**

#### Please amend the paragraph at page 13, line 2 as follows:

Phase shifting example #3 (PS #3) corresponds to adjusting the phase characteristic of the QAM-modulated carrier signal associated with a carrier number N by  $(X_N) \times \frac{\pi}{6}$ , mod  $2\pi$ , where  $X_N$  is an array of N pseudo-random numbers. In this example, a carrier signal having a carrier number N equal to 5 and  $X_N$  equal to [3, 8, 1, 4, 9, 5, . . .] has a phase shift added to the phase characteristic of the carrier signal that is equal to  $\frac{\pi}{6} \pmod{2\pi} = \frac{\pi}{3} = \frac{\pi}{6} \pmod{2\pi} = \frac{3\pi}{2} = \frac{\pi}{6}$  (Note that 9 is the 5<sup>th</sup> value in  $X_N$ .) The carrier signal with a carrier number N equal to 6 has a phase shift added to the phase characteristic of the carrier signal equal to  $\frac{\pi}{6} \pmod{2\pi} = \frac{5\pi}{3} = \frac{\pi}{6} \pmod{2\pi} = \frac{5\pi}{6}$ .

#### **Amendments to the Claims:**

This listing of claims will replace all prior versions, and listings, of claims in the application:

#### **Listing of Claims:**

- 1-19. (Canceled)
- 20. (Original) In a multicarrier modulation system including a first transceiver in communication with a second transceiver using a transmission signal having a plurality of carrier signals for demodulating an input bit stream, each carrier signal having a phase characteristic with the input bit stream, a method for scrambling the phase characteristics of the carrier signals comprising:

associating each carrier signal with a value determined independently of any input bit value carried by that carrier signal;

computing a phase shift for each carrier signal based on the value associated with that carrier signal; and

demodulating the transmission signal using the phase shift computed for each carrier signal.

#### **REMARKS**

The specification has also been amended to correct a mathematical calculation mistake as was done in the parent application.

This application is directed toward the distinct invention of claim 20 with the remaining claims being cancelled without prejudice or disclaimer.

Applicant believes that the pending claims are in condition for allowance and such disposition is respectfully requested. In the event that a telephone conversation would further prosecution and/or expedite allowance, the Examiner is invited to contact the undersigned.

Respectfully submitted,

Date: 24 Sept 07

Jason H. Vick Reg. No. 45,285

SHERIDAN ROSS P. C. 1560 BROADWAY, SUITE 1200 DENVER, COLORADO 80202 TELEPHONE: 303-863-9700

FAX: 303-863-0223

Electronic Patent A	App	lication Fe	e Transm	nittal	
Application Number:					
Filing Date:					
Title of Invention:	SYSTEM AND METHOD FOR SCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM				
First Named Inventor/Applicant Name:	Ma	arcos C. Tzannes			
Filer:	Ja	son Vick/Christine	Jacquet		
Attorney Docket Number:	5550-47-CON-DIV				
Filed as Large Entity					
Utility Filing Fees					
Description		Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Basic Filing:					
Utility application filing		1011	1	300	300
Utility Search Fee		1111	1	500	500
Utility Examination Fee		1311	1	200	200
Pages:					
Claims:					
Miscellaneous-Filing:					
Petition:					
Patent-Appeals-and-Interference:					

Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Post-Allowance-and-Post-Issuance:				
Extension-of-Time:				
Miscellaneous:				
	Tota	al in USE	(\$)	1000

Electronic Acknowledgement Receipt							
EFS ID:	2232898						
Application Number:	11860080						
International Application Number:							
Confirmation Number:	5967						
Title of Invention:	SYSTEM AND METHOD FOR SCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM						
First Named Inventor/Applicant Name:	Marcos C. Tzannes						
Customer Number:	62574						
Filer:	Jason Vick/Christine Jacquet						
Filer Authorized By:	Jason Vick						
Attorney Docket Number:	5550-47-CON-DIV						
Receipt Date:	24-SEP-2007						
Filing Date:							
Time Stamp:	15:44:57						
Application Type:	Utility under 35 USC 111(a)						

## Payment information:

Submitted with Payment	yes
Payment was successfully received in RAM	\$1000
RAM confirmation Number	12068
Deposit Account	191970

The Director of the USPTO is hereby authorized to charge indicated fees and credit any overpayment as follows: Charge any Additional Fees required under 37 C.F.R. Section 1.16 and 1.17

## File Listing:

Document Number	Document Description	File Name	File Size(Bytes) /Message Digest	Multi Part /.zip	Pages (if appl.)			
1	Application Data Sheet	ADS_FORM.pdf	1130699 711877411d208052807860c5728811035	no	4			
Warnings:			b6fdc81					
Information:								
2		PAT_APP_DRAW_DEC.pdf	2195089	yes	27			
	R.F., Idina	rt. Doggription/DDE files in	9a1468bfb8e29768cf0a1574ba49e8b9 70a188c9					
	-	rt Description/PDF files in		_				
	Document De	scription 	Start	E	nd			
	Specificat	tion	1	-	18			
	Claims	3	19	21				
	Abstrac	ot	22	2	22			
	Drawing	23	23 24					
	Oath or Declara	25	27					
Warnings:			,					
Information:								
3		AMEND_PRELIM.pdf	232775 	yes	4			
	Multina	rt Description/PDF files in	7730a62					
	<u> </u>		Start		al			
	Document De	Document Description			nd			
	Preliminary Am	endment	1	1 1				
	Specifical	2	2					
	Claims	3	3					
	Preliminary Am	4	4					
Warnings:			<u> </u>					
Information:								
			8427					
4	Fee Worksheet (PTO-06)	fee-info.pdf	6bf099df3bb6beffad780416fb64e201ba b1bb00	no	2			
Warnings:								

Information:	
Total Files Size (in bytes):	3566990

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

#### New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

#### National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

#### New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application [	ata Sha	not 37 CI	ED 4 76	Attorn	ey Dock	et N	umber	5550-	-47-C	ON-DIV			
Application	ala Sile	eel 37 Ci	K 1.70	Applic	ation Nu	ımbe	er						
Title of Invention	1	EM AND ME			IBLING '	THE	PHASE O	F THE	CAR	RIERS I	N A MUL	TICARRII	ĒR
The application data	l sheet is part	t of the provis	sional or no	nprovisional	application	on for	which it is I	being su	ıbmitte	ed. The fo	llowing for	rm contains	s the
bibliographic data and This document may document may be pr	be complete	ed electronic	ally and su	ibmitted to t								System (EF	S) or the
		-	-										
Secrecy Ord				.: 41: - 0	1:4:-	- D-	.t. Clt		:-U	l C	<u> </u>	01	
Portions or a 37 CFR 5.2													rsuant to
Applicant In	format	ion:											
Applicant 1											Remo	ve	
Applicant Author	ority 🌖 ln	ventor	)Legal Re	epresentati	ve under	· 35 l	J.S.C. 11	7	Pa	rty of In	terest und	der 35 U.S	S.C. 118
Prefix Given N		•	ı	Middle Na	me			Fam	ily N	ame			Suffix
Marcos			(	<b>D</b> .				Tzanı	nes				
Residence Info	rmation (	Select On	<b>e)</b>	S Residen	су	) No	on US Res	sidency	' C	) Active	US Milit	ary Servic	e
City Orinda			State	e/Provinc	e CA	١.	Countr	y of R	eside	ence i	US		
Citizenship und	er 37 CFF	R 1.41(b) <sup>į</sup>	US										
Mailing Address	of Appli	icant:											
Address 1	1	121 La Espir	ral										
Address 2													
City Orino	la					Stat	e/Provin	ice	C.	A			
Postal Code	9	94563			Coun	itryi	US						
All Inventors M generated within					Informa	tion	blocks i	may b	e		Add		
Correspond	ence Ir	nformat	ion:										
Enter either Cus For further info					respon	dend	e Inform	nation	sect	ion bel	ow.		
An Address	s is being	provided	for the	correspo	ndence	Info	rmation	of thi	s apı	olicatio	n.		
Customer Numl	per	62574											
Email Address		srlaw@sh	neridanros	s.com						Add E	mail	Remove	e Email
Application	Inform	ation:							•				
Title of the Inve	ntion			THOD FOI				PHASE	OF T	HE CAF	RIERS	N A	
Attorney Docke	t Number		CON-DIV		57(11014		mall Ent	ity Sta	atus	Claime	d 🗌		
Application Typ	e	Nonprovi	sional			-							
Subject Matter		Utility											
Suggested Clas	s (if any)					s	ub Class	s (if ar	ıy)				
Suggested Tecl	nology C	Center (if a	any)										
Total Number o	f Drawing	Sheets (i	if any)	2		s	uggeste	d Figu	ıre fo	r Publi	ication (	(if any)	
				ı									

Onder the rap	perwork	Reduction Act of 1995, no per	sons are required	to respond to a conecti	on or intormation	ariless it contains	a valid Civib control number		
Application Data Sho		et 37 CFR 1.76	Attorney D	ttorney Docket Number 5550-47-0			ON-DIV		
			Application	n Number					
Title of Invention SYSTEM AND METHOD FOR SCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM									
Publication Information:									
Request Early Publication (Fee required at time of Request 37 CFR 1.219)									
Request Not to Publish. I hereby request that the attached application not be published under 35 U.S.  C. 122(b) and certify that the invention disclosed in the attached application has not and will not be the subject of an application filed in another country, or under a multilateral international agreement, that requires publication at eighteen months after filing.									
Representative									
Representative information should be provided for all practitioners having a power of attorney in the application. Providing this information in the Application Data Sheet does not constitute a power of attorney in the application (see 37 CFR 1.32). Enter either Customer Number or complete the Representative Name section below. If both sections are completed the Customer Number will be used for the Representative Information during processing.									
Please Select One:	(	Customer Number	· Ous	Patent Practitione	r 🔵 Lir	nited Recogni	ition (37 CFR 11.9)		
Customer Number	(	62574							
Domestic Benefit/National Stage Information:  This section allows for the applicant to either claim benefit under 35 U.S.C. 119(e), 120, 121, or 365(c) or indicate National Stage entry from a PCT application. Providing this information in the application data sheet constitutes the specific reference required by 35 U.S.C. 119(e) or 120, and 37 CFR 1.78(a)(2) or CFR 1.78(a)(4), and need not otherwise be made part of the specification.									
Prior Application S	Status	Pending				Rer	nove		
Application Numl	ber	Continuity	Туре	Prior Applicati	on Number	Filing Da	te (YYYY-MM-DD)		
		Division of		11211535		2005-08-26			
Prior Application S	Status					Rer	nove		
Application Numl	ber	Continuity <sup>1</sup>	Туре	Prior Applicati	on Number	Filing Da	te (YYYY-MM-DD)		
11211535		Continuation of		09710310		2000-11-09			
Prior Application S	Status					Rer	nove		
Application Numl	ber	Continuity	Туре	Prior Applicati	on Number	Filing Da	te (YYYY-MM-DD)		
09710310		non provisional of		60164134		1999-11-09			
Additional Domestic Benefit/National Stage Data may be generated within this form by selecting the <b>Add</b> button.									
Foreign Priority Information:									
This section allows for the applicant to claim benefit of foreign priority and to identify any prior foreign application for which priority is not claimed. Providing this information in the application data sheet constitutes the claim for priority as required by 35 U.S.C. 119(b) and 37 CFR 1.55(a).									
A 11 / 51 -				<u> </u>	. 00001		nove		
Application Num	ber	Country	y <sup>1</sup>	Parent Filing D	ate (YYYY-l	им-DD)	Priority Claimed		
							Yes    No		

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Da	ta Sheet 37 CFR 1.76	Attorney Docket Number	5550-47-CON-DIV					
Application Da	ila Sileel 37 CFK 1.70	Application Number						
Title of Invention SYSTEM AND METHOD FOR SCRAMBLING THE PHASE OF THE CARRIERS IN A MULTICARRIER COMMUNICATIONS SYSTEM								
Additional Foreign Priority Data may be generated within this form by selecting the Add button.								
Assissas Info	umation.							

# Assignee Information:

	the application data sheet does not sub nment recorded in the Office.	ostitute for compliance wi	th any requirement of part 3 of Title 37						
Assignee 1			Remove						
If the Assignee is an Organization check here.									
Organization Name Aware, Inc.									
Mailing Address Information:									
Address 1	40 Middlesex Tumpike								
Address 2									
City	Bedford	State/Province	МА						
Country i US		Postal Code	01730						
Phone Number		Fax Number							
Email Address									
Additional Assignee Data may be generated within this form by selecting the Add button.									

# Signature:

A signature of the applicant or representative is required in accordance with 37 CFR 1.33 and 10.18. Please see 37 CFR 1.4(d) for the form of the signature.								
Signature	/Jason H. Vick/		Date (YYYY-MM-DD)	2007-09-24				
First Name	Jason H.	Last Name	Vick	Registration Number	45285			

This collection of information is required by 37 CFR 1.76. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 23 minutes to complete, including gathering, preparing, and submitting the completed application data sheet form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.** 

# **Privacy Act Statement**

The Privacy Act of 1974 (P.L. 93-579) requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

- 1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C. 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether the Freedom of Information Act requires disclosure of these records.
- A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
- A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an
  individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of
  the record
- 4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
- 5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
- 6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
- 7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (i.e., GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
- 8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspections or an issued patent.
- A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

5

10

15

20

25

# A System and Method for Scrambling the Phase of the Carriers in a Multicarrier Communications System

## **Related Application**

This application claims the benefit of the filing date of copending U.S. Provisional Application, Serial No. 60/164,134, filed November 9, 1999, entitled "A Method For Randomizing The Phase Of The Carriers In A Multicarrier Communications System To Reduce The Peak To Average Power Ratio Of The Transmitted Signal," the entirety of which provisional application is incorporated by reference herein.

#### Field of the Invention

This invention relates to communications systems using multicarrier modulation. More particularly, the invention relates to multicarrier communications systems that lower the peak-to-average power ratio (PAR) of transmitted signals.

#### Background of the Invention

In a conventional multicarrier communications system, transmitters communicate over a communication channel using multicarrier modulation or Discrete Multitone Modulation (DMT). Carrier signals (carriers) or sub-channels spaced within a usable frequency band of the communication channel are modulated at a symbol (i.e., block) transmission rate of the system. An input signal, which includes input data bits, is sent to a DMT transmitter, such as a DMT modem. The DMT transmitter typically modulates the phase characteristic, or phase, and amplitude of the

carrier signals using an Inverse Fast Fourier Transform (IFFT) to generate a time domain signal, or transmission signal, that represents the input signal. The DMT transmitter transmits the transmission signal, which is a linear combination of the multiple carriers, to a DMT receiver over the communication channel.

5

10

15

20

The phase and amplitude of the carrier signals of DMT transmission signal can be considered random because the phase and amplitude result from the modulation of an arbitrary sequence of input data bits comprising the transmitted information. Therefore, under the condition that the modulated data bit stream is random, the DMT transmission signal can be approximated as having a Gaussian probability distribution. A bit scrambler is often used in the DMT transmitter to scramble the input data bits before the bits are modulated to assure that the transmitted data bits are random and, consequently, that the modulation of those bits produces a DMT transmission signal with a Gaussian probability distribution.

With an appropriate allocation of transmit power levels to the carriers or sub-channels, such a system provides a desirable performance. Further, generating a transmission signal with a Gaussian probability distribution is important in order to transmit a transmission signal with a low peak-to-average ratio (PAR), or peak-to-average power ratio. The PAR of a transmission signal is the ratio of the instantaneous peak value (i.e., maximum magnitude) of a signal parameter (e.g., voltage, current, phase, frequency, power) to the time-averaged value of the signal parameter. In DMT systems, the PAR of the transmitted signal is determined by the probability of the random transmission signal reaching a certain peak voltage during the time interval required for a certain number of symbols. An example of the PAR of a transmission signal transmitted from a DMT transmitter is 14.5 dB, which is equivalent to having a 1E-7 probability of clipping. The PAR of a

transmission signal transmitted and received in a DMT communication system is an important consideration in the design of the DMT communication system because the PAR of a signal affects the communication system's total power consumption and component linearity requirements of the system.

If the phase of the modulated carriers is not random, then the PAR can increase greatly. Examples of cases where the phases of the modulated carrier signals are not random are when bit scramblers are not used, multiple carrier signals are used to modulate the same input data bits, and the constellation maps, which are mappings of input data bits to the phase of a carrier signal, used for modulation are not random enough (i.e., a zero value for a data bit corresponds to a 90 degree phase characteristic of the DMT carrier signal and a one value for a data bit corresponds to a –90 degree phase characteristic of the DMT carrier signal). An increased PAR can result in a system with high power consumption and/or with high probability of clipping the transmission signal. Thus, there remains a need for a system and method that can effectively scramble the phase of the modulated carrier signals in order to provide a low PAR for the transmission signal.

10

15

20

#### Summary of the Invention

The present invention features a system and method that scrambles the phase characteristics of the modulated carrier signals in a transmission signal. In one aspect, a value is associated with each carrier signal. A phase shift is computed for each carrier signal based on the value associated with that carrier signal. The value is determined independently of any input bit value carried by that carrier signal. The phase shift computed for each carrier signal is combined with the phase characteristic of that carrier signal to substantially scramble the phase characteristics of the carrier signals.

In one embodiment, the input bit stream is modulated onto the carrier signals having the substantially scrambled phase characteristic to produce a transmission signal with a reduced peak-to-average power ratio (PAR). The value is derived from a predetermined parameter, such as a random number generator, a carrier number, a DMT symbol count, a superframe count, and a hyperframe count. In another embodiment, a predetermined transmission signal is transmitted when the amplitude of the transmission signal exceeds a certain level.

5

10

15

20

In another aspect, the invention features a method wherein a value is associated with each carrier signal. The value is determined independently of any input bit value carried by that carrier signal. A phase shift for each carrier signal is computed based on the value associated with that carrier signal. The transmission signal is demodulated using the phase shift computed for each carrier signal.

In another aspect, the invention features a system comprising a phase scrambler that computes a phase shift for each carrier signal based on a value associated with that carrier signal. The phase scrambler also combines the phase shift computed for each carrier signal with the phase characteristic of that carrier signal to substantially scramble the phase characteristic of the carrier signals. In one embodiment, a modulator, in communication with the phase scrambler, modulates bits of an input signal onto the carrier signals having the substantially scrambled phase characteristics to produce a transmission signal with a reduced PAR.

# **Description of the Drawings**

The invention is pointed out with particularity in the appended claims. The advantages of the invention described above, as well as further advantages of the invention, may be better understood

by reference to the following description taken in conjunction with the accompanying drawings, in which:

Fig. 1 is a block diagram of an embodiment of a digital subscriber line communications system including a DMT (discrete multitone modulation) transceiver, in communication with a remote transceiver, having a phase scrambler for substantially scrambling the phase characteristics of carrier signals; and

Fig. 2 is a flow diagram of an embodiment of a process for scrambling the phase characteristics of the carrier signals in a transmission signal.

5

10

15

20

## **Detailed Description**

Fig. 1 shows a digital subscriber line (DSL) communication system 2 including a discrete multitone (DMT) transceiver 10 in communication with a remote transceiver 14 over a communication channel 18 using a transmission signal 38 having a plurality of carrier signals. The DMT transceiver 10 includes a DMT transmitter 22 and a DMT receiver 26. The remote transceiver 14 includes a transmitter 30 and a receiver 34. Although described with respect to discrete multitone modulation, the principles of the invention apply also to other types of multicarrier modulation, such as, but not limited to, orthogonally multiplexed quadrature amplitude modulation (OQAM), discrete wavelet multitone (DWMT) modulation, and orthogonal frequency division multiplexing (OFDM).

The communication channel 18 provides a downstream transmission path from the DMT transmitter 22 to the remote receiver 34, and an upstream transmission path from the remote transmitter 30 to the DMT receiver 26. In one embodiment, the communication channel 18 is a pair of twisted wires of a telephone subscriber line. In other embodiments, the communication channel 18 can be a fiber optic wire, a quad cable, consisting of two pairs of twisted wires, or a quad cable

that is one of a star quad cable, a Dieselhorst-Martin quad cable, and the like. In a wireless communication system wherein the transceivers 10, 14 are wireless modems, the communication channel 18 is the air through which the transmission signal 38 travels between the transceivers 10, 14.

5

10

15

20

By way of example, the DMT transmitter 22 shown in Fig. 1 includes a quadrature amplitude modulation (QAM) encoder 42, a modulator 46, a bit allocation table (BAT) 44, and a phase scrambler 66. The DMT transmitter 22 can also include a bit scrambler 74, as described further below. The remote transmitter 30 of the remote transceiver 14 comprises equivalent components as the DMT transmitter 22. Although this embodiment specifies a detailed description of the DMT transmitter 22, the inventive concepts apply also to the receivers 34, 36 which have similar components to that of the DMT transmitter 22, but perform inverse functions in a reverse order.

The QAM encoder 42 has a single input for receiving an input serial data bit stream 54 and multiple parallel outputs to transmit QAM symbols 58 generated by the QAM encoder 42 from the bit stream 54. In general, the QAM encoder 42 maps the input serial bit-stream 54 in the time domain into parallel QAM symbols 58 in the frequency domain. In particular, the QAM encoder 42 maps the input serial data bit stream 54 into N parallel quadrature amplitude modulation (QAM) constellation points 58, or QAM symbols 58, where N represents the number of carrier signals generated by the modulator 46. The BAT 44 is in communication with the QAM encoder 42 to specify the number of bits carried by each carrier signal. The QAM symbols 58 represent the amplitude and the phase characteristic of each carrier signal.

The modulator 46 provides functionality associated with the DMT modulation and transforms the QAM symbols 58 into DMT symbols 70 each comprised of a plurality of time-

domain samples. The modulator 46 modulates each carrier signal with a different QAM symbol 58. As a result of this modulation, carrier signals have phase and amplitude characteristics based on the QAM symbol 58 and therefore based on the input-bit stream 54. In particular, the modulator 46 uses an inverse fast Fourier transform (IFFT) to change the QAM symbols 58 into a transmission signal 38 comprised of a sequence of DMT symbols 70. The modulator 46 changes the QAM symbols 58 into DMT symbols 70 through modulation of the carrier signals. In another embodiment, the modulator 46 uses the inverse discrete Fourier transform (IDFT) to change the QAM symbols 58 into DMT symbols 70. In one embodiment, a pilot tone is included in the transmission signal 38 to provide a reference signal for coherent demodulation of the carrier signals in the remote receiver 34 during reception of the transmission signal 38.

5

10

20

The modulator 46 also includes a phase scrambler 66 that combines a phase shift computed for each QAM-modulated carrier signal with the phase characteristic of that carrier signal.

Combining phase shifts with phase characteristics, in accordance with the principles of the invention, substantially scrambles the phase characteristics of the carrier signals in the transmission signal 38. By scrambling the phase characteristics of the carrier signals, the resulting transmission signal 38 has a substantially minimized peak-to-average (PAR) power ratio. The phase scrambler 66 can be part of or external to the modulator 46. Other embodiments of the phase scrambler 66 include, but are not limited to, a software program that is stored in local memory and is executed on the modulator 46, a digital signal processor (DSP) capable of performing mathematical functions and algorithms, and the like. The remote receiver 34 similarly includes a phase scrambler 66' for use when demodulating carrier signals that have had their phase characteristics adjusted by the phase scrambler 66 of the DMT transceiver 10.

To compute a phase shift for each carrier signal, the phase scrambler 66 associates one or more values with that carrier signal. The phase scrambler 66 determines each value for a carrier signal independently of the QAM symbols 58, and, therefore, independently of the bit value(s) modulated onto the carrier signal. The actual value(s) that the phase scrambler 66 associates with each carrier signal can be derived from one or more predefined parameters, such as a pseudo-random number generator (pseudo-RNG), a DMT carrier number, a DMT symbol count, a DMT superframe count, a DMT hyperframe count, and the like, as described in more detail below. Irrespective of the technique used to produce each value, the same technique is used by the DMT transmitter 22 and the remote receiver 34 so that the value associated with a given carrier signal is known at both ends of the communication channel 18.

5

10

15

20

The phase scrambler 66 then solves a predetermined equation to compute a phase shift for the carrier signal, using the value(s) associated with that carrier signal as input that effects the output of the equation. Any equation suitable for computing phase shifts can be used to compute the phase shifts. When the equation is independent of the bit values of the input serial bit stream 54, the computed phase shifts are also independent of such bit values.

In one embodiment (shown in phantom), the DMT transmitter 22 includes a bit scrambler 74, which receives the input serial bit stream 54 and outputs data bits 76 that are substantially scrambled. The substantially scrambled bits 76 are then passed to the QAM encoder 42. When the bit scrambler 74 is included in the DMT transmitter 22, the operation of the phase scrambler 66 further assures that the transmission signal 38 has a Gaussian probability distribution and, therefore, a substantially minimized PAR.

Fig. 2 shows embodiments of a process used by the DMT transmitter 22 for adjusting the phase characteristic of each carrier signal and combining these carrier signals to produce the transmission signal 38. The DMT transmitter 22 generates (step 100) a value that is associated with a carrier signal. Because the value is being used to alter the phase characteristics of the carrier signal, both the DMT transmitter 22 and the remote receiver 34 must recognize the value as being associated with the carrier signal. Either the DMT transmitter 22 and the remote receiver 34 independently derive the associated value, or one informs the other of the associated value. For example, in one embodiment the DMT transmitter 22 can derive the value from a pseudo-RNG and then transmit the generated value to the remote receiver 34. In another embodiment, the remote receiver 34 similarly derives the value from the same pseudo-RNG and the same seed as used by the transmitter (i.e., the transmitter pseudo-RNG produces the same series of random numbers as the receiver pseudo-RNG).

10

15

20

As another example, the DMT transmitter 22 and the remote receiver 34 can each maintain a symbol counter for counting DMT symbols. The DMT transmitter 22 increments its symbol counter upon transmitting a DMT symbol; the remote receiver 34 upon receipt. Thus, when the DMT transmitter 22 and the remote receiver 34 both use the symbol count as a value for computing phase shifts, both the DMT transmitter 22 and remote receiver 34 "know" that the value is associated with a particular DMT symbol and with each carrier signal of that DMT symbol.

Values can also be derived from other types of predefined parameters. For example, if the predefined parameter is the DMT carrier number, then the value associated with a particular carrier signal is the carrier number of that signal within the DMT symbol. The number of a carrier signal represents the location of the frequency of the carrier signal relative to the frequency of other carrier

signals within a DMT symbol. For example, in one embodiment the DSL communication system 2 provides 256 carrier signals, each separated by a frequency of 4.3125 kHz and spanning the frequency bandwidth from 0 kHz to 1104 kHz. The DMT transmitter 22 numbers the carrier signals from 0 to 255. Therefore, "DMT carrier number 50" represents the 51st DMT carrier signal which is located at the frequency of 215.625 kHz (i.e., 51 x 4.3125 kHz).

Again, the DMT transmitter 22 and the remote receiver 34 can know the value that is associated with the carrier signal because both the DMT transmitter 22 and the remote receiver 34 use the same predefined parameter (here, the DMT carrier number) to make the value-carrier signal association. In other embodiments (as exemplified above with the transmitter pseudo-RNG), the DMT transmitter 22 can transmit the value to the remote receiver 34 (or vice versa) over the communication channel 18.

10

15

20

In other embodiments, other predefined parameters can be used in conjunction with the symbol count. One example of such a predefined parameter is the superframe count that increments by one every 69 DMT symbols. One exemplary implementation that achieves the superframe counter is to perform a modulo 68 operation on the symbol count. As another example, the DMT transmitter 22 can maintain a hyperframe counter for counting hyperframes. An exemplary implementation of the hyperframe count is to perform a modulo 255 operation on the superframe count. Thus, the hyperframe count increments by one each time the superframe count reaches 255.

Accordingly, it is seen that some predefined parameters produce values that vary from carrier signal to carrier signal. For example, when the predefined parameter is the DMT carrier number, values vary based on the frequency of the carrier signal. As another example, the pseudo-RNG generates a new random value for each carrier signal.

Other predefined parameters produce values that vary from DMT symbol 70 to DMT symbol 70. For example, when the predefined parameter is the symbol count, the superframe count, or hyperframe count, values vary based on the numerical position of the DMT symbol 70 within a sequence of symbols, superframes, or hyperframes. Predefined parameters such as the pseudo-RNG, symbol count, superframe count, and superframe can also be understood to be parameters that vary values over time. Any one or combination of the predefined parameters can provide values for input to the equation that computes a phase shift for a given carrier signal.

In one embodiment, the phase scrambling is used to avoid clipping of the transmission signal 38 on a DMT symbol 70 by DMT symbol 70 basis. In this embodiment, the DMT transmitter 22 uses a value based on a predefined parameter that varies over time, such as the symbol count, to compute the phase shift. It is to be understood that other types of predefined parameters that vary the values associated with carrier signals can be used to practice the principles of the invention. As described above, the transceivers 10, 14 may communicate (step 110) the values to synchronize their use in modulating and demodulating the carrier signals.

10

15

20

The DMT transmitter 22 then computes (step 115) the phase shift that is used to adjust the phase characteristic of each carrier signal. The amount of the phase shift combined with the phase characteristic of each QAM-modulated carrier signal depends upon the equation used and the one or more values associated with that carrier signal.

The DMT transmitter 22 then combines (step 120) the phase shift computed for each carrier signal with the phase characteristic of that carrier signal. By scrambling the phase characteristics of the carrier signals, the phase scrambler 66 reduces (with respect to unscrambled phase characteristics) the combined PAR of the plurality of carrier signals and, consequently, the

transmission signal 38. The following three phase shifting examples, PS #1 - PS #3, illustrate methods used by the phase scrambler 66 to combine a computed phase shift to the phase characteristic of each carrier signal.

## Phase Shifting Example #1

5

10

15

Phase shifting example #1 (PS #1) corresponds to adjusting the phase characteristic of the QAM-modulated carrier signal associated with a carrier number N by  $N \times \frac{\pi}{3}$ , modulo (mod)  $2\pi$ . In this example, a carrier signal having a carrier number N equal to 50 has a phase shift added to the phase characteristic of that carrier signal equal to  $50 \times \frac{\pi}{3} \pmod{2\pi} = \frac{2}{3}\pi$ . The carrier signal with a carrier number N equal to 51 has a phase shift added to the phase characteristic of that carrier signal equal to  $51 \times \frac{\pi}{3} \pmod{2\pi} = \pi$ . The carrier signal with a carrier number N equal to 0 has no phase shift added to the phase characteristic of that carrier signal.

#### Phase Shifting Example #2

Phase shifting example #2 (PS #2) corresponds to adjusting the phase characteristic of the QAM-modulated carrier signal associated with a carrier number N by  $(N+M) \times \frac{\pi}{4}$ , mod  $2\pi$ , where M is the symbol count. In this example, a carrier signal having a carrier number N equal to 50 on DMT symbol count M equal to 8 has a phase shift added to the phase characteristic of that carrier signal equal to  $(50+8) \times \frac{\pi}{4} (\text{mod } 2\pi) = \frac{\pi}{2}$ . The carrier signal with the same carrier number N equal to 50 on the next DMT symbol count M equal to 9 has a phase shift added to the phase characteristic of that carrier signal equal to  $(50+9) \times \frac{\pi}{4} (\text{mod } 2\pi) = \frac{3\pi}{4}$ .

## Phase Shifting Example #3

Phase shifting example #3 (PS #3) corresponds to adjusting the phase characteristic of the QAM-modulated carrier signal associated with a carrier number N by  $(X_N) \times \frac{\pi}{6}$ , mod  $2\pi$ , where  $X_N$  is an array of N pseudo-random numbers. In this example, a carrier signal having a carrier number N equal to 5 and  $X_N$  equal to [3, 8, 1, 4, 9, 5, ...] has a phase shift added to the phase characteristic of the carrier signal that is equal to  $(9) \times \frac{\pi}{6} \pmod{2\pi} = \frac{\pi}{3}$ . (Note that 9 is the 5<sup>th</sup> value in  $X_N$ .) The carrier signal with a carrier number N equal to 6 has a phase shift added to the phase characteristic of the carrier signal equal to  $(5) \times \frac{\pi}{6} \pmod{2\pi} = \frac{5\pi}{3}$ .

It is to be understood that additional and/or different phase shifting techniques can be used by the phase scrambler 66, and that PS #1, #2, and #3 are merely illustrative examples of the principles of the invention. The DMT transmitter 22 then combines (step 130) the carrier signals to form the transmission signal 38. If the transmission signal is not clipped, as described below, the DMT transmitter 22 consequently transmits (step 160) the transmission signal 38 to the remote receiver 34.

# **Clipping of Transmission Signals**

10

15

20

A transmission signal 38 that has high peak values of voltage (i.e., a high PAR) can induce non-linear distortion in the DMT transmitter 22 and the communication channel 18. One form of this non-linear distortion of the transmission signal 38 that may occur is the limitation of the amplitude of the transmission signal 38 (i.e., clipping). For example, a particular DMT symbol 70 clips in the time domain when one or more time domain samples in that DMT symbol 70 are larger than the maximum allowed digital value for the DMT symbols 70. In multicarrier communication

systems when clipping occurs, the transmission signal 38 does not accurately represent the input serial data bit signal 54.

In one embodiment, the DSL communication system 2 avoids the clipping of the transmission signal 38 on a DMT symbol 70 by DMT symbol 70 basis. The DMT transmitter 22 detects (step 140) the clipping of the transmission signal 38. If a particular DMT symbol 70 clips in the time domain to produce a clipped transmission signal 38, the DMT transmitter 22 substitutes (step 150) a predefined transmission signal 78 for the clipped transmission signal 38.

5

10

15

20

The predefined transmission signal 78 has the same duration as a DMT symbol 70 (e.g., 250 ms) in order to maintain symbol timing between the DMT transmitter 22 and the remote receiver 34. The predefined transmission signal 78 is not based on (i.e., independent of) the modulated input data bit stream 54; it is a bit value pattern that is recognized by the remote receiver 34 as a substituted signal. In one embodiment, the predefined transmission signal 78 is a known pseudo-random sequence pattern that is easily detected by the remote receiver 34. In another embodiment, the predefined transmission signal 78 is an "all zeros" signal, which is a zero voltage signal produced at the DMT transmitter 22 output (i.e., zero volts modulated on all the carrier signals). In addition to easy detection by the remote receiver 34, the zero voltage signal reduces the power consumption of the DMT transmitter 22 when delivered by the DMT transmitter 22. Further, a pilot tone is included in the predefined transmission signal 78 to provide a reference signal for coherent demodulation of the carrier signals in the remote receiver 34 during reception of the predefined transmission signal 78.

After the remote receiver 34 receives the transmission signal 38, the remote receiver 34 determines if the transmission signal 38 is equivalent to the predefined transmission signal 78. In

one embodiment, when the remote receiver 34 identifies the predefined transmission signal 78, the remote receiver 34 ignores (i.e., discards) the predefined transmission signal 78.

Following the transmission of the predefined transmission signal 78, the phase scrambler 66 shifts (step 120) the phase characteristic of the QAM-modulated carrier signals (based on one of the predefined parameters that varies over time). For example, consider that a set of QAM symbols 58 produces a DMT symbol 70 comprising a plurality of time domain samples, and that one of the time domain samples is larger than the maximum allowed digital value for the DMT symbol 70. Therefore, because the transmission signal 38 would be clipped when sent to the remote receiver 34, the DMT transmitter 22 sends the predefined transmission signal 78 instead.

5

10

15

20

After transmission of the predefined transmission signal 78, the DMT transmitter 22 again attempts to send the same bit values that produced the clipped transmission signal 38 in a subsequent DMT symbol 70'. Because the generation of phase shifts in this embodiment is based on values that vary over time, the phase shifts computed for the subsequent DMT symbol 70' are different than those that were previously computed for the DMT symbol 70 with the clipped time domain sample. These different phase shifts are combined to the phase characteristics of the modulated carrier signals to produce carrier signals of the subsequent DMT symbol 70' with different phase characteristics than the carrier signals of the DMT symbol 70 with the clipped time domain sample.

DMT communication systems 2 infrequently produce transmission signals 38 that clip (e.g., approximately one clip every 10<sup>7</sup> time domain samples 70). However, if the subsequent DMT symbol 70' includes a time domain sample that clips, then the predefined transmission signal 78 is again transmitted (step 150) to the remote receiver 34 instead of the clipped transmission signal 38. The clipping time domain sample may be on the same or on a different carrier signal than the

previously clipped DMT symbol 70. The DMT transmitter 22 repeats the transmission of the predefined transmission signal 78 until the DMT transmitter 22 produces a subsequent DMT symbol 70' that is not clipped. When the DMT transmitter 22 produces a DMT symbol 70' that is not clipped, the DTM transmitter 22 transmits (step 160) the transmission signal 38 to the remote receiver 34. The probability of a DMT symbol 70 producing a transmission signal 38 that clips in the time domain depends on the PAR of the transmission signal 38.

For example, the following phase shifting example, PST #4, illustrates the method used by the phase scrambler 66 to combine a different phase shift to the phase characteristic of each carrier signal to avoid the clipping of the transmission signal 38.

#### Phase Shifting Example #4

10

15

20

Phase shifting example #4 (PS #4) corresponds to adjusting the phase characteristic of the carrier signal associated with a carrier number N by  $\frac{\pi}{3} \times (M+N)$ , mod  $2\pi$ , where M is the DMT symbol count. In this example, if the DMT symbol 70 clips when the DMT symbol count M equals 5, the predefined transmission signal 78 is transmitted instead of the current clipped transmission signal 38. On the following DMT symbol period, the DMT count M equals 6, thereby causing a different set of time domain samples to be generated for the subsequent DMT symbol 70', although the QAM symbols 58 used to produce both DMT symbols 70, 70' are the same.

If this different set of time domain samples (and consequently the transmission signal 38) is not clipped, the DMT transmitter 22 sends the transmission signal 38. If one of the time domain samples in the different set of time domain samples 70 (and consequently the transmission signal 38) is clipped, then the DMT transmitter 22 sends the predefined transmission signal 78 again. The process continues until a DMT symbol 70 is produced without a time domain sample 70 that is

clipped. In one embodiment, the transmitter 22 stops attempting to produce a non-clipped DMT symbol 70' for the particular set of QAM symbols 58 after generating a predetermined number of clipped DMT symbols 70'. At that moment, the transmitter 22 can transmit the most recently produced clipped DMT symbol 70' or the predetermined transmission signal 78.

5

10

15

20

The PAR of the DSL communication system 2 is reduced because the predefined transmission signal 78 is sent instead of the transmission signal 38 when the DMT symbol 70 clips. For example, a DMT communication system 2 that normally has a clipping probability of  $10^{-7}$  for the time domain transmission signal 38 can therefore operate with a  $10^{-5}$  probability of clipping and a lower PAR equal to 12.8 dB (as compared to 14.5 dB). When operating at a  $10^{-5}$  probability of clipping, assuming a DMT symbol 70 has 512 time-domain samples 70, the DMT transmitter 22 experiences one clipped DMT symbol 70 out of every  $\frac{10^5}{512}$ , or 195 DMT symbols 70. This results in the predefined (non-data carrying) transmission signal 78 being transmitted, on average, once every 195 DMT symbols. Although increasing the probability of clipping to  $10^{-5}$  results in approximately a 0.5% (1/195) decrease in throughput, the PAR of the transmission signal 38 is reduced by 1.7 dB, which reduces transmitter complexity in the form of power consumption and component linearity.

While the invention has been shown and described with reference to specific preferred embodiments, it should be understood by those skilled in the art that various changes in form and detail may be made therein without departing from the spirit and scope of the invention as defined by the following claims. For example, although the specification uses DSL to describe the invention, it is to be understood that various form of DSL can be used, e.g., ADSL, VDSL, SDSL, HDSL, HDSL2, or SHDSL. It is also to be understood that the principles of the invention apply to

various types of applications transported over DSL systems (e.g., telecommuting, video conferencing, high speed Internet access, video-on demand).

#### What is Claimed:

1. In a multicarrier modulation system including a first transceiver in communication with a second transceiver using a transmission signal having a plurality of carrier signals for modulating an input bit stream, each carrier signal having a phase characteristic associated with the input bit stream, a method for scrambling the phase characteristics of the carrier signals comprising:

associating each carrier signal with a value determined independently of any input bit value carried by that carrier signal;

computing a phase shift for each carrier signal based on the value associated with that carrier signal; and

combining the phase shift computed for each carrier signal with the phase characteristic of that carrier signal so as to substantially scramble the phase characteristics of the plurality of carrier signals.

- 2. The method of claim 1 further comprising modulating bits of the input bit stream onto the carrier signals having the substantially scrambled phase characteristics to produce a transmission signal with a reduced peak-to-average power ratio (PAR).
- 3. The method of claim 1 further comprising independently deriving the value associated with each carrier signal at each transceiver.
- 4. The method of claim 1 further comprising transmitting the value associated with each carrier signal from one transceiver to the other transceiver.

- 5. The method of claim 1 further comprising maintaining synchronization between the transceivers using the value associated with each carrier signal.
  - 6. The method of claim 1 wherein the value varies with each carrier signal.
  - 7. The method of claim 1 wherein the value varies with each DMT symbol.
  - 8. The method of claim 1 wherein the value is derived from a predetermined parameter.
  - 9. The method of claim 8 wherein the predefined parameter is a carrier number.
  - 10. The method of claim 8 wherein the predefined parameter is a symbol count.
  - 11. The method of claim 8 wherein the predefined parameter is a hyperframe count.
  - 12. The method of claim 8 wherein the predefined parameter is a superframe count.
  - 13. The method of claim 1 further comprising scrambling the bits of the input bit stream.
- 14. The method of claim 1 further comprising transmitting a predetermined transmission signal when the amplitude of the transmission signal exceeds a certain level.
- 15. The method of claim 14 wherein the predetermined transmission signal comprises a predetermined pattern of bits.

- 16. The method of claim 14 wherein the predetermined transmission signal comprises a pilot tone.
- 17. The method of claim 16 wherein the pilot tone is used to maintain timing synchronization between the first transceiver and the second transceiver.
- 18. The method of claim 15 wherein each bit value in the predetermined pattern of bits is a zero value.
- 19. The method of claim 15 wherein the predetermined pattern of bits is a pseudorandom sequence pattern.
- 20. In a multicarrier modulation system including a first transceiver in communication with a second transceiver using a transmission signal having a plurality of carrier signals for modulating an input bit stream, each carrier signal having a phase characteristic with the input bit stream, a method for scrambling the phase characteristics of the carrier signals comprising:

associating each carrier signal with a value determined independently of any input bit value carried by that carrier signal;


computing a phase shift for each carrier signal based on the value associated with that carrier signal; and

demodulating the transmission signal using the phase shift computed for each carrier signal.

# **Abstract**

A system and method that scrambles the phase characteristic of a carrier signal are described. The scrambling of the phase characteristic of each carrier signal includes associating a value with each carrier signal and computing a phase shift for each carrier signal based on the value associated with that carrier signal. The value is determined independently of any input bit value carried by that carrier signal. The phase shift computed for each carrier signal is combined with the phase characteristic of that carrier signal so as to substantially scramble the phase characteristic of the carrier signals. Bits of an input signal are modulated onto the carrier signals having the substantially scrambled phase characteristic to produce a transmission signal with a reduced PAR.

5

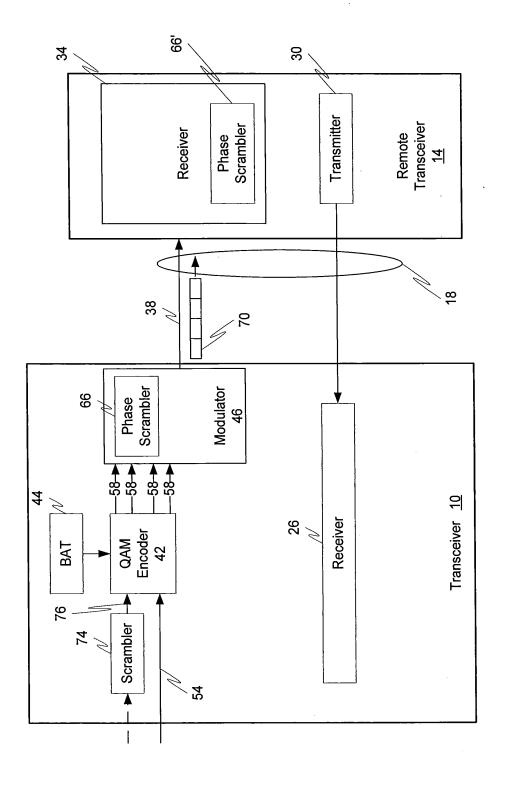

, . . .

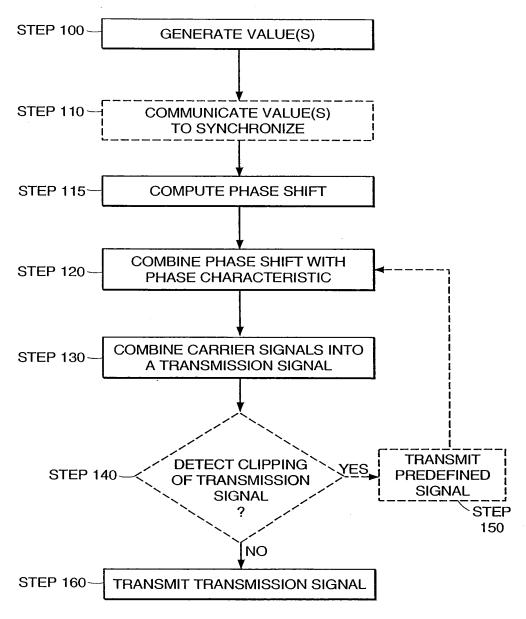


FIG. 2

DECLARATION AND POWER			ey Docket No.	AWR	R-017 (457/19)				
OF ATTORNEY FOR UTILITY			lamed Inventor	Tzann	ies				
ORI	DESIGN		COMPLETE IF KNOWN						
PATENT A	PPLICATION	Applic	cation Serial Number	Not Y	et Assigned				
□ Declaration [	Declaration	Filing	Date	Herew	vith				
Submitted with	Submitted after Init	ial Group	Art Unit	Not Y	et Assigned				
Initial Filing	Filing (surcharge	Exami	ner Name	Not Y	et Assigned				
	37 CFR 1.16(e) requ	uired)							
		1		<u></u>	-				
As a below named inve	ntor, I hereby declar	e that:							
My residence, post offic	e address, and citizens	ship are as stated	below next to my nam	ne.					
I believe I am the original names are listed below)							plural		
A System A	And Method For Scra	nbling The Phas	e Of The Carriers In A	Multica	ırrier Commun	ications System			
the anaification of which	ı.	(Title	of the Invention)			······································	<b>,</b>		
the specification of whic									
OR	is attached hereto OR								
☐ was filed on (MM/DD/YYYY)			as United States Appl	lication S	Serial Number	or PCT Internati	onal		
Application Number		and was ame	nded on (MM/DD/YYY	Y) [		(if applicabl	e).		
I hereby state that I have by any amendment speci			of the above identified	d specifi	cation, includi	ng the claims, as	amended		
I acknowledge the duty t	to disclose to the Pate	nt Office all info	rmation known by me	to be ma	iterial to paten	tability as define	d in 37 CFR		
I hereby claim foreign p									
certificate, or 365(a) of a listed below and have al									
PCT international applic	cation having a filing o						or or any		
Prior Foreign Applicat Number(s)		untry	Foreign Filing Da (MM/DD/YYYY		Priority lot Claimed	Certified Copy	Attached?		
		············	,						
					H	H			
Additional foreign application numbers are listed on a supplemental priority data sheet attached hereto.									
I hereby claim the benef				<del></del>					
Application Serie	<del></del>		ate (MM/DD/YYYY)		ings/ risted being	,			
60/164,			11/09/1999			nal provisional ap			
						serial numbers are listed on a supplemental priority data sheet			
					attached	hereto.			

			or Design Paten						
I hereby claim the benefit under 35 United States of America, listed be States or PCT International applica which is material to patentability a PCT international filing date of thi	clow and, insofar as the subject ation in the manner provided b as defined in 37 CFR 1.56 which	t matter of y the first p	each of the claims of this applica paragraph of 35 U.S.C. 112, I ack	tion is not nowledge	disclosed in the prior United the duty to disclose information				
U.S. Parent Application or PCT Parent Parent Filing Date Parent Patent Number									
Serial Number (MM/DD/YYYY) (if applicable)									
Additional U.S. or PCT international	ational application numbers a	e listed on	a supplemental priority data shee	t attached	hereto.				
As a named inventor, I hereby apparent of the Assaurance of the As	herewith: Customer Nu OR	mber	s to prosecute this application and — (s) name/registration number	<b>→</b>	Place Customer Number Bar Code Label Here				
	Registration				Registration				
Name	Number		Name		Number				
Steven M. Bauer	31,481		Thomas C. Meyers	3	6,989				
John V. Bianco	36,748		Joseph B. Milstein	4	2,897				
Isabelle A.S. Blundell	43,321		David G. Miranda	4	2,898				
Maureen A. Bresnahan	44,559		Ronda P. Moore	4	44,244				
Michael H. Brodowski	41,640		Indranil Mukerji	P	P-46,944				
Jennifer A. Camacho	43,526		Edmund R. Pitcher	2	7,829				
Joseph A. Capraro, Jr.	36,471		Michael A. Rodriguez	4	41,274				
John J. Cotter	38,116		Jamie H. Rose	4	45,054				
John V. Forcier	42,545		R. Stephen Rosenholm	4	5,283				
Steven J. Frank	33,497		Christopher W. Stamos		5,370				
Brian M. Gaff	44,691		Joseph P. Sullivan	4	5,349				
Michael J. Giannetta	42,574		Robert J. Tosti	3	5,393				
Duncan A. Greenhalgh	38,678		Thomas A. Turano	3	5,722				
William G. Guerin	41,047		Michael J. Twomey	3	8,349				
Jonathan A. Harris	44,744		Christine C. Vito	3	9,061				
Ira V. Heffan	41.059		Patrick R.H. Waller	4	1,418				
Danielle L. Herritt	43,670		Daniel A. Wilson	4	5,508				
Douglas J. Kline	35,574		Yin P. Zhang	4	4,372				
John D. Lanza	40,060			1					
Kurt W. Lockwood	40,704	,							
Additional registered pract	titioners named on supplem	nental Reg	sistered Practitioner Information	on sheet a	ttached hereto.				
Direct all correspondence to:	Patent Administr Testa, Hurwitz & High Street Tow 125 High Street Boston, MA 021 Tel. No.: (617) 2 Fax No.: (617) 2	z Thibeaul er 10 48-7000	lt, LLP						

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First	Invento	ır:		petition has been filed for this unsigned inventor						
Given Name (first and middle [if any])					Family Name or Surname					
Marcos C.	Тхапися									
Inventor's Signature	118						Date	No.	19 2000  USA	
Residence	City	Orinda	State	CA	Country	USA	Citiz	cuship	USA	
Post Office Address	121 L	aEspiral	<b>.</b>			- <del></del>			1	
P.O. Address (line 2)	City	Orinda	State	CA	ZIP 94563 Country				USA	
Additional inventor	rs are be	ing named on the		rpplemental	Additional I	nventor(s) she	ct(s) attached	I hereto.		
Name of Additional Jo	oiat Inv	entor, if any;	A petition has been filed for this unsigned inventor							
Given N	ame (fir	st and middle [if i	my])			Famil	y Name or S	urnatne		
					}					
Inventor's Signature			· ·		Date					
Residence	City	~ <del>_</del>	State		Country		Citiz	caship	T	
Post Office Address			1		<del>-1</del>	<del></del>				
P.O. Address (line 2)	City	<del></del>	State		ZIP		Country	Ţ		
Name of Additional Jo	lnt Inv	entor, if any:	A petition has been filed for this unsigned inventor						inventor	
Given Na	me (first	and middle [if a	y])			Family	Name or Su	тивте		
				1						
Inventor's Signature							Date			
Residence	City		State		Country		Citizo	cnship	T	
Post Office Address			<b>ل</b> ــــــــــــــــــــــــــــــــــــ		1 .	1			1	
P.O. Address (line 2)	City		State		ZIP Country					

Approved for use through 7/31/2006. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number. PATENT APPLICATION FEE DETERMINATION RECORD 11/860,080 Substitute for Form PTO-875 APPLICATION AS FILED - PART I OTHER THAN SMALL ENTITY (Column 1) (Column 2) SMALL ENTITY NUMBER FILED NUMBER EXTRA RATE (\$) FEE (\$) RATE (\$) FEE (\$) **FOR** BASIC FEE 300 (37 CFR 1.16(a), (b), or (c)) SEARCH FEE 500 (37 CFR 1.16(k), (i), or (m)) EXAMINATION FEE 200 (37 CFR 1.16(o), (p), or (q)) TOTAL CLAIMS х 25= х 50= (37 CFR 1.16(i)) minus 20 OR INDEPENDENT CLAIMS х 100= х 200= (37 CFR 1.16(h)) minus 3 = f the specification and drawings exceed 100 APPLICATION SIZE sheets of paper, the application size fee due i FEE \$250 (\$125 for small entity) for each additional 50 sheets or fraction thereof. See 35 (37 CFR 1.16(s)) U.S.C. 41(a)(1)(G) and 37 CFR 1.16(s). MULTIPLE DEPENDENT CLAIM PRESENT (37 CFR 1.16(j)) N/A N/A TOTAL If the difference in column 1 is less than zero, enter "0" in column 2. TOTAL 1000 APPLICATION AS AMENDED - PART II OTHER THAN SMALL ENTITY OR (Column 2) (Column 3) SMALL ENTITY HIGHEST CLAIMS ADDI-ADDI-REMAINING NUMBER PRESENT RATE (\$) RATE (\$) TIONAL TIONAL AFTER AMENDMENT PREVIOUSLY **EXTRA** FEE (\$) FEE (\$) PAID FOR Total OR Minus = (37 CFR 1.16(i)) Independent Minus = = X (37 CFR 1.16(h) OR Application Size Fee (37 CFR 1.16(s)) FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM (37 CFR 1.16(j)) N/A N/A OR TOTAL TOTAL OR ADD'T FEE ADD'T FEE (Column 1) (Column 2) (Column 3) OR HIGHEST CLAIMS ADDI-ADDI-REMAINING NUMBER PRESENT RATE (\$) TIONAL RATE (\$) 8 TIONAL **AFTER** PREVIOUSLY **FXTRA** FEE (\$) FEE (\$) AMENDMENT PAID FOR Total OR Minus = X = (37 CFR 1.16(i)) Independent Minus = X X (37 CFR 1.16(h) OR Application Size Fee (37 CFR 1.16(s)) FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM (37 CFR 1.16(j)) N/A N/A OR OR ADD'T FEE ADD'T FEE

This collection of information is required by 37 CFR 1.16. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

. If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

If the entry in column 1 is less than the entry in column 2, write "0" in column 3.

If the "Highest Number Previously Paid For" IN THIS SPACE is less than 20, enter "20".

If the "Highest Number Previously Paid For" IN THIS SPACE is less than 3, enter "3".

The "Highest Number Previously Paid For" (Total or Independent) is the highest number found in the appropriate box in column 1.

PTO/SB/06 (07-06)
Approved for use through 1/31/2007. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
to a collection of information unless it displays a valid OMB control number. Under the Panerwork Reduction Act of 1995, no persons are required to resp

PATENT APPLICATION FEE DETERMINATION RECORD Substitute for Form PTO-875						А	Application or Docket Number 11/860,080			ing Date 24/2007	To be Mailed
	APPLICATION AS FILED – PART I (Column 1) (Column 2)						SMALL ENTITY				HER THAN
	FOR NUMBER FILED NUMBER EXTRA				MBER EXTRA		RATE (\$)	FEE (\$)		RATE (\$)	FEE (\$)
	BASIC FEE (37 CFR 1.16(a), (b),	or (c))	N/A		N/A	1	N/A			N/A	
	SEARCH FEE (37 CFR 1.16(k), (i), (		N/A		N/A	1	N/A		1	N/A	
	EXAMINATION FE (37 CFR 1.16(o), (p),	Ε	N/A		N/A	1	N/A			N/A	
	TAL CLAIMS CFR 1.16(i))		mir	nus 20 = *		1	X \$ =		OR	X \$ =	
	EPENDENT CLAIM CFR 1.16(h))	IS	m	inus 3 = *		1	X \$ =			X \$ =	
	If the specification and drawings exceed 100 sheets of paper, the application size fee due is \$250 (\$125 for small entity) for each additional 50 sheets or fraction thereof. See 35 U.S.C. 41(a)(1)(G) and 37 CFR 1.16(s).										
	MULTIPLE DEPEN	NDENT CLAIM PR	ESENT (3	7 CFR 1.16(j))							
* If	the difference in colu	umn 1 is less than	zero, ente	r "0" in column 2.			TOTAL			TOTAL	
	APP	(Column 1)	AMENE	OED — PART II (Column 2)	(Column 3)		SMALL ENTITY				ER THAN ALL ENTITY
AMENDMENT	09/24/2007	CLAIMS REMAINING AFTER AMENDMENT		HIGHEST NUMBER PREVIOUSLY PAID FOR	PRESENT EXTRA		RATE (\$)	ADDITIONAL FEE (\$)		RATE (\$)	ADDITIONAL FEE (\$)
ME	Total (37 CFR 1.16(i))	* 1	Minus	** 20	= 0		X \$ =		OR	X \$50=	0
ΝΞ	Independent (37 CFR 1.16(h))	* 1	Minus	***3	= 0	1	X \$ =		OR	X \$200=	0
AM	Application Size Fee (37 CFR 1.16(s))										
	FIRST PRESEN	NTATION OF MULTIF	PLE DEPEN	DENT CLAIM (37 CF	R 1.16(j))	П			OR		
							TOTAL ADD'L FEE		OR	TOTAL ADD'L FEE	0
		(Column 1)		(Column 2)	(Column 3)		•			·	
L		CLAIMS REMAINING AFTER AMENDMENT		HIGHEST NUMBER PREVIOUSLY PAID FOR	PRESENT EXTRA		RATE (\$)	ADDITIONAL FEE (\$)		RATE (\$)	ADDITIONAL FEE (\$)
ENT	Total (37 CFR 1.16(i))	*	Minus	**	=		X \$ =		OR	X \$ =	
NDME	Independent (37 CFR 1.16(h))	*	Minus	***	=	]	X \$ =		OR	X \$ =	
ΠEN	Application Si	ize Fee (37 CFR 1	.16(s))								
AN	Application Size Fee (37 CFR 1.16(s))  FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM (37 CFR 1.16(j))								OR		
							TOTAL ADD'L FEE		OR	TOTAL ADD'L FEE	
** If	the entry in column the "Highest Numbe If the "Highest Numb · "Highest Number P	er Previously Paid oer Previously Paid	For" IN TH d For" IN T	HIS SPACE is less HIS SPACE is less	than 20, enter "20's than 3, enter "3".		/SONY	nstrument Ex A HILLIARD/		er:	

This collection of information is required by 37 CFR 1.16. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS

ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.