



www.newtypecommunications.com

STATE OF NEW YORK)
CITY OF NEW YORK :
COUNTY OF NEW YORK)

445 Fifth Avenue
New York, New York 10016
Phone 212-686-5555
Fax 212-686-5414


CERTIFICATION

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the results of these proceedings.

I declare under penalty of perjury under the laws of the United States of America that the translation into ENGLISH is true and accurate of the attached document relating to:

DE 196 04 160 C1

written in GERMAN.



NEWTPE COMMUNICATIONS, INC.

Sworn to and subscribed before me
this 4th day of October, 2016



NOTARY PUBLIC

BRIAN G. BROWN
Notary Public, State of New York
No. 01BR6151227
Qualified in Suffolk County
Commission Expires August 14, 2018

Translations • Typesetting/Desktop Publishing



19 FEDERAL REPUBLIC
OF GERMANY



GERMAN
PATENT OFFICE

12 Patent Specification

51 Int. Cl.⁶:
F 16 F 15/14

10 **DE 196 04 160 C1**

21 Serial No.: 196.04.160.0-13
22 Application date: 06 February 1996
43 Date laid open: ---
45 Date of publication
of the patent grant: 28 May 1997

Opposition may be filed within 3 months after publication of the grant


73 Patent holder:
Carl Freudenberg, 69469 Weinheim, DE

72 Inventors:
Eckel, Hans-Gerd, Dr., 69514 Laudenbach,
DE; Kunkel, Anja, 69483 Wald-Michelbach,
DE

56 Publications taken into consideration for the
evaluation of patentability:
GB 5 98 811

54 Rotational-speed-adaptive absorber

57 A rotational-speed-adaptive absorber, comprising a hub part (1) capable of rotating around an axis of rotation, as well as several inertial masses (2), which are able to swivel around swivel axes spaced apart from the axis of rotation (3) in a manner following the rotational movement (4), wherein each inertial mass (2) is mounted on two pins (5), which in the hub part (1) are spaced apart in circumferential direction and extend parallel to the axis of rotation (3), and wherein the pins (5) are capable of rolling on curved tracks (6), which in the region of the hub part (1) have a profile that is open in U-shaped manner in the direction of the axis of rotation (3) and in the region of the inertial masses (2) have a profile that is open in U-shaped manner in the opposite direction, and wherein the pins (5) are guided on the sides facing away from the respective curved tracks (6) by a guide track (7).

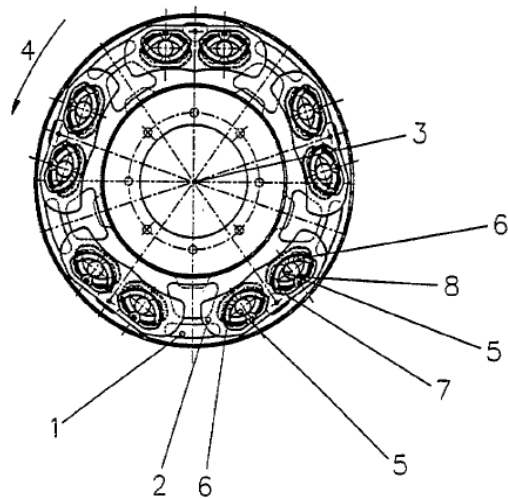

DE 196 04 160 C1

DE 196 04 160 C1

GERMAN GOVERNMENT PRINTING OFFICE 04.97 702 122/303 16

Description

The invention relates to a rotational-speed-adaptive absorber, comprising a hub part capable of rotating around an axis of rotation, as well as several inertial masses, which are able to swivel in the direction of the rotational movement around swivel axes spaced apart from the axis of rotation, wherein each inertial mass is mounted by two pins, which in the hub part are spaced apart in circumferential direction and extend parallel to the axis of rotation, and wherein the pins are capable of rolling on curved tracks, which in the region of the hub part have a profile that is open in U-shaped manner in the direction of the axis of rotation and in the region of the inertial masses have a profile that is open in U-shaped manner in the opposite direction.

Such an absorber is known from GB Patent 598811. Therein the curved tracks are formed by partial regions of the wall of bores having a considerably larger diameter than that of the pins. Upon introduction of torsional vibrations into such a torsional vibration absorber, the pins roll over the walls that bound the bores and form the curved tracks, with the result that the distance between each inertial mass and the axis of rotation changes constantly in the course of each individual vibration. Such an absorber has a natural frequency proportion to the rotational speed, and so torsional oscillations with frequencies proportional to the rotational speed can be absorbed in the entire rotational-speed range. Such frequencies proportional to the rotational speed occur in all periodically operating machines, such as the combustion engines of motor vehicles.

In the known rotational-speed-adaptive absorber, the pins and the curved tracks are pressed against one another only when the shaft is rotating. While the shaft is rotating uniformly, all inertial masses orbit the axis of rotation always at the greatest possible distance. This condition is perturbed, however, when the rotational movement comes to a standstill. Under the influence of gravity, all parts are then displaced to a position in which they have the smallest possible distance from the center of the earth. In this condition, the inertial masses and pins distributed in circumferential direction of the rotational-speed-adaptive absorber therefore have distances from the axis of rotation that differ from one another.

In rotational-speed-adaptive absorbers that are occasionally in rotating motion and occasionally in a stationary state, the transition from the rotating to the stationary state is unpleasantly noticeable, because precisely the inertial masses located on the side of the axis of rotation facing away from the center of the earth suddenly fall down, while the pins in the bore

suddenly strike the respective opposite metallic wall. This produces metallic impact noises. The same effect can be observed at the onset of rotational movement after a preceding standstill.

The object of the invention is to further develop a rotational-speed-adaptive absorber of the type mentioned in the introduction to the effect that the mounting of the inertial masses at the beginning and at the end of a rotational movement can no longer lead to unacceptable noise generation.

This object is achieved according to the invention in a rotational-speed-adaptive absorber of the type mentioned in the introduction by the fact that the pins on the sides facing away from the respective curved tracks are guided by a guide track. The pins are already braced by the guide tracks on the side facing away from the curved tracks after overcoming a small clearance before a large relative velocity develops. Thereby the occurrence of impact noises can be limited to acceptable values under all conceivable operating conditions.

In order to improve the safety against operation-related impact noises even more, it has proved advantageous when the guide tracks consist of polymer material, for example of polyurethane or polyamide.

It is also possible to use an elastomeric material. By virtue of the elastic properties, particularly efficient damping of impact noises is achieved in such a construction.

In circumferential direction, the damping layers may end on both sides in stop surfaces, by which the circumferential mobility of the pins is limited to a fixed value. The resulting aperture in which each pin is movable has a kidney-shaped contour. It is bounded in a first partial region by the curved track over which the pins are able to roll, and in a second partial region by the guide tracks, by which the pins can be braced when the torsional-vibration absorber is not rotation, and in circumferential direction on both sides by the stop surfaces, which limit the circumferential mobility of the pin. Ideally, all partial surfaces merge continuously into one another, thus avoiding sudden changes of direction.

The curved tracks and the guide tracks may form components of insert parts, which can be clipped into recesses of the hub part and/or of the inertial masses. Their size and dimensioning may be modified as a function of the respective application, thus permitting the respective absorber to be adapted selectively to a specified application. Assembly is very simple. It may also be achieved by simple insertion into the recesses and the additional use of adhesives, threaded couplings and/or rivets.

It has proved particularly advantageous when the damping layer is joined to the insert pieces and recesses supporting the curved tracks by molding the body of material forming it

directly onto them and curing it. This permits the secondary advantage of mutual bonding, of equalization of the tolerances between the insert pieces and recesses and of wobble-free fixation of the insert pieces in the recesses. The mounting and curing of the body of material forming the damping layer can be achieved, for example, in the course of an injection-molding process.

The subject matter of the invention will be further illustrated hereinafter on the basis of the drawings, wherein:

Fig. 1 shows a structural shape of a rotational-speed-adaptive absorber in a frontal view,

Fig. 2 shows an insert part for fitting into the hub part or the absorber masses of the rotational-speed-adaptive absorber according to **Fig. 1**,

Fig. 3 shows a rotational-speed-adaptive absorber in cross-sectional view.

The rotational-speed-adaptive absorber reproduced in the drawings comprises a hub part **1** capable of rotating around an axis of rotation as well as several inertial masses **2**, which are able to swivel around swivel axes spaced apart from axis of rotation **3** in a manner that more or less follows rotational movement **4**, wherein each inertial mass **2** is mounted on two pins **5**, in the hub part are spaced apart in circumferential direction and extend parallel to the axis of rotation **3**, and wherein pins **5** are capable of rolling on curved tracks **6**, which in the region of hub part **1** have a profile that is open in U-shaped manner in the direction of axis of rotation **3** and in the region of inertial masses **2** have a profile that is open in U-shaped manner in the opposite direction. Pins **5** are guided on the sides facing away from the respective curved tracks **6** by a guide track **7**. This consists of a guide layer **8** of polymer material, for example of rubber. Guide tracks **7** are bounded on both sides by stop surfaces **9**, which at the same time limit the circumferential mobility of the respective pin **5** to a fixed value. The diameter of the pin **5** is so matched to the radial distance between the respective curved track **6** and the associated guide track **7** that no or at least no noteworthy clearance is present.

Curved tracks **6** and guide tracks **7** form components of insert parts, which are received captively in recesses **10** of hub part **1** and of inertial masses **2**, for example by being clipped therein. The periphery of recesses **10** in inertial masses (2) according to **Fig. 2** is indicated by a broken line. Inertial masses **2** may also have a contour differing from that of **Fig. 2**, for example a rectangularly bounded contour. The manufacture of such a structure is indeed simpler, but it necessarily involves a certain loss with respect to the magnitude of the theoretically attainable absorber mass.

Insert pieces **6.1/6.2** forming curved tracks **6** may also be fitted loosely into recesses **10** then bonded with recesses **10** and insert pieces **6.1** by subsequent molding in place of damping

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.