

Dec. 24, 1968


R. L. VALENTE

3,417,598

APPARATUS FOR POINTING WORK PIECES

Filed Aug. 19, 1966

3 Sheets-Sheet 1

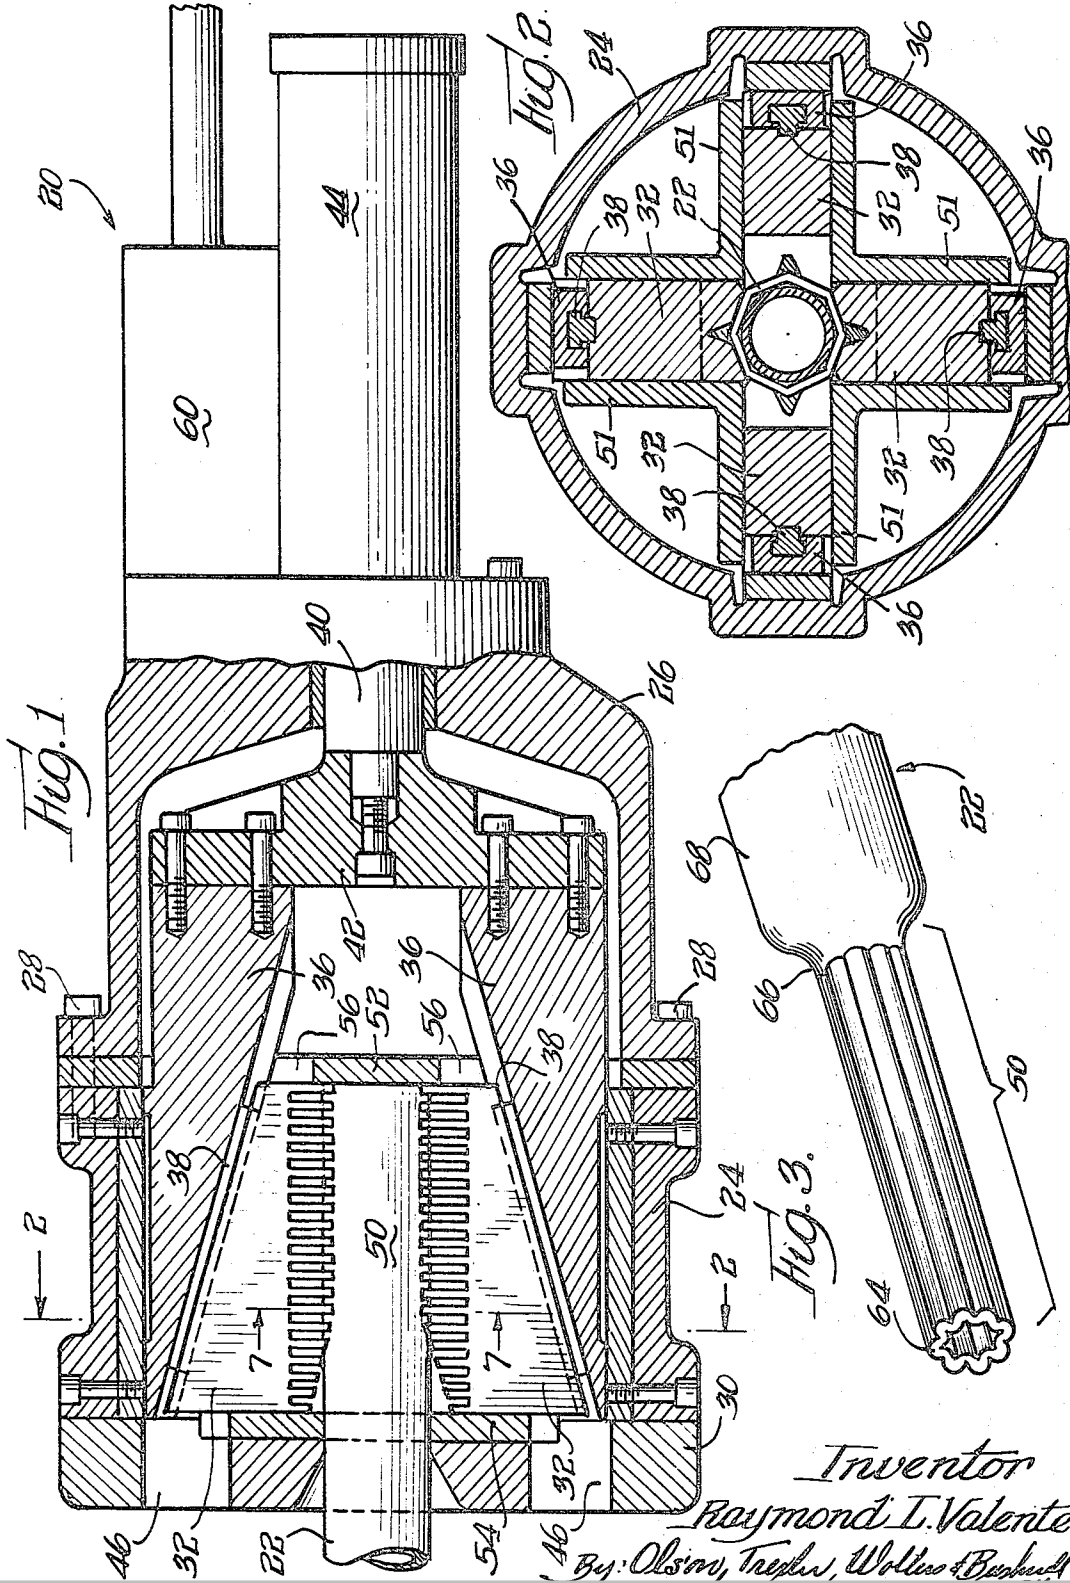

Inventor
Raymond L. Valente
By: Olson, Trepko, Walker & Benhardt

Dec. 24, 1968


R. L. VALENTE

3,417,598

APPARATUS FOR POINTING WORK PIECES

Filed Aug. 19, 1966

3 Sheets-Sheet 2

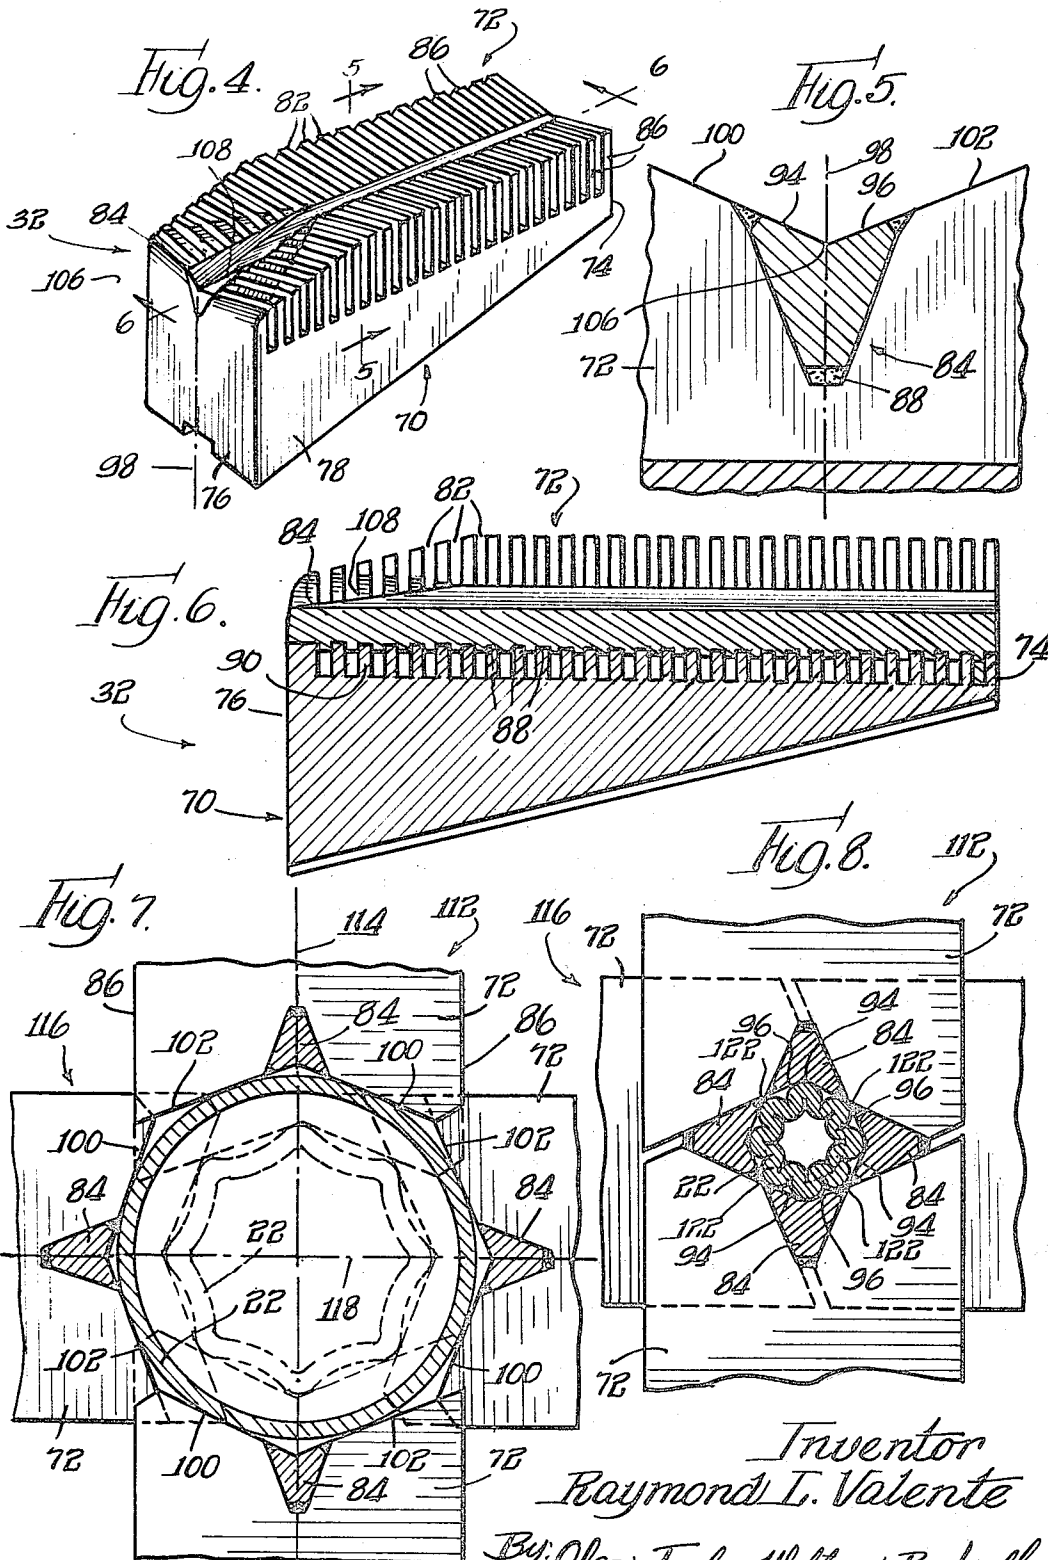

Inventor
Raymond L. Valente

By: [Signature]

Dec. 24, 1968






R. L. VALENTE

3,417,598

APPARATUS FOR POINTING WORK PIECES

Filed Aug. 19, 1966

3 Sheets-Sheet 3

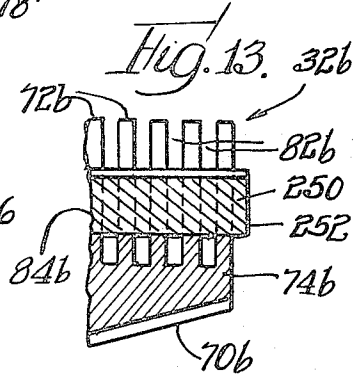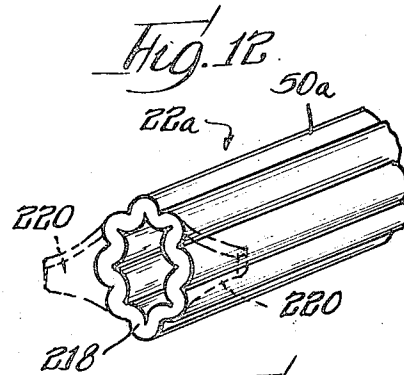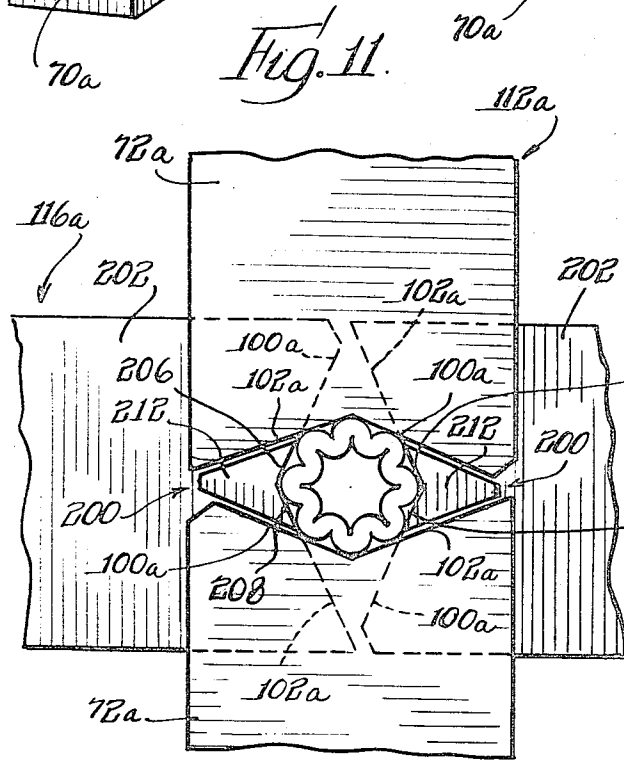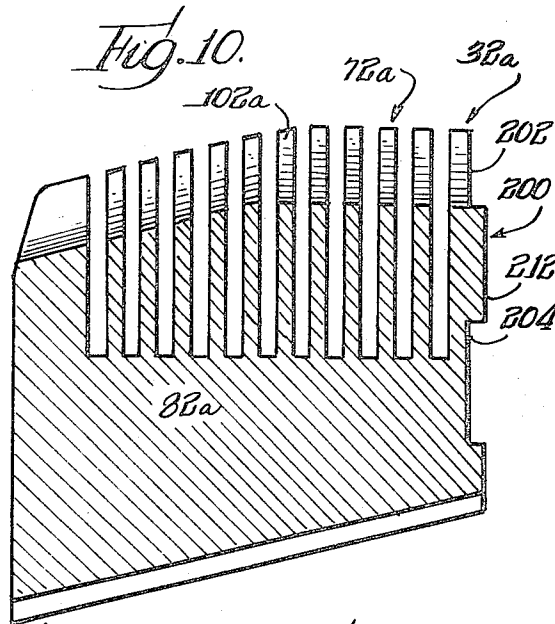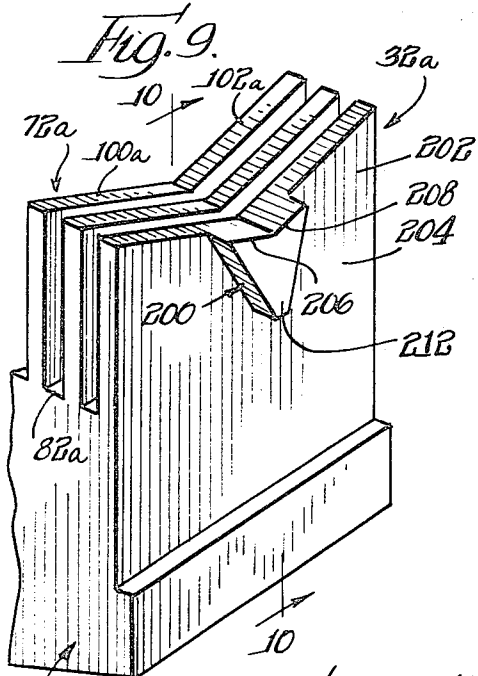

Inventor
Raymond L. Valente

By: Olson, Trester, Wollers & Bushnell

1

2

3,417,598

APPARATUS FOR POINTING WORK PIECES

Raymond L. Valente, Kankakee, Ill., assignor to Manco Manufacturing Co., Bradley, Ill., a corporation of Illinois

Filed Aug. 19, 1966, Ser. No. 573,650

17 Claims. (Cl. 72—383)

This invention relates generally to a workpiece shaping machine and more particularly to a die for a tube pointing machine.

The fabricators of tubes often reduce the diameter of the tube by forcing the tube through a drawing machine. It is a common practice to facilitate inserting the tube in the drawing machine by first pointing or reducing the diameter of an end portion of the tube. Tube pointing machines generally use a plurality of relatively movable forming dies to reduce the diameter of an end portion of a tube. These forming dies are mounted with work engaging ribs or blades in an interleaved arrangement. The diameter of the tube is reduced by moving the dies radially inwardly relative to the tube while increasing the interleaved relationship between the outwardly projecting workpiece engaging die ribs or blades.

The widespread industrial usage of such pointing machines clearly indicates their generally satisfactory performance. However, difficulty is frequently encountered in using the machines due to relative movement between the outwardly extending blades of a die. The relative movement between the work-engaging blades of a die is caused by the extrusion of small ridges of metal between the blades of the die as the end portion of the tube is compressed. Since the tube tends to elongate slightly in an axial direction as the end portion is compressed, the ribs are stretched and deflected axially by the ridges of metal. This deflection often, after a period of use, breaks the die blades necessitating the replacement of the relatively expensive dies.

Another problem which is frequently encountered in using prior art tube pointing machines is the formation of nibs or flashes at an outermost end portion of a tube, due to the interleaved or intermeshing arrangement of the forming dies. The nip or flash is formed between the two outermost ribs or blades and the adjacent laterally inwardly displaced intermeshing blades of the adjacent dies. Since these nibs or flashes tend to catch on the dies of a drawing machine when the end portion of a tube is inserted in the drawing machine, these nibs or flashes impede rapid insertion of a tube member into a forming machine.

Therefore, it is an object of this invention to provide a tube pointing machine die which eliminates nibs or flashes at the end of a pointed tube and which has a relatively long service life.

Another object of this invention is to provide a pointing machine die which is constructed to prevent metal from being extruded between load engaging ribs or blades of the die.

Another object of this invention is to provide a tube pointing die having load engaging blades which are not deflected when a tube is compressed.

Another object of this invention is to provide an interleaved tube pointing die assembly which circumscribes an outermost end portion of a tube to eliminate the formation of flashes or nibs when the tube is shaped.

These and other objects and features of the invention will become more apparent upon a reading of the following detailed description taken in connection with the accompanying drawings, wherein:

FIG. 1 is a partial sectional view of a tube shaping

FIG. 2 is a sectional view, along the line 2—2 of FIG. 1, illustrating the inter-relationship of a plurality of pairs of relatively movable tube shaping dies for forming a point on a tube;

FIG. 3 is an enlarged perspective view of a tube member which has been pointed or shaped by the machine of FIG. 1;

FIG. 4 is an enlarged perspective view of a tube shaping die utilized in the machine of FIG. 1;

FIG. 5 is an enlarged sectional view, taken along the line 5—5 of FIG. 4, illustrating the relationship of a longitudinally extending bar member to a vertically extending blade of a die;

FIG. 6 is an enlarged sectional view, taken along the line 6—6 of FIG. 4, illustrating the relationship of the longitudinally extending bar to the die;

FIG. 7 is an enlarged sectional view, taken along the line 7—7 of FIG. 1, illustrating in solid lines the initial relationship of a plurality of pairs of tube forming or pointing dies to a tube member and, in dashed lines, the relationship of the dies to the tube member as the tube is radially compressed by the dies;

FIG. 8 is an enlarged sectional view illustrating the relationship of the dies of FIG. 7 to each other and a tube member at the completion of a tube shaping or forming process;

FIG. 9 is an enlarged perspective view of a tube forming or pointing die illustrating a second embodiment of the invention;

FIG. 10 is an enlarged sectional view, taken along the line 10—10 of FIG. 9, illustrating the construction of the die of FIG. 9;

FIG. 11 is an enlarged view of a pair of dies, similar to the die of FIG. 9, at the completion of a tube forming and pointing operation;

FIG. 12 is a perspective view of a forwardmost end portion of a tube member shaped or pointed by the dies of FIG. 11; and

FIG. 13 is an enlarged sectional view of a die illustrating a third embodiment of the invention.

Referring now to the drawings in greater detail, there is shown in FIG. 1 a tube shaping machine 20 for pointing or otherwise shaping a cylindrical tube 22. The machine 20 includes a cylindrical outer housing or frame 24 to which an end housing 26 is connected by bolts 28. A face plate 30 is mounted on a rear or tube receiving end of the housing 24. A plurality of forming or pointing dies 32 are mounted in sliding engagement with a longitudinally rearwardly extending wedge members 36. The wedge members 36 are connected to the dies by means of a suitable key and slot arrangement 38 (see FIG. 2 also). The wedges 36 are moved rearwardly toward the face plate 30, by means of a ram 40 which is formed with a head 42 for engaging a forwardmost end portion of the wedges 36. The ram 40 is moved rearwardly by means of fluid pressure in a hydraulic cylinder 44.

As the wedges 36 are moved rearwardly, they extend through apertures 46 formed in the face plate 30. During this rearward movement, the dies 32 slide on the key and slot structure 38 and contemporaneously therewith move radially inwardly relative to the tube 22 to compress a forwardmost end section 50 of the tube. Radially inwardly extending guide walls 51 are provided for guiding the dies 32 radially inwardly (see FIG. 2). The dies 32 are retained in the longitudinal position shown in FIG. 1 by a forward positioning wall 52 and a rear plate 54 against which opposite end portions of the dies 32 are placed in an abutting relationship. The positioning wall 52 is formed with a plurality of suitably shaped

is regulated by a control assembly 60. Tube shaping machines similar to the one illustrated are well known to those skilled in the art, and, therefore, it is believed that a further disclosure of the structural details of the machine is not necessitated at this time. However, United States Patent No. 3,154,978 to Baker is herein incorporated by this reference as setting forth in some detail the structure of such a tube shaping machine.

The structure of a tube member 22 which has been shaped or pointed by the machine 20 is illustrated in FIG. 3. A shaped or pointed end portion 50 of the tube 22 is of a substantially reduced diameter. The end portion 50 includes a plurality of arcuate ridges 64 which are formed in the end portion 50 by the dies 32. The arcuate ridges 64 extend longitudinally rearwardly of the tube until an arcuate radially outwardly extending shoulder 66 is encountered which separates the pointed end portion 50 of the tube from a larger body section 68. The pointed or shaped tube 22 can be readily inserted in a forming machine by inserting the foremost end or pointed portion 50 into the drawing machine and pulling the relatively large diameter body section 68 of the tube through dies in the drawing machine.

Referring now to FIG. 4, taken in conjunction with FIGS. 5 and 6, it can be seen that the dies 32 include a truncated base block 70 from which a plurality of spaced-apart parallel work-engaging blades or ribs 72 extend. The die 32 has a vertically extending forward end surface 74 which engages the positioning wall 52 (FIG. 1) of the tube shaping machine 20 and a vertically extending rectangular rear surface 76 which engages the rear plate 54 (FIG. 1) of the tube shaping machine 20. This engagement of the forward and rear surfaces 74 and 76 of the die 32 positions the die longitudinally in the tube shaping machine 20. The die is positioned for radial movement relative to a tube by sliding engagement of trapezoidal side surfaces 78 (only one of which is shown in FIG. 4) of the die with the guide walls 51.

The fins or blades 72 are integrally formed with the base block 70 and extend radially inwardly from the base block to engage a cylindrical outer surface of a tube which is to be shaped. The blades 72 are spaced apart by transversely extending slots 82 which have a width of the same dimension as the thickness of the blades 72. The blades 72 are interconnected by a longitudinally extending bar member 84 which is centrally positioned intermediate outer edge surfaces 86 of the blades 72. The bar member 84 has a series of transversely extending slots 88 (see FIG. 6) which engage a base section 90 of the outwardly extending blades 72 to securely interconnect the blades.

The longitudinally extending bar member, as is perhaps seen in FIG. 5, has a substantially triangular cross-section. A base of the triangle is formed with a pair of inwardly converging work engaging surfaces 94 and 96 which intersect at a central axis 98 of the die 32. The blades 72 are formed with a pair of inwardly converging work engaging surfaces 100 and 102 which are substantially coplanar with the surfaces 94 and 96 of the bar member 84. The inwardly converging surfaces 94, 96, 100 and 102 form a generally V-shaped outer work engaging surface of the die 32 (as is best seen in FIG. 7) engages an outer surface of a tube member 22 which is to be formed to position the tube member with its longitudinally extending axis in substantial alignment with the central axis 98 of the die 32. It should be noted that a line of intersection 106 of the work engaging surfaces 94 and 96 is coincident with a line of intersection of the work engaging surfaces 100 and 102 of the blades 72. As is perhaps best seen in FIGS. 4 and 6, a rearward end surface 108 of the bar 84 is sloped longitudinally outwardly in a forward direction to form the shoulder 68 on a tube.

22. Two sets of blades are associated with a vertical pair of dies 112 which are movable radially inwardly toward each other along a central axis 114 which is coincident with the central axis 98 of the dies. The two remaining sets of blades are associated with a second pair of dies 116. The dies 116 are mounted for radial inwardly movement along a horizontally extending axis 118. The work engaging surfaces 100 and 102 of the two pairs of dies 112 and 116 position the tube 22 with its central longitudinally extending axis coincident with the intersection of the vertical axis 114 and horizontal axis 118 of the dies. The vertical pair of dies 112 are mounted in a longitudinally forwardly offset relationship relative to the horizontal pair of dies 116. The vertical pair of dies 112 is offset relative to the horizontal pair of dies 116 by a distance equal to the thickness of a single blade or rib 72. Blades 72 of the longitudinally offset dies 112 are, therefore, mounted in an intermeshing or interleaved relationship juxtaposed with the blades of the horizontal dies 116. The blades of the dies 116 are located in an interleaved relationship rearwardly of the blades of the dies 112. This interleaved or intermeshing relationship between the pairs of dies 112 and 116 results in the two pairs of dies substantially circumscribing or surrounding the tube 22. As the dies 112 and 116 are moved simultaneously radially inwardly by the wedge members 36 (see FIG. 1), the tube 22 is deformed from the position indicated in solid lines in FIG. 7 toward the position indicated in dashed lines in FIG. 7.

As the radially inwardly movement of the dies is continued, the tube 22 is gradually compressed by the two pairs of dies to the position indicated in FIG. 8. The radially inward movement of the pairs of dies 112 and 116 is limited by the bar members 84. As is apparent from an inspection of FIG. 8, the outer upper edges of the bar member 84 just engage each other at a longitudinally extending line of intersection 122 to limit the inward movement of the pairs of dies. At the limit of inward movement of the pairs of dies 112 and 116, the tube 22 is circumscribed by the longitudinally extending, inwardly converging, outer surfaces 94 and 96 of the bar members 84. Since the outer surfaces 94 and 96 extend for substantially the entire length of the die, the tube 22 is not extruded between the juxtaposed blades of the dies to form ridges on the tube which engage and deflect the blades 72. Therefore, the longitudinally extending bar members increase the structural rigidity of the dies 32 by interconnecting the blades 72 to prevent relative movement between the blades and by preventing the tube member 22 from being extruded between juxtaposed intermeshing blades as the tube is shaped or pointed. It will also be apparent that a tube which is shaped or pointed, by the dies 32, has a relatively smooth longitudinally extending outer surface which is substantially free from transversely extending ridges of tube material.

Referring now to FIGS. 9 through 13 in which several modified embodiments of the invention are illustrated. In these modified forms of the invention, like numerals have been used to designate like parts, with the suffix letter *a* being employed to distinguish the elements associated with FIGS. 9 through 12, and the suffix letter *b* being used to distinguish the elements associated with FIG. 13.

Referring now to FIG. 9, in which a second embodiment of the forming or pointing die 32*a* is illustrated, the die 32*a* includes a longitudinally extending base block 70*a* from which a plurality of work engaging blades or ribs 72*a* extend. As in the embodiment of the invention illustrated in FIGS. 1 through 8, the blades are separated by slots and have inwardly converging work engaging surfaces 100*a* and 102*a*. However, from an inspection of FIGS. 9 and 10, it can be seen that the blades 72*a* are not interconnected by a bar member, as are the blades of the embodiment of FIGS. 1 through 8. Since

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.