

[54] ART OF FORMING TIRE TREADS WITH ELONGATED TRACTION-AUGMENTING ELEMENTS

2,568,542	9/1951	Freistedt.....	152/211
2,600,506	6/1952	Kimes.....	152/211
2,756,799	7/1956	Pfeiffer.....	152/211
3,182,706	5/1965	Cousins.....	152/211
3,276,501	10/1966	Clark.....	152/211
3,283,053	11/1966	Felker.....	152/211

[75] Inventor: Paul J. Felker, Marshfield, Wis.

[73] Assignee: Penetred Corporation, Marshfield, Wis.

[22] Filed: Feb. 14, 1974

Primary Examiner—Drayton E. Hoffman
Attorney, Agent, or Firm—Arthur L. Morsell, Jr.

[21] Appl. No.: 442,526

Related U.S. Application Data

[62] Division of Ser. No. 20,356, March 17, 1970, Pat. No. 3,872,207.

[52] U.S. Cl. 152/211; 152/168; 152/169; 152/222

[51] Int. Cl.²..... B60C 11/16

[58] Field of Search..... 152/208, 209 R, 210, 211, 152/168, 169, 222

[56] References Cited


UNITED STATES PATENTS

2,502,521	4/1950	Hawkinson.....	152/211
2,565,619	8/1951	Oest.....	152/211






[57] ABSTRACT

A vehicle tire has a rubber tread portion with laterally-spaced, circumferentially-extending rider strips, each rider strip being zigzag in plan view so that the sides of the rider strips present alternating peaks and valleys. A helical wire coil extends circumferentially of the tire in each rider strip, with the peaks on the sides of the rider strips providing rubber stock which projects beyond the sides of the wire coils to retain the latter in position during use. This rubber stock is in the form of a series of triangular blocks and there is a sipe slit extending transversely into each of said triangular blocks from the peak thereof.

1 Claim, 5 Drawing Figures

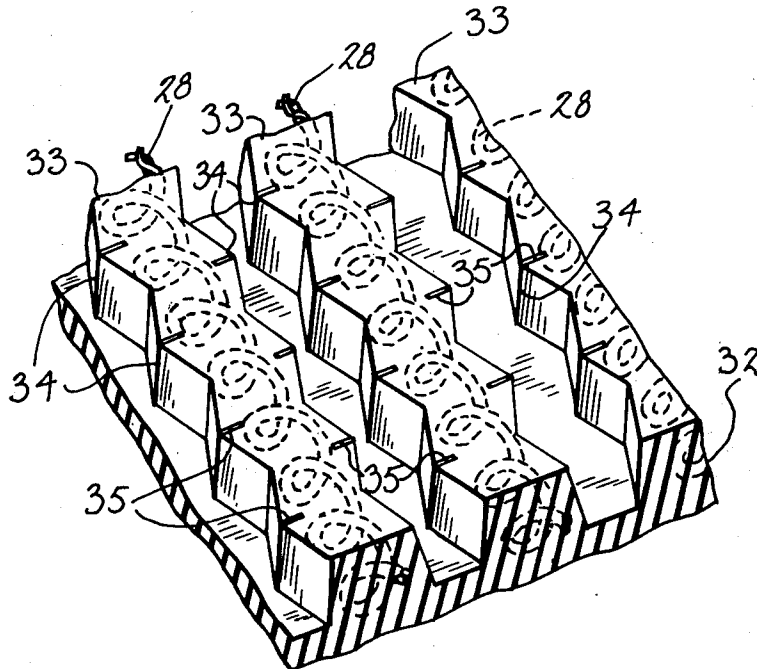

Dynacraft BSC, Inc.
Exhibit 1007
 Dynacraft v. Mattel
 IPR2018-00042

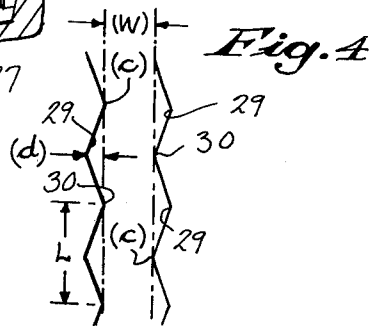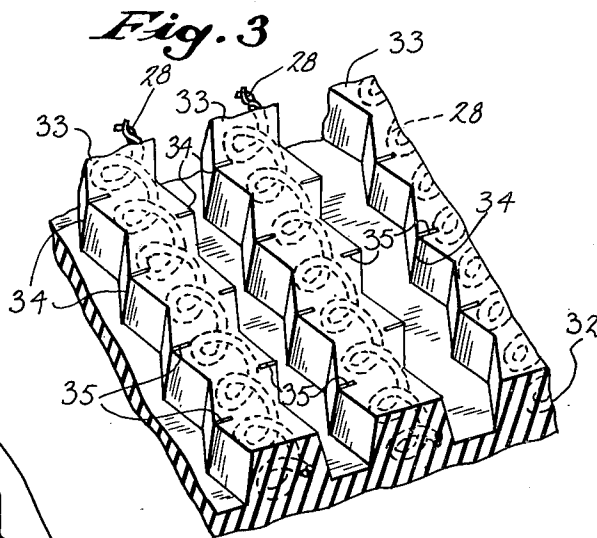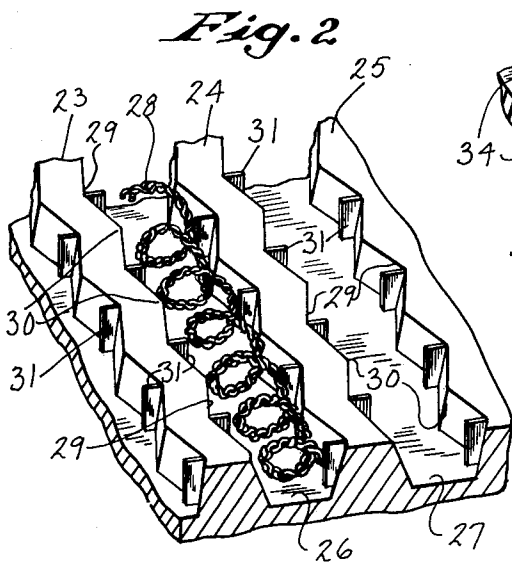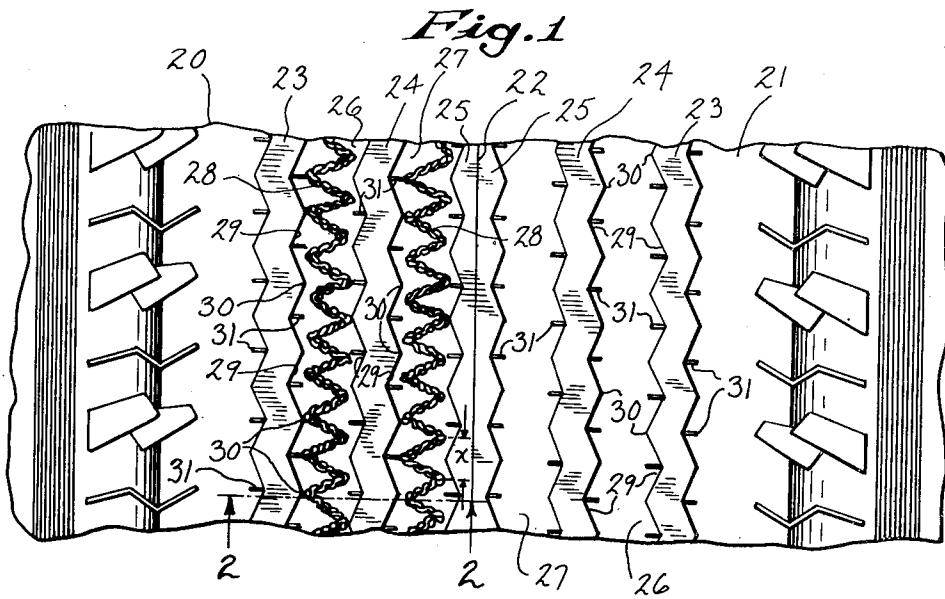

ART OF FORMING TIRE TREADS WITH ELONGATED TRACTION-AUGMENTING ELEMENTS

This application is a division of my co-pending appli- 5
cation Ser. No. 20,356, filed Mar. 17, 1970, now U.S.
Pat. No. 3,872,207, and reference is also made to my
U.S. Pat. No. 3,687,583, which was also a division of
said application Ser. No. 20,356.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention pertains to retreaded tires or to
new tires wherein the tread portion has elongated,
circumferentially-extending rider strips with traction-
augmenting members, such as wire coils, in the rider
strips.

2. Description of the Prior Art

It has heretofore been proposed to retread tires or to
manufacture new tires with wire coils embedded in the 20
rubber of the rider strips. The proper positioning of the
coils during tread molding has always presented prob-
lems. Heretofore it has been customary to cut a length
of wire coil approximately two inches longer than the
circumference of the tire and to insert by hand one of
these coils in each of the grooves of the matrix with
ends abutting. With this arrangement the wire coils are
longitudinally compressed because of their greater
length and they thereby maintain themselves in the
grooves of the matrix. With this early method of proce-
dure, centering of the coils in the grooves presented a
problem, but in Crooker U.S. Pat. No. 2,619,678 this
problem was dealt with by having a centering channel
in the bottom of each of the matrix grooves. In my prior
U.S. Pat. No. 3,283,053, circumferential extents of
sipe-forming strips were used in wide grooves of the
matrix for centering wire coils in the grooves. In Spitz
U.S. Pat. No. 2,832,292, a method is shown which in-
volves the use of peculiarly-shaped wire coils having
projecting wings for centering the coils in the grooves. 40
It is desirable to provide a simpler method which can
be used with standard coils and which does not require
the use of the centering channel in the bottom of the
groove as in the Crooker patent, and which can employ
a simpler type of siping than that required by my U.S.
Pat. No. 3,283,053.

SUMMARY OF THE INVENTION

The present invention provides a vehicle tire which
has a rubber tread portion with laterally-spaced, 50
circumferentially-extending rider strips, each rider
strip being zigzag in plan view so that the sides of the
rider strips present alternating peaks and valleys, there
being an elongated traction-augmenting member such
as a helical wire coil extending circumferentially of the
tire in at least some of the rider strips, with the peaks
on the sides of the rider strips providing rubber stock
which projects beyond the sides of the wire coils.

A further object of the invention is to provide an im-
proved tire having traction-augmenting members in the
rider strips thereof, wherein each rider strip has a row
of triangular blocks of rubber on each side projecting
beyond the sides of the coil, to thereby create ample
stock to maintain the coils in the rider strips during use.

A further object of the invention is to provide an im-
proved tire as above described wherein, in a preferred
embodiment, there is a sipe slit extending transversely

inwardly from the peak of each of said triangular
blocks.

With the above and other objects in view, the inven-
tion consists of the improvements in the art of forming
tire treads with elongated traction-augmenting ele-
ments, and all of its parts, combinations, and steps, as
set forth in the claims, and all equivalents thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

10 In the accompanying drawings, illustrating one com-
plete embodiment of the preferred form of the inven-
tion, in which the same reference numerals designate
the same parts in all of the views:

FIG. 1 is a fragmentary view looking at the interior
of a tread-forming matrix showing wire coils inserted in
two of the grooves of the matrix;

FIG. 2 is a fragmentary perspective view showing a
portion of the matrix interior with one coil centered in
a groove;

FIG. 3 is a fragmentary view of a tire tread showing
several of the rider strips with wire coils therein;

FIG. 4 is a diagrammatic plan view of a matrix
groove; and

FIG. 5 is a fragmentary cross section through one of
the matrix grooves showing a coil therein.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring now more particularly to FIG. 1 of the
drawings, the improved matrix may be used either for
retreading operations or for the manufacture of new
tires. It includes complementary circular matrix sec-
tions 20 and 21 which meet at a circumferential parting
line 22. These matrix sections are designed for use in
a mold in the manner shown in FIGS. 1 and 2 of
Crooker U.S. Pat. No. 2,619,678, the operation of
which is fully described in said patent. In this prior pa-
tent the centering channels in the bottoms of the rider
strip-forming grooves maintain the coils in a laterally-
centered position in the grooves of the matrix during
the curing operation and prevent the coils from bowing
from one side to the other of the grooves. Such bowing
would be unacceptable in practice as the sides of the
coil are then not protected by enough rubber in the fin-
ished product and the coils may work loose in use.

The matrix sections have circumferentially-extending
ribs 23 and 24 on each half, and each half has a longitu-
dinal half 25 of a center rib, one on each side of the
parting line 22. The spaces between the ribs 23 and 24
provide rider strip-forming grooves 26 and 27 which
form the rider strips 126 and 127 on the finished tire,
as shown in FIG. 3. Any selected number of ribs 23-24
may be provided in the matrix depending upon the
number of rider strips desired on the tire. In the ar-
rangement embodied in FIG. 1 there are four rider
strip-forming grooves.

As a novel feature of the present invention each of
the matrix ribs is shaped in a special manner to provide
centering for the wire coils 28 or other elongated trac-
tion-augmenting elements while still providing stock at
the sides of the coils to furnish protection so that the
coils will not work loose in use. To accomplish this pur-
pose the matrix ribs 23, 24 and 25 are zigzag in plan
view and have sides with alternating peaks 30 and val-
leys 29. The valleys 29 of the rib 23 on one side of a coil
are opposite peaks 30 of the rib 24 on the other side of
the coil 28, referring to the left-hand coil in FIG. 1.

Referring to FIG. 4, the circumferential distance (L) between peaks is relatively short and, in a preferred arrangement, $\frac{3}{4}$ inch or less for a passenger car tire. The unobstructed channel portion within each of the grooves 26 or 27 has a width (W) which is of between $\frac{5}{16}$ and $\frac{7}{16}$ inch for a passenger car tire to receive traction-augmenting members which are of no greater width, the standard coil for a passenger car tire having a diameter of $\frac{3}{8}$ inch, with the coil having approximately four turns to the inch. The depth (d) of each valley is preferably at least $\frac{1}{8}$ inch for a standard passenger car tire. While the wire is preferably flexible, nevertheless, due to the short distance (L) between peaks, the wire is of such property that it is unable to flex sidewise into the valleys 29 of the ribs after the coils are inserted to the position shown in FIG. 1, the coils preferably having a greater number of pitch distances (x) FIG. 1, per unit of length than the number of matrix peaks per unit of length so that the pitch sequence of the coil is out of sequence with the peaks of the matrix. Thus the coil will not straddle a series of peaks and will have positive centering between peaks on alternating sides of the matrix groove. With this arrangement lengths of wire coil approximately 1 inch longer than the circumference of the tire, for passenger car tires, may be inserted in each of the grooves 26 and 27 in the manner shown in FIG. 1 with the ends of the coil abutting. With this arrangement the coils are longitudinally compressed somewhat and tend to maintain themselves seated in the grooves of the matrix. With the novel method of the present invention, and with the use of the novel matrix, each coil 28 is automatically centered in its groove, as shown in FIG. 1. With the present invention, in the manufacture of the matrix ribs, a constant pitch (distance between peaks 30) can be employed as this is the simplest procedure in manufacture, and in manufacture of the wire coils there is no need to worry about maintaining any special tolerances or consistency in the pitch of the convolutions. As a matter of fact, the poorer the coil is in this respect, the better the centering in the mold.

As a typical example for a passenger car tire it may be assumed that (W) in FIG. 4 is $\frac{3}{8}$ inch, (L) is $\frac{3}{4}$ inch, and that the coil has approximately 48 turns to the foot, this, of course, varying somewhat due to tolerances and inconsistencies in manufacture. With this general relationship, if the pitch distances of the coil, in an axial direction as at (d) FIG. 1, were perfectly constant, which they are not, the coil would contact a peak as at (C) on the left-hand side of FIG. 4, and would then have another contact no farther away than (C) on the right-hand side of FIG. 4. If all of the pitch distances were constant there would be contact every $1\frac{1}{2}$ inches. However, because there will be imperfections and inconsistencies in manufacture in both the matrix and the coils, this contact may vary somewhat around the circumference of the tire, it being noted that the peaks 30 extend at right angles to the bottom of the grooves 27 whereas the sides of the coils have angularly-extending portions which cross the peaks at about a 30° angle so that there will always be sufficiently frequent contact between the coil and some of the peaks 30 to provide positive centering of the relatively stiff wire coil. Furthermore, where the sipe strips are employed, their end edge extended parallel to the peaks 30 and will be crossed at about a 30° angle by portions of the coil convolutions so that the sipe strips also aid in positive centering.

An additional feature of the novel method which is not essential in practice but which is very desirable in the final product is to equip the matrix with relatively short metal sipe-forming strips 31, with one strip projecting laterally from the bottom of each valley 29, as shown in FIGS. 1 and 2. Each strip 31 has a transverse length which is limited so that it projects as at (p) in FIG. 5 approximately the same distance as the adjacent peaks 30. In the case of a standard passenger car tire, this is preferably at least $\frac{1}{8}$ inch. These strips, being short, do not interfere with the groove width (W) of FIG. 1 so that the coils may be readily inserted without interference from the sipe strips. In addition, the ends of the sipe strips will frequently contact portions of the wire coils due to the varying pitch sequence between the matrix and the coil, as may be seen in FIGS. 1 and 2, to further aid in centering the latter.

With coils in all of the grooves 26-27 of the matrix, when the procedure is used for retreading, the curing bag or curing tube of the mold is inflated and this inflation pressure forces the uncured rubber of the tread stock against the hot matrix, the uncured rubber being forced into the pattern of the matrix. After a predetermined period of exposure to the heat and pressure, the curing of the rubber is completed and the tire is removed from the matrix. When the mold is in closing condition the ribs 23, 24 and 25 of the matrix enter the tread stock and the rubber of the tread stock is forced to flow into the grooves 26 and 27 to fill the grooves and cure around the wire coils 28, as is shown in FIG. 3. A very similar procedure may be used in the building of new tires.

In FIG. 3, showing the novel tire tread, the numeral 32 designates the tread stock having zigzag ribs 33 thereon, each rib having a centered coil 28 therein. It is to be noted that on each side of each coil there is a circumferential series of triangular rubber blocks 34 which project beyond the sides of the coils to provide sufficient stock for protection of the coils so they do not work loose in use. Where the sipe-forming strips 31 are employed in the matrix there will be sipe slits 35 extending inwardly from the peak of each triangular block 34. These slits break up the solid rubber portions of the rider strips and bring about a desired flexibility of action during use. Besides centering the coils, the novel method and matrix create rider strips on the tire which improve traction due to the zigzag configuration.

While this invention is particularly adapted for use in connection with wire coils, it is obvious that it is applicable for use in connection with various other types of elongated traction-augmenting elements which require centering, a number of which are illustrated and described in my U.S. Pat. No. 3,283,053.

It is to be understood that I do not desire to be limited to the exact details of construction shown and described, for obvious modifications will occur to a person skilled in the art.

What I claim is:

1. In a tire having a rubber tread portion with laterally-spaced, circumferentially-extending rider strips, each rider strip being zigzag in plan view so that the sides of the rider strips present alternating peaks and valleys, the bottoms of the valleys on one side being spaced from the bottoms of the valleys on the other side of a rider strip to provide unbroken stock of substantial width, and an elongated traction-augmenting member positioned in said unbroken stock in at least

5

some of said rider strips, the peaks on the sides of the rider strips providing rubber stock projecting beyond the sides of the traction-augmenting members to retain the latter in position during use, which rubber stock is in the form of a series of triangular blocks, the width of the traction-augmenting members being substantially equal to the transverse distance between the bottoms

6

of the valleys on one side of the rider strip and the bottoms of the valleys on the other side of the rider strip, there being a sipe slit extending transversely into each of said triangular blocks from the peak thereof, the length of each sipe slit being substantially equal to the altitude of each triangular block.

* * * * *

10

15

20

25

30

35

40

45

50

55

60

65