


BC
350
265+

Applied Optics

January
1971

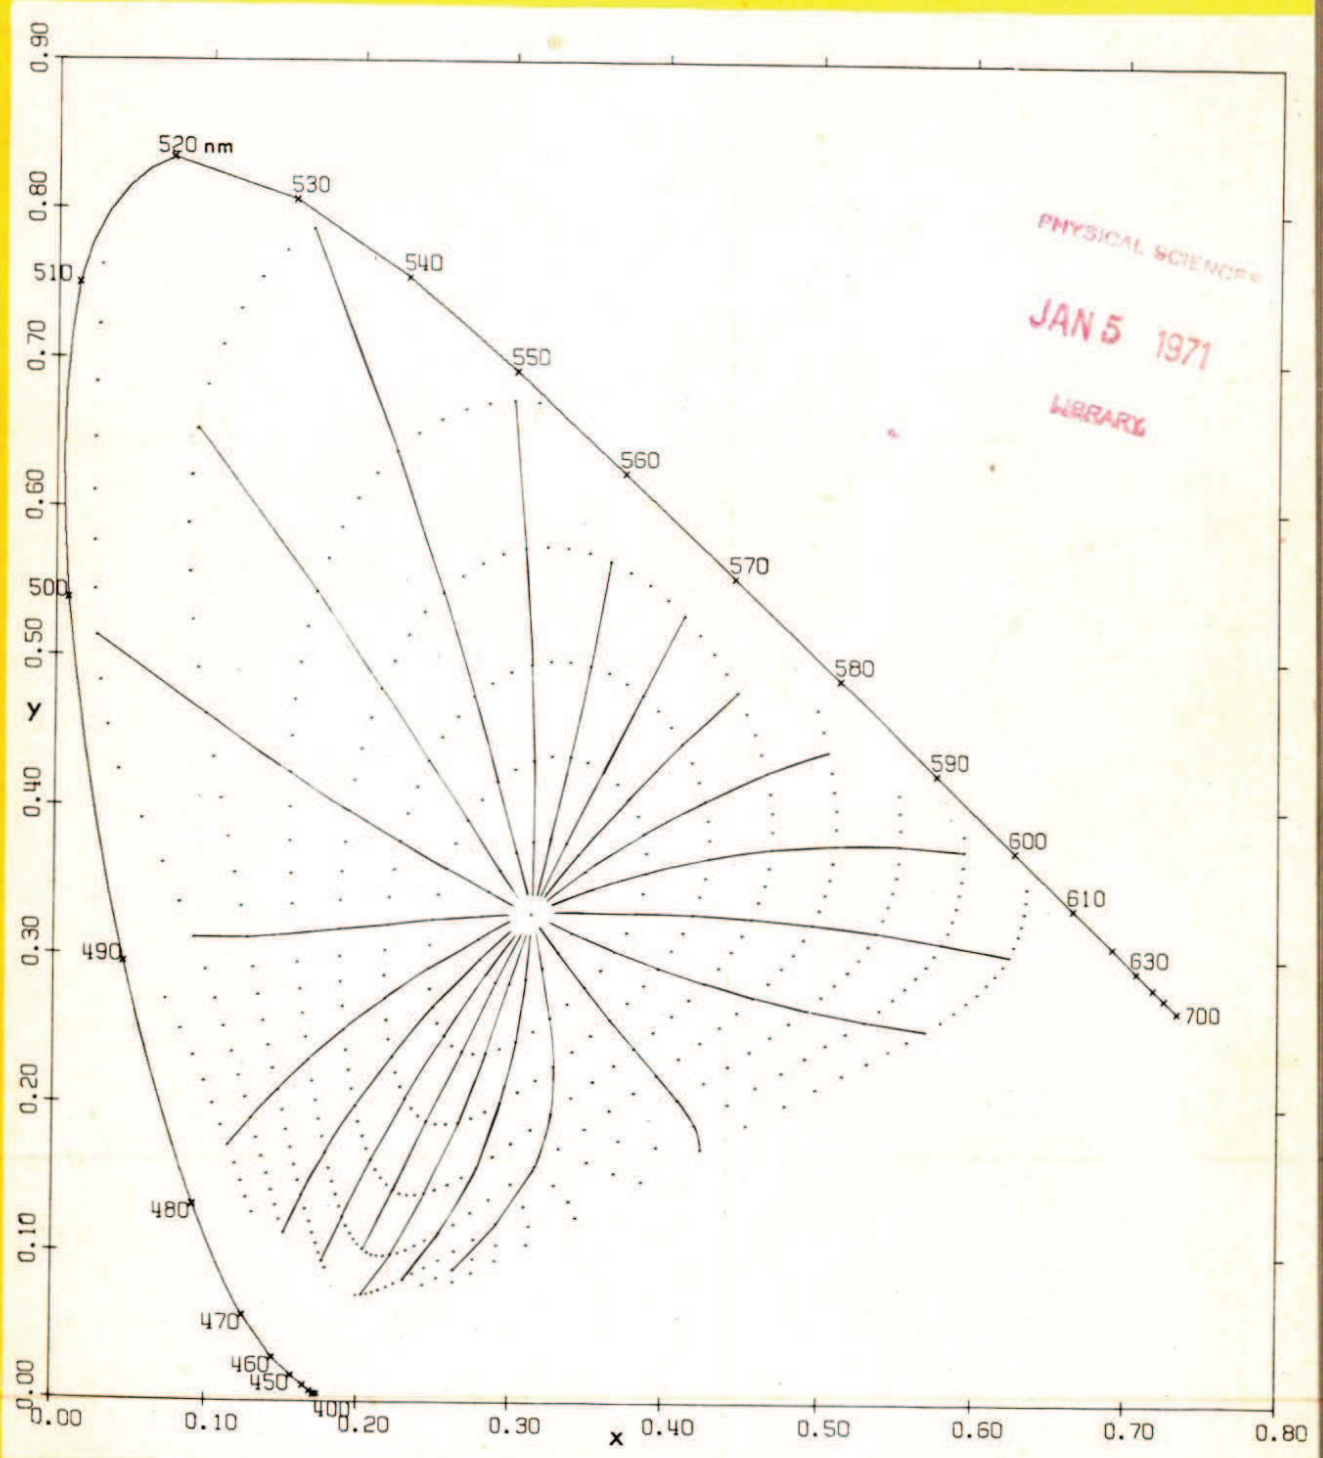

PHYSICAL SCIENCES
JAN 5 1971
LIBRARY

CHROMATICITY DIAGRAM

Applied Optics

VOLUME 10
NUMBER 1
JANUARY
1971

A monthly publication of the
Optical Society of America

J. N. Howard Editor

P. R. Wakeling Managing Editor

- 1 Geodesic Chromaticity Diagram Based on Variances of Color Matching by 14 Normal Observers—D. L. MacAdam
- 8 A Visual Tristimulus Projection Colorimeter—A. Valberg
- 14 Adjustment of the Munsell-Value and W^* -Scales to Uniform Lightness Steps for Various Background Reflectances—C. C. Semmelroth
- 19 Internal Reflection Spectroscopy: Validity of Effective Thickness Equations—N. J. Harrick and A. I. Carlson
- 24 Hadamard-Transform Exhaust-Analysis Spectrometer—J. A. Decker, Jr.
- 28 A Grazing Incidence Monochromator for Satellite Studies of the Solar Hell Lyman- α Line at 303.8 Å—P. J. Bowen, J. A. Bowles, W. M. Glencross, R. J. Speer, A. F. Timothy, J. G. Timothy, and A. P. Willmore
- 34 A Convenient Technique for Determining the Relative Quantum Efficiency of a Monochromator and Detector System—J. L. Kohl, L. J. Curtis, D. A. Chojnacki, and R. M. Schectman
- 38 Motion Blurring with Decaying Detector Response—L. Levi
- 42 Electrical Recording of the Amplitude and Phase Fluctuations of a Wave Front—M. Bertolotti
- 46 A Simple Double Beam Accessory for Absorption Spectroscopy—K. Leutwein
- 51 Spectral Absorption Characteristics of the Major Components of Dust Clouds—D. F. Flanagan and H. P. DeLong
- 58 Effects of Argon Atoms on the Self-Absorption and the Intensity of Hg 2537-Å Radiation in Hg + Ar Discharges—T. J. Hammond and C. F. Gallo
- 65 Statistical Band Model Parameters and Integrated Intensities for the 5.9- μ , 7.5- μ , and 11.3- μ Bands of HNO₂ Vapor—A. Goldman, T. G. Kyle, and F. S. Bono
- 74 Radiance and Polarization of Light Reflected from Optically Thick Clouds—G. W. Kattawar and G. N. Plass
- 81 Radiation-Induced Changes in Refractive Index and Absorption Coefficient for Several Optical Materials—D. R. Olson, H. D. Dieselman, and J. B. Schroeder
- 87 Damping of Lattice Vibrations in Solids—J. N. Pendl
- 99 The Correction of Optical Aberrations by Neutron Irradiation—P. Sinai
- 105 Images of Truncated One-Dimensional Periodic Bar Targets in Aberration-Limited Optical Systems—J. W. Foreman, Jr., G. H. Hunt, and E. K. Lawson
- 109 Influence of Scattered Radiation on Narrow Field of View Communication Links—D. E. Setzer
- 114 Small-Angle Scattering of Light by Ocean Water—H. T. Yura
- 119 Bidirectional Scattering Characteristics of Healthy Green Soybean and Corn Leaves *in vivo*—H. T. Breece III and R. A. Holmes
- 128 Cineholography of Small Animal Microcirculation—M. E. Cox, R. G. Buckles, and D. Whitlow
- 132 Calorimeter for Laser Energy Measurements—M. M. Birky
- 136 The CO₂ Laser Signature Problem—P. C. Claspay and Yoh-Han Pao
- 141 CO₂ Laser with Simultaneous Active and Passive Q-Switching—O. M. Stafsudd, O. Ersoy, and S. Pizzica
- 144 A Precision Variable, Double Prism Attenuator for CO₂ Lasers—T. Oseki and S. Saito
- 150 Photoluminescent Conversion of Laser Light for Black and White and Multi-color Displays. 1: Materials—L. G. Van Uitert, D. A. Pinnow, and J. C. Williams
- 154 Photoluminescent Conversion of Laser Light for Black and White and Multi-color Displays. 2: Systems—D. A. Pinnow, L. G. Van Uitert, and M. Feldman
- 161 Measurement of the Beam Parameters of a Laser Beam and Its Diffraction Field, Using a Hologram—T. Miyamoto and K. Yasuura
- 168 A Contribution to the Comparison of Single Exposure and Multiple Exposure Storage Holograms—M. Lang, G. Goldmann, and P. Graf
- 174 Holographic Subtraction—K. Bromley, M. A. Monahan, J. F. Bryant, and B. J. Thompson
- 182 A Holographic Interferometer for Measuring Radiation Energy Deposition Profiles in Transparent Liquids—E. K. Hussmann
- 187 A Generalized Technique of Two-Wavelength, Nondiffuse Holographic Interferometry—F. Weigl
- 193 A Technique for Recovering Doppler Line Profiles from Fabry-Perot Interferometer Fringes of Very Low Density—P. B. Hays and R. G. Roble
- 201 Schlieren Visualization Device Allowing an Arbitrary Orientation of the Lines

Cover: See page 153.

Published monthly by the Optical Society of America at 20th and Northampton Streets, Easton, Pa. 18042. Office of the Editor: AFCRL, Bedford, Mass. 01730; 617-861-4281. Office of the Managing Editor: WINC, 1613 Nineteenth Street, N.W., Washington, D.C. 20009; 202-387-1773. Advertising office: American Institute of Physics, 335 E. 45th Street, New York, N.Y. 10017; 212-MU 5-1940. Subscription rates per year: included in membership dues to OSA members; nonmembers and libraries \$35. Single copies \$4; complete volumes \$40. Second class postage paid at Easton, Pa. © Copyright 1971 by the Optical Society of America

Photoluminescent Conversion of Laser Light for Black and White and Multicolor Displays. 1: Materials

L. G. Van Uitert, D. A. Pinnow, and J. C. Williams

A number of photoluminescent materials have been found to have properties that make them extremely useful for improving the quality of laser displays as well as offering simplifications for multicolor systems. The principal function of these materials is that of color conversion when coated onto a laser illuminated viewing screen. A secondary, yet significant, role is that of rendering the converted light incoherent. This eliminates the unpleasant granular or speckly texture associated with direct viewing of diffusely scattered coherent light. It is concluded that virtually any visible color may be achieved by photoluminescent conversion of a monochromatic blue or ultraviolet laser beam.

I. Introduction

In a recent review of laser display technology Baker¹ pointed out that considerable motivation in this field stems from the promise of producing a cathode ray tube type of display with essentially unlimited screen size. He concluded that although adequate light beam modulation and scanning techniques are presently available, broadly applicable equipment awaits the development of an efficient multicolor laser source.

Although such a multicolor source would indeed be desirable, the prospects for its realization, even in the distant future, are speculative. However, it is clear that efficient monochromatic or limited color range laser sources can and will be developed.² The purpose of the present work is to show that a monochromatic laser source is satisfactory for white light and multicolor displays when advantage is taken of photoluminescence, the absorption of light of one wavelength and the subsequent emissions at another wavelength. By properly coating a viewing screen with existing organic and inorganic phosphors it is possible to efficiently convert monochromatic blue or ultraviolet laser light into virtually any visible color including white. An additional benefit of this conversion is the elimination of the unpleasant granular texture generally associated with direct viewing of diffusely scattered coherent light,³ because the converted light is incoherent.

The basic physics of photoluminescent conversion is quite simple. Photons from a light beam such as a laser beam are absorbed in a material which is thereby raised to an excited state. This excitation equilibrates in a brief interval, typically 10^{-3} sec to 10^{-8} sec. Equil-

ibration can proceed both radiatively by the emission of a photon and nonradiatively by, for example, a series of phonon interactions. A material is considered to be a phosphor if radiative emission is observed. The relative strength of radiative transitions is specified in terms of the phosphor's quantum efficiency, defined as the ratio of emitted photons to absorbed photons. In general, the energy of the emitted photons is less than or equal to the energy of the absorbed photon (Stokes's law). That is, the color of the emitted light is either unchanged or shifted in the direction of longer wavelengths. In certain limited cases anti-Stokes (shorter wavelength) emission is also possible when additional energy is supplied to the single photon excited state by other means such as thermal excitation or multiple photon absorption.⁴ In the present work we will consider only Stokes emitting phosphors which have sufficiently high quantum efficiencies to be of interest for laser display applications. Some emphasis will be placed on those materials that can be excited by the argon ion laser which is presently the most suitable source for a laser display system.

II. Characterization

There are four basic properties that characterize photoluminescent materials. They are (1) absorption and emission spectra, (2) conversion lifetime, (3) quantum efficiency, and (4) absorption cross section. It should be noted that the last three properties can be functions of the exciting wavelength. The features that make a phosphor desirable for application in laser display systems can be related to these properties. First, the phosphor must have a high absorption cross section for the exciting laser wavelength so that nearly total absorption can take place in a thin layer of material that is coated onto a screen. The phosphor should have an emission spectrum in a desired wavelength

The authors are with Bell Telephone Laboratories, Inc., Murray Hill, New Jersey 07974.
Received 16 March 1970.

range with a high quantum efficiency, say, 50% or greater, since the display screen size is limited by available light intensity. In addition, the conversion lifetime should be sufficiently short so that the screen will not be overly persistent; there is no perceptible consequence if the lifetime is exceptionally short.⁵ Finally, the phosphor should be inexpensive, stable, and preferably nontoxic.

III. Materials

Rather than attempting to cover the broad field of phosphors, we will discuss, by way of particular examples, those materials that we consider to be particularly suitable for laser display systems. They generally fall into two categories, inorganic rare-earth phosphors and organic dye phosphors. To a lesser extent we will also consider inorganic compounds that are activated by transition metals and other organic materials such as the aromatic hydrocarbons.

A. Inorganic Phosphors

According to Pringsheim,⁶ practically all molecules that are photoluminescent in condensed states are rather complex. The only exceptions are the positive ions of some rare-earth metals. The optical properties of these ions are so little perturbed by the surrounding medium that, even in crystals, they behave almost like isolated atoms, and their energy levels are well known.⁷ The rare-earth Tb^{3+} is a particularly useful ion since the wavelength for maximum absorption of its 5D_4 manifold corresponds quite closely to the blue (4880 Å) emission of the argon ion laser. When this ion is embedded in a properly chosen host, such as a tungstate or a molybdate, it will emit upon excitation a strong greenish-yellow color which has a peak at approximately 5440 Å.⁷ The lifetime is approximately 0.5 msec, and the quantum efficiency is high, approaching 100%. We have examined the performance of $Na_{0.5}Tb_{0.5}WO_4$ under excitation by an argon laser (4880 Å) and find that 1-mm thick sample absorbs approximately 50% of the incident beam. This absorption cross section is substantially lower than optimum since a considerable thickness of material would be required to coat a display screen.

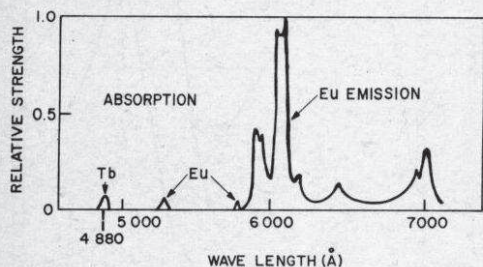


Fig. 1. Relative absorption spectra of Tb^{3+} and Eu^{3+} and the emission spectra of Eu^{3+} . When these two rare-earth ions are included in the same host, such as $Na_{0.5}Tb_{0.25}Eu_{0.25}WO_4$, absorption of argon laser radiation at 4880 Å is due to Tb^{3+} while excitation transfer to Eu^{3+} results in the characteristic Eu^{3+} emission spectrum which peaks in the red at 6140 Å.

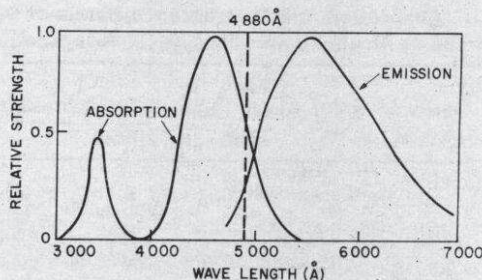


Fig. 2. Relative absorption and emission spectra of YAG:Ce. The broad absorption band is due to a d -band excitation.

It is possible to achieve other colors by photoluminescent conversion using different rare-earth ions. For example, Sm^{3+} has a peak emission at 5980 Å, Eu^{3+} at 6140 Å, Dy^{3+} at 5740 Å, and Er^{3+} at 5520 Å.⁷ However, none of these transitions other than those for Tb^{3+} can be directly excited to any extent by the 4880-Å line of the argon laser. Generally, shorter wavelength excitation is required. However, indirect excitation of Eu^{3+} is possible through an intermediate Tb^{3+} ion.⁸ For example, excitation transfer from Tb^{3+} to Eu^{3+} in $Na_{0.5}Tb_{0.25}Eu_{0.25}WO_4$ causes this material to emit a strong red color under 4880-Å illumination. The absorption bands of Tb^{3+} and Eu^{3+} and the emission of Eu^{3+} are displayed as a function of wavelength in Fig. 1. The absorption cross section, quantum efficiency, and lifetime of this material are similar to $Na_{0.5}Tb_{0.5}WO_4$ discussed above.

The Ce^{3+} and Eu^{2+} ions are exceptions to the general observation that the fluorescence of rare-earth ions is little affected by the host. This is so because their emissions are from d -bands which strongly interact with the crystal field.⁹ A rather unusual but useful material is made by adding cerium to $Y_3Al_5O_{15}$ (YAG). The lower excited states of the crystal field components of the $5d$ configuration of the YAG:Ce composition are sufficiently low in energy that absorption of 4880-Å light becomes appreciable.¹⁰ Figure 2 shows the absorption and emission spectra in detail. Note that the peak of the emission spectrum occurs at 5500 Å, the wavelength at which the eye is most sensitive. We have found that at 4880 Å the absorption cross section is approximately 30 dB/mm/wt % of Ce added to the YAG host. In addition to this relatively large absorption cross section, this compound has a very short lifetime of approximately 0.07 μsec (Ref. 11) and a quantum efficiency of approximately 70%.¹⁰ These properties make YAG:Ce very attractive for display screen applications. Furthermore, this material may be tuned for a particular use. By replacing some Y with Gd the peaks of the absorption and emission spectra shift to somewhat longer wavelengths, while replacing Al with Ga causes the opposite effect.¹⁰ Other Ce^{3+} and Eu^{2+} compositions that have been investigated^{9,10} require excitation at wavelengths substantially shorter than 4880 Å, generally in the ultraviolet.⁴

In addition to the rare-earth compounds, there are large classes of inorganic phosphors which have II-VI hosts such as ZnS and activators such as Bi, Mn, Cu,

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.