

Medical device & diagnostic industry.
Vol. 21, no. 4 (Apr. 1999)
General Collection
ME29661
Received: 04-29-1999

April 1999

DEVICE & DIAGNOSTIC INDUSTRY

THE MAGAZINE OF MEDICAL PRODUCT DESIGN, MANUFACTURING, AND MARKETING

<http://www.device-link.com/mddi>

20th
MDDI
ANNIVERSARY
1979-1999

In Vitro Diagnostics:

New technology
spurs next-generation
products, p. 66



PROPERTY OF THE
NATIONAL
LIBRARY OF
MEDICINE

Medical Plastics:

Using heat-shrink tubing, p. 54

PVC replacement issues, p. 80


Materials Directory, p. 100

Nevro Corp.
Ex. 1011

DOCKET
ALARM

Find authenticated court documents without watermarks at docketalarm.com.

Presenting...
HelixMark™
 By The Trusted Source
 for Silicone Products



Helix Medical is the world's
 only manufacturer to focus
 exclusively on silicone products
 for the medical & pharmaceutical



community. We are a global
 leader in the development &
 manufacturing of BioMedical/
 Pharmaceutical Grade Platinum-



Cured Silicone Products.
*Choose only
 the best...*
 Call for a free catalog today!

**15 Years
 Experience**
 Manufacturing Silicone Products

Standard Tubing Available

On The Shelf

The Industry's Widest Selection
 of Material Choices



GE Silicones



HELIUM
MARK
 MEDICAL, INC.

CALL TODAY for a free catalog or to order:
(800) 266-4421

1110 Mark Avenue
 Carpinteria, CA 93013, USA
 Email: sales@helixmed.com
 FAX: (805) 684-1934
 www.helixmed.com

FDA Registered Medical Device Manufacturer (State Federal FDA)
 Quality Systems Certified to ISO 9001/EN 45001 Quality Standards



See us at **INTERPHEX EAST 1999** Booth #220

MEDICAL DEVICE & DIAGNOSTIC INDUSTRY

PUBLISHER

William F. Cobert

EDITORIAL DIRECTOR

John Bethune

EDITOR

Jon Katz

MANAGING EDITOR

Jennifer M. Sakurai

SENIOR EDITOR

Sherrie Steward

ASSISTANT EDITOR

Kassandra S. Kania

EUROPEAN EDITOR

Norbert Sparrow

PROOFREADERS

Debra Duff

Stephen Levy

CONTRIBUTING EDITORS

James G. Dickinson

Greg Freiherr

Jonathan S. Kahan

Michael E. Wiklund

ART DIRECTOR

Tom Medsger

SENIOR ASSOCIATE ART DIRECTOR

Jennifer Field

ASSISTANT ART DIRECTOR

James Schlesinger

PRODUCTION DIRECTOR

David S. Sutton

PRODUCTION MANAGER

Roger Burg

ADVERTISING TRAFFIC SUPERVISOR

Meredith Cole

DIGITAL PRODUCTION MANAGER

Mark D'Antoni

SENIOR PRODUCTION ARTIST

Jeff Polman

PRODUCTION SYSTEMS

SUPERVISOR

Marco Aguilera

PRODUCTION ARTISTS

Carlos Flores

Juan Gonzalez

Hagit Worona

CIRCULATION DIRECTOR

Willy Bruijns-Miller

ADVERTISING INFORMATION

310/445-3700, Fax: 310/445-3799

DIRECTOR OF SALES

Ed Sexton

ASSOCIATE DIRECTOR OF SALES

Justine Miller

GROUP SALES MANAGER

Jennifer Quinn Dempsey

NATIONAL ACCOUNTS SALES MANAGER

Janine Orlando

ACCOUNT EXECUTIVES

Southwest: Carolyn Dale

Northwest: Alaleh Konoudi

Midwest: Neal Halter

Eastern: Julie Steinkrauss

(973/808-9445)

Northeast: Keith Parry

(973/808-6554)

North Central

(973/808-8855)

DIRECT MARKETING ACCOUNT

EXECUTIVES, SPECIAL PROJECTS

Rebecca Bermudez, SueEllen Belliveau

GROUP SALES MANAGER,

SPECIAL PROJECTS/CLASSIFIEDS

Mandy Harrison

SPECIAL PROJECTS/CLASSIFIEDS

ACCOUNT EXECUTIVE

Patrick Thompson

INTERACTIVE MEDIA SALES MANAGER

Lisa Bradley

INTERNATIONAL SALES

Douglas Sellers

Director of Sales, Europe

Tel: +49 0 6122 95590

Fax: +49 0 6122 51090

Canon Communications Europe

Vogelsbergstrasse 13

D-65205 Wiesbaden, Germany

Hermann Jordi, Charlotte Hasler,

Laura Polidori

Italy, Switzerland, Western Austria

Jordi Publilpress

Utzenstorf, Switzerland

Tel: +41 32 665 31 86

Fax: +41 32 665 52 33

Other Regions

Tel: +1 310 445 3700

Fax: +1 310 445 3799

Medical Device & Diagnostic Industry (ISSN 0194844X) is published monthly by Canon Communications LLC, 11444 W. Olympic Blvd., Ste. 900, Los Angeles, CA 90064; 310/445-4200; FAX 310/445-4299. Periodicals postage paid at Los Angeles, California, and at additional mailing offices. SUBSCRIPTIONS—Free to qualified subscribers as defined on the subscription card. Basic subscription price \$125 (one year). Delivery outside United States by air service. For telephone inquiries regarding subscriptions call 651/686-7824. Back issues: \$10 per copy, prepaid. CHANGE OF ADDRESS—Notices should be sent promptly to P.O. Box 21651, St. Paul, MN 55121. Please provide old mailing label as well as new address. Allow two months for change. EDITORIAL CONTRIBUTIONS—Unsolicited manuscripts should be submitted in triplicate and should be accompanied by stamped return envelopes. Copy will receive every reasonable care; however, the publishers assume no responsibility for safety of artwork, photographs, or manuscripts. NOTICE—Every precaution is taken to ensure accuracy of content; however, the publishers cannot accept responsibility for the correctness of the information supplied or advertised or for any opinion expressed herein. POSTMASTER—Send address changes to *Medical Device & Diagnostic Industry*, P.O. Box 21651, St. Paul, MN 55121. Canadian Post International Publications Mail Product (Canadian Distribution) Sales Agreement No. 0589527. Printed in U.S.A. ©1999 by Canon Communications LLC. All rights reserved. Reproduction in whole or part without written permission is prohibited.



**DOCKET
 ALARM**

Find authenticated court documents without watermarks at docketalarm.com.

Medical Plastics and Biomaterials

SPECIAL SECTION

Using Thin-Wall Heat-Shrink Tubing in Medical Device Manufacturing

A reduction in device size is among the advantages of shrink tubing, which has a wide range of applications.

Mark Saab

THE DEMAND for less-invasive medical procedures is a major driving force in today's medical device industry. Smaller and thinner are better—especially in catheters, endoscopes, and other devices that are inserted into the body. Designers are looking for new ways to downsize existing devices and to develop new minimally invasive devices. The industry is also under pressure to build more features into devices without increasing their profile (size). Thin-wall heat-shrink tubing is one product that can help designers meet this demand by reducing diameters and improving production processes. Applications in which this tubing offers advantages include:

- Variable-stiffness catheters.
- Electrical insulation.
- Encapsulation and protective coverings.
- Bundling of components.
- Tube joining and transitioning.
- Marking and printing.
- Catheter tip forming.
- Micro hose clamps.
- Masking for coatings.

This article compares the key properties of thermoplastic materials used in the manufacture of high-end medical shrink

tubing—polyolefin, fluoropolymers (PTFE), polyvinyl chloride (PVC), and polyester, specifically polyethylene terephthalate (PET)—and focuses on some of the more interesting product design applications, especially those employing PET.

MATERIALS COMPARISON


Table I compares the properties of the primary materials used in the manufacture of thin-wall heat-shrink tubing. PET polyester is the clear leader in terms of thin walls and high tensile strength. It is 10 to 100 times thinner than any other heat-shrink tubing and more than 10 times as strong. Tube walls of 0.00015 to 0.004 in. can be produced from PET while still maintaining high hoop strength, compared with walls of >0.002 in. for PTFE and >0.005 in. for polyolefin and PVC. Polyester also has superior flex-fatigue properties and the lowest shrink temperature (185°F/85°C) of the commonly used materials, which enables it to be used without being concerned about heat degradation to delicate substrates.

Although PTFE offers outstanding lubricity, a significant drawback is its very high shrink temperature of about 600°F, which precludes its use with plastic catheters and other plastic components. PTFE cannot be sterilized via gamma irradiation, which is a handicap in some market sectors that are moving away from ethylene oxide sterilization. Neither can the walls be

Material	Wall Thickness	Shrink Temp.	Shrink Ratio	Sterilization	Strength	Cost
Polyolefin	>0.005 in.	Medium	2:1 to 3:1	Most	Low	Low/medium
PTFE	>0.002 in.	Very high	1.3:1 to 4:1	No gamma	Low	High
PVC	>0.005 in.	Medium	2:1	Most	Low	Low
PET	0.00015–0.004 in.	Low/medium	1.1:1 to 3:1 ^a	Most	High	High

^aShrinkage over 20% can be accomplished by drawing while shrinking.

The best combination
of clarity, toughness
and low cost.

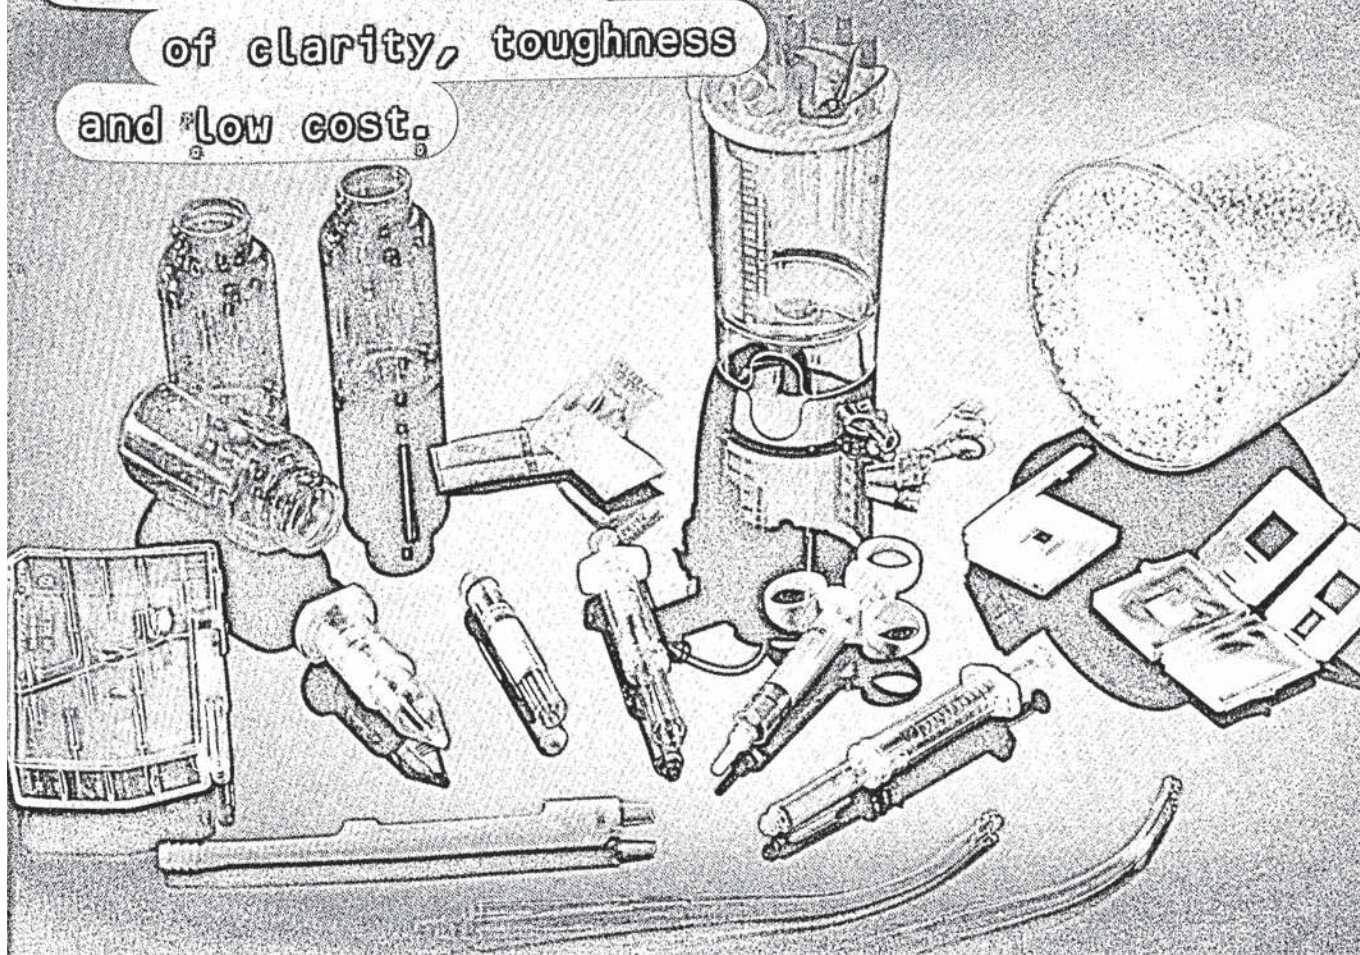

The proof.

K-Resin® styrene-butadiene copolymers (SBC)
provide crystal clarity and excellent toughness
without the higher cost of the clear type
engineering polymers.

- Crystal clarity
- Shatter-resistant toughness
- Complies with FDA regulations
- USP Class VI-50
- Sterilizable
- Blood compatible
- Non-cytotoxic
- Non-mutagenic
- Non-irritant

Find out how K-Resin® SBC can add value
to your applications.

Call us toll-free: **1-800-53-RESIN**
www.resinnet.com

	BULK MKT PRICE/LB	SPECIFIC GRAVITY	UNIT VOL COST (CENTS/IN ³)
K-Resin/GPPS 50/50 Blend	.63	1.03	2.34
K-Resin	.86	1.01	3.14
GPPS	.39	1.04	1.46
PVC	.55	1.31	2.60
SAN	1.02	1.07	3.94
Acrylic	.93	1.19	4.00
SMA	1.37	1.08	5.34
Cellulosics	1.75	1.20	7.58
Polycarbonate	1.62	1.20	7.02

**PRICE/DENSITY
RELATIONSHIP OF CLEAR RESINS***

K-Resin 

Wall thickness	Ultrathin wall thickness can be achieved (0.00015–0.004 in.)
Tensile strength	Very high tensile strength can be realized (>20,000 psi).
Electrical insulation	Has one of the highest dielectric strength ratings of any thermoplastic material Dielectric strength: >4,000 V/mil (60 Hz) Dielectric constant: 3.3 Dissipation factor: 0.0025 Volume resistivity: $10^{18} \Omega\text{-cm}$ Surface resistivity: $10^{14} \Omega/\text{square}$
Shrink temperature	185° to 374°F (85° to 190°C)
Melt point	High, 455°F (235°C)
Shrink ratio	5–15% typical—up to 70% if drawn or stretched during application
Surface finish	Ultrasmooth, hard, glossy finish
Color/clarity	Optically clear or can be pigmented
Bondability	Can be bonded using a wide range of adhesives (surface treatment recommended)
Flex fatigue	Very high flex fatigue properties
Biocompatibility	Meets USP Class VI requirements

Table II. Properties of polyester (PET) heat-shrink tubing.

made as thin as with polyester tubing and still retain useful strength, and wall-thickness tolerances are generally quite high. PTFE shrink tubing is typically used as a liner inside devices and as a covering for metal components and devices.

PET SHRINK-TUBING PROPERTIES

The key properties of polyester heat-shrink tubing are listed in Table II. With polyester tubing, shrinkage is a function of temperature: the higher the temperature, the higher the shrinkage. PET shrink temperature ranges from approximately 185° to 374°F (85° to 190°C). Unrestricted, the tubing will shrink both radially and axially, and the best overall performance is achieved with minimal shrinkage (less than 15–20%). Whenever a very high radial shrinkage is required (up to 70%), the tubing can be drawn while it is being heated. The ability to draw or stretch the tubing to achieve very high radial shrinkage while maintaining thin walls is unique to polyester.

SHRINK-TUBING APPLICATIONS

Variable-Stiffness Catheters. Because of its ultrathin walls, polyester heat-shrink tubing can be used to add stiffness to catheters without significantly adding to the size of the device. By using different thicknesses of tubing along the length of the catheter, varying degrees of flexibility can be created for improved control of the device. This quick and easy tubing application eliminates the need for joining dissimilar materials or adding braid to sections of a catheter in order to achieve multiple zones of stiffness. For example, some manufacturers use shrink tubing with a wall measuring 1-mil thick at the back end of a catheter, 1/2-mil in the middle, 1/4-mil near the end, and no tubing at all on the tip end. This provides varying degrees of stiffness along the

Electrical Insulation. Virtually every type of heat-shrink tubing is used in electrical insulation. Materials are typically chosen based on temperature, dielectric strength, cost, and wall thickness. High dielectric and resistivity properties make polyester heat-shrink tubing an effective electrical insulation material that adds little dimension because of its ultrathin walls. It can be used over needles, for example, to protect the surface of the skin from being burned during electrical stimulation and has also been employed effectively to cover electrical components or to insulate wiring on catheters and other devices (Figure 1). Some manufacturers are using PET tubing over metal shafts for electrical insulation, replacing a coating process. Application of the polyester greatly reduces the likelihood of the

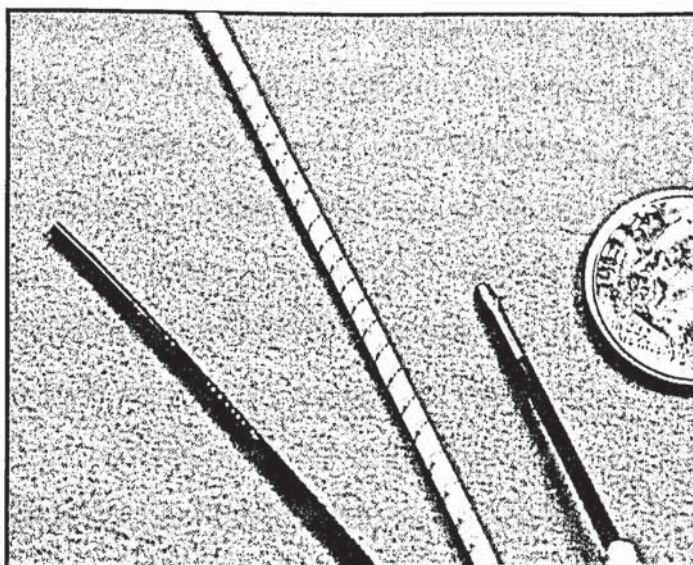


Figure 1. Black polyester shrink tubing covers a needle (right), leaving only the tip exposed. Electrical wires (left and middle) are cov-

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.