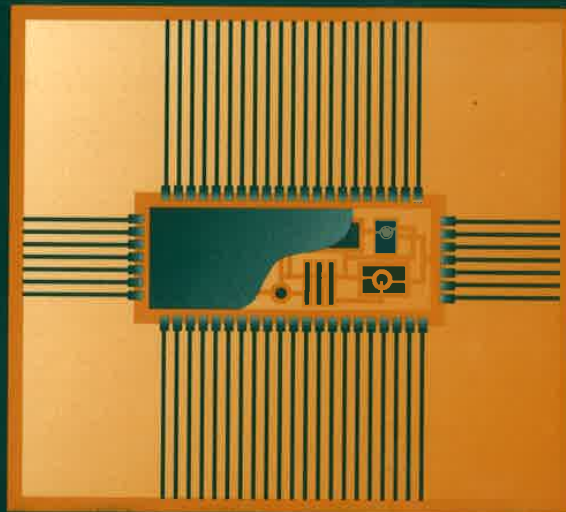

PLASTIC- ENCAPSULATED MICROELECTRONICS



Materials,
Processes,
Quality,
Reliability, and
Applications

Edited by

Michael G. Pecht
Luu T. Nguyen
Edward B. Hakim

PLASTIC-ENCAPSULATED MICROELECTRONICS

Materials, Processes, Quality, Reliability, and Applications

Edited by

**Michael G. Pecht
Luu T. Nguyen
Edward B. Hakim**



A Wiley-Interscience Publication

JOHN WILEY & SONS, INC.

New York / Chichester / Brisbane / Toronto / Singapore

This text is printed on acid-free paper.

Copyright © 1995 by John Wiley & Sons, Inc.

All rights reserved. Published simultaneously in Canada.

Reproduction or translation of any part of this work beyond that permitted by Section 107 or 108 of the 1976 United States Copyright Act without the permission of the copyright owner is unlawful. Requests for permission or further information should be addressed to the Permissions Department, John Wiley & Sons, Inc., 605 Third Avenue, New York, NY 10158-0012.

This publication is designed to provide accurate and authoritative information in regard to the subject matter covered. It is sold with the understanding that the publisher is not engaged in rendering legal, accounting, or other professional services. If legal advice or other expert assistance is required, the services of a competent professional person should be sought.

Library of Congress Cataloging-in-Publication Data:

Pecht, Michael.

Plastic encapsulated microelectronics: materials, processes, quality, reliability, and applications / Michael G. Pecht, Luu T. Nguyen, Edward B. Hakim.

p. cm.

Includes index.

ISBN 0-471-30625-8 (cloth ; alk. paper)

1. Microelectronic packaging--Materials. 2. Microencapsulation.

3. Plastics in packaging. I. Nguyen, Luu T. II. Hakim, Edward B.

III. Title.

TK7874.P428 1995

621.381'046--dc20

94-46528

Printed in the United States of America

10 9 8 7 6 5 4 3 2 1

LIFE TEST: Test of a component or circuit under electrical load and high temperature to assure reliability device.

LOOP: The curve or arc of the wire between the attachment points at each end of a wirebond.

LOOP HEIGHT: A measure of the deviation of the wire loop from the straight line between the attachment points of a wirebond. Usually, it is the maximum perpendicular distance from this line to the top of the wire loop.

MARKING: A method of identifying printed boards or components with part number, revision letter, manufacturer code, and so on.

METALLIZATION: A deposited or plated thin metallic film used for its protective or electrical properties. The process of applying a conductive metal film to the surface of the integrated circuit chip. This metallization is used both for interconnection on the chip and to define a place for the attachment of bond wires.

MICROCRACKS: A thin crack in a substrate or chip, or in thick-film trim-kerf walls, that can only be seen under magnification and which can contribute to latent failure phenomena.

MICROSECTIONING: The preparation of a specimen for the metallographic examination of the material (usually by cutting out a cross section, followed by polishing, etching, staining, and mounting).

MIL: An unit of length that is equal to 0.001 in or 0.0254 mm.

MISREGISTRATION: Improper alignment of successively produced features or patterns.

MODULE: A generic term referring to assembled units in electronic equipments/assemblies.

MODULUS OF ELASTICITY: The ratio of stress to strain in a material that is elastically deformed.

MOISTURE BARRIER BAG (MBB): A plastic bag designed to restrict the transmission of water vapor and used to pack moisture-sensitive plastic-encapsulated components.

MOISTURE STABILITY: The functional stability of a circuit under high-humidity conditions.

MOLDING COMPOUND: The plastic formulation used to package ICs through a molding process.

MONOMER: A precursor of low molecular weight used as a starting material for polymerization to produce molecules of larger molecular weight, called polymers.

MULTICHIP PACKAGE: An electronic package that carries a number of chips and

**SEOUL SEMICONDUCTOR CO., LTD.,
and SEOUL SEMICONDUCTOR, INC.
EX. NO. 1006**