




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>6</sup> : <b>H02K 1/16, 3/46</b></p>	<p>AI</p>	<p>(11) International Publication Number: <b>WO 95/12912</b> (43) International Publication Date: 11 May 1995 (11.05.95)</p>
<p>(21) International Application Number: PCT/SE94/01026 (22) International Filing Date: 1 November 1994 (01.11.94)  (30) Priority Data: 9303602-8 1 November 1993 (01.11.93) SE 9400076-7 10 January 1994 (10.01.94) SE 9401524-5 3 May 1994 (03.05.94) SE  (71) Applicant (for all designated States except US): STRIDSBERG INNOVATION AB [SE/SE]; Tanneforsvägen 14, S-122 47 Enskede (SE).  (72) Inventor; and (75) Inventor/Applicant (for US only): STRIDSBERG, Lennart [SE/SE]; Tanneforsvägen 14, S-122 47 Enskede (SE).  (74) Agents: LINDÉN, Stefan et al.; Bergenstråhle &amp; Lindvall AB, P. O. Box 17704, S-118 93 Stockholm (SE).</p>		<p>(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, ES, FI, GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LT, LU, LV, MD, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TT, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ).  <b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>

(54) Title: AN ELECTRIC MOTOR AND ITS FABRICATION

(57) Abstract

In a brushless electric motor/generator there are poles (301, 401) which are separate mechanical parts and are assembled to form a stator. The poles (301, 401) comprises outer portions (304, 404) projecting in a circumferential direction from the main leg of the poles. These outer portions (304, 404) are engaged with each other, thus forming a magnetic yoke carrying magnetic flux between the poles. This permits an easy winding of the separate poles and a good support thereof by an outer ring.

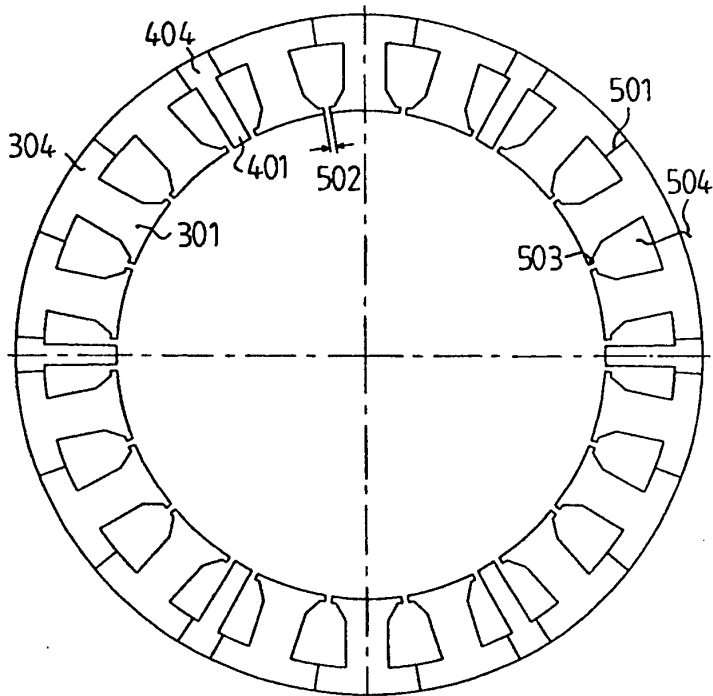

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgystan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

## AN ELECTRIC MOTOR AND ITS FABRICATION

### Technical Field

The invention is concerned with methods of designing and producing stators for in particular brushless motors/generators and the motor/generator stators and motors/generators thus produced.

### Background of the invention and prior art

To obtain highly efficient electrical motors some requirements are commonly understood. The design should give short amounts of current conducting winding material that is outside the stator parts that are highly permeable for magnetic flux. The design should also permit much current conducting winding material in the winding slots. Further, the thermal path between the current conducting winding material and the intermediate heat sink like the outer housing of the motor should be good enough to keep the winding temperature at an acceptable level at power losses that the outer casing can dissipate at acceptable surface temperatures. The design should also give stators that are mechanically robust.

Brushless DC motors have their windings in the stator. Most stators are three-phase and have stator windings similar to that of a three phase induction motor.

Almost all electric motors with alternating current stator windings (including brushless DC motors and induction motors) in sizes up to some 10 kW have their stators made of lamination sheets that cover the whole circumference of the motor. These punched laminations are assembled together by welding or other means to form a rigid hollow cylinder. Thereafter the winding slots are insulated. The windings are wound outside the stator and thereafter inserted in the slots. This method does give two disadvantages.

The first disadvantage is that it does not permit a very orderly arrangement of the winding wires in the winding slots. In order to obtain a very high utilization of a winding slot in a stator, the wires should run parallel to each other. For wires of circular cross-section, a hexagonal arrangement where each wire is surrounded by six other wires is normally the most efficient arrangement.

The second disadvantage is that a prewound winding coil must

have a considerable surplus length to permit insertion in a stator winding slot. In the case of overlapping polyphase windings, a certain excess length is required to permit insertion of a winding without being locked by the other phases. In the case of salient poles, a certain excess length is required so as the winding must be heeled over the pole tooth head portions. This results in unnecessary current conducting winding material that is outside the stator parts that are highly permeable for magnetic flux.

Figure 1 illustrates a rolled-out view of a conventional stator with overlapping phases as seen from the rotor.

The arc 101 shows one part of the current conducting winding 104 that is not inserted inside the flux permeable part of the stator, while 103 shows a part that is inserted inside the flux permeable part of the stator. 102 shows the stator pole as seen from the rotor.

Figure 2 illustrates a rolled-out view of a conventional stator as seen from the rotor of a brushless motor as disclosed in the published International patent application WO-A1 92/06530. These motors, and motors as disclosed in the published International patent application WO-A1 93/15547, have windings consisting of groups of stator poles 201, each having a simple coils 202 around it. In the case of motors as disclosed in the cited International patent application WO-A1 92/06530, the gaps between different pole groups are bridged by balancing poles 203.

A common problem in the winding of motor stators is to reduce the amounts of current conducting winding material that is outside the flux high permeable stator parts. This material is shown separately as 101 and 204 in figures 1 and 2 respectively.

The US patent 3,792,299 discloses a stator for an electric motor comprising an outer annual yoke and a plurality of radially directed stator teeth. In another embodiment (figure 7) in the same patent, the yoke is assembled of a plurality of yoke parts. In both cases, the flux carrying parts of the stator consists of separately punched stator teeth. The winding of the stator is made by first arranging the stator teeth so that during the winding procedure, the slot spaces for the stator winding will be open radially outwards. This permits a winding with far less surplus length as there is more freedom in adjusting the coils of

the different phases of the winding to each other during assembly. After the winding procedure these openings are closed by a stator ring or yoke, whereafter moulding together of winding, stator teeth and stator yoke is carried out by means of lacquer or moulding compound to a rigidly assembled stator unit.

The US patent 3,353,046 discloses a stator produced from a cog-wheel shaped stator teeth set. After winding, impregnation with a thermosetting resin and baking, the resulting solid body is ground down to an outer diameter that fits an outer, cylinder shaped yoke ring. After that the yoke cylinder is assembled and fixed by another impregnation and baking process, the common base of all the stator teeth is ground down from the inside so that the base disappears and the required gaps between each stator tooth appears.

The US patents 2,459,673, 2,517,105, 2,654,037, 2,655,613, 2,687,483, 2,691,113, 2,745,031, 3,449,607, 3,549,926, 3,612,930, 3,740,600, 4,246,505, 4,433,262 and 4,816,710 and the published International patent application WO-A1 92/10021 disclose various ways to design electrical machines with yokeless separate salient poles which are assembled on a stator or rotor yoke. Most or all of these designs have solid (not laminated) poles and/or yokes and seem to be designed exclusively for poles with DC current coils to be used as stator field magnets (interacting with laminated rotors in mechanically commutated DC machines) or rotor poles for synchronous machines (interacting with laminated three-phase stators).

The published International patent application WO-A1 92/03870 discloses a design where laminated salient poles can be assembled into a laminated stator yoke. The assembled stator shape corresponds to stators commonly as field in a mechanically commutated DC machine).

#### Summary

A purpose of the invention is to provide a brushless motor stator that permits much current conducting winding material in the winding slots.

Another purpose of the invention is to provide a brushless motor stator that give short amounts of current conducting winding material that is outside the stator parts that are highly permeable for magnetic flux.

# Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

## Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

## Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

## Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

## API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

## LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

## FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

## E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.