




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04H 1/00, H04B 7/155		A1	(11) International Publication Number: WO 99/49602
			(43) International Publication Date: 30 September 1999 (30.09.99)
(21) International Application Number: PCT/US98/14280		(74) Agents: HOLMES, John, E. et al.; Roylance, Abrams, Berdo & Goodman, LLP, 1225 Connecticut Avenue, N.W., Washington, DC 20036 (US).	
(22) International Filing Date: 10 July 1998 (10.07.98)			
(30) Priority Data: 60/079,591 27 March 1998 (27.03.98) US 09/058,663 10 April 1998 (10.04.98) US		(81) Designated States: AL, AM, AT, AT (Utility model), AU (Petty patent), AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(63) Related by Continuation (CON) or Continuation-in-Part (CIP) to Earlier Application US 09/058,663 (CIP) Filed on 10 April 1998 (10.04.98)			
(71) Applicant (for all designated States except US): WORLDSPACE MANAGEMENT CORPORATION [US/US]; 2400 N Street, N.W., Washington, DC 20037 (US).			
(72) Inventor; and (75) Inventor/Applicant (for US only): CAMPANELLA, S., Joseph [US/US]; 18917 Whetstone Circle, Gaithersburg, MD 20879 (US).		Published With international search report.	

(54) Title: DIGITAL BROADCAST SYSTEM USING SATELLITE DIRECT BROADCAST AND TERRESTRIAL REPEATER

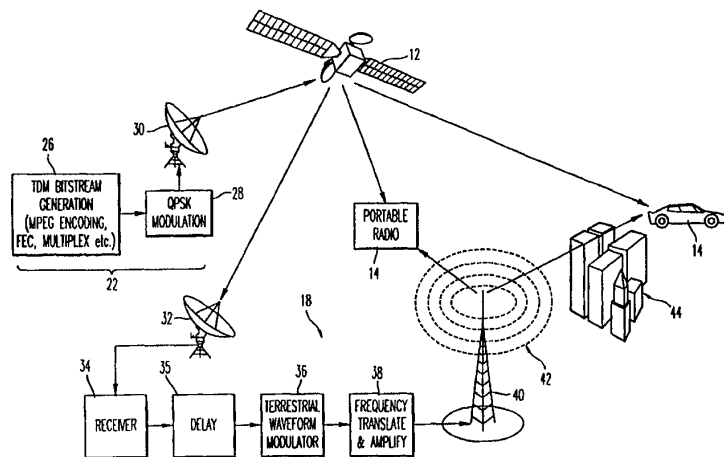

(57) Abstract

A digital broadcast system is provided which uses a satellite direct radio broadcast system having different downlink modulation options in combination with a terrestrial repeater network employing different re-broadcasting modulation options to achieve high availability reception by mobile radios (14), static radios and portable radios (14) in urban areas, suburban metropolitan areas, and rural areas, including geographically open areas and geographic areas characterized by high terrain elevations. Two-arm and three-arm receivers are provided which each comprise a combined architecture for receiving both satellite and terrestrial signals, and for maximum likelihood combining of received signals for diversity purposes. A terrestrial repeater is provided for reformatting a TDM satellite signal as a multicarrier modulated terrestrial signal. Configurations for indoor and outdoor terrestrial repeaters are also provided.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

DIGITAL BROADCAST SYSTEM USING SATELLITE DIRECT
BROADCAST AND TERRESTRIAL REPEATER

Field of Invention

A digital broadcast system is provided which uses a satellite direct radio broadcast system having different downlink options in combination with a terrestrial repeater network employing different re-broadcasting options to achieve high
5 availability reception by mobile radios, static radios and portable radios in urban areas, suburban metropolitan areas, rural areas, including geographically open areas and geographic areas characterized by terrain having high elevations.

Background of the Invention

Receivers in existing systems which provide digital audio radio service (DARS) have been radically affected by multipath effects which create severe degradations in signal quality, such as signal fading and inter-symbol interference (ISI). Fading effects on broadcast channels to receivers can be sensitive to frequency, particularly in an urban environment or geographic areas with high elevations where blockage of line of sight (LOS) signals from satellites is most prevalent. Locations directly beneath a satellite (hereinafter referred to as the sub-satellite point) inherently have the highest elevation angles, while locations that depart from the sub-satellite point inherently have decreasing elevation angles and, accordingly, an increase of the earth center angle subtended between the sub-satellite point and the reception location. Locations that are near the sub-satellite point typically enjoy virtually unblocked LOS reception. Thus, the need for terrestrial reinforcement of potentially blocked LOS signals is minimal. When the LOS elevation angle to the satellite becomes less than about 85 degrees, however, blockage by tall buildings or geological elevations (i.e., on the order of 30 meters) becomes significant. Terrestrial re-radiation for gap filling is needed to achieve satisfactory coverage for mobile radios, static radios, as well as portable radios. In areas where the heights of buildings or geological sites are relatively low (i.e., on the order of less than 10 meters), the blockage is not significant until the LOS elevation angle is lower than 75 degrees. Thus, at the mid-latitude and high latitude locations within the coverages of one or more broadcast satellites, terrestrial re-radiation is needed to achieve suitable radio reception. A need exists for fully satisfactory radio reception that combines satellite LOS transmission and terrestrial re-radiation of a satellite downlink signal waveform.

Summary of the Invention

In accordance with one aspect of the present invention, a digital broadcast system (DBS) is provided which overcomes a number of disadvantages associated with existing broadcast systems and realizes a number of advantages. The DBS of the present invention comprises a TDM carrier satellite delivery system for digital audio broadcasts (DAB) and other digital information which is combined with a network of terrestrial

repeaters for the re-radiation of satellite downlink signals toward radio receivers. The terrestrial repeaters are configured to employ multipath-tolerant modulation techniques.

5 In accordance with another aspect of the present invention, a satellite delivery system and a terrestrial repeater operate using different carrier frequencies. The terrestrial repeater employs multipath-tolerant modulation techniques.

In accordance with yet another aspect of the present invention, a satellite delivery system and a terrestrial repeater both employ multipath-tolerant modulation techniques and can be configured to use the same or different carrier frequencies,
10 depending on the type of waveform used. The satellite delivery system preferably employs a TDM or code division multiple access (CDMA)-type waveform. The terrestrial repeater preferably employs a multipath-tolerant waveform such as CDMA, Adaptive Equalized TDM (AETDM), Coherent Frequency Hopping Adaptively Equalized TDM (CFHATDM) or Multiple Carrier Modulation (MCM).

15 In accordance with still another aspect of the present invention, a single geostationary satellite transmits downlink signals which can be received by radio receivers in the LOS of the satellite signal, as well as by terrestrial repeaters. Each terrestrial repeater is configured to recover the digital baseband signal from the satellite signal and modulate the signal using multicarrier modulation (MCM) for retransmission
20 toward radio receivers. Radio receivers are configured to receive both a quadrature phase shift keyed (QPSK) modulated TDM bit stream, as well as an MCM stream. Radio receivers are programmed to select a broadcast channel demodulated from the TDM bit stream and the MCM bit stream, and to select the broadcast channel recovered with the least errors using a diversity combiner.

25 In accordance with still yet another aspect of the present invention, a DBS is provided which comprises two geostationary satellites in combination with a network of terrestrial repeaters. The terrestrial repeaters are configured to process satellite downlink signals to achieve the baseband satellite signal and to modulate the signal using MCM. Radio receivers are configured to implement a diversity decision logic to
30 select from among three diversity signals, including the two satellite signals and the MCM signal. Each radio receiver employs maximum likelihood combining of two LOS

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.