

U.S. Patent No. 6,628,629


T-Mobile & Ericsson Infringement Contentions

Claims 1-4

Claim 1 of '629	T-Mobile & Ericsson Infringement Contentions
<p>1. A method for assigning future slots of a transmission frame to a data packet in the transmission frame for transmission over a wireless medium, comprising:</p>	<p><b>T-Mobile and Ericsson each directly infringe claim 1 under 35 U.S.C. § 271 (a) by literally method step.</b></p> <p>T-Mobile performs all steps of claim 1 and its dependent claims literally by making, installing, testing, or operating a wireless telecom network in accordance with Long-Term Evolution (“LTE”) stations in the T-Mobile network are Evolved Node-Bs (“eNodeB” or “eNB”) provided by Ericsson 8640 (Ericsson Press Release, Sep. 23, 2014); IVMN00008641-42 (Ericsson Press Release, May 8, 2012); IVMN00008649-51 (T-Mobile Press Release, May 7, 2012). T-Mobile performs all steps either directly or indirectly by controlling its subscribers.</p> <p>Ericsson performs all steps of claim 1 and its dependent claims literally by operating, maintaining, and testing wireless base stations, e.g., eNodeBs, in the T-Mobile network. <i>See, e.g.</i>, IVMN00008638-8640 (Ericsson Press Release, Sep. 23, 2014); IVMN00008641-42 (Ericsson Press Release, May 8, 2012); IVMN00008649-51 (T-Mobile Press Release, May 7, 2012).</p> <p><b>Ericsson indirectly infringes claim 1 under 35 U.S.C. § 271 (b) by inducing T-Mobile to literally perform the claimed method step, and under 35 U.S.C. § 271 (c) by selling material or apparatus for use in performing the claimed method step.</b></p> <p>Ericsson has induced, and continues to induce, T-Mobile to infringe claim 1 and its dependent claims by contributory infringement of claim 1 and its dependent claims by providing the hardware and software to T-Mobile to perform the claimed method, along with instructions that induce T-Mobile to perform the claimed method.</p> <p>Ericsson has taken, and continues to take, active steps to induce T-Mobile to infringe claim 1 and its dependent claims knowing that those steps will induce, encourage, and facilitate direct infringement by T-Mobile. Those steps described in detail below and include, but are not limited to, configuring Ericsson eNodeBs to perform the claimed method, scheduling, providing instructions on the use of the semi-persistent scheduling feature, and performing the claimed operation, and maintenance of the T-Mobile network specifically for the purpose of performing the claimed method.</p> <p>To the extent the preamble is found to be limiting, T-Mobile and Ericsson each perform a method that includes the preamble language.</p>

**OVERVIEW OF LTE NETWORK**

Figure 4.1-1 (below) shows an eNB connected to an Evolved Packet Core (“EPC”). TS 36.300<sup>1</sup>

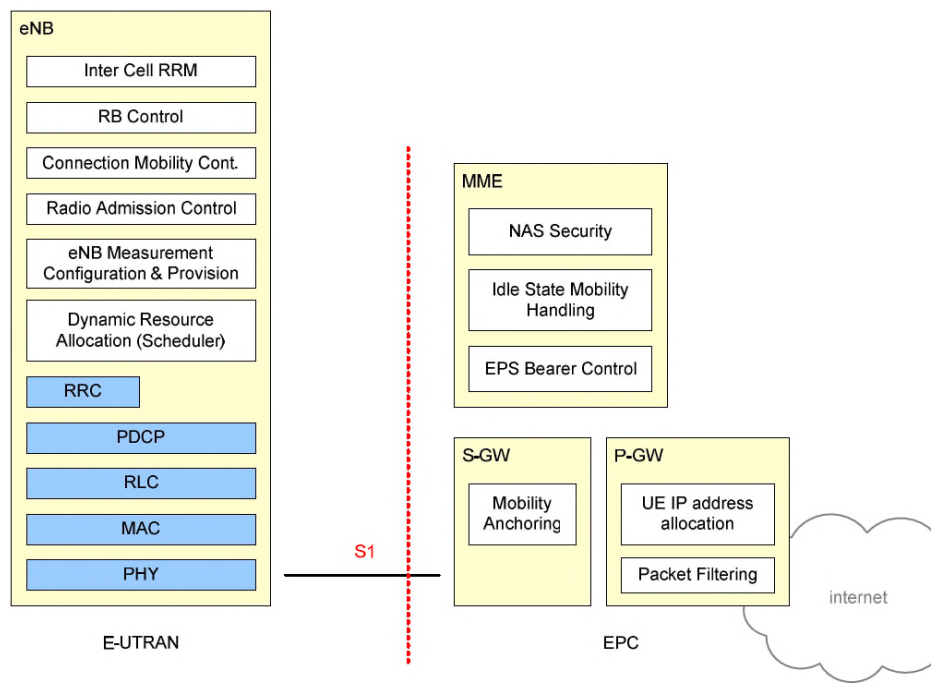

**Figure 4.1-1: Functional Split between E-UTRAN and EPC**

TS 36.300 § 4.1.

An eNB communicates wirelessly with user equipment (“UE,” e.g., smart phones). TS 36.300 § 4.4.3.2; TR 21.905 §§ 3B, 3E, 3N. EPC components include: a signaling gateway (“S-GW”); an MME (“MME”); and a packet gateway (“P-GW”) that interfaces with packet data networks (“PDN”). TS 23.401 §§ 4.1 & 4.4; TS 36.300 § 4.1; TS 23.228 § 4. The eNB and UEs communicate via a physical (“PHY”), medium access control (“MAC”), radio link control (“RLC”), and packet data control (“PDCP”) layers. TS 36.300 §§ 4 & 6. The eNB also operates a radio resource control (“RRC”)

<sup>1</sup> Citations to TR \_\_. \_\_ and TS \_\_. \_\_ refer to 3rd Generation Partnership Project (“3GPP”) LTE documentation listed in the Infringement Contentions served concurrently herewith. Unless a specific version is noted, the citation refers to the latest version of the specification. Where a citation is cited, the citation refers to all subsections of the specification.

**OVERVIEW OF LTE RADIO TRANSMISSION SCHEMES AND RADIO RESOURCES**

The wireless transmissions between an eNodeB and UE include downlink (“DL”) transmissions and uplink (“UL”) transmissions (i.e., from a UE to an eNB) organized in either of two frame structures: frequency division duplex (“FDD”), and time division duplex (“TDD”). TS 36.300 § 5. On information and belief, the defendant operates at least in accordance with FDD. *Id.* at §§ 5 & 5.1.1; TS 36.211 §§ 4 & 6. The FDD and TDD both divide frequency into subcarriers, and divide time into frames, subframes and slots. *Id.* As shown in Figure 5-1 (below), each frame includes ten subframes, each subframe includes two slots, wherein each frame has a duration of 10ms, and each slot has a duration of 0.5ms. *Id.*

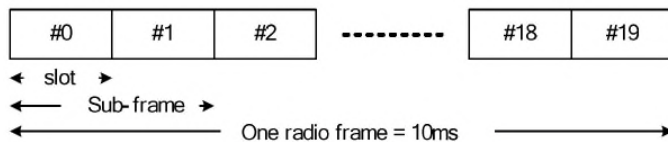


Figure 5-1: Frame structure type 1

TS 36.300 § 5.

Figures 5.2.1-1 and 6.2.2-1 (below) show UL and DL resource grids, respectively. TS 36.211 §§ 4.1, 4.2 & 6.2.3. Both grids plot time and frequency on horizontal and vertical axes, and both divide time into frames as described above. *Id.*; see also TS 36.300 § 5. Both grids also divide frequency into subcarriers and resource blocks. *Id.* Referring to Figure 6.2.2-1 (below), DL transmission uses orthogonal frequency-division multiplexing (“OFDM”). *Id.* OFDM divides frequency into sub-carriers spaced 15 kHz apart. *Id.* Each sub-carrier contains one resource element (“RE”) and resource blocks (“RBs”). *Id.* at § 6.2. Each RE includes one sub-carrier for one symbol period. *Id.* Each RB contains 12 subcarriers for a duration of one slot. *Id.* When using normal cyclic prefix, each slot has seven symbols. *Id.* So, with a normal cyclic prefix, each RB has 84 REs (12 rows

<sup>2</sup> A cyclic prefix is part of an OFDM symbol. TS 36.211 §§ 4.1, 4.2 & 6.2.3. LTE transmission schemes use either a normal cyclic prefix (6 OFDM symbols per slot) or an extended cyclic prefix (6 OFDM symbols per slot). TS 36.300 § 5.1.1.

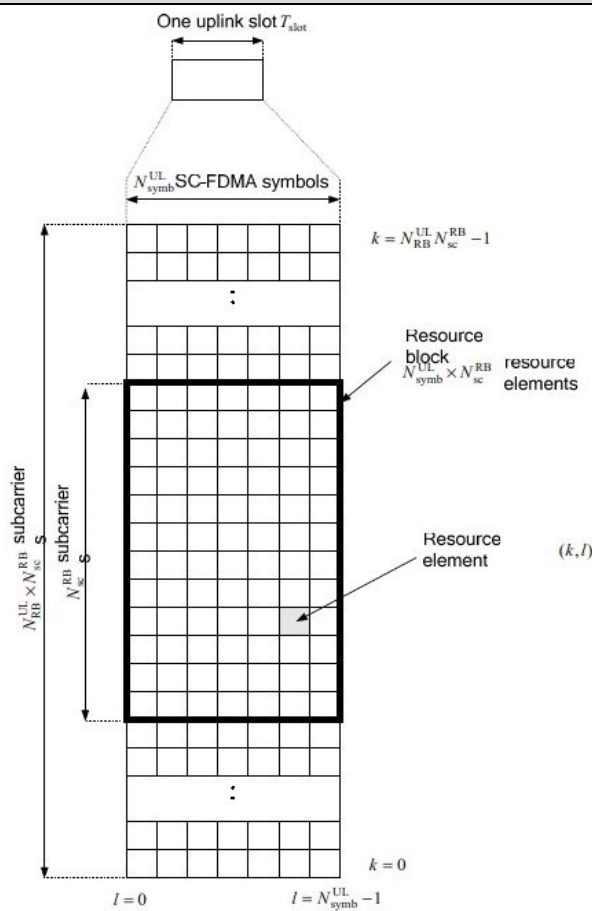


Figure 5.2.1-1: Uplink resource grid.

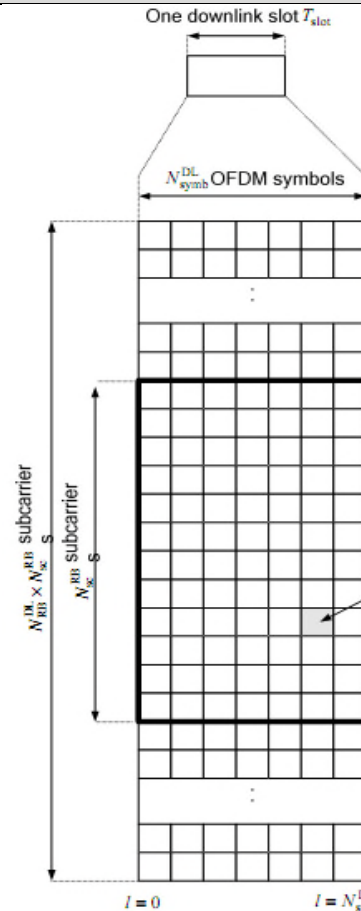


Figure 6.2.2-1: Downlink resource grid.

Referring to Fig. 5.2.2-1 (above), the UL resource grid also includes REs and RBs. TS 36.211 § 5.2.2.1, in my belief, the T-Mobile network uses Single Carrier Frequency Division Multiple Access (“SC-FDMA”) transmission. *Id.* at §§ 5.2. & 5.3. SC-FDMA divides frequency into sub-carriers spaced 15 kHz. Each RB in the UL resource grid includes 84 REs (12 rows by 7 columns of REs).

**OVERVIEW OF LTE PHYSICAL CHANNELS CARRYING DATA AND CONTROL MESSAGES**

The DL radio resources are used to transport downlink physical channels that are shared by multiple UEs with a single eNB in the DL direction. Likewise, UL radio resources are used to transport uplink physical channels shared by the UEs to communicate with the eNB in the UL direction. TS 36.300 §§ 5.6.6.1 & 5.6.6.2.

Claim 1 of '629	T-Mobile & Ericsson Infringement Contentions
	<p>eNB and UEs must exchange control messages in order to allocate resources (i.e., specified RBs) to and from UEs. <i>Id.</i> These resource allocations may be valid for one or more subframes, wherein to a transmission time interval (“TTI”) of one millisecond. <i>See</i> TS 36.300 §§ 5, 5.1.1 and 11. Physical LTE include:</p> <ul style="list-style-type: none"> <li>• physical downlink control channel (“PDCCH”) carrying control information sent from an eNB including downlink resource allocations, and uplink scheduling grants;</li> <li>• enhanced physical downlink control channel (“EPDCCH”) carrying control information sent including downlink resource allocations, and uplink scheduling grants;</li> <li>• physical downlink shared channel (“PDSCH”) carrying data sent from an eNB to one or more UEs;</li> <li>• physical uplink control channel (“PUCCH”) carrying control information sent from one or more UEs to an eNB;</li> <li>• physical uplink shared channel (“PUSCH”) carrying data sent from one or more UEs to an eNB.</li> </ul> <p>TS 36.300 V12.0.0 § 5.</p> <p>Discussions in this document about resource allocation and grant control information sent on a PDCCH for monitoring a PDCCH for control information, applies also to resource allocation and grant control information sent on an EPDCCH, when an EPDCCH is configured.</p> <p><b><u>LTE TRANSPORT CHANNELS, LOGICAL CHANNELS, AND RADIO BEARERS</u></b></p> <p>Figures 6-1 and 6-2 (below) show relationships between transport channels, logical channels, and radio bearers for downlink and uplink communications. TS 36.300 §§ 4.1 &amp; 6.</p>

# Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

## Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

## Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

## Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

## API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

## LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

## FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

## E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.