

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ :

G01S 17/88, G05D 1/02

A1

(11) International Publication Number:

WO 93/03399

(43) International Publication Date:

18 February 1993 (18.02.93)

(21) International Application Number: PCT/SE92/00544

(22) International Filing Date: 7 August 1992 (07.08.92)

(30) Priority data:


741,683 7 August 1991 (07.08.91) US

(71) Applicant: AKTIEBOLAGET ELECTROLUX [SE/SE];
Luxbacken 1, S-105 45 Stockholm (SE).(72) Inventor: ÖHMAN, Carl, Gustav ; Talgoxevägen 8, S-597
00 Åtvidaberg (SE).(74) Agents: HAGELBÄCK, Evert et al.; AB Electrolux, Cor-
porate Patents & Trademarks, S-105 45 Stockholm (SE).(81) Designated States: European patent (AT, BE, CH, DE,
DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, SE).

Published

With international search report.

(54) Title: OBSTACLE DETECTING ASSEMBLY

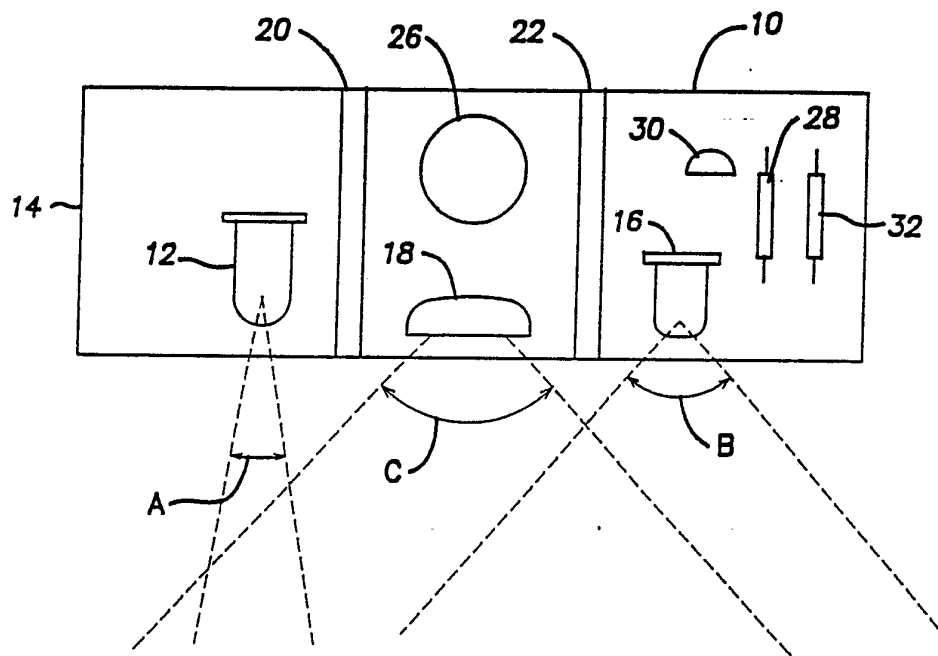

(57) Abstract

An obstacle detecting assembly includes a narrow-beam LED, a wide-beam LED and a light detector. The narrow-beam LED provides range, while the wide-beam LED provides wide coverage at closer range. The assemblies are located about the front of a vacuum cleaner robot and provide warning of obstacles in the robot's path. When an obstacle is first detected, the robot reduces speed and continues until contact or a fixed distance is traveled. The assemblies not only detect obstacles, but also over-

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FI	Finland	MN	Mongolia
AU	Australia	FR	France	MR	Mauritania
BB	Barbados	GA	Gabon	MW	Malawi
BE	Belgium	GB	United Kingdom	NL	Netherlands
BF	Burkina Faso	GN	Guinea	NO	Norway
BG	Bulgaria	GR	Greece	NZ	New Zealand
BJ	Benin	HU	Hungary	PL	Poland
BR	Brazil	IE	Ireland	PT	Portugal
CA	Canada	IT	Italy	RO	Romania
CF	Central African Republic	JP	Japan	RU	Russian Federation
CG	Congo	KP	Democratic People's Republic of Korea	SD	Sudan
CH	Switzerland	KR	Republic of Korea	SE	Sweden
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovak Republic
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CS	Czechoslovakia	LU	Luxembourg	SU	Soviet Union
CZ	Czech Republic	MC	Monaco	TD	Chad
DE	Germany	MG	Madagascar	TG	Togo
DK	Denmark	MI	Mali	UA	Ukraine
ES	Spain			US	United States of America

1 The assembly may also advantageously include a first
2 light blocking means located between the first light source
3 and the light sensing means. The first light blocking means
4 blocks the light detecting means from the first light source.
5 Also included may be a second light blocking means located
6 between the second light source and the light sensing means.
7 The second light blocking means blocks the light detecting
8 means from the second light source.

9 The robot control system includes a plurality of forward
10 obstacle detection sensors facing in a forward direction.
11 These forward obstacle detection sensors provide an early
12 warning signal indicative of the remote presence of an
13 obstacle.

14 Also included is a forward contact sensor. This sensor
15 provides a contact signal indicative of the robot contacting
16 an obstacle.

17 Also included is a control means adapted to receive the
18 signals from the sensors and a drive means adapted to propel
19 the robot in response to the control means.

20 The robot decelerates to a low speed upon receipt of the
21 early warning signal and continues at the slow speed until the
22 first occurring of receipt of the contact signal or a known
23 distance is traveled.

24 The robot control system may also advantageously include
25 a left obstacle detection sensor facing in a direction of
26 between 25 and 50 degrees left of the forward direction and
27 between 25 and 35 degrees up from the forward direction. The
28 left sensor provides a left overhang signal indicative of an
29 overhanging obstacle.

30 Also included may be a right obstacle detection sensor
31 facing in a direction of between 25 and 50 degrees right of
32 the forward direction and between 25 and 35 degrees up from
33 the forward direction. The right sensor provides a right
34 overhang signal indicative of an overhanging obstacle.

35 The robot decelerates to the low speed upon receipt of
36 either overhang signal and continues at the slow speed until

1 the first occurring of receipt of the contact signal or the
2 known distance is traveled.

3 The obstacle detection sensors may advantageously
4 comprise the obstacle detecting assemblies described above.

5 The system may also advantageously include a drop-off
6 sensor facing in a downward direction. The drop-off sensor
7 provides a drop-off (e.g., a stair step downward) signal
8 indicative of the presence of a drop-off, wherein the robot
9 stops and reverses direction upon receipt of the drop-off
10 signal.

11 BRIEF DESCRIPTION OF THE DRAWINGS

12 FIG. 1 is a top plan view of an assembly according to the
13 invention.

14 FIG. 2 is a front elevation view of an assembly according
15 to the invention.

16 FIG. 3 is a schematic circuit diagram of an assembly
17 according to the invention.

18 FIG. 4 is a top plan view diagram showing the orientation
19 of the obstacle detection assemblies according to the
20 invention in the forward portion of a vacuum cleaner robot.

21 FIG. 5 is a block diagram of a robot control system
22 according to the invention.

23 FIG. 6 is a flow chart diagram of a robot control system
24 according to the invention.

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.