


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : G05D 1/02	A1	(11) International Publication Number: WO 00/38025 (43) International Publication Date: 29 June 2000 (29.06.00)
<p>(21) International Application Number: PCT/GB99/04072</p> <p>(22) International Filing Date: 6 December 1999 (06.12.99)</p> <p>(30) Priority Data: 9827777.5 18 December 1998 (18.12.98) GB</p> <p>(71) Applicant (for all designated States except US): NOTETRY LIMITED [GB/GB]; Kingsmead Mill, Little Somerford, Wiltshire SN15 5JN (GB).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): BISSET, David, Lindsey [GB/GB]; 4 Chandler Way, Chippenham, Wiltshire SN15 3YG (GB). ALDRED, Michael, David [GB/GB]; 16 Sutherland Crescent, Cepen Park North, Chippenham, Wiltshire SN14 6RS (GB).</p> <p>(74) Agents: SMITH, Gillian, Ruth et al.; Dyson Research Limited, P.O. Box 2080, Malmesbury, Wiltshire SN16 0SW (GB).</p>		<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>

(54) Title: IMPROVEMENTS IN OR RELATING TO FLOOR CLEANING DEVICES

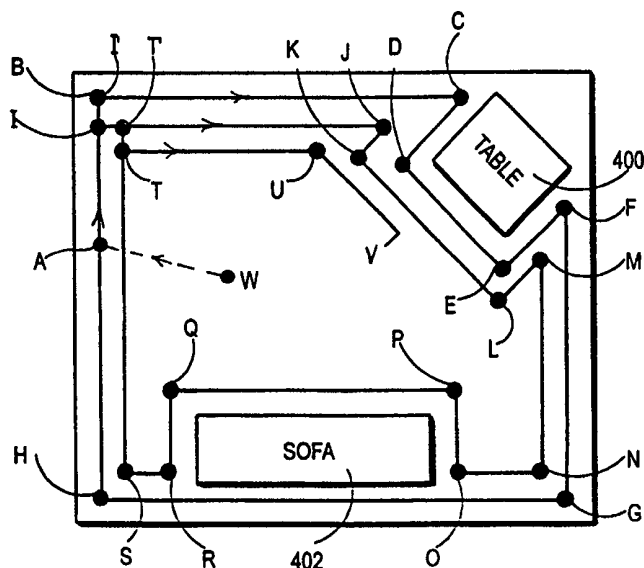

(57) Abstract

A robotic floor cleaning device is arranged so that it firstly completes a traverse around the edge of a room (A-I), avoiding any obstacles in its path, and then moves inwards (at I) and completes a second traverse of the room. The cleaning device continues to move inwards after each traverse (e.g. at T) so as to travel in a generally inwardly spiral manner until the floor of the room, apart from areas occupied by obstacles (400, 402), has been cleaned. Preferably, the distance by which the cleaning device moves inwards after each traverse of the room is substantially the width of the cleaning head of the cleaning device, or a distance set by the user. The cleaning device seeks a wall of the room if it is started from a position (W) away from a wall. The cleaning device can determine when it has completely traversed a room.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

IMPROVEMENTS IN OR RELATING TO
FLOOR CLEANING DEVICES

5 This invention relates to a robotic floor cleaning device, a method of operating a robotic floor cleaning device, and to software and a control apparatus for performing the method. The invention can be used in a robotic vacuum cleaning device.

There have been a number of proposals to provide robotic or autonomous vacuum cleaning
10 devices which can clean a floor area without the need for a human user to push or drag the cleaning device along the floor. It is known to provide vacuum cleaners which are fed a detailed map of a room and which are then trained to reciprocate to and fro from one side or one end of a room to the other side or other end of the room. It is also known to provide a robotic vacuum cleaner which is lead around a room in a training cycle and which will
15 then repeat the cycle from information stored in memory. A robotic vacuum cleaner has also been proposed which travels round the edge of a room and then moves about the room in a random fashion deflecting off obstacles as it moves around.

DE 35 36 974 A1 shows a floor cleaning device which performs a spiralling path over a
20 surface to be cleaned. It requires a wet or dust trail to be deposited on the surface to be cleaned in order that the machine can follow this spiral path.

The present invention seeks to provide a robotic vacuum cleaner which minimises or overcomes disadvantages with the prior art. In particular, the present invention seeks to
25 provide a robotic vacuum cleaner that can cover a floor area without the need for advance knowledge of the layout of the floor area and which does not leave a trail on the floor.

A first aspect of the present invention provides method of operating a robotic floor cleaning device so that the floor cleaning device:

30

(a) firstly completes a traverse around the edge of a room (or around a feature of the

room or an object in the room) avoiding any obstacles in its path, monitoring and storing information from detectors during the traverse, and

(b) when it is determined that monitored information from detectors is the same or substantially the same as previously stored information, the floor cleaning device moves inwards (or outwards) and completes a second traverse, the cleaning device continuing to move inwards (or outwards) after each traverse so as to travel in a generally inwardly (or outwardly) spiral manner until the floor of the room, apart from areas occupied by obstacles, has been cleaned.

10

Another aspect of the invention provides a robotic floor cleaning device comprising: power operated means for moving the cleaning device along the floor, and a navigation system, including sensors and a memory means, for navigating the cleaning device around the room, the navigation system being arranged to: (a) firstly cause the cleaning device to complete a traverse around the edge of a room (or around a feature of the room or an object in the room) avoiding any obstacles in its path, monitoring and storing information from the sensors in the memory during the traverse, and (b) when it is determined that monitored information from the sensors is the same or substantially the same as previously stored information, cause the device to move inwards (or outwards) and complete a second traverse, the device continuing to move inwards (or outwards) after each completed traverse so as to travel in a generally inwardly (or outwardly) spiral manner until the floor of the room, apart from areas occupied by obstacles, has been cleaned.

25

By following a spiralling pattern, the floor cleaning device can cover the complete floor area in an efficient manner. This method has the advantage that the floor cleaning device does not need to be programmed with advance knowledge of the layout of the floor area, or the need to maintain a cartesian map of the floor area. This can simplify the processing requirements of the controller of the cleaning device and avoids the need for a user to train the device or to load and update a map of the floor area that the device is to clean. Thus, the cleaning device can easily cope with different room layouts. It also does not require the cleaning device to leave a trail on the floor during the cleaning operation so that the

30

device can determine where it has previously travelled within the room.

Each further step inwards (or outwards) occurs when a comparison of monitored information from the sensors with previously stored information indicates that the present position of the cleaning device is the same, or almost the same, as a position that the
5 cleaning device has visited on the same circuit.

A further problem with known robotic floor cleaning devices that have no advance knowledge of the layout of the floor area that they are cleaning is that they are incapable of
10 determining when they have completely traversed the floor area. By performing an inwardly spiralling coverage pattern of the floor area, the cleaning device progresses methodically towards the centre of the room. The cleaning device can determine when it has reached the middle of the room. One way for determining when the cleaning device has completely traversed a floor area is to associate stored information from each traverse,
15 or circuit, of the floor area into strands and to determine when the strands converge, indicating that the floor area has been completely traversed. Any stored data which is not part of a strand that has converged is indicative of a part of the floor area that has not been completely traversed.

20 The navigation system of the cleaning device can store information about the direction at which the cleaning device turns at each of the points where it stores sensor information. This can be used on later circuits to help the cleaning device in deciding which way to turn.

25 The floor cleaning device carries a cleaner head or other cleaning mechanism that is generally of the same or similar width as the cleaning device. It will be appreciated that the stepping inwardly or outwardly during the spiralling method is based upon the effective width of the cleaning mechanism carried by the cleaning device so that the floor area is properly covered. Preferably the stepping distance is substantially one width of the
30 cleaner head, or slightly less than one width of the cleaner head so that each traverse slightly overlaps with the previous traverse. This ensures full coverage of the floor area

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.