# Lens Design Fundamentals

Second Edition

RUDOLF KINGSLAKE R. BARRY JOHNSON



DOCKET

Δ

AMSTERDAM • BOSTON • HEIDELBERG • LONDON NEW YORK • OXFORD • PARIS • SAN DIEGO SAN FRANCISCO • SINGAPORE • SYDNEY • TOKYO Academic Press is an imprint of Elsevier



Find authenticated court documents without watermarks at docketalarm.com.

Academic Press is an imprint of Elsevier 30 Corporate Drive, Suite 400 Burlington, MA 01803, USA The Boulevard, Langford Lane Kidlington, Oxford, OX5 1 GB, UK

© 2010 Elsevier Inc. All rights reserved.

Co-published by SPIE P.O. Box 10 Bellingham, Washington 98227-0010 USA Tel.: +1 360-676-3290 / Fax: +1 360-647-1445 Email: Books@SPIE.org SPIE ISBN: 9780819479396 SPIE Vol: PM195

No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or any information storage and retrieval system, without permission in writing from the publisher. Details on how to seek permission, further information about the Publisher's permissions policies and our arrangements with organizations such as the Copyright Clearance Center and the Copyright Licensing Agency, can be found at our website: www.elsevier.com/permissions.

This book and the individual contributions contained in it are protected under copyright by the Publisher (other than as may be noted herein).

#### Notices

Knowledge and best practice in this field are constantly changing. As new research and experience broaden our understanding, changes in research methods, professional practices, or medical treatment may become necessary.

Practitioners and researchers must always rely on their own experience and knowledge in evaluating and using any information, methods, compounds, or experiments described herein. In using such information or methods they should be mindful of their own safety and the safety of others, including parties for whom they have a professional responsibility.

To the fullest extent of the law, neither the Publisher nor the authors, contributors, or editors, assume any liability for any injury and/or damage to persons or property as a matter of products liability, negligence or otherwise, or from any use or operation of any methods, products, instructions, or ideas contained in the material herein.

### Library of Congress Cataloging-in-Publication Data

Application submitted.

DOCKE

ISBN: 978-0-12-374301-5

British Library Cataloguing-in-Publication Data A catalogue record for this book is available from the British Library.

For information on all Academic Press publications visit our Web site at www.elsevierdirect.com

Printed in the United States 09 10 11 12 13 10 9 8 7 6 5 4 3 2 1

Working together to grow libraries in developing countries

www.elsevier.com | www.bookaid.org | www.sabre.org

ELSEVIER BOOK AID International Sabre Foundation

Find authenticated court documents without watermarks at docketalarm.com.

Chapter 4

## Aberration Theory

### 4.1 INTRODUCTION

In the preceding chapter, imaging was considered to be ideal or stigmatic. This means that rays from a point source P that pass through an optical system will converge to a point located at its Gaussian image P'. In a like manner, the portion of wavefronts from P passing through the optical system will converge as portions of spherical wavefronts toward P'. In other words, the point sources are mapped onto the image surface as point images according to the laws of Gaussian image formation presented in the prior chapter. Deviations from ideal image formation are the result of defects or aberrations inherent in the optical system.

As will be discussed in this chapter, it is possible that the actual image P' is formed at a location other than at P' which can be caused by field curvature and distortion while still forming a stigmatic image. When an optical system fails to form a point image of a point source in the Gaussian image plane, the rays do not pass through the same location and the converging wavefront is no longer spherical as a consequence of the optical system suffering aberrations. In this chapter, a mathematical description of the aberrations for symmetrical optical systems will be presented primarily from the viewpoint of ray deviation errors rather than wavefront errors. In the following chapters, each of the aberrations will be treated in significant detail in addition to their control during the optical design process.

### 4.2 SYMMETRICAL OPTICAL SYSTEMS

Figure 4.1 illustrates the basic elements of a symmetric optical system. This system is invariant under an arbitrary rotation about its optical axis (OA) and under reflection in any plane containing OA. Both of these symmetry characteristics are necessary properties of a symmetrical optical system.<sup>1</sup> A right-hand

Copyright © 2010, Elsevier Inc. All rights reserved. DOI: 10.1016/B978-0-12-374301-5.00008-5

Find authenticated court documents without watermarks at docketalarm.com.

Aberration Theory

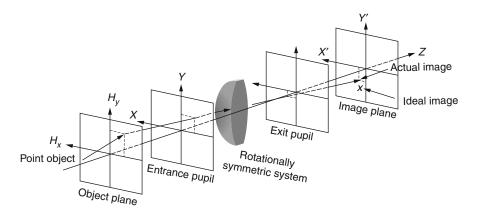


Figure 4.1 Basic elements of a symmetrical optical system.

Cartesian coordinate system is used where the optical axis is always taken to lie along the z-axis.<sup>2</sup> The ideal state of correction for a symmetrical optical system is when a system forms in the image plane (*IP*) normal to the optical axis a sharp and undistorted image of an object in the object plane (*OP*) orthogonal to the optical axis. These planes are designated as the image and object planes, respectively, and are conjugate since the optical system forms an image of one in the other. Unless otherwise specified, these planes should be considered to be orthogonal to the optical axis.

Consider for the moment an arbitrary point *P* in the object space of a symmetric system. In general the family of rays from *P* traversing the optical system will fail to pass through a unique point in the image space and the image of *P* formed by the system is said to be *astigmatic*, that is, to suffer from aberrations. If, on the other hand, all rays from *P* do pass through a unique point P' in the image space, the image of point *P* is said to be *stigmatic*.<sup>3</sup> From the definition of a symmetric system, it should be evident that if P' is the stigmatic image of some point *P* then the two points *P* and *P'* lie in a plane containing the optical axis. Now imagine that object points are stigmatic and that the object plane *OP* and that the images of all such points are stigmatic and that the object plane is stigmatically imaged by the system onto an image surface (in contrast to an image plane).

Again relying on the definition of a symmetric system, it is obvious that the stigmatic image of a plane object surface *OP*, which is normal to the optical axis of a symmetric system, is a surface of revolution about the optical axis. When this image surface of revolution is not planar, the imagery is considered to suffer an aberration or image defect known as *curvature of field* although there is no blurring of the image. Since the optical system is considered to be rotationally symmetric, we can arbitrarily select a reference plane that contains the optical

Find authenticated court documents without watermarks at docketalarm.com.

102

### 4.2 Symmetrical Optical Systems

DOCKE

axis. Referring to Figure 4.1, this plane is the Y-Z plane and is generally called the *tangential* or *meridional* plane.

Assume now that a stigmatic image of the object plane is formed in the image plane where the object has some geometrical shape. If the optical system forms an image having the same geometrical shape as the object to some scaling factor, the image is considered to be undistorted or be an accurate geometric representation of the object. Should the optical system form an image which is not geometrically similar to the object's shape, then the image is said to suffer distortion. When the system is free of distortion (undistorted), the ratio of image size to the corresponding object size is the *magnification m*, with the image for a positive lens being inverted and reverted with respect to the object. Let the object be a line extending from the origin of the object plane to the location denoted as point object in Figure 4.1 which has coordinates expressed as  $(H_x, H_y)$ . The image size can be computed by

$$H'_{x} = mH_{x}$$
 and  $H'_{y} = mH_{y}$ 

since the line can be projected onto each axis and propagated independently without loss of generality since a paraxial skew ray is linearly separable into its orthogonal components.

It is evident from the preceding discussion that an ideal image of the object plane requires three conditions to be satisfied, namely, stigmatic image formation, no curvature of field, and no distortion. In contrast, an optical system having stigmatic image formation can still suffer the image defects of distortion and curvature of field.

As explained, an ideal optical system forms a perfect or stigmatic image which essentially means that rays emanating from a point source will be converged by the optical system to a point image, although curvature of field and distortion may be present. At this juncture, image quality will be discussed in strictly geometric terms. In later chapters, the impact of diffraction on image quality will be discussed.

The majority of this book addresses rotationally symmetric optical systems, their aberrations, and configurations. Figure 4.1 shows the generic geometry for such systems, which comprise five principal elements: the object plane, *entrance pupil*, lenses (including stop), *exit pupil*, and image plane.<sup>4</sup> A ray propagating through this system is specified by its object coordinates  $(H_x, H_y)$  and entrance pupil coordinates  $(\rho_x, \rho_y) = \vec{\rho}$ , or in polar coordinates  $(\rho, \theta)$ , as illustrated in Figure 4.2. This means that point *P* in the entrance pupil can be expressed by  $X = \rho \cos(\theta)$  and  $Y = \rho \sin(\theta)$  where  $\theta$  is zero when  $\vec{\rho}$  lies along the Y-axis.

This ray is incident on the image plane at  $(H'_x, H'_y)$  and displaced or aberrant from the ideal image location by  $(\varepsilon_x, \varepsilon_y)$ . Since the optical system is rotationally symmetric, the (point) object is assumed to always be located on the *y*-axis in the object plane, that is,  $H \equiv (0, H_y)$ . This means the ideal image is located along the *y*-axis in the image plane, that is, h' = mH where *m* is the magnification. The actual



# DOCKET A L A R M



# Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

## **Real-Time Litigation Alerts**



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

## **Advanced Docket Research**



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

## **Analytics At Your Fingertips**



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

## API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

### LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

### FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

## E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.