



US00RE38844E

(19) **United States**
(12) **Reissued Patent**
Hiltzik et al.

(10) **Patent Number:** **US RE38,844 E**
(45) **Date of Reissued Patent:** **Oct. 25, 2005**

(54) **METHOD FOR REDUCING EMISSIONS FROM EVAPORATIVE EMISSIONS CONTROL SYSTEMS**

FOREIGN PATENT DOCUMENTS

(75) Inventors: **Laurence H. Hiltzik**, Charleston, SC (US); **Jacek Z. Jaqiello**, Boynton Beach, FL (US); **Edward Don Tolles**, Charleston, SC (US); **Roger S. Williams**, Lexington, VA (US)

EP	1094032	4/2001
EP	1113163	7/2001
JP	10339218	12/1998
JP	02256989	11/2002
KR	012826	2/2002
WO	WO 9201585	2/1992
WO	WO 0162367	8/2001

(73) Assignee: **MeadWestvaco Corporation**, Stamford, CT (US)

OTHER PUBLICATIONS

Williams, R. S. and C. R. Clontz "Impact and Control of Canister Bleed Emissions" Covington Virginia, *Society of Automotive Engineers, Inc.* 2001.

(21) Appl. No.: **10/690,298**

Primary Examiner—Frank M. Lawrence

(22) Filed: **Oct. 21, 2003**

(74) *Attorney, Agent, or Firm*—Terry B. McDaniel; Daniel B. Reece, IV

Related U.S. Patent Documents

Reissue of:

(64) Patent No.: **6,540,815**
Issued: **Apr. 1, 2003**
Appl. No.: **10/100,362**
Filed: **Mar. 18, 2002**

(57) **ABSTRACT**

Disclosed is a method for sharply reducing diurnal breathing loss emissions from automotive evaporative emissions control systems by providing multiple layers, or stages, of adsorbents. On the fuel source-side of an emissions control system canister, high working capacity carbons are preferred in a first canister (adsorb) region. In subsequent canister region(s) on the vent-side, the preferred adsorbent should exhibit a flat or flattened adsorption isotherm on a volumetric basis and relatively lower capacity for high concentration vapors as compared with the fuel source-side adsorbent. Multiple approaches are described for attaining the preferred properties for the vent-side canister region. One approach is to use a filler and/or voidages as a volumetric diluent for flattening an adsorption isotherm. Another approach is to employ an adsorbent with the desired adsorption isotherm properties and to process it into an appropriate shape or form without necessarily requiring any special provision for dilution. The improved combination of high working capacity carbons on the fuel source-side and preferred lower working capacity adsorbent on the vent-side provides substantially lower diurnal breathing emissions without a significant loss in working capacity or increase in flow restriction compared with known adsorbents used in canister configurations for automotive emissions control systems.

U.S. Applications:

(60) Provisional application No. 60/335,897, filed on Nov. 21, 2001.

(51) **Int. Cl.**⁷ **F02M 33/02; B01D 53/04**

(52) **U.S. Cl.** **95/146; 95/900; 96/132; 96/133; 123/519**

(58) **Field of Search** 95/90, 146, 148, 95/900–903; 96/132, 133, 147; 502/416; 123/518, 519


(56) **References Cited**

U.S. PATENT DOCUMENTS

4,677,086 A	6/1987	McCue et al.
4,869,739 A	9/1989	Kanome et al.
4,894,072 A	1/1990	Turner et al.
5,204,310 A	4/1993	Tolles et al.
5,206,207 A	4/1993	Tolles

(Continued)

54 Claims, 3 Drawing Sheets

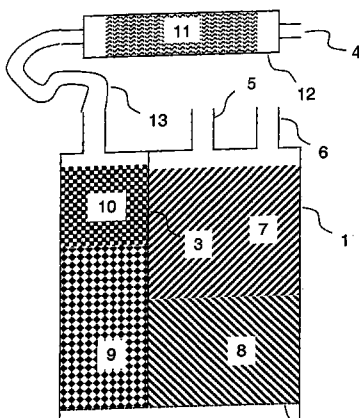

US RE38,844 E

Page 2

U.S. PATENT DOCUMENTS

5,207,808 A	5/1993	Haruta et al.	5,538,932 A	7/1996	Yan et al.
5,238,470 A	8/1993	Tolles et al.	5,564,398 A	10/1996	Maeda et al.
5,250,491 A	10/1993	Yan	5,687,697 A	11/1997	Ishikawa
5,276,000 A	1/1994	Matthews et al.	5,691,270 A	11/1997	Miller
5,304,527 A	4/1994	Dimitri	5,736,481 A	4/1998	Miller
5,324,703 A	6/1994	McCue et al.	5,736,485 A	4/1998	Miller
5,337,721 A	8/1994	Kasuya et al.	5,863,858 A	1/1999	Miller et al.
5,355,861 A	10/1994	Arai	5,914,294 A	6/1999	Park et al.
5,377,644 A	1/1995	Krohm	5,914,457 A	6/1999	Itakura et al.
5,408,976 A	4/1995	Reddy	5,931,141 A	8/1999	Chino
5,416,056 A	5/1995	Baker	5,957,114 A	9/1999	Johnson et al.
5,456,236 A	10/1995	Wakashiro et al.	6,098,601 A	8/2000	Reddy
5,456,237 A	10/1995	Yamazaki et al.	6,136,075 A	10/2000	Bragg et al.
5,460,136 A	10/1995	Yamazaki et al.	6,171,373 B1	1/2001	Park et al.
5,477,836 A	12/1995	Hyodo et al.	6,279,548 B1	8/2001	Reddy
5,482,023 A	1/1996	Hunt et al.	6,284,705 B1	9/2001	Park et al.
			6,488,748 B2	12/2002	Yamafuji et al.

FIGURE 1

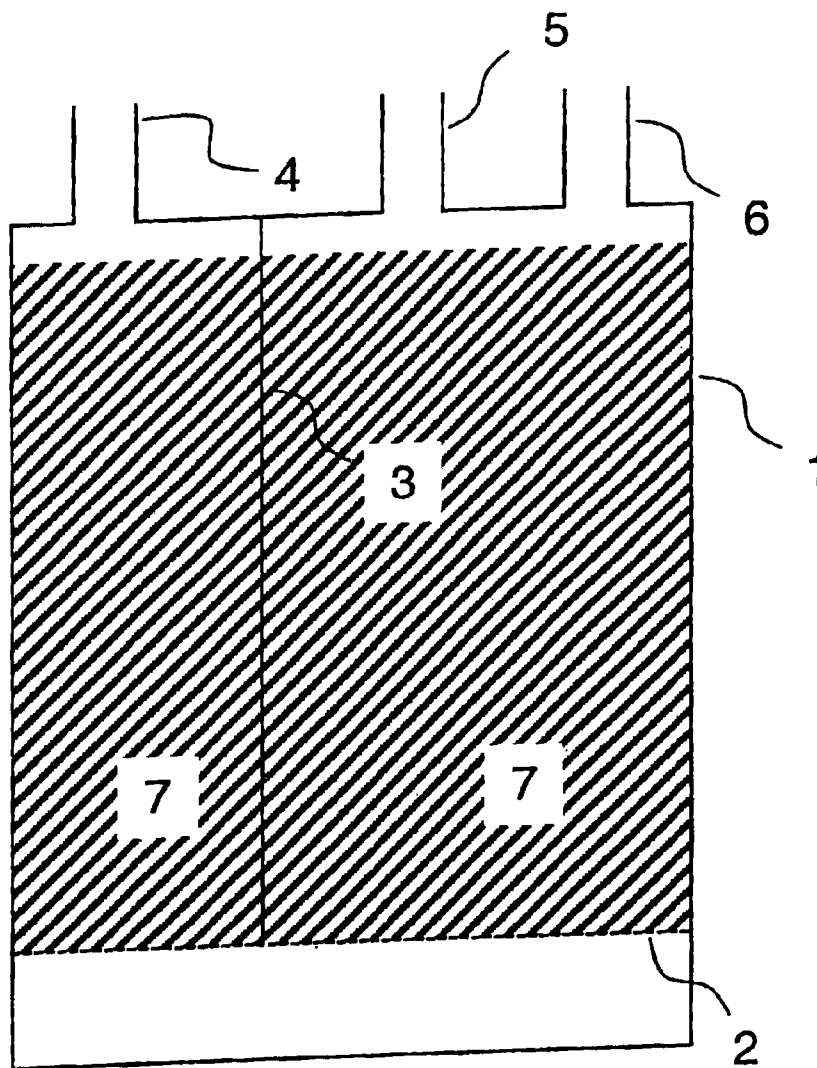


FIGURE 2


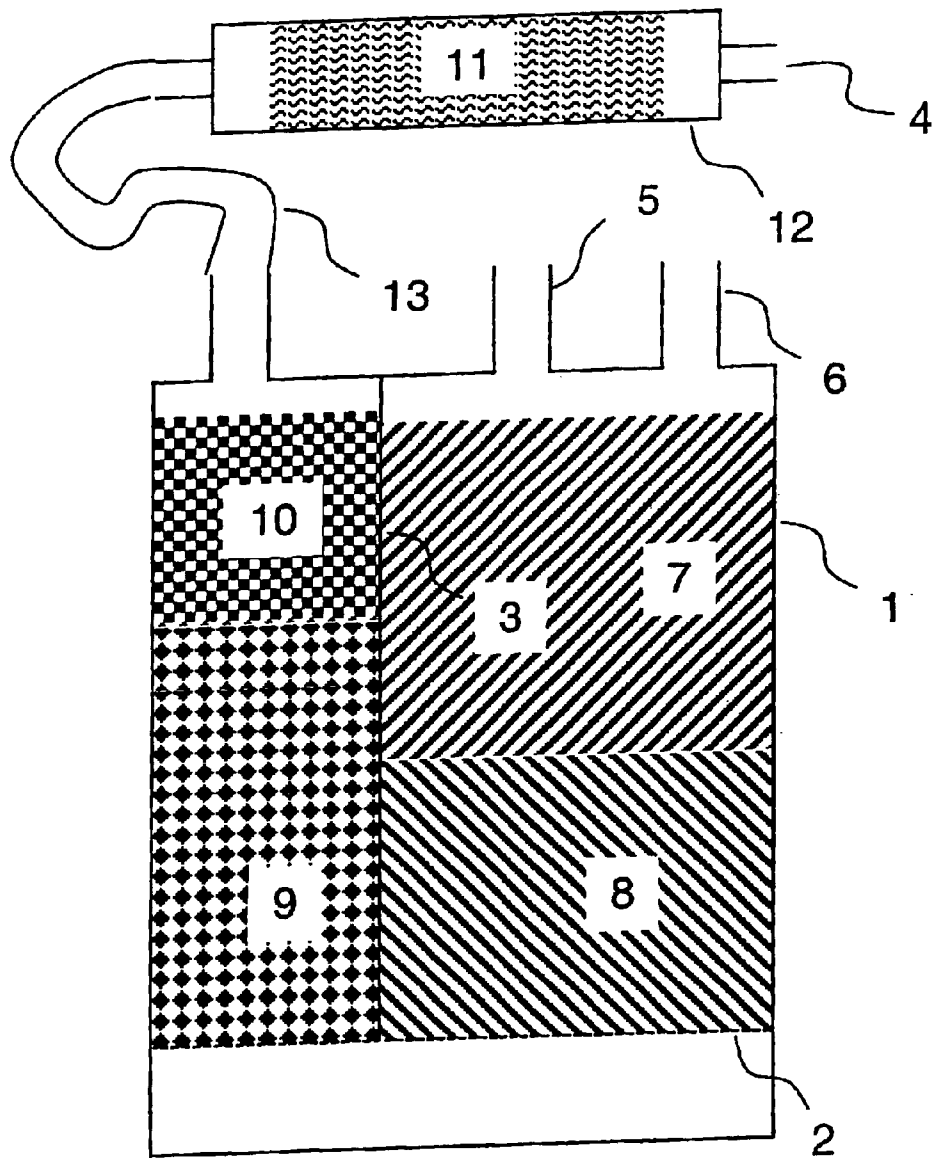


FIGURE 3

n-Butane Adsorption Isotherm at 25°C

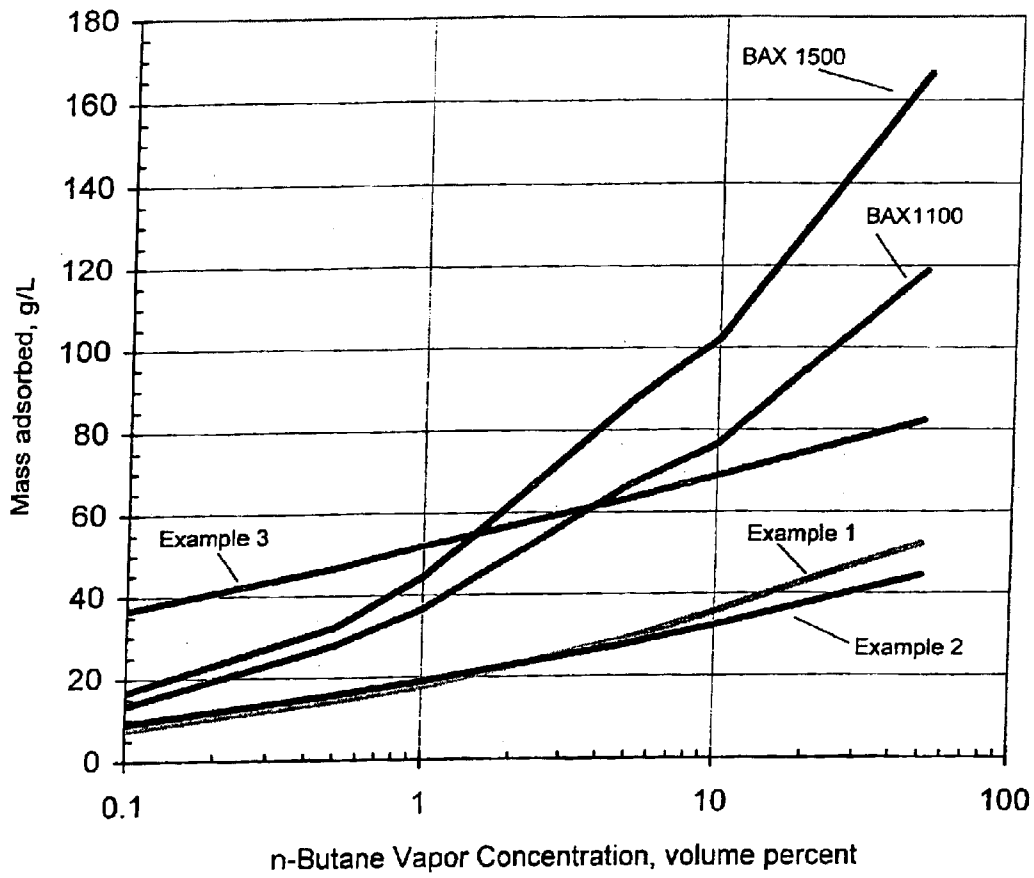

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.