

SAE Technical Paper Series

901110

The Development of a Real-Time Evaporative Emission Test

Harold M. Haskew
William R. Cadman
Thomas F. Liberty

Powertrain Control Center
Current Product Engineering
General Motors Corporation

Government/Industry
Meeting and Exposition
Washington, DC
May 1-4, 1990

S. A. E.
LIBRARY

10-21-90

The appearance of the ISSN code at the bottom of this page indicates SAE's consent that copies of the paper may be made for personal or internal use of specific clients. This consent is given on the condition, however, that the copier pay a \$5.00 per article copy fee through the Copyright Clearance Center, Inc., Operations Center, 27 Congress St., Salem, MA 01970 for copying beyond that permitted by Sections 107 or 108 of the U.S. Copyright Law. This consent does not extend to other kinds of copying such as copying for general distribution, for advertising or promotional purposes, for creating new collective works, or for resale.

SAE routinely stocks printed papers for a period of three years following date of publication. Direct your orders to SAE Customer Service Department.

To obtain quantity reprint rates, permission to reprint a technical paper or permission to use copyrighted SAE publications in other works, contact the SAE Publications Group.



All SAE papers are abstracted and indexed in the SAE Global Mobility Database.

No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.

ISSN 0148-7191
Copyright 1990 Society of Automotive Engineers, Inc.

Positions and opinions advanced in this paper are those of the author(s) and not necessarily those of SAE. The author is solely responsible for the content of the paper. A process is available by which discussions will be printed with the paper if it is published in SAE Transactions. For permission to publish this paper in full or in part, contact the SAE Publications Division.

Persons wishing to submit papers to be considered for presentation or publication through SAE should send the manuscript or a 300 word abstract of a proposed manuscript to: Secretary, Engineering Activity Board, SAE.

Printed in USA

The Development of a Real-Time Evaporative Emissions Test

Harold M. Haskew, William R. Cadman, Thomas F. Liberty

Powertrain Control Center
Current Product Engineering
General Motors Corporation

ABSTRACT

In recent years various parties have proposed new evaporative emission test procedures focused on controlling "excess" evaporative emissions, on hot "ozone prone" days. Studies by General Motors established the need for real-time measurements of daily emissions from parked vehicles and of "running losses" from vehicles that are driven to quantify and control the mobile source contribution to VOC inventory. "Resting losses" are shown to be a previously unidentified major source of hydrocarbon emissions. This paper describes the theories, data and development of GM's Real-Time Test Procedure.

WRITERS NOW Characterize the 1990's as "The Decade of the Environment." Public concern for the environment is at a new high. Many urban areas, for example, exceed the National Ambient Air Quality Standard (NAAQS) for ozone. The problem is particularly severe in California. Figure 1 shows the 1988 hourly ozone measurements for four California locations. The horizontal line indicates the 0.12 part per million (ppm) standard that should not be exceeded more than once a year on average. As Figure 1 indicates, Azusa exceeded the standard 125 times in 1988.

Figure 2, on the other hand, shows the locations of the nine most severe ozone areas identified by EPA. Figure 3 shows the 1988 ozone monitor records for four of these cities, Chicago, New York, Houston, and Kenosha. These exceedances are not as chronic as the California results.

Against that backdrop, additional control measures for all organic compounds, including the

hydrocarbons from motor vehicles, are being considered. The current exhaust and evaporative emission test procedures and standards have achieved significant reductions in in-use emission levels, but they are now more than a decade old. [1] Combinations of higher ambient temperatures, high fuel volatility, extended driving, and multiple day park episodes have revealed higher levels of evaporative emissions than were previously assumed to exist.

In recent years, and particularly since 1988, there have been significant advances in the measurement and characterization of in-use evaporative emissions. [2] These advances have demonstrated that the current procedures and standard, as well as the assumptions about in-use vehicle performance upon which they were based, are obsolete. This important point is largely conceded by most participants in the current rulemaking process. A new focus on high temperature, "ozone-prone" conditions for control of evaporative emissions has resulted.

The Environmental Protection Agency (EPA) in January, 1990 proposed new evaporative emission test procedures designed to further reduce the mobile source contribution to air pollution. Another proposal, the subject of this paper, has been developed by General Motors. [3] Another new test procedure from the California Air Resources Board (CARB) [4] included many features of the GM Real-Time proposal.

EPA's new evaporative emission control proposal [5] differs substantially from the CARB and GM proposals. The EPA proposal's most significant change from the current test protocol is the use of multiple diurnal heat builds (two rather than one) conducted at higher temperatures (72 to 96°F instead of 60 to 84°F) thought to be

1. Numbers in brackets designate references listed at the end of the paper.

Figure 1.

HOURLY AMBIENT AIR MEASUREMENT - OZONE
CALIFORNIA LOCATIONS - CALENDAR YEAR 1988

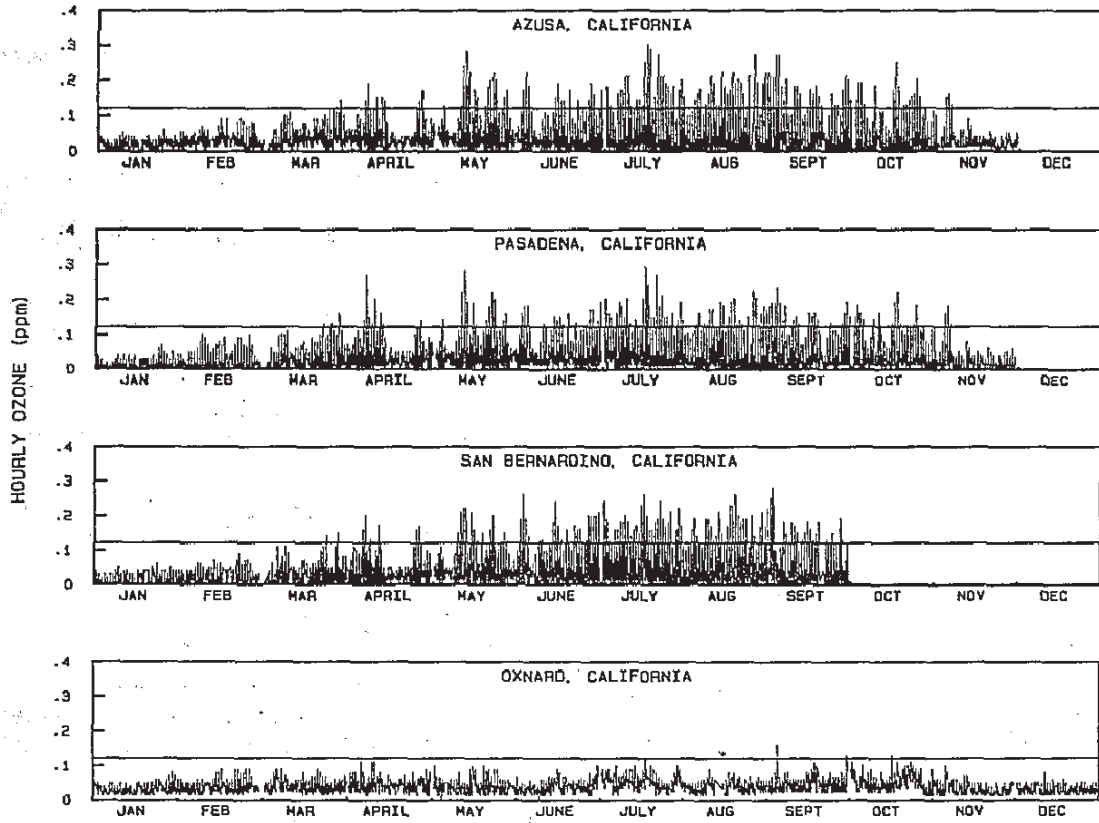


Figure 2.

NINE SEVERE OZONE AREAS


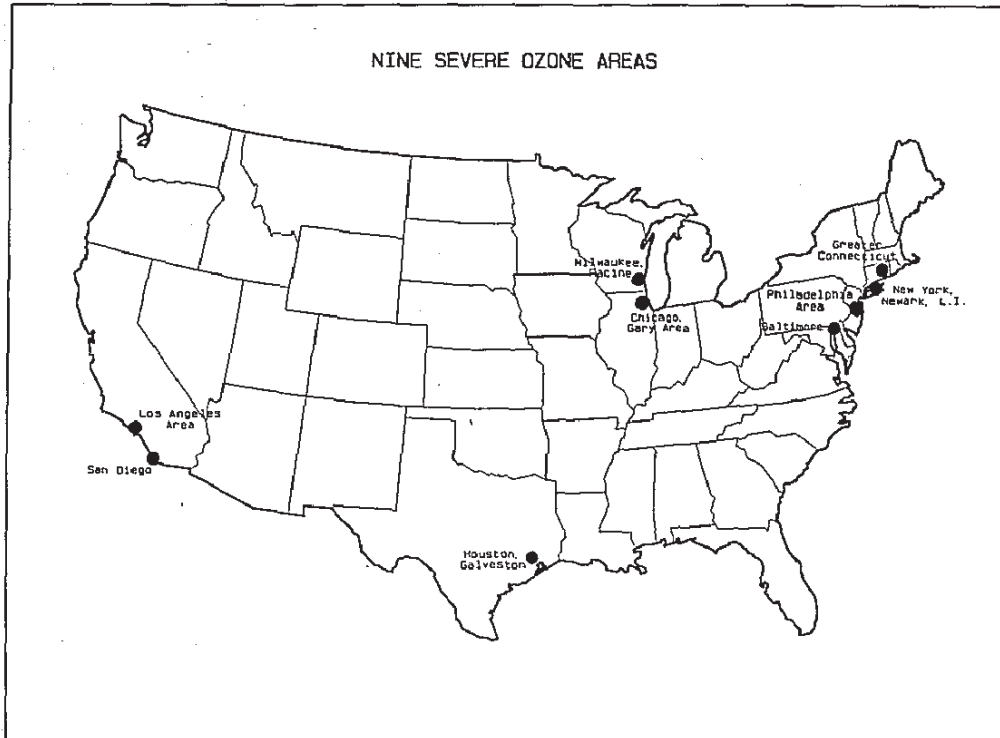


Figure 3.

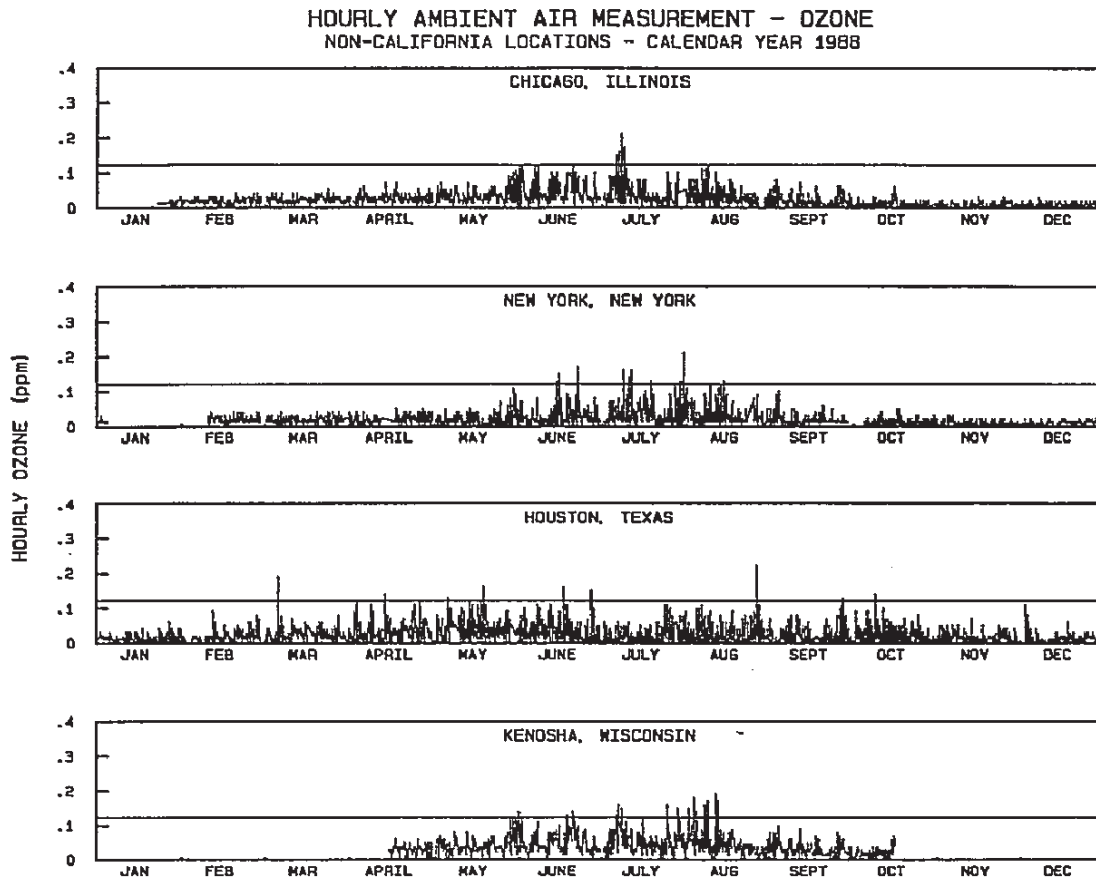

representative of high ozone days. EPA's new procedure relies on various design-review requirements and test procedure changes to influence vehicle purge rates in order to regulate "running losses". It does not directly measure vehicle running losses. It also leaves the hot soak measurement procedure at the laboratory ambient (i.e., 76 instead of 96°F) temperatures.

California's proposal includes direct measurements for high-temperature hot soaks and running losses. It also measures emissions from vehicles in extended-park situations on a "real-time" (24 hour) basis, rather than with the traditional time-compressed diurnal test procedure. It shares many of the same features with the GM proposal. The major differences are the daily high temperature (105°F vs. 96°F), three diurnals vs. two, the tank fill level (40% vs. 60%), and the standard.

The purpose of this paper is to describe the theories, data, and tests that were part of the development of the GM "Real-Time" Environ-

mentally Based Evaporative Test Procedure.

There are four parts to this paper:

1. Test Procedure Goals
2. Test Methodologies
3. Test Parameters
4. The Procedure, the Standard and Estimated Benefits

TEST PROCEDURE GOALS

As explained below, the Real-Time test procedure would require manufacturers to optimize vehicle evaporative emissions control during a very high percentage of hot urban driving episodes and during extended-park "diurnal" events. It would require stringent control of "resting losses", which are a large and growing segment of the uncontrolled in-use vehicle evaporative emissions inventory. As a result, the Real-Time test procedure will almost certainly involve increased compliance risks in the early years of the new program.

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.